

PARTS LIST AND DESCRIPTIONS (Continued)

COILS (RF-IF)

ITEM No.	USE	REPLACEMENT DATA				NOTES
		TRANSETTE PART No.	Merit PART No.	Stancor PART No.	Workman TV PART No.	
L1	Loopstick					
L2	Osc.					
L3	1st IF					
L4	2nd IF					
L5	3rd IF					

TRANSFORMER (DRIVER)

ITEM No.	TURNS RATIO	REPLACEMENT DATA				NOTES
		TRANSETTE PART No.	Merit PART No.	Stancor PART No.	Triad PART No.	
T1	PRI. SEC. 1 1					

TRANSFORMER (AUDIO OUTPUT)

ITEM No.	IMPEDANCE	REPLACEMENT DATA				NOTES
		TRANSETTE PART No.	Merit PART No.	Stancor PART No.	Triad PART No.	
T2	PRI. SEC. 15000 CT. 10-123			TA-26	TR-105	

SPEAKER

ITEM No.	TYPE	REPLACEMENT DATA		NOTES
		TRANSETTE PART No.	QUAM PART No.	
SPI	SIZE FIELD V. C. IMP. 2 1/4" PM 10-123		22A0628	

BATTERIES

ITEM No.	VOLTAGE	REPLACEMENT DATA				NOTES
		TRANSETTE PART No.	BURGESS PART No.	EVEREADY PART No.	MALLORY PART No.	
M1	9V		"A" "B" "C" 2U6	"A" "B" "C" 216	"B" "C" M-1604	

SIGNAL DIODES

ITEM No.	ORIG. TYPE	REPLACEMENT DATA		NOTES
		TRANSETTE PART No.	GENERAL ELECTRIC PART No.	
M2	SD46		1N60	Detector


MISCELLANEOUS

ITEM No.	PART NAME	TRANSETTE PART No.	NOTES
M3	Tuning Cap.		2 Gang

WIRING DATA

General-use Unshielded Hook-up Wire Use BELDEN No. 8530 (Solid) Available in Ten Colors 8524 (Stranded) Available in Ten Colors

CHASSIS—TOP VIEW

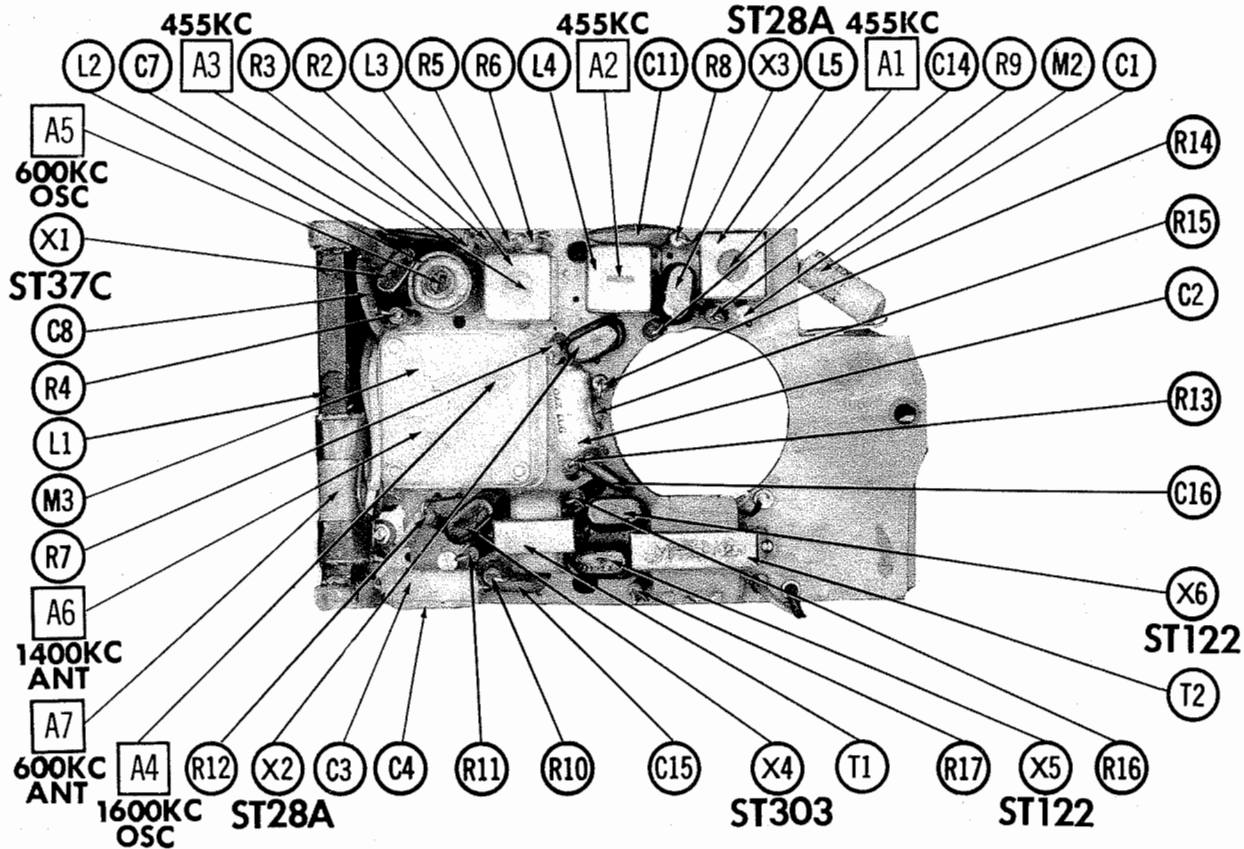

FOLDER 15
SET 571

PHOTOFACT® Folder

with CIRCUITRACE®

TRANS-ETTE
MODEL YRM6

TRANS-ETTE
MODEL YRM6



TRADE NAME Transette Model YRM6
IMPORTER Custom Importing Co., 1409-11 Murray Road, N. Kansas City 16, Missouri
TYPE SET Battery Operated Transistorized Portable AM Receiver
POWER SUPPLY 9 Volts DC
TUNING RANGE—BROADCAST 540-1600KC
RATING 6MA @ 9 Volts DC (No Signal, Min. Volume)
10MA @ 9 Volts DC (Signal, Normal Volume)

ALIGNMENT INSTRUCTIONS

ALIGNMENT INSTRUCTIONS—READ CAREFULLY BEFORE ATTEMPTING ALIGNMENT

Volume control should be at maximum position. Output of signal generator should be no higher than necessary to obtain an output reading.
Suggested Alignment Tools:
A1, A2, A3..... GENERAL CEMENT #8607, 9291, 9294
WALSCO #2520, 2522, 2523, 2524, 2534, 2537
A4, A6..... GENERAL CEMENT #5000, 5003, 5066, 8276, 8290, 9087, 9089
WALSCO #2512, 2525, 2528
A5..... GENERAL CEMENT #9440

	SIGNAL GENERATOR COUPLING	SIGNAL GENERATOR FREQUENCY	RADIO DIAL SETTING	OUTPUT METER	ADJUST	REMARKS
1.	Fashion loop of several turns of wire and radiate signal into loop of receiver.	455KC (400% Mod.)	Tuning gang fully open.	Across voice coil.	A1, A2, A3	Adjust for maximum output.
2.	"	1600KC	1600KC	"	A4	"
3.	"	600KC	600KC	"	A5	"
4.	"	1400KC	1400KC Signal.	"	A6	"
5.	"	600KC	600KC Signal.	"	A7	Adjust for maximum output by moving antenna coil turns along ferrite core. Repeat steps 2 thru 5.

HOWARD W. SAMS & CO., INC. Indianapolis 6, Indiana

The listing of any available replacement part herein does not constitute in any case a recommendation, warranty or guaranty by Howard W. Sams & Co., Inc., as to the quality and suitability of such replacement part. The numbers of these parts have been compiled from information furnished to Howard W. Sams & Co., Inc., by the manufacturers of KF924

the particular type of replacement part listed. Reproduction or use, without express permission, of editorial or pictorial content, in any manner, is prohibited. No patent liability is assumed with respect to the use of the information contained herein. © 1962 Howard W. Sams & Co., Inc., Indianapolis 6, Indiana. Printed in U.S. of America

DATE 3-62

SET 571

FOLDER 15

TRANS-ETTE
MODEL YRM6

SET 571
FOLDER 15

