

PARTS LIST AND DESCRIPTIONS (Continued)

TRANSFORMER (AUDIO OUTPUT)

ITEM No.	REPLACEMENT DATA				NOTES
	IMPEDANCE	SILVERTONE PART No.	Halldorson PART No.	Merit PART No.	
T1	2700Ω 3-4Ω	42700-5 ①	26558	A-3025	① Connect in parallel and phase. ② Used in Models 9002, 9003
	PRL SEC			AU-805	③ Alternate Part #42700-2L

SPEAKER

ITEM No.	REPLACEMENT DATA				NOTES
	TYPE	SILVERTONE PART No.	GUAM PART No.		
SP1	4" 8-Ω	45800-8 ①	4A126.4 ①		
SP2	4" 8-Ω	45800-9 ①	4A126.4 ②		
SP3	4" 8-Ω	45800-4 ②			

COMPONENT COMBINATIONS

ITEM No.	USE	DESCRIPTION	SILVERTONE PART No.	REPLACEMENT DATA
K1	Audio Coupling Network	220mmf. 250mmf. 5000mmf. 5000mmf. 470K, 470K, 8.8meg	43743-2	PA-512-3 PC-188 DT-5

MISCELLANEOUS

ITEM No.	PART NAME	SILVERTONE PART No.	NOTES
M1	Tuning Cap.	48175	2 Gang, Ch. 132.44300
	Tuning Cap.	45647	2 Gang, Ch. 132.44300
	Printed Board	45975-1	

CABINETS & CABINET PARTS


(When Ordering Cabinets & Cabinet Parts, Specify Model, Chassis & Color)

NAME	PART NO.	DESCRIPTION
Knob	45883-48	Tuning, Brown, Model 9004
Knob	45883-17	Tuning, Ivory, Model 9005
Knob	45883-66	Tuning, Sage Green, Model 9006
Knob	45881	Tuning, Volume-On-Off, Model 9002, 9003
Knob	45885-48	Volume-On-Off, Brown, Model 9004
Knob	45885-17	Volume-On-Off, Ivory, Model 9005
Knob	45885-66	Volume-On-Off, Sage Green, Model 9006
Cabinet Assembly	45962-48	Brown, Model 9004
Cabinet Assembly	45962-17	Ivory, Model 9005
Cabinet Assembly	45962-66	Sage Green, Model 9006
Cabinet	45860-48	Brown, Model 9002
Cabinet	45860-17	Ivory, Model 9003

WIRING DATA

General-use Unshielded Hook-up Wire ..... Use BELDEN No. 8530 (Solid) Available in Ten Colors  
Power Cord (Interlock Type) ..... Use BELDEN No. 8874

CHASSIS—TOP VIEW

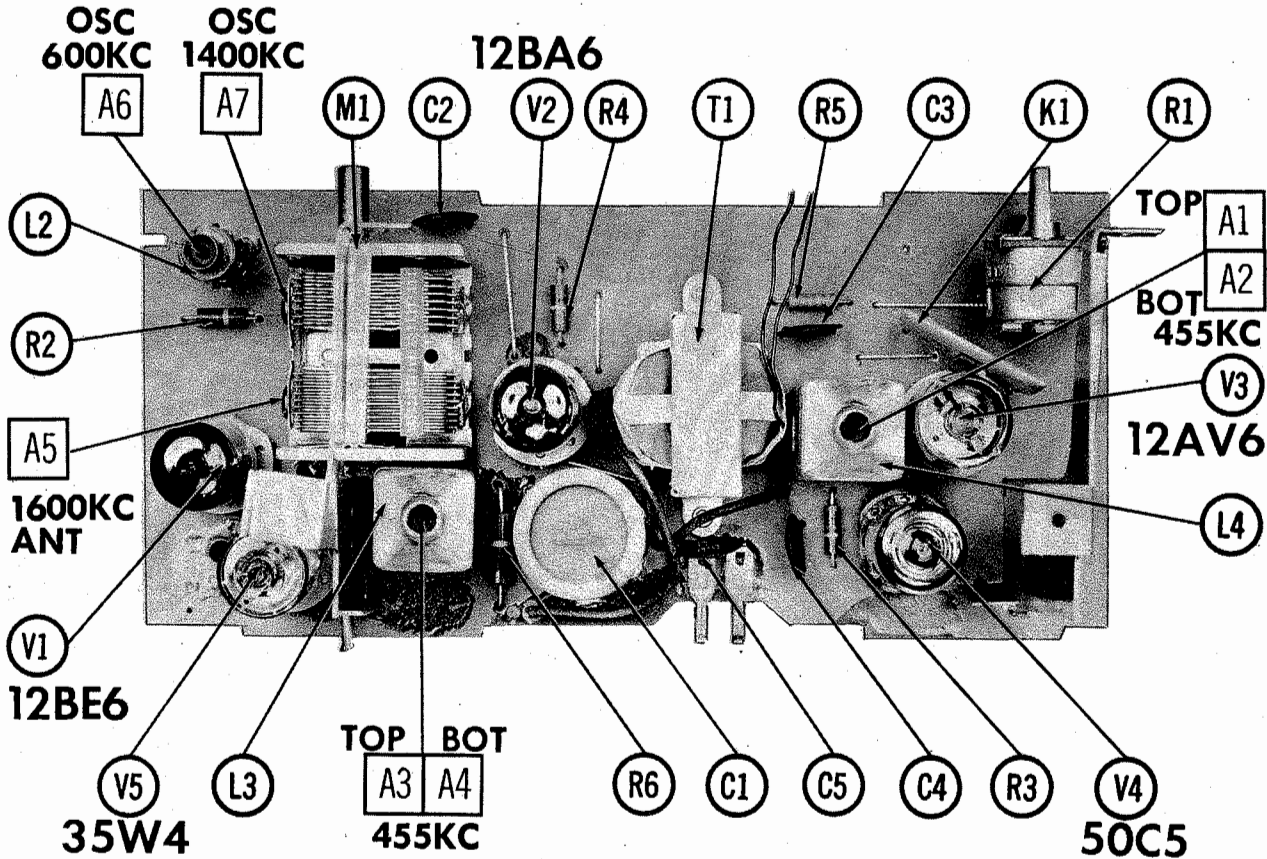


FOLDER 18  
SET 460



SILVERTONE MODELS 9002, 9003, 9004, 9005, 9006 (Ch. 132.44300, 132.44400)

SILVERTONE MODELS 9002, 9003, 9004, 9005, 9006 (Ch. 132.44300, 132.44400)

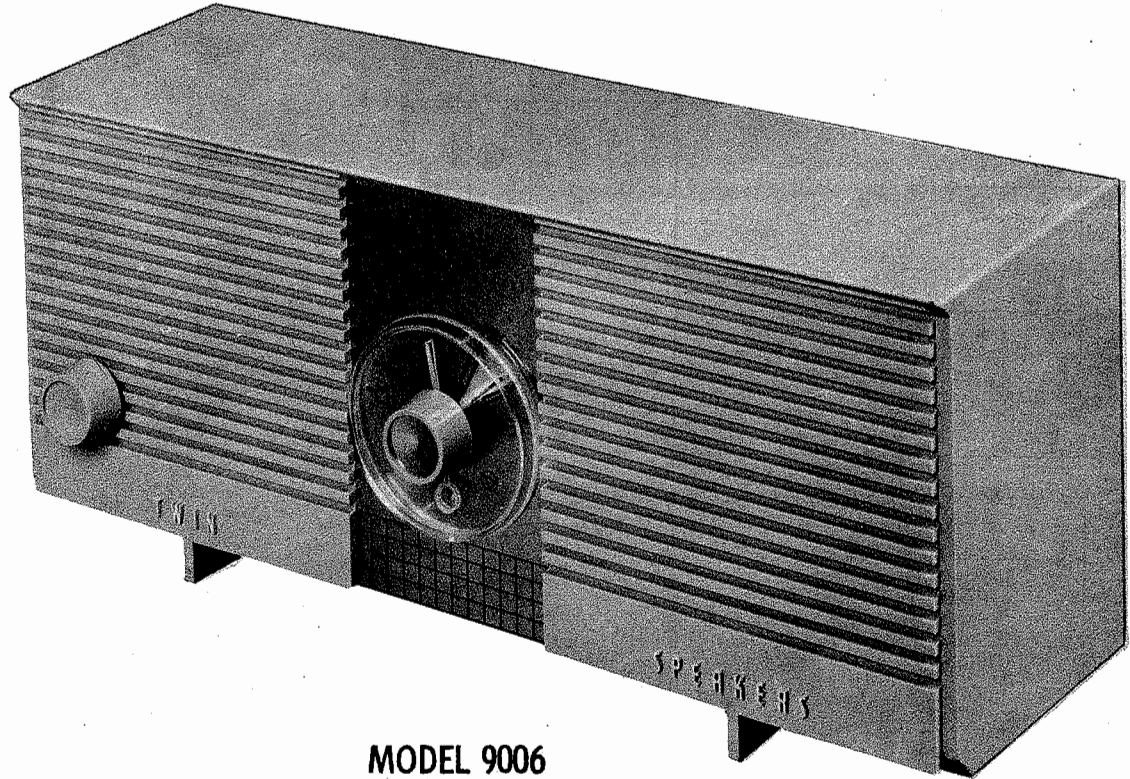

MODEL 9006

TRADE NAME	Silverstone Models 9002, 9003 (Ch. 132.44300); 9004, 9005, 9006 (Ch. 132.44400)		
SUPPLIER	Sears, Roebuck & Co., 925 S. Homan Ave., Chicago, Illinois		
TYPE SET	AC-DC Operated 5 Tube AM Receiver		
POWER SUPPLY	110-120 Volts AC-DC	RATING	30 Watts, .32 Amp. @ 117 Volts AC
TUNING RANGE—BROADCAST	520KC-1690KC		

ALIGNMENT INSTRUCTIONS

ALIGNMENT INSTRUCTIONS—READ CAREFULLY BEFORE ATTEMPTING ALIGNMENT

Use isolation transformer, if available. If not, connect a .1mfd capacitor in series with low side of signal generator. Volume control should be at maximum position. Output of signal generator should be no higher than necessary to obtain an output reading.

Suggested Alignment Tools: A1, A2, A3, A4, A6 ... GENERAL CEMENT #8606, 8606L, 8282, 9295  
WALSCO #2526, 2543, 2544, 2545  
A5, A7 ..... GENERAL CEMENT #5004, 5008, 5009  
WALSCO #2520

DUMMY ANTENNA	SIGNAL GENERATOR COUPLING	SIGNAL GENERATOR FREQUENCY	RADIO DIAL SETTING	OUTPUT METER	ADJUST	REMARKS
1. .1mfd	High side to antenna stator lug of tuning gang. Low side to B-	455KC (400v Mod)	Tuning gang fully open	Across voice coil	A1, A2, A3, A4	Adjust for maximum output.
2. "	Loop	1600KC	1600KC	"	A5	Fashion loop of several turns of wire and radiate signal into loop of receiver. Adjust for maximum output.
3. "	"	600KC	600KC	"	A6	"
4. "	"	1400KC	1400KC	"	A7	"

HOWARD W. SAMS & CO., INC. Indianapolis 6, Indiana

The listing of any available replacement part herein does not constitute in any case a recommendation, warranty or guaranty by Howard W. Sams & Co., Inc., as to the quality and suitability of such replacement part. The numbers of these parts have been compiled from information furnished to Howard W. Sams & Co., Inc., by the manufacturers of JG122

the particular type of replacement part listed. Reproduction or use, without express permission, of editorial or pictorial content, in any manner, is prohibited. No patent liability is assumed with respect to the use of the information contained herein. © 1959 Howard W. Sams & Co., Inc., Indianapolis 6, Indiana. Printed in U.S. of America

SILVERTONE MODELS 9002, 9003, 9004, 9005, 9006 (Ch. 132.44300, 132.44400)

SET 460 FOLDER 18

DATE 10-59

SET 460

FOLDER 18

