



LCD-TV

Chassis	: N68A		
Model	: LE32B55*	LE32B57*	LE40B62*
	LE37B55*	LE37B57*	LE46B62*
	LE40B55*	LE40B57*	LE52B62*
	LE46B55*	LE46B57*	LE40B75*
	LE32B65*	LE32B67*	LE46B75*
	LE37B65*	LE37B67*	LE52B75*
	LE40B65*	LE40B67*	
	LE46B65*	LE46B67*	
	LE55B65*	LE55B67*	

SERVICEManual

TFT-LCD TV



LE32B55*/LE37B55*/LE40B55*/LE46B55*
/LE32B65*/LE37B65*/LE40B65*/LE46B65*
/LE55B65*/LE32B57*/LE37B57*/LE40B57*
/LE46B57*/LE32B67*/LE37B67*/LE40B67*
/LE46B67*/LE55B67*/LE40B62*/LE46B62*/
LE52B62*/LE40B75*/LE46B75*/LE52B75*

Contents

1. Precautions
2. Product specifications
3. Disassembly and Reassembly
4. Troubleshooting
5. Exploded View & Part List
6. Wiring Diagram

Contents

1. Precautions	1-1
1-1. Safety Precautions	1-1
1-2. Servicing Precautions	1-2
1-3. Electrostatically Sensitive Devices (ESD) Precautions	1-2
1-4. Installation Precautions	1-3
2. Product specifications	2-1
2-1. Feature & Specifications	2-1
2-2. Movie Plus: MJC(Motion Judder Cancellation)	2-20
2-3. Specification Comparison to Old Models	2-21
2-4. Accessories	2-22
3. Disassembly and Reassembly	3-1
3-1. Disassembly and Reassembly	3-1
4. Troubleshooting	4-1
4-1. Troubleshooting	4-1
4-2. Alignments and Adjustments	4-14
4-3. Factory Mode Adjustments	4-15
4-4. White Balance - Calibration	4-26
4-5. White Ratio (Balance) Adjustment	4-28
4-6. Servicing Information	4-29
5. Exploded View & Part List	5-1
5-1. LE32B55* Exploded View	5-1
5-2. LE37B55* Exploded View	5-3
5-3. LE40B55* Exploded View	5-5
5-4. LE46B55* Exploded View	5-7
5-5. LE32B65* Exploded View	5-9
5-6. LE37B65* Exploded View	5-11
5-7. LE40B65* Exploded View	5-13
5-8. LE46B65* Exploded View	5-15
5-9. LE55B65* Exploded View	5-17
5-10. LE40B75* Exploded View	5-19
5-11. LE46B75* Exploded View	5-21
5-12. LE52B75* Exploded View	5-23
5-13. LE32B55*A Parts List	5-25
5-14. LE37B55*A Parts List	5-56
5-15. LE40B55*A Parts List	5-87
5-16. LE46B55*A Parts List	5-118
5-17. LE32B65*A Parts List	5-149
5-18. LE37B65*A Parts List	5-182
5-19. LE40B65*A Parts List	5-215
5-20. LE46B65*A Parts List	5-248
5-21. LE55B65*A Parts List	5-281
5-22. LE40B75* Parts List	5-314
5-23. LE46B75* Parts List	5-346
5-24. LE52B75* Parts List	5-378
6. Wiring Diagram	6-1
6-1. Wiring Diagram	6-1
6-2. Wiring Picture	6-3
6-3. Connector Functions	6-3
6-4. Cables	6-4

1. Precautions

1-1. Safety Precautions

Follow these safety, servicing and ESD precautions to prevent damage and to protect against potential hazards such as electrical shock.

1-1-1. Warnings

1. For continued safety, do not attempt to modify the circuit board.
2. Disconnect the AC power and DC power jack before servicing.

1-1-2. Servicing the LCD TV

1. When servicing the LCD TV, Disconnect the AC line cord from the AC outlet.
2. It is essential that service technicians have an accurate voltage meter available at all times. Check the calibration of this meter periodically.

1-1-3. Fire and Shock Hazard

Before returning the LCD TV to the user, perform the following safety checks:

1. Inspect each lead dress to make certain that the leads are not pinched or that hardware is not lodged between the chassis and other metal parts in the LCD TV.
2. Inspect all protective devices such as nonmetallic control knobs, insulating materials, cabinet backs, adjustment and compartment covers or shields, isolation resistor/capacitor networks, mechanical insulators, etc.
3. Leakage Current Hot Check (Figure 1-1):

WARNING : Do not use an isolation transformer during this test.

Use a leakage current tester or a metering system that complies with American National Standards Institute (ANSI C101.1, Leakage Current for Appliances), and Underwriters Laboratories (UL Publication UL1410, 59.7).

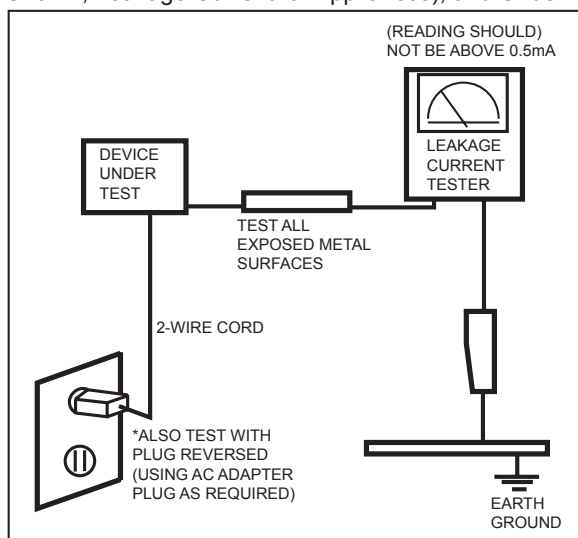



Figure 1-1. Leakage Current Test Circuit

4. With the unit completely reassembled, plug the AC line cord directly into a 120V AC outlet. With the unit's AC switch first in the ON position and then OFF, measure the current between a known earth ground (metal water pipe, conduit, etc.) and all exposed metal parts, including: metal cabinets, screwheads and control shafts. The current measured should not exceed 0.5 milliamp. Reverse the power-plug prongs in the AC outlet and repeat the test.

1-1-4. Product Safety Notices

Some electrical and mechanical parts have special safety-related characteristics which are often not evident from visual inspection. The protection they give may not be obtained by replacing them with components rated for higher voltage, wattage, etc. Parts that have special safety characteristics are identified by  on schematics and parts lists. A substitute replacement that does not have the same safety characteristics as the recommended replacement part might create shock, fire and/or other hazards. Product safety is under review continuously and new instructions are issued whenever appropriate.

1-2. Servicing Precautions

WARNING: An electrolytic capacitor installed with the wrong polarity might explode.

Caution: Before servicing units covered by this service manual, read and follow the Safety Precautions section of this manual.

Note: If unforeseen circumstances create conflict between the following servicing precautions and any of the safety precautions, always follow the safety precautions.

1-2-1 General Servicing Precautions

1. Always unplug the unit's AC power cord from the AC power source and disconnect the DC Power Jack before attempting to:
(a) remove or reinstall any component or assembly, (b) disconnect PCB plugs or connectors, (c) connect a test component in parallel with an electrolytic capacitor.
2. Some components are raised above the printed circuit board for safety. An insulation tube or tape is sometimes used. The internal wiring is sometimes clamped to prevent contact with thermally hot components. Reinstall all such elements to their original position.
3. After servicing, always check that the screws, components and wiring have been correctly reinstalled. Make sure that the area around the serviced part has not been damaged.
4. Check the insulation between the blades of the AC plug and accessible conductive parts (examples: metal panels, input terminals and earphone jacks).
5. Insulation Checking Procedure: Disconnect the power cord from the AC source and turn the power switch ON. Connect an insulation resistance meter (500 V) to the blades of the AC plug. The insulation resistance between each blade of the AC plug and accessible conductive parts (see above) should be greater than 1 megohm.
6. Always connect a test instrument's ground lead to the instrument chassis ground before connecting the positive lead; always remove the instrument's ground lead last.

1-3. Electrostatically Sensitive Devices (ESD) Precautions

Some semiconductor (solid state) devices can be easily damaged by static electricity. Such components are commonly called Electrostatically Sensitive Devices (ESD). Examples of typical ESD are integrated circuits and some field-effect transistors. The following techniques will reduce the incidence of component damage caused by static electricity.

1. Immediately before handling any semiconductor components or assemblies, drain the electrostatic charge from your body by touching a known earth ground. Alternatively, wear a discharging wrist-strap device. To avoid a shock hazard, be sure to remove the wrist strap before applying power to the LCD TV.
2. After removing an ESD-equipped assembly, place it on a conductive surface such as aluminum foil to prevent accumulation of an electrostatic charge.
3. Do not use freon-propelled chemicals. These can generate electrical charges sufficient to damage ESDs.
4. Use only a grounded-tip soldering iron to solder or desolder ESDs.
5. Use only an anti-static solder removal device. Some solder removal devices not classified as "anti-static" can generate electrical charges sufficient to damage ESDs.
6. Do not remove a replacement ESD from its protective package until you are ready to install it. Most replacement ESDs are packaged with leads that are electrically shorted together by conductive foam, aluminum foil or other conductive materials.
7. Immediately before removing the protective material from the leads of a replacement ESD, touch the protective material to the chassis or circuit assembly into which the device will be installed.
Caution: Be sure no power is applied to the chassis or circuit and observe all other safety precautions.
8. Minimize body motions when handling unpackaged replacement ESDs. Motions such as brushing clothes together, or lifting your foot from a carpeted floor can generate enough static electricity to damage an ESD.

1-4. Installation Precautions

1. For safety reasons, more than a people are required for carrying the product.
2. Keep the power cord away from any heat emitting devices, as a melted covering may cause fire or electric shock.
3. Do not place the product in areas with poor ventilation such as a bookshelf or closet. The increased internal temperature may cause fire.
4. Bend the external antenna cable when connecting it to the product. This is a measure to protect it from being exposed to moisture. Otherwise, it may cause a fire or electric shock.
5. Make sure to turn the power off and unplug the power cord from the outlet before repositioning the product. Also check the antenna cable or the external connectors if they are fully unplugged. Damage to the cord may cause fire or electric shock.
6. Keep the antenna far away from any high-voltage cables and install it firmly. Contact with the highvoltage cable or the antenna falling over may cause fire or electric shock.
7. When installing the product, leave enough space (0.1m) between the product and the wall for ventilation purposes. A rise in temperature within the product may cause fire.

Memo

Model	LE32B55*	
Feature		
<ul style="list-style-type: none">▶ Digital-TV, RF, 4-HDMI, 2Ext, 1Component, 1-A/V, 1USB2.0, D-sub▶ Brightness : 500cd/m²▶ Contrast Ratio : 8000:1▶ Response time : 6.5ms▶ Full HDTV (1920 x 1080 pixels)▶ PIP(in HDMI1, 2, 3, 4, Component1, PC mode and Sub picture is available TV, Ext1/2, AV)		
Specifications		
Item	Description	
LCD Panel	T315HW02 V2,8bit,31.5 inch,16.7M,16:9,0 to +50,12V,AMVA3,72%,31.5 inch, FHD, 4U-Lamp, w/o inverter (Second Panel : LTF320HA09,SSCZAI,8bit,32inch, 16.7M,16:9,0.3635(H)*0.36375(w),0 to +50,12V,SPVA 72%,32 inch FHD)	
Scanning Frequency	Horizontal : 60kHz ~ 73kHz (Automatic) Vertical : 47HZ ~ 63HZ (Automatic)	
Display Colors	16.7 million colors	
Maximum resolution	Horizontal : 1920 Pixels Vertical : 1080 Pixels	
Input Signal	Analog 0.7 Vp-p ± 5% positive at 75Ω , internally terminated	
Input Sync Signal	H/V Separate, TTL, P. or N.	
Maximum Pixel Clock rate	400MHz	
Active Display Horizontal/Vertical	698.4(H) x 392.85(V) mm	
AC power voltage & Frequency	AC 110V ~ 240V, 50/60Hz	
Power Consumption	<130 W (< 0.3W, stand by)	
Dimensions Set (W x D x H)	31.53 x 9.92 x 22.58 inches (801.0 x 251.9 x 573.5mm)_with stand 28.88 x 3.11 x 20.69 inches (801.0 x 79 x 525.5mm)_without stand	
Weight (Set)	28.88lbs (13.1 kg)	
TV System	Tuning	Frequency Synthesize (Refer to detailed Frequency Table)
	System	DVB-T, PAL, SECAM, NT4.43
	Sound	BG, DK, NICAM, MPEG1
Environmental Considerations	Operating Temperature : 50°F ~ 104°F (10°C ~ 40°C) Operating Humidity : 10% ~ 80%, non-condensing Storage temperature : -13°F ~ 113°F (-25°C ~ 45°C) Storage Humidity : 5% ~ 95%, non-condensing	
Audio spec.	- MAX Internal speaker Out : Right => 10W, Left => 10W - BASS Control Range : -8 dB ~ + 8dB - TREBLE Control Range : -8 dB ~ +8 dB - Headphone Out : 10 mW MAX - Output Frequency : RF : 80 Hz ~ 15 kHz A/V : 80 Hz ~ 20 kHz	
Note: Anynet+, WISELINK		

2. Product specifications

Model	LE37B55*
Feature	
<ul style="list-style-type: none"> ▶ Digital-TV, RF, 4-HDMI, 2Ext, 1Component, 1-A/V, 1USB2.0, D-sub ▶ Brightness : 500cd/m² ▶ Contrast Ratio : 8000:1 ▶ Response time : 6ms ▶ Full HDTV (1920 x 1080 pixels) ▶ PIP(in HDMI1, 2, 3, 4, Component1, PC mode and Sub picture is available TV, Ext1/2, AV) 	
Specifications	
Item	Description
LCD Panel	T370HW02 V,8bit,37 inch,16.7M,16:9,0 to +50,12V,AMVA,72%,37 inch, FHD, 10S-Lamp, w/o inverter
Scanning Frequency	Horizontal : 60kHz ~ 73kHz (Automatic) Vertical : 47Hz ~ 63Hz (Automatic)
Display Colors	16.7 million colors
Maximum resolution	Horizontal : 1920 Pixels Vertical : 1080 Pixels
Input Signal	Analog 0.7 Vp-p ± 5% positive at 75Ω , internally terminated
Input Sync Signal	H/V Separate, TTL, P. or N.
Maximum Pixel Clock rate	310MHz
Active Display Horizontal/Vertical	819.36(H) x 460.89(V) mm
AC power voltage & Frequency	AC 110V ~ 240V, 50/60Hz
Power Consumption	<140 W (< 0.3W, stand by)
Dimensions Set (W x D x H)	36.12 x11.81 x 25.58 inches (917.5 x 300 x 649.8mm)_with stand 36.12 x 3.26 x 23.82 inches (917.5 x 82.8 x 605.0mm)_without stand
Weight (Set)	39.46lbs (17.9 kg)
TV System	Tuning Frequency Synthesize (Refer to detailed Frequency Table)
	System DVB-T, PAL, SECAM, NT4.43
	Sound BG, DK, NICAM, MPEG1
Environmental Considerations	Operating Temperature : 50°F ~ 104°F (10°C ~ 40°C) Operating Humidity : 10% ~ 80%, non-condensing Storage temperature : -13°F ~ 113°F (-25°C ~ 45°C) Storage Humidity : 5% ~ 95%, non-condensing
Audio spec.	- MAX Internal speaker Out : Right => 10W, Left => 10W - BASS Control Range : -8 dB ~ + 8dB - TREBLE Control Range : -8 dB ~ +8 dB - Headphone Out : 10 mW MAX - Output Frequency : RF : 80 Hz ~ 15 kHz A/V : 80 Hz ~ 20 kHz
Note: Anynet+, WISELINK	

2-3

2. Product specifications

Model	LE46B55*	
Feature		
<ul style="list-style-type: none"> ▶ Digital-TV, RF, 4-HDMI, 2Ext, 1Component, 1-A/V, 1USB2.0, D-sub ▶ Brightness : 500cd/m² ▶ Contrast Ratio : 5000:1 ▶ Response time : 6.5ms ▶ Full HDTV (1920 x 1080 pixels) ▶ PIP(in HDMI1, 2, 3, 4, Component1, PC mode and Sub picture is available TV, Ext1/2, AV) 		
Specifications		
Item	Description	
LCD Panel	V460H1-L06,8bits,46inch,16.7M,16:9,0 to +50,12V,Flip Pixel, 72%,46 inch, FHD (Second Panel : LTF460HA06,SSEZAV,8bit,46inch,16.7M,16:9,0.53025(H)*0.53025 (W,0 to +50,12V,SPVA 72%,AG3)	
Scanning Frequency	Horizontal : 30 kHz ~ 80 kHz (Automatic) Vertical : 56 Hz ~ 75 Hz (Automatic)	
Display Colors	16.7 million colors	
Maximum resolution	Horizontal : 1920 Pixels Vertical : 1080 Pixels	
Input Signal	Analog 0.7 Vp-p ± 5% positive at 75Ω , internally terminated	
Input Sync Signal	H/V Separate, TTL, P. or N.	
Maximum Pixel Clock rate	310MHz	
Active Display Horizontal/Vertical	1018.08(H) x 572.67(V) mm	
AC power voltage & Frequency	AC 110V ~ 240V, 50/60Hz	
Power Consumption	<240 W (< 0.3W, stand by)	
Dimensions Set (W x D x H)	44.39 x 11.02 x 30.18 inches (1127.4 x 279.9 x 766.5mm)_with stand 44.39 x 3.66 x 28.18 inches (1127.4 x 93 x 715.7mm)_without stand	
Weight (Set)	60.85lbs (27.6 kg)	
TV System	Tuning	Frequency Synthesize (Refer to detailed Frequency Table)
	System	DVB-T, PAL, SECAM, NT4.43
	Sound	BG, DK, NICAM, MPEG1
Environmental Considerations	Operating Temperature : 50°F ~ 104°F (10°C ~ 40°C) Operating Humidity : 10% ~ 80%, non-condensing Storage temperature : -13°F ~ 113°F (-25°C ~ 45°C) Storage Humidity : 5% ~ 95%, non-condensing	
Audio spec.	- MAX Internal speaker Out : Right => 10W, Left => 10W - BASS Control Range : -8 dB ~ + 8dB - TREBLE Control Range : -8 dB ~ +8 dB - Headphone Out : 10 mW MAX - Output Frequency : RF : 80 Hz ~ 15 kHz A/V : 80 Hz ~ 20 kHz	
Note: Anynet+, WISELINK		

2-5

2. Product specifications

Model	LE37B65*	
Feature		
<ul style="list-style-type: none"> ▶ Digital-TV, RF, 4-HDMI, 2Ext, 1Component, 1-A/V, 2USB2.0(HDD Support), LAN, D-sub ▶ Brightness : 500cd/m² ▶ Contrast Ratio : 8000:1 ▶ Response time : 6ms ▶ 100Hz Full HDTV (1920 x 1080 pixels) ▶ PIP(in HDMI1, 2, 3, 4, Component1, PC mode and Sub picture is available TV, Ext1/2, AV) 		
Specifications		
Item	Description	
LCD Panel	T370HW02 VE,8bit,37 inch,16.7M,16:9,0 to +50,12V,AMVA,72%,37 inch, FHD, 10S-Lamp, w/o inverter, 120Hz(MEMC)	
Scanning Frequency	Horizontal : 131.52Hz ~ 135.6Hz (Automatic) Vertical : 118Hz ~ 122Hz (Automatic)	
Display Colors	16.7 million colors	
Maximum resolution	Horizontal : 1920 Pixels Vertical : 1080 Pixels	
Input Signal	Analog 0.7 Vp-p ± 5% positive at 75Ω , internally terminated	
Input Sync Signal	H/V Separate, TTL, P. or N.	
Maximum Pixel Clock rate	310MHz	
Active Display Horizontal/Vertical	819.36(H) x 460.89(V) mm	
AC power voltage & Frequency	AC 110V ~ 240V, 50/60Hz	
Power Consumption	<140 W (< 0.3W, stand by)	
Dimensions Set (W x D x H)	926.7 x 255.0 x 668.2 mm _with stand 926.7 x 78.2 x 608.4 mm _without stand	
Weight (Set)	17.4kg	
TV System	Tuning	Frequency Synthesize (Refer to detailed Frequency Table)
	System	DVB-T, PAL, SECAM, NT4.43
	Sound	BG, DK, NICAM, MPEG1
Environmental Considerations	Operating Temperature : 50°F ~ 104°F (10°C ~ 40°C) Operating Humidity : 10% ~ 80%, non-condensing Storage temperature : -13°F ~ 113°F (-25°C ~ 45°C) Storage Humidity : 5% ~ 95%, non-condensing	
Audio spec.	- MAX Internal speaker Out : Right => 10W, Left => 10W - BASS Control Range : -8 dB ~ + 8dB - TREBLE Control Range : -8 dB ~ +8 dB - Headphone Out : 10 mW MAX - Output Frequency : RF : 80 Hz ~ 15 kHz A/V : 80 Hz ~ 20 kHz	
Note: Anynet+, WISELINK, Internet TV		

2-7

2. Product specifications

Model	LE46B65*	
Feature		
<ul style="list-style-type: none"> ▶ Digital-TV, RF, 4-HDMI, 2Ext, 1Component, 1-A/V, 2USB2.0(HDD Support), LAN, D-sub ▶ Brightness : 500cd/m² ▶ Contrast Ratio : 5000:1 ▶ Response time : 6ms ▶ 100Hz Full HDTV (1920 x 1080 pixels) ▶ PIP(in HDMI1, 2, 3, 4, Component1, PC mode and Sub picture is available TV, Ext1/2, AV) 		
Specifications		
Item	Description	
LCD Panel	LTF460HF03,SSEZFT,8bit,46inch,1.07B,16:9,0.53025(H)*0.53025(w,0 to +50, 12V,SPVA 75% ZBD,46 inch FHD	
Scanning Frequency	Horizontal : 100kHz ~ 140kHz (Automatic) Vertical : 90Hz ~ 125Hz (Automatic)	
Display Colors	1.07B colors	
Maximum resolution	Horizontal : 1920 Pixels Vertical : 1080 Pixels	
Input Signal	Analog 0.7 Vp-p ± 5% positive at 75Ω , internally terminated	
Input Sync Signal	H/V Separate, TTL, P. or N.	
Maximum Pixel Clock rate	310MHz	
Active Display Horizontal/Vertical	1018.08(H) x 572.67(V) mm	
AC power voltage & Frequency	AC 110V ~ 240V, 50/60Hz	
Power Consumption	<240 W (< 0.3W, stand by)	
Dimensions Set (W x D x H)	1126.1 x 277.0 x 783.4 mm_with stand 1126.1 x 78.6 x 730.3 mm_without stand	
Weight (Set)	25.0kg	
TV System	Tuning	Frequency Synthesize (Refer to detailed Frequency Table)
	System	DVB-T, PAL, SECAM, NT4.43
	Sound	BG, DK, NICAM, MPEG1
Environmental Considerations	Operating Temperature : 50°F ~ 104°F (10°C ~ 40°C) Operating Humidity : 10% ~ 80%, non-condensing Storage temperature : -13°F ~ 113°F (-25°C ~ 45°C) Storage Humidity : 5% ~ 95%, non-condensing	
Audio spec.	- MAX Internal speaker Out : Right => 10W, Left => 10W - BASS Control Range : -8 dB ~ + 8dB - TREBLE Control Range : -8 dB ~ +8 dB - Headphone Out : 10 mW MAX - Output Frequency : RF : 80 Hz ~ 15 kHz A/V : 80 Hz ~ 20 kHz	
Note: Anynet+, WISELINK, Internet TV		

2-9

2. Product specifications

Model	LE40B62*	
Feature		
<ul style="list-style-type: none"> ▶ Digital-TV, RF, 4-HDMI, 2Ext, 1Component, 1-A/V, 1USB2.0, D-sub ▶ Brightness : 500cd/m² ▶ Contrast Ratio : 4000:1 ▶ Response time : 4ms ▶ 100Hz Full HDTV (1920 x 1080 pixels) ▶ PIP(in HDMI1, 2, 3, 4, Component1, PC mode and Sub picture is available TV, Ext1/2, AV) 		
Specifications		
Item	Description	
LCD Panel	V400H1-LH3,CM40H13A,10bits,40inch,1073.7M,16:9,0 to +50,12V,DJITO, 72%, 40 inch, FHD, w/o inverter, 120Hz(MEMC)	
Scanning Frequency	Horizontal : 135kHz (Automatic) Vertical : 120Hz (Automatic)	
Display Colors	1G colors	
Maximum resolution	Horizontal : 1920 Pixels Vertical : 1080 Pixels	
Input Signal	Analog 0.7 Vp-p ± 5% positive at 75Ω , internally terminated	
Input Sync Signal	H/V Separate, TTL, P. or N.	
Maximum Pixel Clock rate	310MHz	
Active Display Horizontal/Vertical	885.6(H) x 498.15(V) mm	
AC power voltage & Frequency	AC 110V ~ 240V, 50/60Hz	
Power Consumption	<200 W (< 0.3W, stand by)	
Dimensions Set (W x D x H)	995.1 x 255.0 x 705.9 mm _with stand 995.1 x 78.6 x 650.4 mm _without stand	
Weight (Set)	21.2Kg	
TV System	Tuning	Frequency Synthesize (Refer to detailed Frequency Table)
	System	DVB-T, PAL, SECAM, NT4.43
	Sound	BG, DK, NICAM, MPEG1
Environmental Considerations	Operating Temperature : 50°F ~ 104°F (10°C ~ 40°C) Operating Humidity : 10% ~ 80%, non-condensing Storage temperature : -13°F ~ 113°F (-25°C ~ 45°C) Storage Humidity : 5% ~ 95%, non-condensing	
Audio spec.	- MAX Internal speaker Out : Right => 10W, Left => 10W - BASS Control Range : -8 dB ~ + 8dB - TREBLE Control Range : -8 dB ~ +8 dB - Headphone Out : 10 mW MAX - Output Frequency : RF : 80 Hz ~ 15 kHz A/V : 80 Hz ~ 20 kHz	
Note: Anynet+, WISELINK		

2-11

2. Product specifications

Model	LE52B62*	
Feature		
<ul style="list-style-type: none"> ▶ Digital-TV, RF, 4-HDMI, 2Ext, 1Component, 1-A/V, 1USB2.0, D-sub ▶ Brightness : 500cd/m² ▶ Contrast Ratio : 5000:1 ▶ Response time : 6ms ▶ 100Hz Full HDTV (1920 x 1080 pixels) ▶ PIP(in HDMI1, 2, 3, 4, Component1, PC mode and Sub picture is available TV, Ext1/2, AV) 		
Specifications		
Item	Description	
LCD Panel	LTF520HE09,SSNZEI,8bit,52inch,1.06B,16:9,0.6(H)*0.6(w),0 to +50,12V,SPVA 72%,FHD 120Hz(AG)	
Scanning Frequency	Horizontal : 135kHz (Automatic) Vertical : 120Hz (Automatic)	
Display Colors	1.07B colors	
Maximum resolution	Horizontal : 1920 Pixels Vertical : 1080 Pixels	
Input Signal	Analog 0.7 Vp-p ± 5% positive at 75Ω , internally terminated	
Input Sync Signal	H/V Separate, TTL, P. or N.	
Maximum Pixel Clock rate	310MHz	
Active Display Horizontal/Vertical	1152 (H) x 648 (V) mm	
AC power voltage & Frequency	AC 110V ~ 240V, 50/60Hz	
Power Consumption	< 250W (< 0.3W, stand by)	
Dimensions Set (W x D x H)	1310.8 x 305 x 894.8 mm_with stand 1310.8 x 79.9 x 841.8 mm_without stand	
Weight (Set)	32.3Kg	
TV System	Tuning	Frequency Synthesize (Refer to detailed Frequency Table)
	System	DVB-T, PAL, SECAM, NT4.43
	Sound	BG, DK, NICAM, MPEG1
Environmental Considerations	Operating Temperature : 50°F ~ 104°F (10°C ~ 40°C) Operating Humidity : 10% ~ 80%, non-condensing Storage temperature : -13°F ~ 113°F (-25°C ~ 45°C) Storage Humidity : 5% ~ 95%, non-condensing	
Audio spec.	- MAX Internal speaker Out : Right => 10W, Left => 10W - BASS Control Range : -8 dB ~ + 8dB - TREBLE Control Range : -8 dB ~ +8 dB - Headphone Out : 10 mW MAX - Output Frequency : RF : 80 Hz ~ 15 kHz A/V : 80 Hz ~ 20 kHz	
Note: Anynet+, WISELINK		

2-13

2. Product specifications

Model	LE46B75*	
Feature		
<ul style="list-style-type: none"> ▶ Digital-TV, RF, 4-HDMI, 2Ext, 1Component, 1-A/V, 1USB2.0, D-sub ▶ Brightness : 500cd/m² ▶ Contrast Ratio : 4000:1 ▶ Response time : 6ms ▶ 100Hz Full HDTV (1920 x 1080 pixels) ▶ PIP(in HDMI1, 2, 3, 4, Component1, PC mode and Sub picture is available TV, Ext1/2, AV) 		
Specifications		
Item	Description	
LCD Panel	T460HW03 V5,AU46H35,8bit,46 inch,16.7M,16:9,0 to +50,12V,AMVA3,72%,46 inch, FHD, 20S-Lamp, 120Hz(MEMC)	
Scanning Frequency	Horizontal : 131.52 kHz ~ 139.2 kHz (Automatic) Vertical : 118 Hz ~ 122Hz (Automatic)	
Display Colors	1.07B colors	
Maximum resolution	Horizontal : 1920 Pixels Vertical : 1080 Pixels	
Input Signal	Analog 0.7 Vp-p ± 5% positive at 75Ω , internally terminated	
Input Sync Signal	H/V Separate, TTL, P. or N.	
Maximum Pixel Clock rate	310MHz	
Active Display Horizontal/Vertical	1018.08(H) x 572.67(V) mm	
AC power voltage & Frequency	AC 110V ~ 240V, 50/60Hz	
Power Consumption	< 240 W (< 0.3W, stand by)	
Dimensions Set (W x D x H)	1115.0 x 275.0 x 766.0 mm_with stand 1115.0 x 78.6 x 702.5 mm_without stand	
Weight (Set)	24.6Kg	
TV System	Tuning	Frequency Synthesize (Refer to detailed Frequency Table)
	System	DVB-T, PAL, SECAM, NT4.43
	Sound	BG, DK, NICAM, MPEG1
Environmental Considerations	Operating Temperature : 50°F ~ 104°F (10°C ~ 40°C) Operating Humidity : 10% ~ 80%, non-condensing Storage temperature : -13°F ~ 113°F (-25°C ~ 45°C) Storage Humidity : 5% ~ 95%, non-condensing	
Audio spec.	- MAX Internal speaker Out : Right => 10W, Left => 10W - BASS Control Range : -8 dB ~ + 8dB - TREBLE Control Range : -8 dB ~ +8 dB - Headphone Out : 10 mW MAX - Output Frequency : RF : 80 Hz ~ 15 kHz A/V : 80 Hz ~ 20 kHz	
Note: Anynet+, WISELINK		

2-15

PAL On-Air Channel Frequency Table

channel	Europe PAL-BG	INDONESIA PAL-BG	IRELAND PAL-I	South Africa PAL-I	ANGOLA PAL-I	NEWZEALAND PAL-BG	ITALY PAL-BG
A	x	x	x	x	x	x	53.75
B	x	x	x	x	x	x	62.25
C1	x	x	x	x	x	x	x
C	x	x	x	x	x	x	82.25
D	x	x	x	x	x	x	175.25
E	x	x	x	x	x	x	183.75
F	x	x	x	x	x	x	192.25
G	x	x	x	x	x	x	201.25
H	x	x	x	x	x	x	210.25
H1	x	x	x	x	x	x	217.25
H2	x	x	x	x	x	x	224.25
0	x	x	x	x	x	x	x
1	x	44.25	45.75	x	43.25	45.25	x
2	48.25	55.25	53.75	x	52.25	55.25	x
3	55.25	62.25	61.75	x	60.25	62.25	x
4	62.25	175.25	175.25	175.25	175.25	175.25	x
5	175.25	182.25	183.25	183.25	183.25	182.25	x
5A	x	x	x	x	x	x	x
6	182.25	189.25	191.25	191.25	191.25	189.25	x
7	189.25	196.25	199.25	199.25	199.25	196.25	x
8	196.25	203.25	207.25	207.25	207.25	203.25	x
9	203.25	210.25	215.25	215.25	215.25	210.25	x
9A	x	x	x	x	x	x	x
10	210.25	217.25	223.25	223.25	223.25	217.25	x
11	217.25	224.25	231.25	231.25	x	224.25	x
12	224.25	x	x	239.25	x	x	x
13	x	x	x	247.25	x	x	x
14	x	x	x	x	x	x	x
15	x	x	x	x	x	x	x
16	x	x	x	x	x	x	x
17	x	x	x	x	x	x	x
18	x	x	x	x	x	x	x
19	x	x	x	x	x	x	x
20	x	x	x	x	x	x	x
21	471.25						
22	479.25						
23	487.25						
24	495.25						
25	503.25						
26	511.25						
27	519.25						
28	527.25						
29	535.25						
30	543.25						
31	551.25						
32	559.25						
33	567.25						
34	575.25						
35	583.25						
36	591.25						
37	599.25						
38	607.25						
39	615.25						
40	623.25						
41	631.25						
42	639.25						
43	647.25						
44	655.25						
45	663.25						
46	671.25						
47	679.25						
48	687.25						
49	695.25						
50	703.25						
51	711.25						
52	719.25						
53	727.25						
54	735.25						
55	743.25						
56	751.25						
57	759.25						
58	767.25						
59	775.25			x	x	775.25	
60	783.25			x	x	783.25	
61	791.25			x	x	791.25	
62	799.25			x	x	799.25	
63	807.25			x	x	807.25	
64	815.25			x	x	815.25	
65	823.25			x	x	823.25	
66	831.25			x	x	831.25	
67	839.25			x	x	839.25	
68	847.25			x	x	847.25	
69	855.25			x	x	855.25	


EUROPE SECAM-BG	FRANCE SECAM-L	PALII	UK PAL-I	CIS(OIRT) SECAM -DK	AUSTRALIA PAL-BG	CHINA PAL-D
x	47.75	x	x	x	x	x
x	55.75	x	x	x	x	x
x	60.50	x	x	x	x	x
x	63.75	x	x	x	x	x
x	x	x	x	x	x	x
x	x	x	x	x	x	x
x	x	x	x	x	x	x
x	x	x	x	x	x	x
x	x	x	x	x	x	x
x	x	x	x	x	x	x
x	x	x	x	x	x	x
x	x	x	x	x	46.25	x
41.25	176.00	45.00	x	49.75	57.25	49.75
48.25	184.00	51.75	x	59.25	64.25	57.75
55.25	192.00	56.75	x	77.25	86.25	65.75
62.25	200.00	61.75	x	85.25	95.25	77.25
175.25	208.00	66.75	x	93.25	102.25	85.25
x	x	x	x	x	138.25	x
182.25	216.00	179.75	x	175.25	175.25	168.25
189.25	x	184.75	x	183.25	182.25	176.25
196.25	x	189.75	x	191.25	189.25	184.25
203.25	x	194.75	x	199.25	196.25	192.25
x	x	x	x	x	203.25	x
210.25	x	199.75	x	207.25	209.25	200.25
217.25	x	204.75	x	215.25	216.25	208.25
224.25	x	209.75	x	223.25	x	216.25
x	x	214.75	x	x	x	471.25
x	x	x	x	x	x	479.25
x	x	x	x	x	x	487.25
x	x	x	x	x	x	495.25
x	x	x	x	x	x	503.25
x	x	x	x	x	x	511.25
x	x	x	x	x	x	519.25
x	x	x	x	x	x	527.25
					x	535.25
					x	543.25
					x	551.25
					x	559.25
					x	607.25
					x	615.25
					x	623.25
					527.25	631.25
					534.25	639.25
					541.25	647.25
					548.25	655.25
					555.25	663.25
					562.25	671.25
					569.25	679.25
					576.25	687.25
					583.25	695.25
					590.25	703.25
					597.25	711.25
					604.25	719.25
					611.25	727.25
					618.25	735.25
					625.25	743.25
					632.25	751.25
					639.25	759.25
					646.25	767.25
					653.25	775.25
					660.25	783.25
					667.25	791.25
					674.25	799.25
					681.25	807.25
					688.25	815.25
					695.25	823.25
					702.25	831.25
					709.25	839.25
					716.25	847.25
					723.25	855.25
					730.25	863.25
					737.25	x
					744.25	x
					751.25	x
					758.25	x
					765.25	x
					772.25	x
					779.25	x
					786.25	567.25
					793.25	575.25
					800.25	583.25
					807.25	591.25
					814.25	599.25

PAL CATV Channel Frequency Table



channel	Europe	INDONESIA	IRELAND	South Africa	ANGOLA	NEWZEALAND	ITALY
	PAL-BG	PAL-BG	PAL-BG	SEAAM	SEAAM	PAL-BG	PAL-BG
S1'	69.25						
S2'	76.25						
S3'	83.25						
S4'	90.25						
S5'	97.25						
S1	105.25						
S2	112.25						
S3	119.25						
S4	126.25						
S5	133.25						
S6	140.25						
S7	147.25						
S8	154.25						
S9	161.25						
S10	168.25						
S11	231.25						
S12	238.25						
S13	245.25						
S14	252.25						
S15	259.25						
S16	266.25						
S17	273.25						
S18	280.25						
S19	287.25						
S20	294.25						
S21	303.25						
S22	311.25						
S23	319.25						
S24	327.25						
S25	335.25						
S26	343.25						
S27	351.25						
S28	359.25						
S29	367.25						
S30	375.25						
S31	383.25						
S32	391.25						
S33	399.25						
S34	407.25						
S35	415.25						
S36	423.25						
S37	431.25						
S38	439.25						
S39	447.25						
S40	455.25						
S41	463.25						

2-19




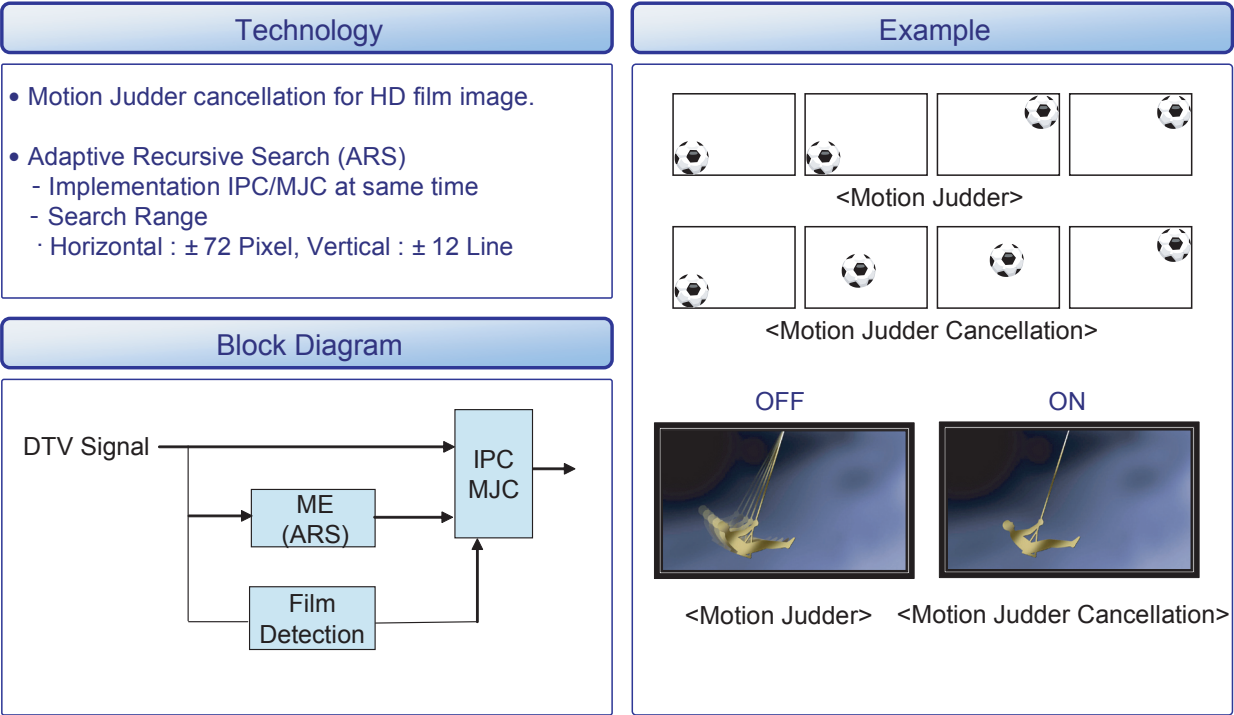


2-2. Movie Plus: MJC(Motion Judder Cancellation)



2-3. Specification Comparison to Old Models

Model	Arsenal/Chelsea (LE40B65*)	Amber (LE32A65*/LE37A65*/LE40A65*/ LE46A65*/ LE52A65*A)
Design		
Display Type	LCD TV	LCD TV
Built-in Tuner	O	O
Resolution	1920 x 1080	1920 x 1080
LCD Panel	TFT LCD Panel 100Hz FULL HD	TFT LCD Panel 100Hz Super Clear (Only 32" : 50Hz) TFT LCD Panel 100Hz Non Ultra Clear : LE37A65*A
Screen Size	32"/37"/40"/46"/55"	32"/37"/40"/46"/52"
Picture ratio	16 : 9	16 : 9
Dimensions (W x H x D)	40 43.08 x 11.41 x 26.59 inches_with stand 43.08 x 4.04 x 23.9 inches_without stand	40 39.24 x 11.81 x 27.01 inches_with stand 39.24 x 3.26 x 25.25 inches_without stand
Weight	40 52.2 lbs (set)	40 46.74lbs (set)
Brightness	500 cd	500 cd
Contrast Ratio	8000:1	8000:1
Picture Enhacer	DNle (FBE2)	DNle (FBE3)
Equalizer	5 Band	5 Band
Movie Plus(MJC)	O	O
Surround Sound	3 Way SRS TruSurround Dolby Digital	3 Way SRS TruSurround Dolby Digital
Speaker Output	10W + 10W	10W + 10W
Antenna	1(DVB-T/C)	1(DVB-T)
USB	2 (USB1:HDD Support)	1
LAN	O	X
HDMI	4	4 LE37A616A, LE40A616A : 3

2-4. Accessories

Product	Description	Code. No	Remark
	Remote Control & Batteries (AAA x 2)	BN59-00861A (LB650) BN59-00862A (LB550/LB620)	Samsung Electronics Service center
	Power Cord	3903-000145	
	Cover-Bottom	32" : BN63-05284B 37" : BN63-05285B 40" : BN63-05286B 46" : BN63-05287B 55" : BN63-05478B (LB620 40" : BN63-05385B 46" : BN63-05254B 52" : BN63-05314B)	
	Owner's Instructions	BN68-01900L BN96-10241A (LB650 E-Manual) BN96-10410A (LB550 E-Manual) BN96-10241E (LB620 E-Manual) BN68-01894A (LB550 QSG) BN68-01902A (LB650 QSG)	
	Cleaning Cloth	BN63-01798B	
	Warranty Card / Safety Guide Manual (Not available in all locations)	BN68-00514E/ AA68-03242Q	

	Manual Type	Country	Language
XC	USB+QSG	Italy, France, Germany, Portugal, Cypress, Spain, Andorra, Belgium, Luxembourg, Iceland, Austria, Switzerland, Slovenia, Turkey	Eng/Fre/Ger/Dut/Ita/Spa/Pol/Sln/Tur
XE	BOOK	Nordic	Eng/Swe/Dan/Nor/Fin
XU	BOOK	UK	Eng
ZG	USB+BOOK	Germany	Book : Ger only USB : same XC
XN	USB+QSG	Netherlands, Luxembourg, Belgium	Eng/Dut/Ger/Fre
XH	USB+QSG	Poland, Greece, Czech, Slovakia, Hungary, Bulgaria, Rumania, Croatia, Serbia, Bosnia, Montenegro, Macedonia, Albania	Eng/Hun/Pol/Bul/Cro/Rum/Ser/Gre/Cze/Slk
BT	BOOK	Baltic 3 Country (Estonia, Lithuania, Latvia)	Eng/Lat/Lit/Est/Rus
RU	BOOK	Russia	Eng/Rus
UA/CS	BOOK	Ukraine, Kazakhstan	Eng/Rus/Ukr/Kaz/Uzb

3. Disassembly and Reassembly

This section of the service manual describes the disassembly and reassembly procedures for the LE40B65*A LCD TV.







⚠ WARNING: This LCD TV contains electrostatically sensitive devices. Use caution when handling these components.


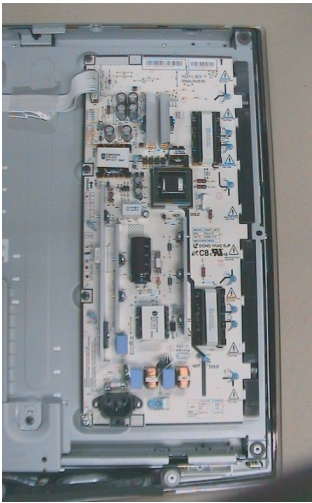
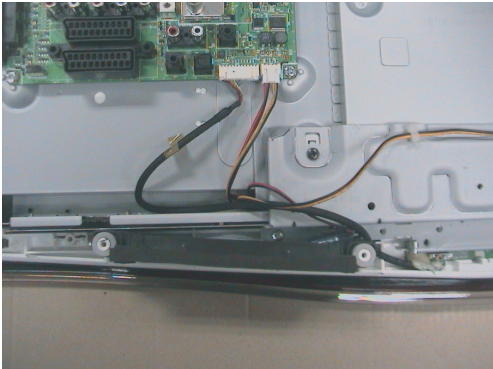
3-1. Disassembly and Reassembly

- ⚠ Cautions:**
- 1. Disconnect the LCD TV from the power source before disassembly.
 - 2. Follow these directions carefully; never use metal instruments to pry apart the cabinet.

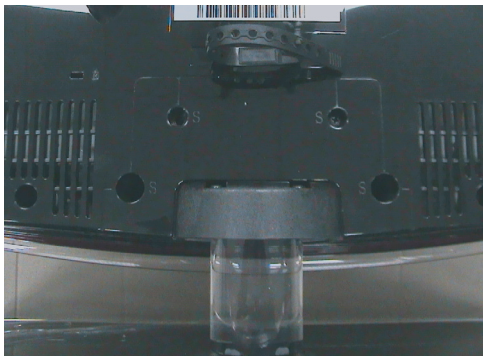
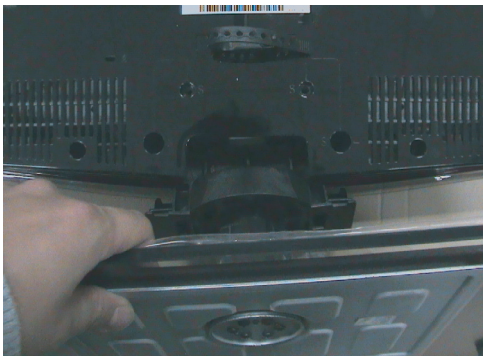


Description	Picture Description	Screws
1. Place LCD TV face down on cushioned table. Remove screws from the Stand. Remove stand.		
		
		
		

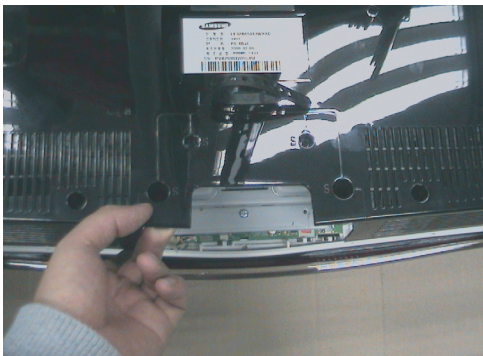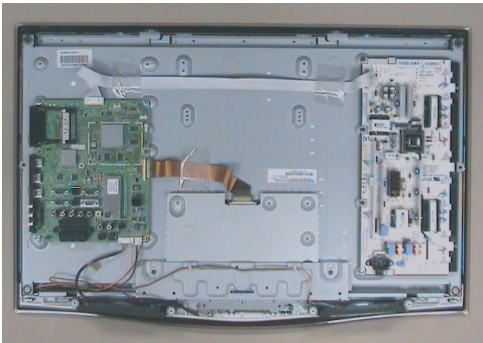

3. Disassembly and Reassembly

Description	Picture Description	Screws
2. Remove the screws of rear-cover.		
		 
3. Lift up the rear-cover.		
* Fan is used in 40" only		

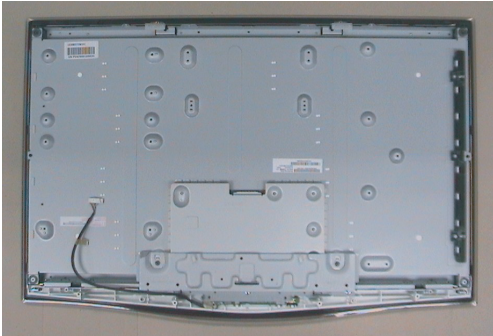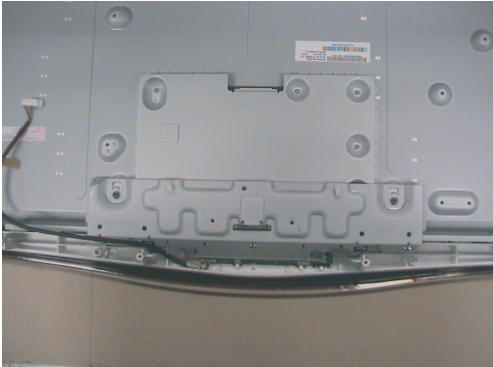Description	Picture Description	Screws
4. Remove the screws of IP and main board.	 A photograph of the main printed circuit board (PCB) of a device. The board is green and populated with various electronic components, including integrated circuits, capacitors, and connectors. It is shown mounted within a white plastic housing.	
5. Remove the speakers and screws of inlet socket.	 A photograph showing the internal speaker assembly. Two small, rectangular speaker drivers are visible, mounted on a white printed circuit board. The assembly is housed within a white plastic frame.	
	 A close-up photograph of the inlet socket area. It shows a green PCB with various electronic components, including a large black integrated circuit and several capacitors. Wires are connected to the board, and the assembly is mounted within a white plastic housing.	

3. Disassembly and Reassembly

Description	Picture Description	Screws
6. Remove the screws of Stand BKLT. Lift up the Stand BKLT.		
7. Remove the Side AV Ass'y (only 46")		
		
		

Description	Picture Description	Screws
8-1. Remove the screws of bracket. (32")		
8-2. Remove the screws of bracket. (40")		

※ Reassembly procedures are in the reverse order of disassembly procedures.


4. Troubleshooting

4-1. Troubleshooting


1. Check the various cable connections first.
 - Check to see if there is a burnt or damaged cable.
 - Check to see if there is a disconnected or loose cable connection.
 - Check to see if the cables are connected according to the connection diagram.
2. Check the power input to the Main Board.
3. Check the Power input to the FRC(Frame Rate Conversion) Board.
 Check internal Pattern both of FRC and FBE3 if there is some picture noise.
 FRC: Factory mode(Info - MENU - MUTE - power on) -> Control -> Test Pattern -> FRC PATT_BeforeDDR / FRC PATT_AfterDDR -> Press right button of Remocon.
 FBE: Factory mode(Info - MENU - MUTE - power on) -> Control -> Test Pattern -> FBE Pattern Sel -> Press right button of Remocon.
 Case1: FBE ok, FRC NG: change the FRC Board Case2: FBE NG: change the main Board

Check the LED lamp for source button on front


If this LED blank 100mS frequently then FRC board is defective(communication problem via Main board)
 in this case change the FRC board

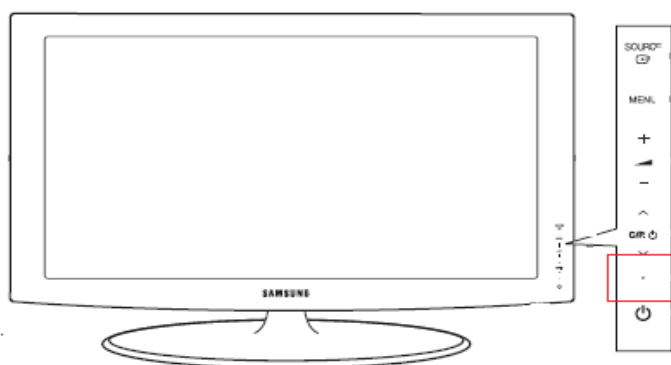

4-1-1. No Power

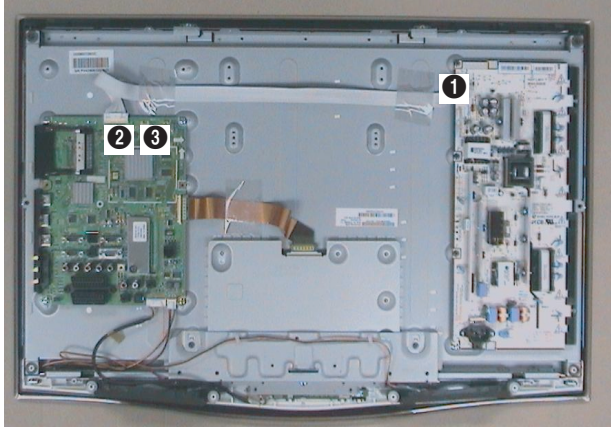Symptom	<ul style="list-style-type: none"> - The LEDs on the front panel do not work when connecting the power cord. - The SMPS relay does not work when connecting the power cord. - The units appears to be dead.
Major checkpoints	<p>The IP relay or the LEDs on the front panel does not work when connecting the power cord if the cables are improperly connected or the Main Board or SMPS is not functioning. In this case, check the following:</p> <ul style="list-style-type: none"> - Check the internal cable connection status inside the unit. - Check the fuses of each part. - Check the output voltage of SMPS. - Replace the Main Board.
Diagnostics	 <pre> graph TD Q1[LAMP off, power indicator LED red color?] -- No --> A1[Check a connection a power cable.] Q1 -- Yes --> Q2[1 Does proper DC 13V appear at pin21,22 of CN801?] Q2 -- No --> A2[Change a Assy PCB Power.] Q2 -- Yes --> Q3[2 Does proper DC A3.3V appear at C1131_NACH, C1132_NACH?] Q3 -- No --> A3[Check a IC1103_NACH. Change a main PCB ass'y] Q3 -- Yes --> Q4[3 Does proper DC 5V, 3.3V, 1.25V(B1.2VD), 1.5V, 1.8V(MT_DDRV) appear at C1140, C1169, C1163, C1167, C1174?] Q4 -- No --> A4[Check a IC1108, IC1107, IC1109 Change a main PCB ass'y] Q4 -- Yes --> Q5[A power is supplied to set?] Q5 -- No --> A5[Check a other function. (No picture part) Replace a lcd panel.] </pre>
Caution	Make sure to disconnect the power before working on the IP board.

4-1-2. No Video (Analog PC signal)

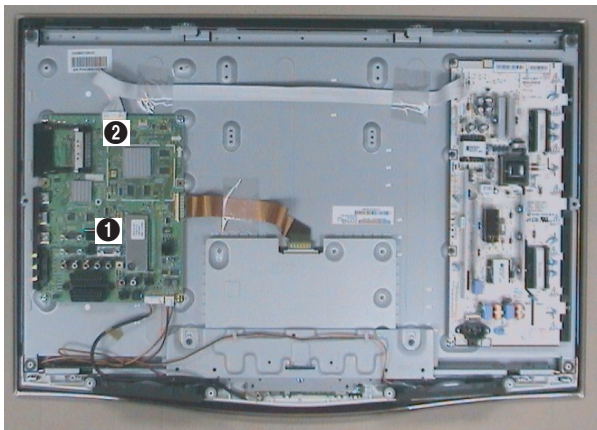Symptom	<ul style="list-style-type: none"> Audio is normal but no picture is displayed on the screen.
Major checkpoints	<ul style="list-style-type: none"> Check the PC source Check the IC6001(SDP84) This may happen when the LVDS cable connecting the Main Board and the Panel is disconnected.
Diagnostics	 <pre> graph TD Start[Power Indicator is off. Lamp on, no video.] -- Yes --> Q1[Check a PC source and check the connection of DSUB cable?] Q1 -- No --> A1[Input a analog PC signal and connected cable(DPMS).] Q1 -- Yes --> Q2[1 Does the signal appear at R3012,R3011,R3009(R,G,B)?] Q2 -- No --> A2[PC cable. Change a PC cable. Change a main PCB ass'y.] Q2 -- Yes --> Q3[2 Does the digital data appear at the output of LVDS (TP7025~TP7038 , TP7040~TP7053)?] Q3 -- No --> A3[Check a IC7001 Change a main PCB ass'y] Q3 -- Yes --> Q4[Check a LVDS cable? Replace a lcd panel?] Q4 -- No --> A4[Please, Contact Tech support.] </pre> <p>Power Indicator is off. Lamp on, no video.</p> <p>Yes</p> <p>Check a PC source and check the connection of DSUB cable?</p> <p>No</p> <p>Input a analog PC signal and connected cable(DPMS).</p> <p>Yes</p> <p>1 Does the signal appear at R3012,R3011,R3009(R,G,B)?</p> <p>No</p> <p>PC cable. Change a PC cable. Change a main PCB ass'y.</p> <p>Yes</p> <p>2 Does the digital data appear at the output of LVDS (TP7025~TP7038 , TP7040~TP7053)?</p> <p>No</p> <p>Check a IC7001 Change a main PCB ass'y</p> <p>Yes</p> <p>Check a LVDS cable? Replace a lcd panel?</p> <p>No</p> <p>Please, Contact Tech support.</p>
Caution	Make sure to disconnect the power before working on the IP board.


WAVEFORMS

1



R,G,B, H_sync input signal of IC6001(SDP84)




4-1-3. No Video (HDMI - Digital Signal)

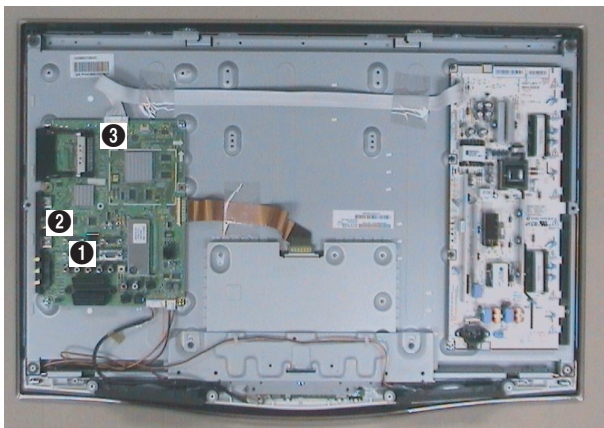Symptom	<ul style="list-style-type: none"> Audio is normal but no picture is displayed on the screen.
Major checkpoints	<ul style="list-style-type: none"> Check the HDMI source Check the IC3013 This may happen when the LVDS cable connecting the Main Board and the Panel is disconnected.
Diagnostics	 <pre> graph TD Start[Power Indicator is off. Lamp on, no video.] -- Yes --> Q1{1 Check the connection of HDMI cable?} Q1 -- No --> A1[Input a HDMI cable.] Q1 -- Yes --> Q2{2 Does the digital data appear at RA3668~RA3671 around IC3013?} Q2 -- No --> A2[Check a IC3013 Change a main PCB ass'y.] Q2 -- Yes --> Q3{3 Does the digital data appear at output of LVDS (TP7025~TP7038 , TP7040~TP7053)?} Q3 -- No --> A3[Check a IC7001 Change a main PCB ass'y.] Q3 -- Yes --> Q4[Check the LVDS cable? Replace the LCD panel?] Q4 -- No --> A4[Please, Contact Tech support] </pre>
Caution	Make sure to disconnect the power before working on the IP board.

WAVEFORMS

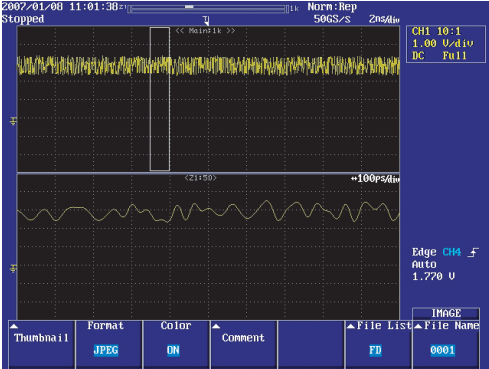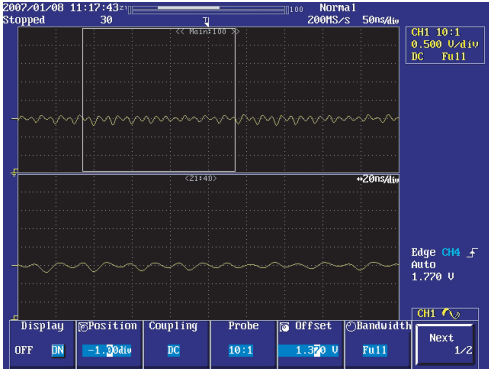
2	Digital Output Data
	
3	Signal of HDMI(Data)
	

4-1-4. No Video (Tuner_CVBS)

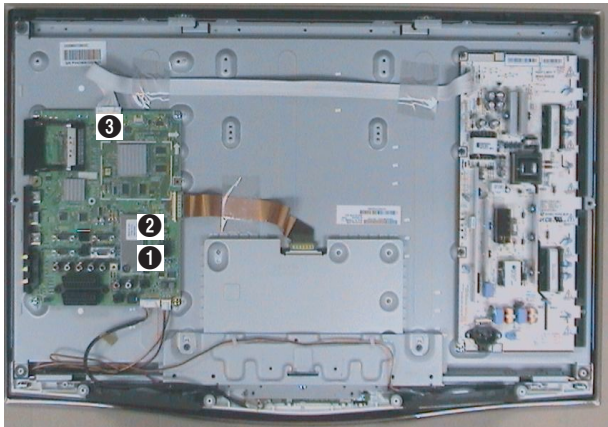
Symptom	<ul style="list-style-type: none"> Audio is normal but no picture is displayed on the screen.
Major checkpoints	<ul style="list-style-type: none"> Check the Tuner CVBS source Check the IC6001(SDP84) This may happen when the LVDS cable connecting the Main Board and the Panel is disconnected.
Diagnostics	 <pre> graph TD Start[Power Indicator is off. Lamp on, no picture.] -- No --> RF[Connect the RF cable and check RF signal.] Start -- Yes --> Q1{1 Does the signal appear at R5035?} Q1 -- No --> Bplus[Check a B+ voltage (#3 of Tuner) 5V, change a main PCB ass'y.] Q1 -- Yes --> Q2{2 [4] Does the signal appear at pin 9 of TU5001?} Q2 -- No --> Tuner[Check a Tuner(TU5001) Change a main PCB ass'y.] Q2 -- Yes --> Q3{3 Does the digital data appear at the output of LVDS (TP7025~TP7038 , TP7040~TP7053)?} Q3 -- No --> IC7001[Check a IC7001 Change a main PCB ass'y] Q3 -- Yes --> Q4{Check the LVDS cable? Replace the LCD panel?} Q4 -- No --> Support[Please, Contact Tech support.] </pre>
Caution	Make sure to disconnect the power before working on the IP board.

WAVEFORMS


3 CVBS Output Signal

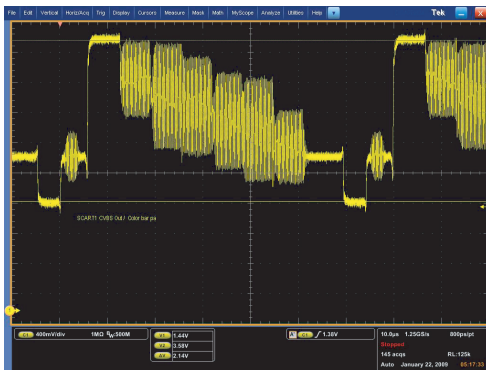

4 Tuner_CVBS Output Signal

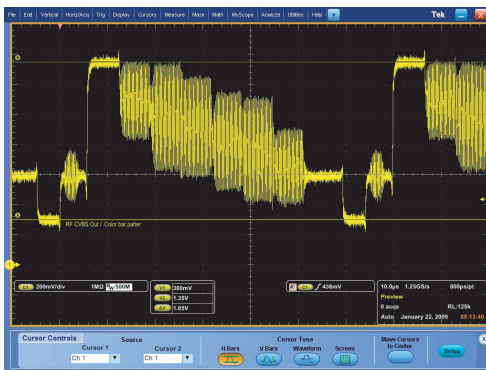


4-1-5. No Picture (Video_CVBS)

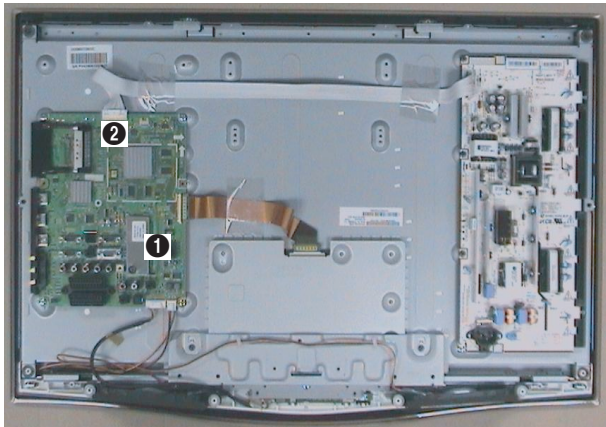
Symptom	<ul style="list-style-type: none"> Audio is normal but no picture is displayed on the screen.
Major checkpoints	<ul style="list-style-type: none"> Check the Video Source Check the IC6002, IC6001(SDP84), IC7001 This may happen when the LVDS cable connecting the Main Board and the Panel is disconnected.
Diagnostics	 <pre> graph TD A[Power Indicator is off. Lamp on, no picture.] -- No --> B[Check a A/V cable and video signal.] A -- Yes --> C[1 Does the signal appear at C6852,C6853,C6854?] C -- No --> D[Check a connection harness.] C -- Yes --> E[2 Does the digital data appear at the output of LVDS (TP7025~TP7038 , TP7040~TP7053)?] E -- No --> F[Check a IC7001 Change a main PCB ass'y] E -- Yes --> G[Check a LVDS cable? Replace lcd panel?] G -- No --> H[Please, Contact Tech support.] </pre>
Caution	Make sure to disconnect the power before working on the IP board.

WAVEFORMS

4 CVBS Output Signal at C6852, C6853, C6854

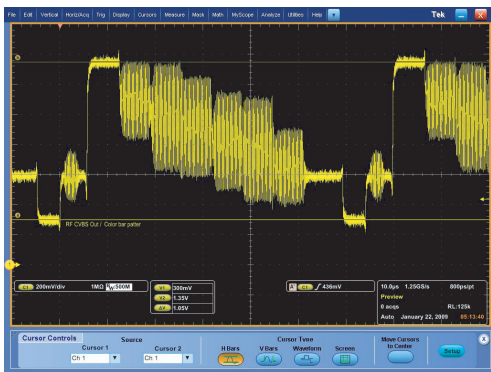


4-1-6. No Sound

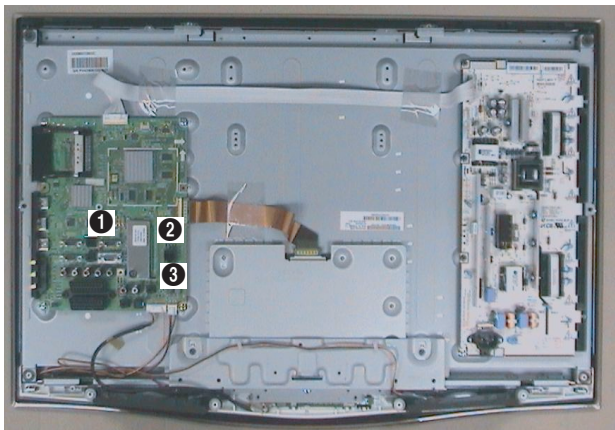
Symptom	<ul style="list-style-type: none"> Picture is normal But no Sound
Major checkpoints	<ul style="list-style-type: none"> Check the RF Source Check the IC6001(SDP84) This may be happened when LVDS Cable is Connected between Panel and Main Board , But Sound cable is disconnected.
Diagnostics	 <pre> graph TD Start[Picture is display, no sound.] -- No --> No1[Connect a sound cable. control a volume.] Start -- Yes --> Q1[1 Does the signal appear at pin #1 ~#9 , #33~#44 , #61~#64 around IC2001?] Q1 -- No --> No2[Check a connection harness and headphone jack./Side AV Check Sound Processor IC2001] Q1 -- Yes --> Q2[2 Check the DC 12V and 9V at BD2012 and C2002?] Q2 -- No --> No3[Check a B12VS, B9V Line. Change a main PCB ass'y.] Q2 -- Yes --> Q3[3 Does the signal appear at Pin6 , Pin9 , Pin10 , Pin13 of IC2002?] Q3 -- No --> No4[Please, Contact Tech support.] Q3 -- Yes --> End[Replace the speaker ass'y?] </pre>
Caution	Make sure to disconnect the power before working on the IP board.

WAVEFORMS

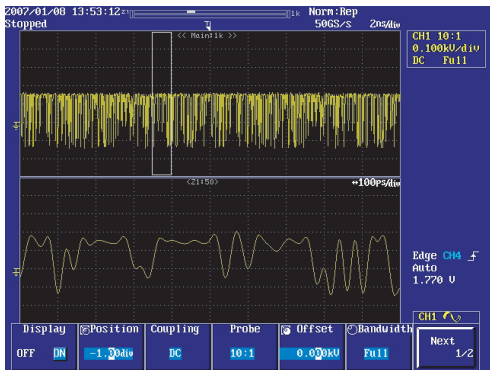



6 The Signal are Inputed to IC2002

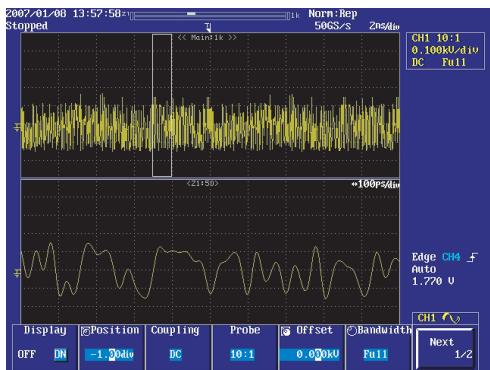

7 The Signal are Inputed to IC2002



4-1-8. Defect Analysis ahead of models.

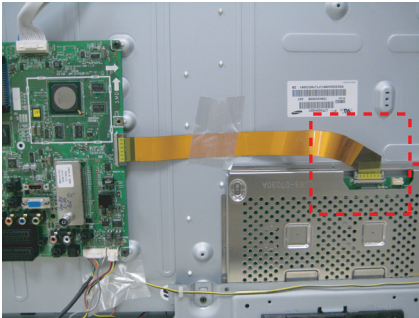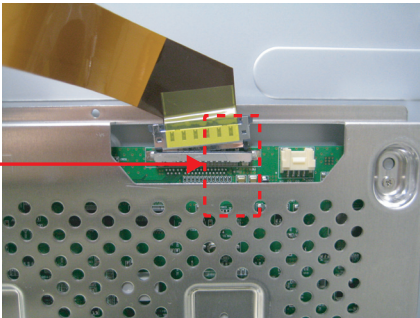Defective image	Defective Symptoms
	<p>No Picture and normal sound in case of defective a Panel or a defective connector between main board and panel.</p>
<p>Another kind of defect</p>	<div data-bbox="547 568 1010 801"></div> <div data-bbox="542 857 963 1173"></div> <div data-bbox="1002 857 1423 1173"></div> <p>LVDS Connector</p>

4-2. Alignments and Adjustments

4-2-1. General Alignment Instruction

1. Usually, a color LCD-TV needs only slight touch-up adjustment upon installation.
Check the basic characteristics such as height, horizontal and vertical sync.
2. Use the specified test equipment or its equivalent.
3. Correct impedance matching is essential.
4. Avoid overload. Excessive signal from a sweep generator might overload the front-end of the TV. When inserting signal markers, do not allow the marker generator to distort test result.
5. Connect the TV only to an AC power source with voltage and frequency as specified on the backcover nameplate.
6. Do not attempt to connect or disconnect any wire while the TV is turned on. Make sure that the power cord is disconnected before replacing any parts.
7. To protect against shock hazard, use an isolation transformer.

4-3. Factory Mode Adjustments

4-3-1 Entering Factory Mode

To enter 'Service Mode' Press the remote -control keys in this sequence :

- If you do not have Factory remote - control



- If you have Factory remote - control



- The buttons are active in the service mode.

1. Remote - Control Key : Power, Arrow Up, Arrow Down, Arrow Left

Arrow Right, Menu, Enter, Number Key(0~9)

2. Function - Control Key : Power, CH +, CH -, VOL +, VOL -,
Menu, TV/VIDEO(Enter)

4-3-2 Factory Data

1. Option
2. ADC/WB
3. Control
4. Advanced

1. Option

Item	Range	Option
Factory Reset		
Type	Inch Vendor(A:AMLCD, D:CMO, L:AUO, I:CPT) Panel frequency (6:50/60Hz, 1:100/120Hz, 2:200/240Hz) Panel(A:AG, T:TN U:UC) Resolution (F:FHD, H:HD, U:UD) Panel 1st/2nd (1st:0, 2nd:1...) BLU (C:CCFL, L:LED, E:Edge LED) ex) 32D1UF0E : Vendor: CMO inch: 32 120Hz FHD U/C Edge LED panel 40A2UF1C : Vendor: AMLCD inch: 40 240Hz U/C panel CCFL	
Model	LB550, LB570, UB6000, LB650, LB670, UB7000, LB750, UB8000	
TUNER	ALPS, SEC_T, SEC_TC, SEC_TS, SEC_TCS	
Region	PANEURO, PANNORDIG, ASIA_DTV, ASIA_ATV	
DDR	-	
Light Effect	ON/OFF	
Ch Table	NONE, SUWON, SESK, TTSEC, SHE	
Medialink Type	Infolink ON, Infolink OFF	
Local Set	Other_1	

2. ADC/WB

Item	Range	Option
ADC	AV CAL : SUCCESS, COMP CAL : INITIAL , PC CAL : FAIL	
ADC Target	Each MODE LOW, HIGH Delta(same as 08`)	
ADC Result	Each MODE Calibration result value (same as 08`)	
WB	8(Dynamic)+4(Movie)	

3. Control

1) EDID

Item	Range	Option
EDID ON/OFF	OFF	
EDID WRITE ALL	SUCCESS	
EDID WRITE PC	SUCCESS	
EDID WRITE HDMI	SUCCESS	
EDID WRITE HDMI1	...	
EDID WRITE HDMI2	...	
EDID WRITE HDMI3	...	
EDID WRITE HDMI4	...	
EDID 1.2PORT	NONE,Not Support	

2) Sub Option

Item	Range	Option
Mute Time(VIDEO)	2	
PROTECT	on/off	
SUB U-COM	On/off	
Watchdog	0	
WD COUNT	0	
SPREAD SPECTURM	2	
HDMI AV MUTE TIME	40	
DVI/HDMI SOUND	Auto	
HOT PLUG OFF HOLD TIME	1500ms	
HDMI LOSS TIME	1	
HDMI_PC LOSS TIME	1	
PC LOSS TIME	1	
HDMI EQ1	MIDDLE	
HDMI EQ2	MIDDLE	
HDMI EQ3	MIDDLE	
HDMI EQ4	MIDDLE	
SIDE AV	OFF	
PANEL DISPLAY TIME	735hr	
Checksum	0*0000	
View Log		
Font Data Viewer		

3) Hotel Option

Item	Range	Option
HOTEEL MODE	OFF	
POWER ON CHANNEL	3	
POWER ON BAND	AIR	
POWER ON VOLUME	10	
MAX VOLUME	100	
PANEL BUTTOM LOCK	ON	
POWER ON SOURCE	TV	

4. Troubleshooting

4) Shop Option

Item	Range	Option
Shop Mode	OFF	
USB DEMO ON(SEC)	OFF	
USB DEMO OFF(SEC)	OFF	

4. Advanced

1) FBE3

Item	Range	Option
Pattern_sel	0	
BM_slope1	19	
BM_slope2	36	
BM_slope3	56	
BM_slope4	75	
BM_start	68	
BM_start_max	110	
Lfunc-basis	70	
Hfunc-basis	80	
Mean-Offset1	30	
Mean-Offset2	235	
Mean-Slope	112	
ACR-Offset	10	
ACR-th1	10	
ACR-th2	110	
Skin-Enable	ON	
Skin-UV	135	
Sub color	128	
M-Skin-UV	138	
M-Sub Color	128	

2) WB Movie

Item	Range	Option
W/B MOVIE ON/OFF	OFF	
MODE	Dynamic	
Color Tone	Cool	
MSub Brightness	128	
MSub Contrast	128	
W3_Rgain	33	
W3_Bgain	-99	
W3_Roffset	1	
W3_Boffset	0	
W2_Rgain	37	
W2_Bgain	-64	
W2_Roffset	-8	
W2_Boffset	4	
W1_Rgain	13	
W1_Bgain	-39	
W1_Roffset	-1	
W1_Boffset	1	
Cool_Rgain	-23	
Cool_Bgain	21	
Cool_Roffset	2	
Cool_Boffset	-2	
Movie Contrast	95	
Movie Bright	45	
Movie Color	50	
Movie Sharpness	20	
Movie Tint	0	
Movie Backlight	5	
Movie Gamma	M2	
M_Sub_Gamma	0	

3) EPA Standard

Item	Range	Option
Standard Contrast	95	
Standard Brightness	45	
Standard Sharpness	50	
Standard Color	50	
Standard Tint	0	
Standard Backlight	7	

4. Troubleshooting

4) CH_VDEC

Item	Range	Option
AGC_mode	1	
Gain_VCR	0	
Y_Gain_Man	880	
Saturation	128	
Hue	0	
Y_Shape_sel	13	
Y_Shape_SCM	29	
C_Shape_sel	4	
C_Shape_SCM	4	
If_iir	0	
If_filt_sel	6	
LTI_en	0	
LTI_level	100	
CTI_en	0	
SCM_STI_EN	0	
CTI_level	15	
ST_Beg_NTSC	0	
VS_Slice_Level	4	
HS_Slice_Level	3	
FB_Delay_adj	0	
RGB_Delay_adj	0	
h_pk_gain	1	
v_pk_gain	1	
h_pk_band	0	
2d_pk_gain	0	
2d_pk_band	0	
slice_mod_fine	44	
scm_fdet_lvl	150	
bl_range	3	

5) YC_Delay

Item	Range	Option
V_Delay_adj	0	
U_Delay_adj	0	

6) AR_ADC

Item	Range	Option
RED CUTOFF	0	
GREEN CUTOFF	0	
BLUE CUTOFF	0	
RED GAIN	0	
GREEN GAIN	0	
BLUE GAIN	0	
PHASE	16	
SOG_BW	7	
SSC_PC	6	
RGB_DLY	0	

7) CH_DP

Item	Range	Option
MNR	0	
DCR	0	
SD2HD_DCR	0	
SD2HD_DE	0	
SD2HD_SCL	0	
SD2HD_LTI	0	
SD2HD_NARS	0	
SD2HD_DUR	50	
SD2HD_Metric	-	
Coring_ON_OFF	1	
SD_CSC	7094	
HD_CSC	7438	
M_SD_CSC	7094	
M_HD_CSC	7438	
PC_SD_CSC	7094	
MJC_DBG	0	
MB_STEPS	72	
LIMIT_MV_STEP	80	
GLOBAL_FALLBACK	48	
LOCAL_FALLBACK	5	

8) NR

Item	Range	Option
OFF_Y	20	
OFF_C	6	
Noise_bias	1	
OFF_YMAX	128	
	128	
OFF_FADER	200	
LOW_Y	60	
LOW_C	16	
Noise_bias	1	
LOW_YMAX	140	
	140	
LOW_FADER	210	
MED_Y	65	
MED_C	16	
Noise_bias	1	
MED_YMAX	150	
	150	
MED_FADER	205	
HIGH_Y	70	
HIGH_C	16	
Noise_bias	1	
HIGH_YMAX	160	
	160	
HIGH_FADER	200	

9) Sharpness

Item	Range	Option
Pre_GainH1	10	
Pre_GainH2	15	
Pre_GainH3	15	
Post_GainH1	10	
Post_GainH2	15	
Post_GainH3	15	
Post_GainV1	30	
Post_GainV2	50	
Post_GainV3	40	
CTI_Gain	15	
Pre_LTIH	4	
SD_TH	100	
HD_TH	132	
NORMAL_LTIH	8	
NORMAL_LTIV	4	
SD_LTIH	16	
SD_LTIV	24	
PRE_CORING	8	
POST_CORING_H	8	
POST_CORING_V	8	
Pre_TOT	32	
Post_TOT	32	
Sub Color	59	

10) Sharpness_LNA

Item	Range	Option
Pre_GainH1	7	
Pre_GainH2	11	
Pre_GainH3	11	
Post_GainH1	7	
Post_GainH2	11	
Post_GainH3	11	
Post_GainV1	22	
Post_GainV2	37	
Post_GainV3	30	

4. Troubleshooting

11) CE DIMMING

Item	Range	Option
Contrast Dimming	0x30220008 [4] = 0 0x30220008 [5] = 0 0x30220008[7] = 0 0x30220008[6] = 0 0x30220488 [12] = 0 0x30220680 [8] = 0	
	0x30220008 [4] = 1 0x30220008 [5] = 1 0x30220008[7] = 1 0x30220008[6] = 1 0x30220488 [12] = 1 0x30220680 [8] = 1	
Dimming in Standard	ON(Analog PC, HDMI-PC-OFF)	
Dimming in Movie	ON(Analog PC, HDMI-PC-OFF)	

12) LNA_Plus

Item	Range	Option
Synctip_Noise	-	
dB01_th	16	
dB12_th	48	
dB23_th	73	
dB34_th	185	
dB45_th	318	

13) FRC


Item	Range	Option
SSC_OnOff	ON	
SSC_Width	96	
SSC_Freq	240	
FMD_Demo	0	
PATT_BeforeDDR	0	
PATT_AfterDDR	0	
CSB Vertical	ON	
CSB Horizontal	ON	
X_VStabStatVid	7	
X_VStabStatF	0	
X_VStabCorF	8	
X_VStabSensF	48	
X_HaloSizStatVid	7	
X_HaloSizStatF	0	
X_HaloSizCorF	12	
X_HaloSizSensF	32	
Film_Low_SD	12 -> 32	
Film_Medium_SD	3	
Film_High_SD	0	
Film_Low_HD	12 -> 32	
Film_Medium_HD	3	
Film_High_HD	0	
Video_Judder_Low	10 -> 0	
Video_Judder_Med	5 -> 0	
Video_Judder_High	0	
Hangup Detection	On	
Q LVDS Sequence	0-1-2-3	
Q LVDS Format	JEIDA	
Q LVDS bit width	10bit	
SensD_Film_Low	31	
SensD_Film_Medium	31	
SensD_Film_High	31	
Rel_Start_Film	20	
Rel_Slope_Film	3	
H_Len_Start_Film	127	
H_Len_Slope_Film	1	
V_Len_Start_Film	40	
V_Len_Slope_Film	1	
SensD_Video	0	
Rel_Start_Video	20	
Rel_Slope_Video	1	
H_Len_Start_Video	127	
H_Len_Slope_Video	1	
V_Len_Start_Video	40	
V_Len_Slope_Video	1	

14) PQ Others

Item	Range	Option
7.5 IRE NTSC	ON	
7.5 IRE OFFSET	60	
48Hz Enable	OFF	

4-4. White Balance - Calibration

4-4-1 White Balance -Calibration

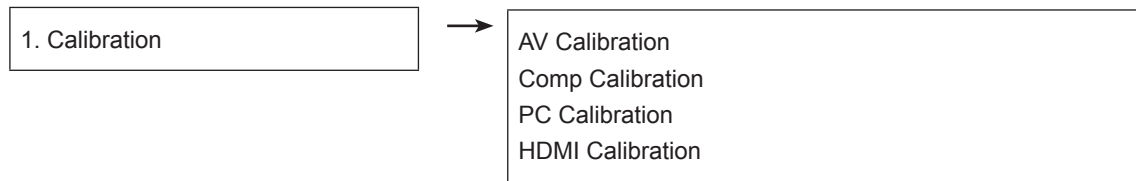


4-4-2 Service Adjustment - You must perform Calibration in the Lattice Pattern before adjusting the White Balance.

■ Color Calibration

Adjust spec.

1. Source : HDMI
2. Setting Mode : 1280*720@60Hz
3. Pattern : Pattern #24 (Chess Pattern)

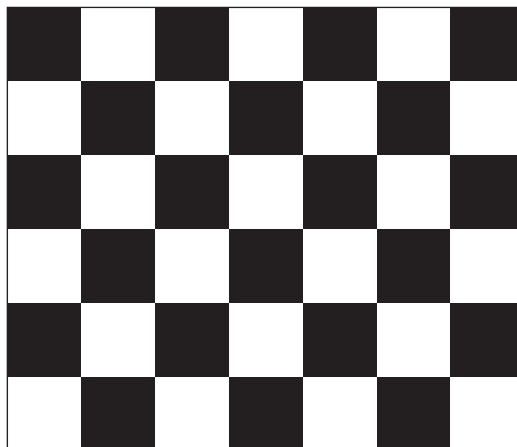

(Chess Pattern)

4. Use Equipment : CA210 & Master MSPG925 Generator

- Use other equipment only after comparing the result with that of the Master equipment.

Input mode	Calibration	Pattern
CVBS IN (Model_#2)	Perform in PAL B&W Pattern #24	Lattice
Component IN (Model_#6)	Perform in 720p B&W Pattern #24	Lattice
PC Analog IN (Model_#21)	Perform in VESA XGA (1024x768) B&W Pattern #24	Lattice
HDMI IN (Model_#6)	Perform in 720p B&W Pattern #24	Lattice

<Table 1>

■ Method of Color Calibration (AV)

- 1) Apply the NTSC Lattice (N0. 3) pattern signal to the AV IN 1 port
- 2) Press the Source key to switch to "AV1" mode
- 3) Enter Service mode
- 4) Select the "Calibration" menu
- 5) Select the "AV Calibration" menu.
- 6) In "AV Calibration Off" status, press the "►" key to perform Calibration.
- 7) When Calibration is complete, it returns to the high-level menu.
- 8) You can see the change of the "AV Calibration" status from Failure to Success.

■ Method of Color Calibration (Component)

- 1) Apply the 720p Lattice (N0. 6) pattern signal to the Component IN 1 port
- 2) Press the Source key to switch to "Component1" mode
- 3) Enter Service mode
- 4) Select the "Calibration" menu
- 5) Select the "DTV Calibration" menu.
- 6) In "DTV (Component) Calibration Off" status, press the "►" key to perform Calibration.
- 7) When Calibration is complete, it returns to the high-level menu.
- 8) You can see the change of the "Comp Calibration" status from Failure to Success.

■ Method of Color Calibration (PC)

- 1) Apply the VESA XGA Lattice (N0. 21) pattern signal to the PC IN port
- 2) Press the Source key to switch to "PC" mode
- 3) Enter Service mode
- 4) Select the "Calibration" menu
- 5) Select the "PC Calibration" menu.
- 6) In "PC Calibration Off" status, press the "►" key to perform Calibration.
- 7) When Calibration is complete, it returns to the high-level menu.
- 8) You can see the change of the "PC Calibration" status from Failure to Success.

■ Method of Color Calibration (HDMI)

- 1) Apply the 720p Lattice (N0. 6) pattern signal to the HDMI1/DVI IN port
- 2) Press the Source key to switch to "HDMI1" mode
- 3) Enter Service mode
- 4) Select the "Calibration" menu
- 5) Select the "HDMI Calibration" menu.
- 6) In "HDMI Calibration Off" status, press the "►" key to perform Calibration.
- 7) When Calibration is complete, it returns to the high-level menu.
- 8) You can see the change of the "HDMI Calibration" status from Failure to Success.

4-4-3 White Balance - Adjustment

	(low light)	(hight light)
3. W/B	Sub Bright R offset G offset B offset	Sub Contrast R gain G gain B gain


(W/B adjustment Condition refer next page)

4-5. White Ratio (Balance) Adjustment

1. You can adjust the white ratio in factory mode (1:Calibration, 3:White-Balance).
2. Since the adjustment value and the data value vary depending on the input source, you have to adjust these in CVBS, Component 1 and HDMI 1 modes.
3. The optimal values for each mode are configured by default. (Refer to Table 1, 2)
It varies with Panel's size and Specification.

- Equipment : CS-210
- Pattern: MIK K-7256 #92 "Flat W/B Pattern" as standard
- Use other equipment only after comparing the result with that of the Master equipment.
- Set Aging time : 60min ↑

- Calibration and Manual setting for WB adjustment.

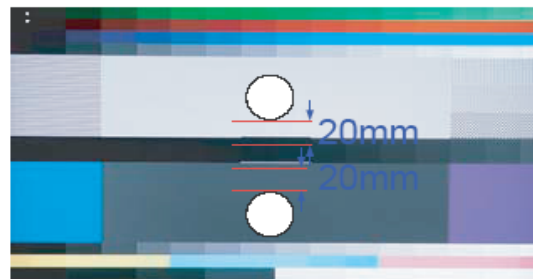

- | | |
|---|---|
| HDMI : Time #6 720P, Pattern #24 Chessboard Calibration | → Manual adjustment #92 pattern (720p) |
| COMP: Time #6 720P, Pattern #24 Chessboard Calibration | → Manual adjustment at #92 pattern (720p) |
| CVBS: Time #2 PAL, Pattern #24 Chessboard Calibration | → Manual adjustment at #92 pattern (NTSC) |
| PC: Time #21 1024*768, Pattern #24 Chessboard Calibration | → Manual adjustment at #92 pattern (NTSC) |

- If finishing in HDMI mode, adjustment coordinate is almost same in AV/COMP mode.
- White Balance Manual Adjustment

	CA-210				
		x	y	Y(L)	T(K) + MPCD
CVBS (NTSC)	H/L	272	278	(Sub_CT:140)	12,000 (+/- 0)
	L/L	272	278	19.7cd/m ² (5.8 Ft - Sub_BR:128)	12,000 (+/- 0)
COMP (720P)	H/L	272	278	(Sub_CT:140)	12,000 (+/- 0)
	L/L	272	278	19.7cd/m ² (3.5 Ft - Sub_BR:128)	12,000 (+/- 0)
HDMI (720P)	H/L	272	278	(Sub_CT:140)	12,000 (+/- 0)
	L/L	272	278	19.7cd/m ² (5.8 Ft - Sub_BR:128)	12,000 (+/- 0)

- Adjustment Specification

White Balance : High light (± 3), Low light (± 5)

Luminance : High light (± 0.1 Ft/L), Low light (± 0.1 Ft/L)


4-6. Servicing Information

4-6-1 USB Download Method

Samsung may offer upgrades for TV's firmware in the future. Please contact the Samsung call center at 1-800-SAMSUNG (7267864) to receive information about downloading upgrades and using a USB drive.

Upgrades will be possible by connecting a USB drive to the USB port located on the back of your TV.




1. Insert a USB drive containing the firmware upgrade into the wiselink port on the side of the TV.
(USB drive make folder "T-CHL7DEUC (550 : T-CHL5DEUC)" and this folder download micom program.)

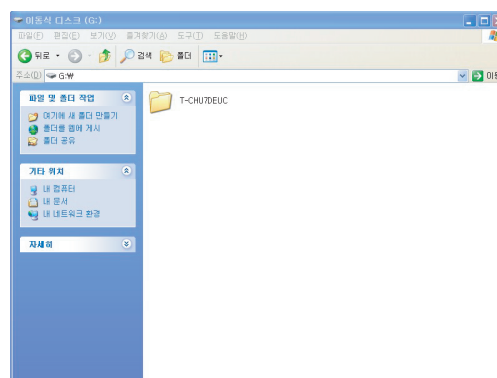

4. Troubleshooting


2. To enter User menu

Support - Software Upgrade - By USB then press the ENTER button. The message USB searching... It may take up to 30 seconds is displayed.
Please be careful to not disconnect the power or remove the USB drive while upgrade is being applied.
Next message : refer to "Second picture"
Press the left, right button to select "OK".
The TV will shut off after completing the firmware upgrade
Please check the firmware version after the upgrade is complete.

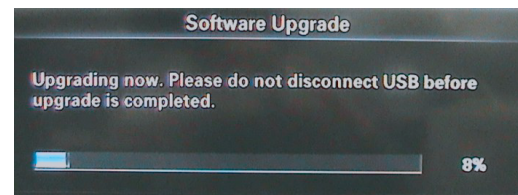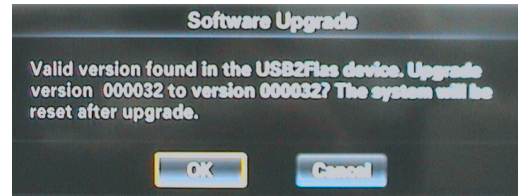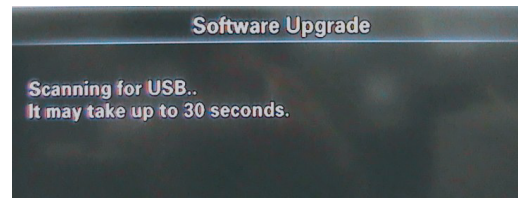


* How to check Program Version

1. To enter Factory mode
2. Check the main micom version T-CHL7DEUS-XXXX

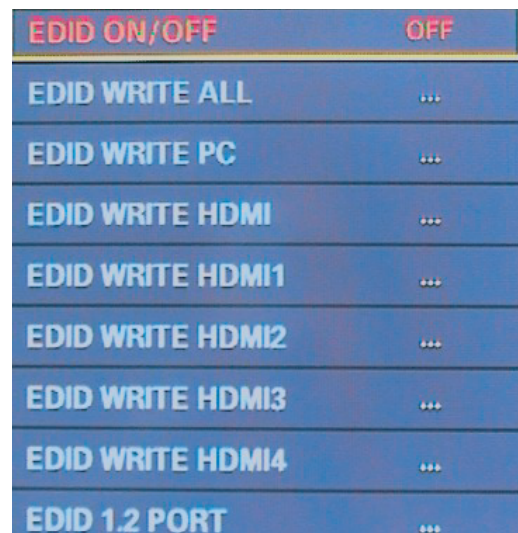

5. Exploded View & Part List


5-1. LE32B55* Exploded View

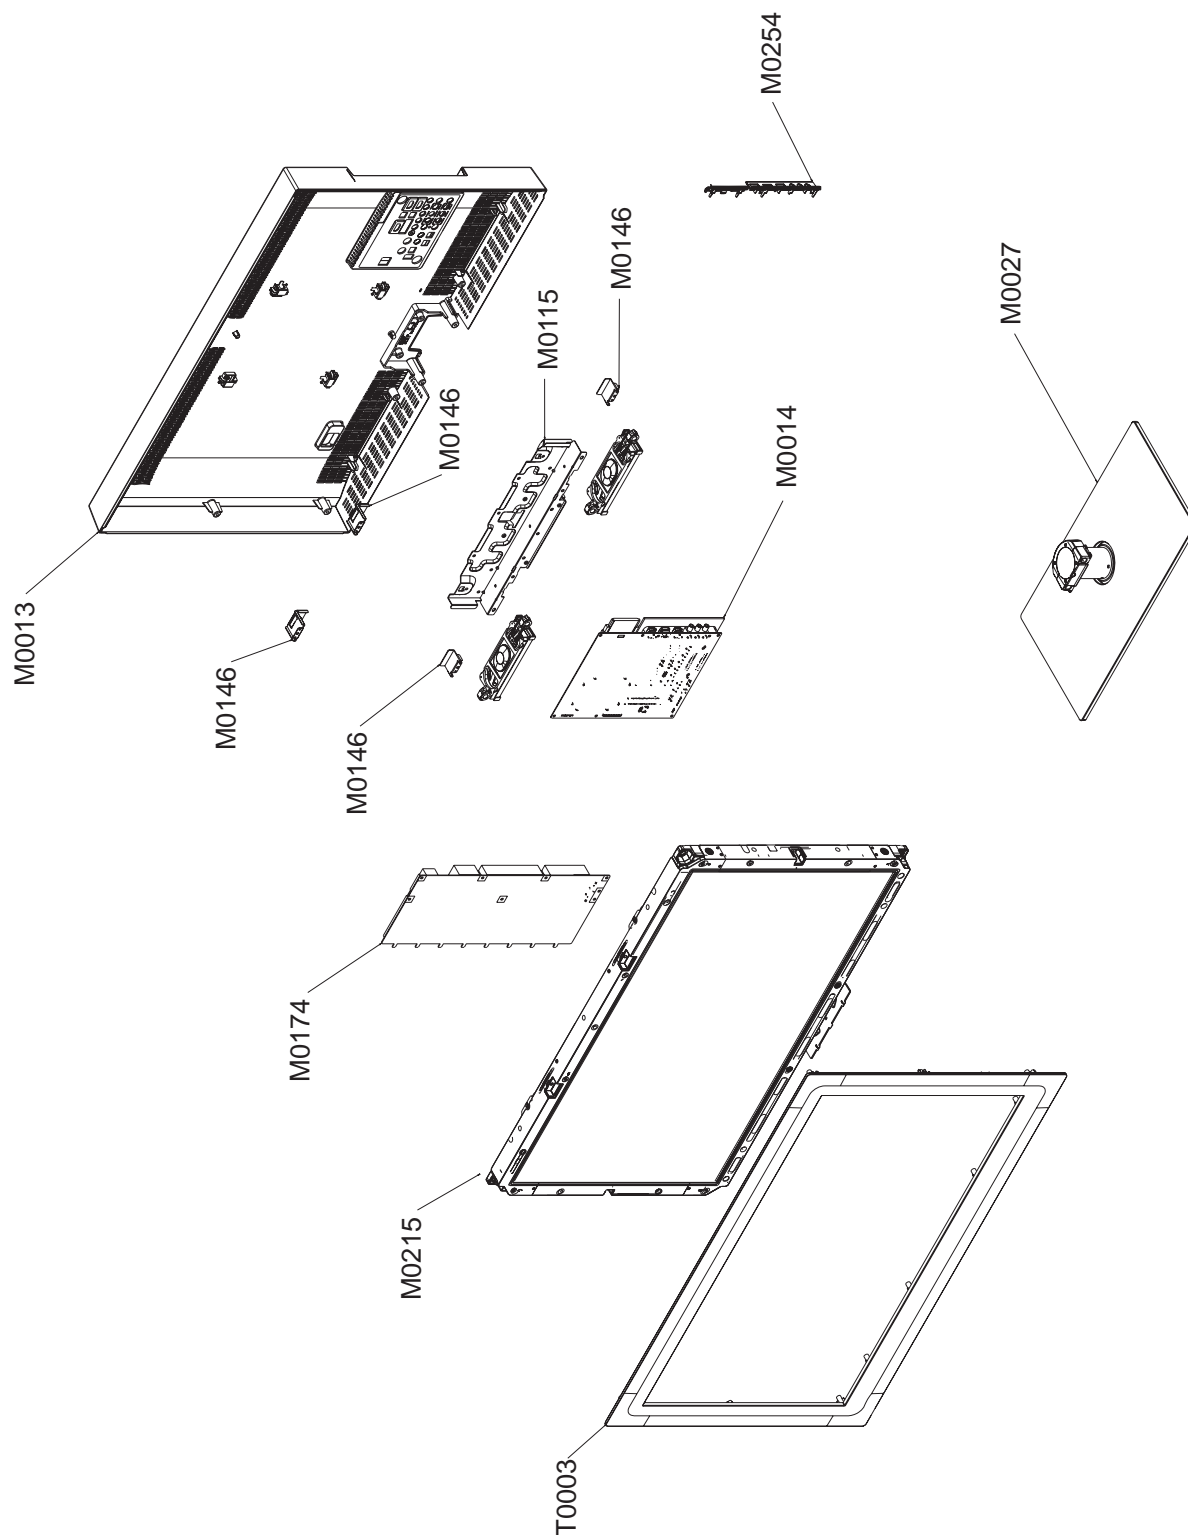

5-1-1. LE32B55* Parts List

Location No.	Code No.	Description & Specification	Q'ty	S.A/S.N.A	Remark
T0003	BN96-09553A	ASSY COVER P-FRONT;32,LB550,EO,PC(CLR)+P	1	S.A	
M0215	BN07-00640A	LCD-PANEL;T315HW02 V2	1	S.A	
	BN07-00679D	LCD-PANEL;LTF320HA09	1	S.A	
T0175	BN96-09463A	ASSY SPEAKER P;8ohm,4pin,10W,R:200 / L:4	1	S.A	
M0115	BN61-04820A	BRACKET-STAND LINK;B650-32,SECC,T1.2	1	S.N.A	
M0146	BN61-04980A	BRACKET-PANEL TOP;B550-3 32,SECC,T1.2	2	S.N.A	
M0174	BN44-00261B	IP BOARD-IP;H32F1_9DY,H32F1_9DY,0.12mA,1	1	S.A	
M0014	BN94-02668A	ASSY PCB MAIN;LE32B550A5WXXC	1	S.A	
M0254	BN61-04801C	HOLDER-SIDE AV;EO,HIPS,HB,BK500,1USB,1HD	1	S.N.A	
M0013	BN96-09609A	ASSY COVER P-REAR;32,LB550,EO,HIPS,HB,BK	1	S.A	
M0027	BN96-09497B	ASSY STAND P-BASE;32,LB650,TEMPERED GLAS	1	S.A	


5-2. LE37B55* Exploded View

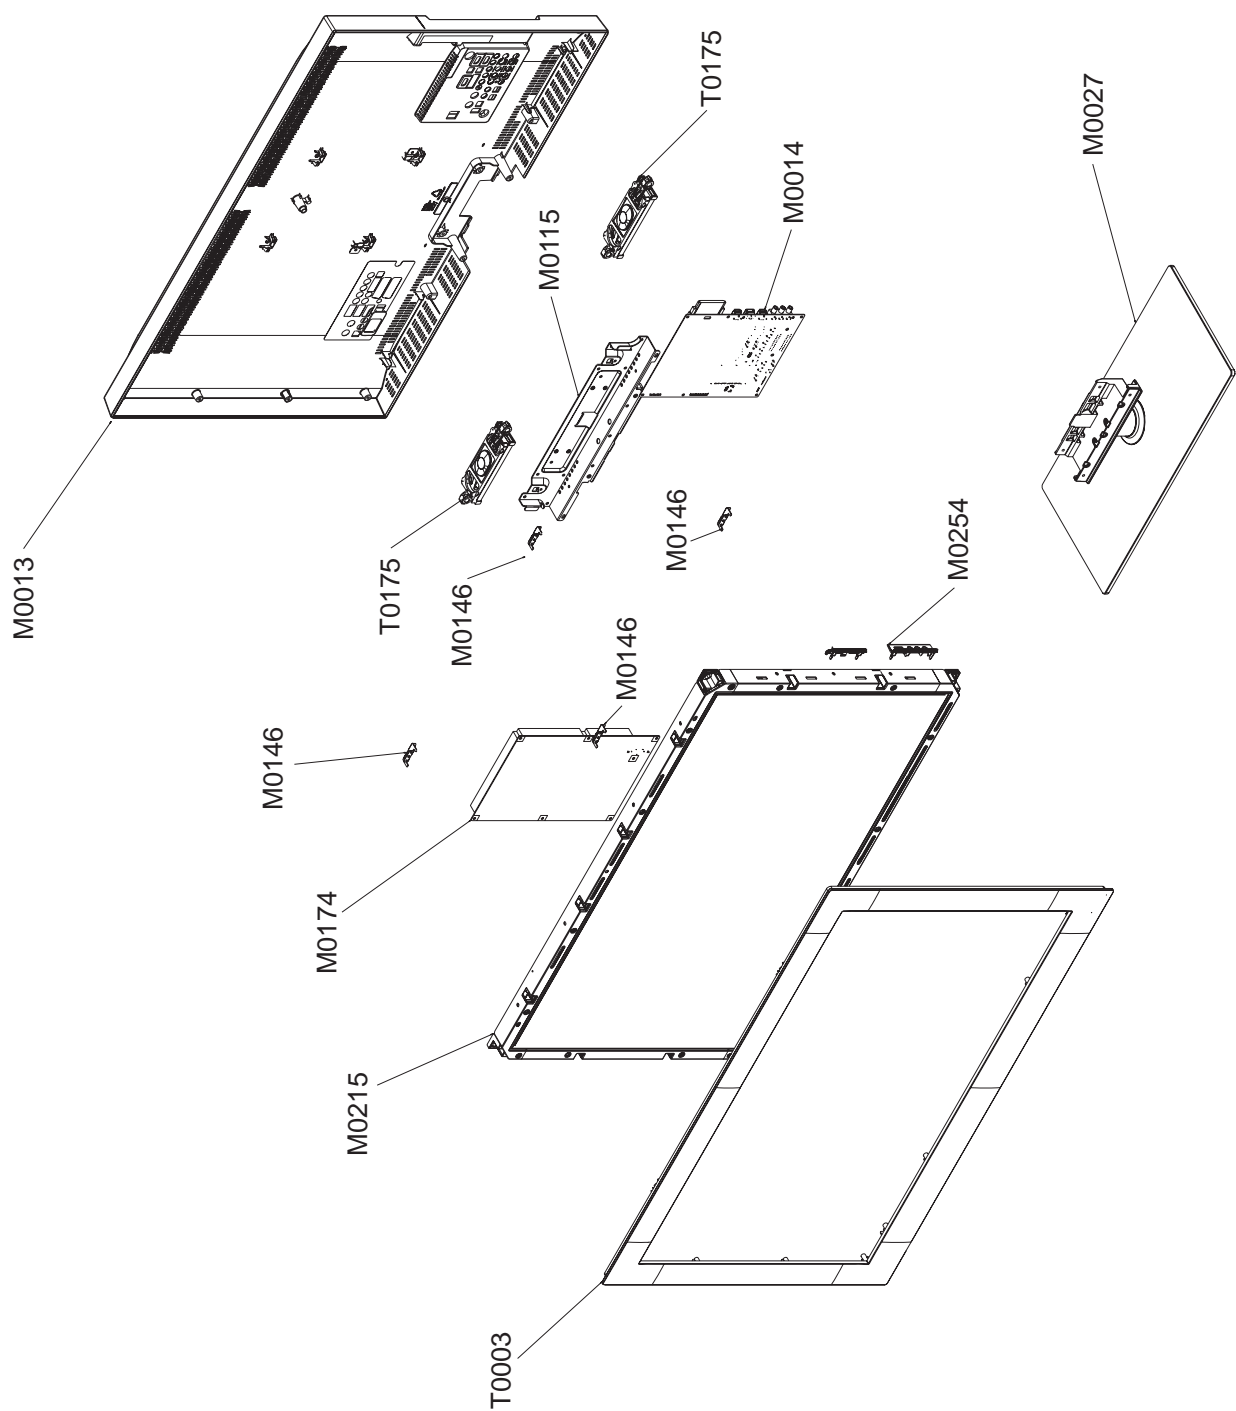

5-2-1. LE37B55* Parts List

Location No.	Code No.	Description & Specification	Q'ty	S.A/S.N.A	Remark
T0003	BN96-09554A	ASSY COVER P-FRONT;32,LB650,EO,PC(CLR)+P	1	S.A	
M0215	BN07-00643A	LCD-PANEL;T370HW02 VC	1	S.A	
T0175	BN96-09463C	ASSY SPEAKER P;8ohm,4pin,10W,R:250/ L:60	1	S.A	
M0115	BN61-04918A	BRACKET-STAND LINK;40, B610,SECC,T1.6	1	S.N.A	
M0146	BN61-03414A	BRACKET-PANEL TOP;PEONY52,SECC T1.2	2	S.A	
M0174	BN44-00262A	IP BOARD;PSIV181E01A,H37F1_9SS,0.1mA,10m	1	S.A	
M0014	BN94-02668B	ASSY PCB MAIN;LE37B550A5WXXC	1	S.A	
M0254	BN61-04801C	HOLDER-SIDE AV;EO,HIPS,HB,BK500,1USB,1HD	1	S.N.A	
M0013	BN96-09611A	ASSY COVER P-REAR;37,LB550,EO,HIPS,HB,BK	1	S.A	
M0027	BN96-09608A	ASSY STAND P-BASE;37,LB610,TEMPERED GLAS	1	S.N.A	


5-3. LE40B55* Exploded View

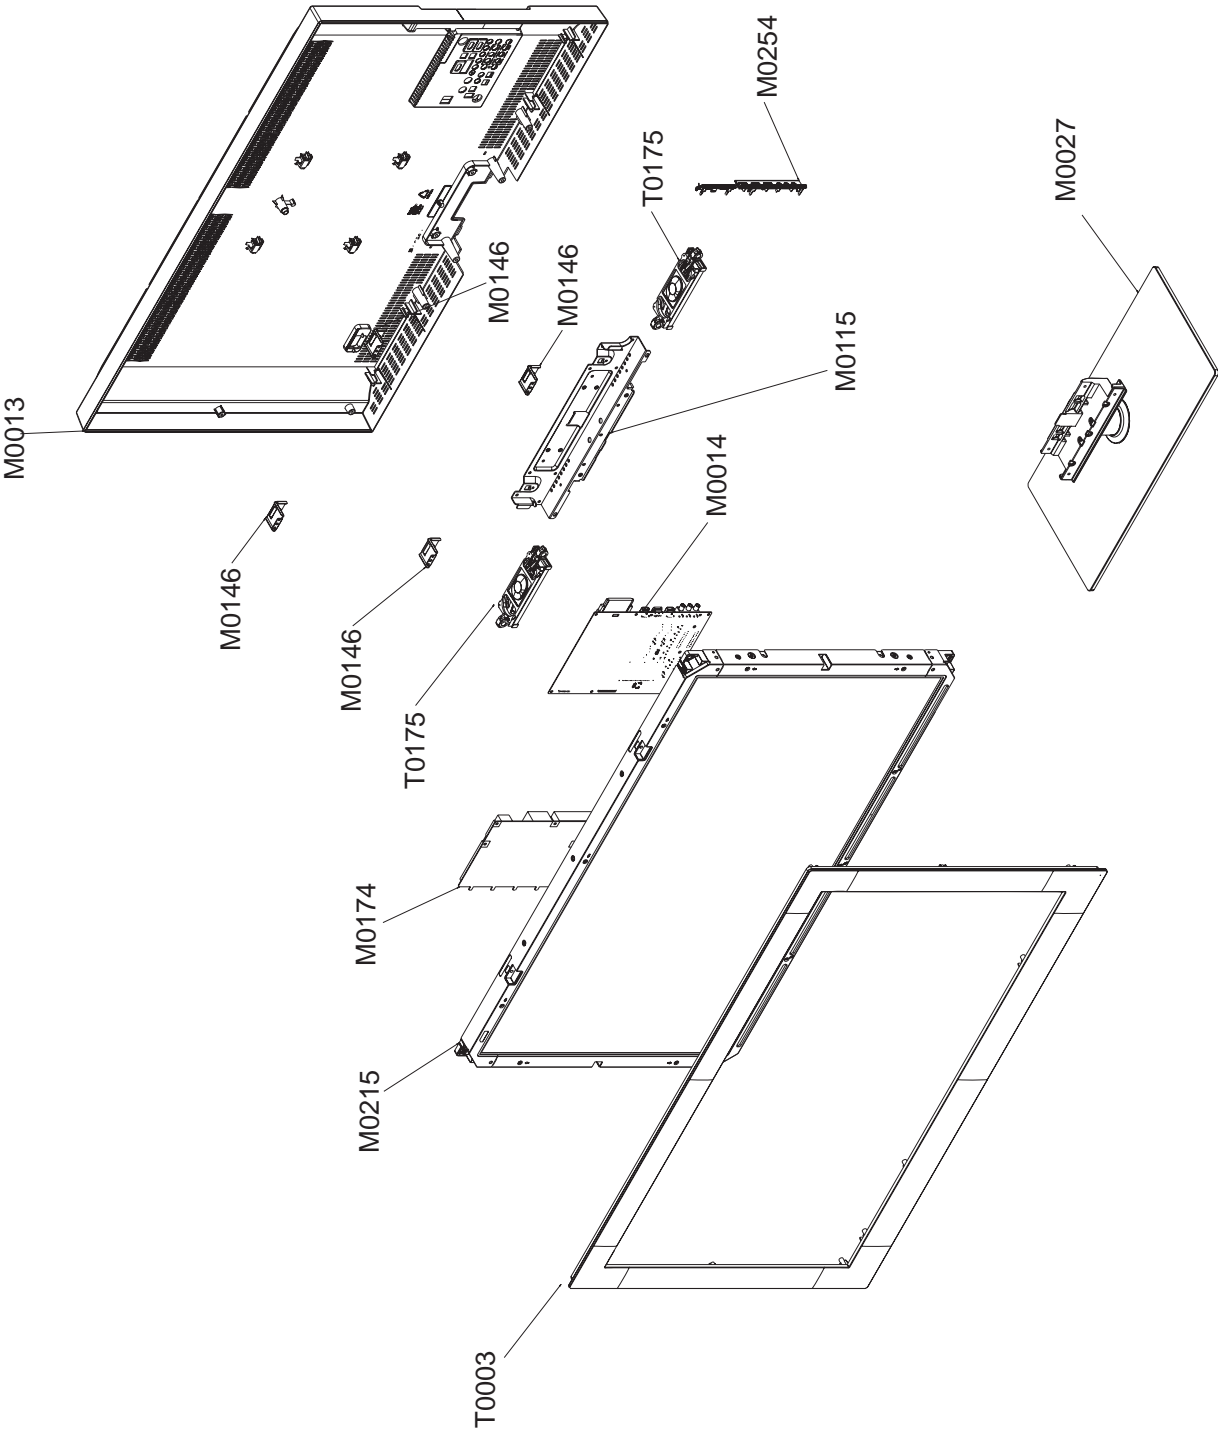

5-3-1. LE40B55* Parts List

Location No.	Code No.	Description & Specification	Q'ty	S.A/S.N.A	Remark
T0003	BN96-09555B	ASSY COVER P-FRONT;40,LB550,EO,PC(CLR)+P	1	S.A	
M0215	BN07-00675D	LCD-PANEL;LTF400HA08	1	S.A	
	BN81-02390A	A/S-T CON V400H1-L05;V400H1-L05	1	S.A	
T0175	BN96-09463C	ASSY SPEAKER P;8ohm,4pin,10W,R:250/ L:60	1	S.A	
M0115	BN61-04918A	BRACKET-STAND LINK;40, B610,SECC,T1.6	1	S.N.A	
M0146	BN61-03414A	BRACKET-PANEL TOP;B650-32,SECC,T1.2	2	S.N.A	
M0174	BN44-00264C	IP BOARD;H40F1_9HS,H40F1_9HS,0.11mA,11mA	1	S.A	
M0014	BN94-02668C	ASSY PCB MAIN;LE40B550A5WXXC	1	S.A	
M0254	BN61-04801C	HOLDER-SIDE AV;EO,HIPS,HB,BK500,1USB,1HD	1	S.N.A	
T0101	BN61-04816A	BRACKET-WALL;40, B610,SECC,T1.2	4	S.N.A	
M0013	BN96-09613A	ASSY COVER P-REAR;40,LB550,EO,HIPS,HB,BK	1	S.A	
M0027	BN96-09610A	ASSY STAND P-BASE;40,LB610,TEMPERED GLAS	1	S.A	


5-4. LE46B55* Exploded View

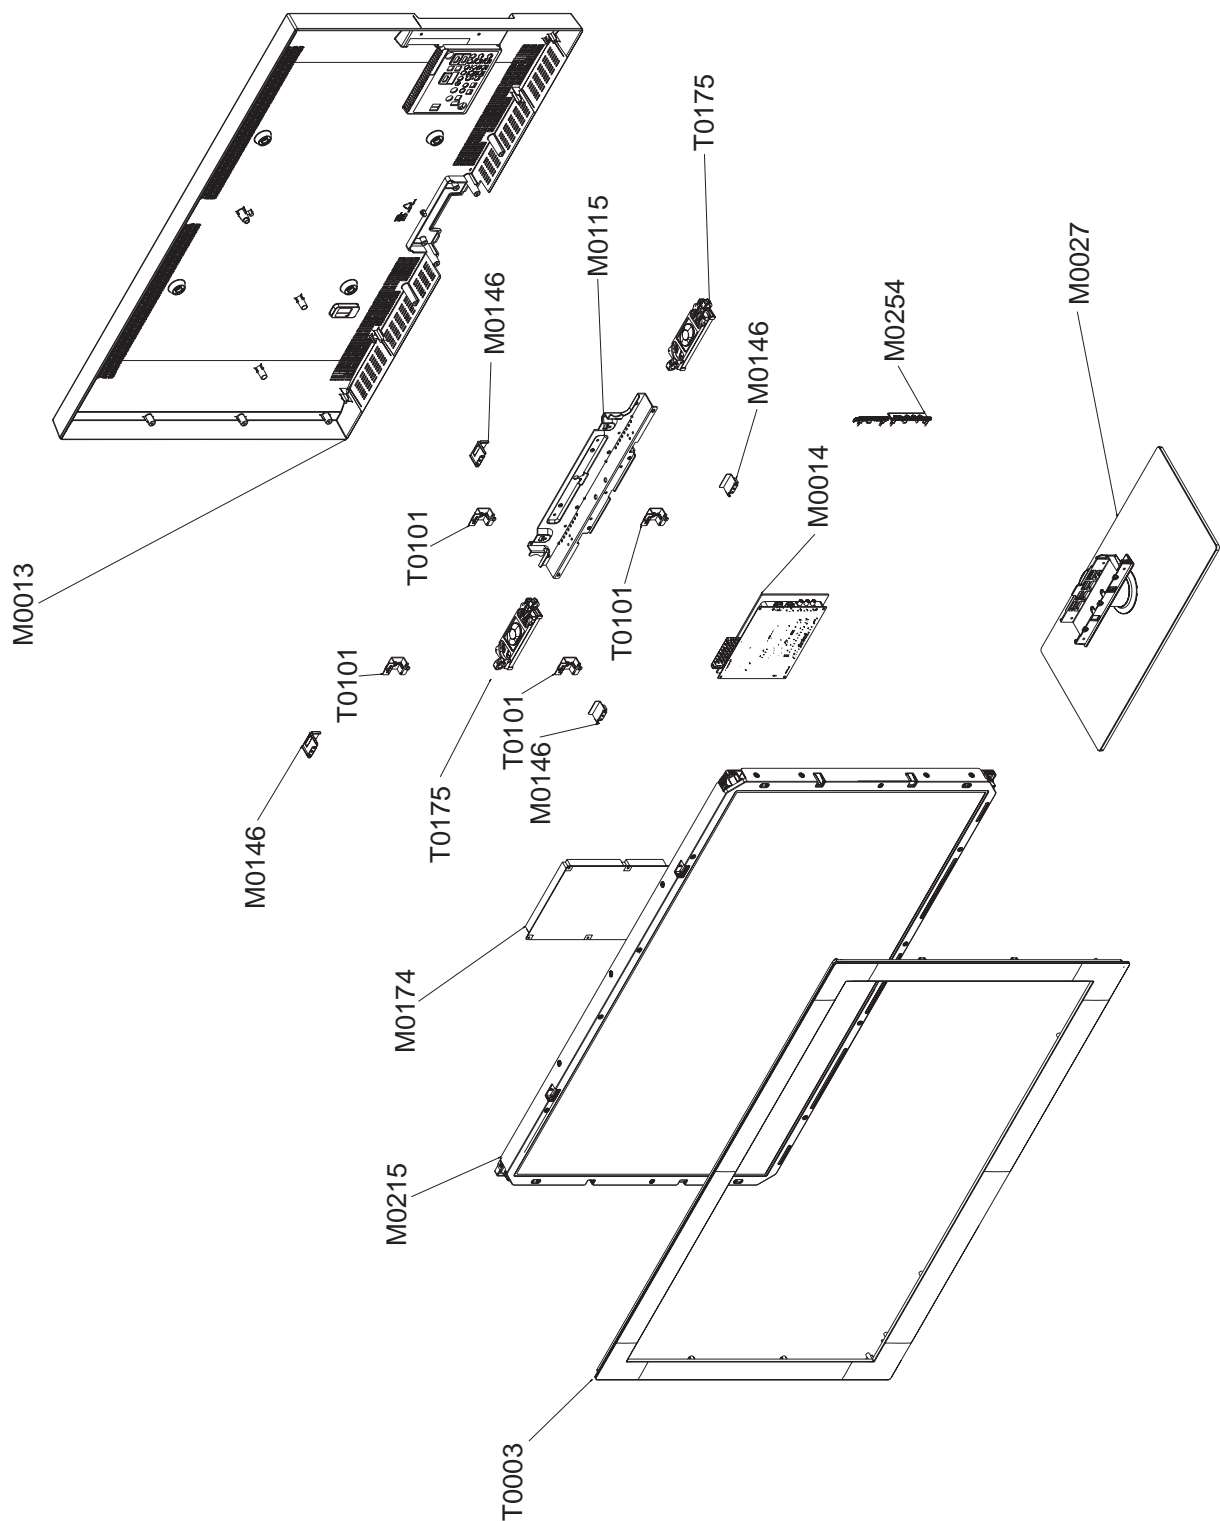

5-4-1. LE46B55* Parts List

Location No.	Code No.	Description & Specification	Q'ty	S.A/S.N.A	Remark
T0003	BN96-09556B	ASSY COVER P-FRONT;46,LB550,EO,PC(CLR)+P	1	S.A	
M0215	BN07-00668A	LCD-PANEL;V460H1-L06	1	S.A	
	BN07-00685B	LCD PANEL;LTF460HA06	1	S.A	
T0175	BN96-09463D	ASSY SPEAKER P;8ohm,4pin,10W,R:250/ L:70	1	S.A	
M0115	BN61-04788A	BRACKET-STAND LINK;46, B610,SECC,T2.0	1	S.N.A	
M0174	BN44-00261A	IP BOARD-IP;PSIV161C01A,H32F1_9SS,0.12mA	1	S.A	
M0014	BN94-02583A	ASSY PCB MAIN;LE32B653T5WXXC	1	S.A	
T0101	BN61-04800A	HOLDER-SIDE AV;EO,ABS+PMMA,HB,BK23,H/GLO	1	S.N.A	
M0254	BN61-04800A	HOLDER-SIDE AV;EO,ABS+PMMA,HB,BK23,H/GLO	1	S.N.A	
M0013	BN96-09502A	ASSY COVER P-REAR;32,LB650,EO,ABS+PMMA,H	1	S.A	
M0027	BN96-09497A	ASSY STAND P-BASE;32,LB650,TEMPERED GLAS	1	S.A	


5-5. LE32B65* Exploded View

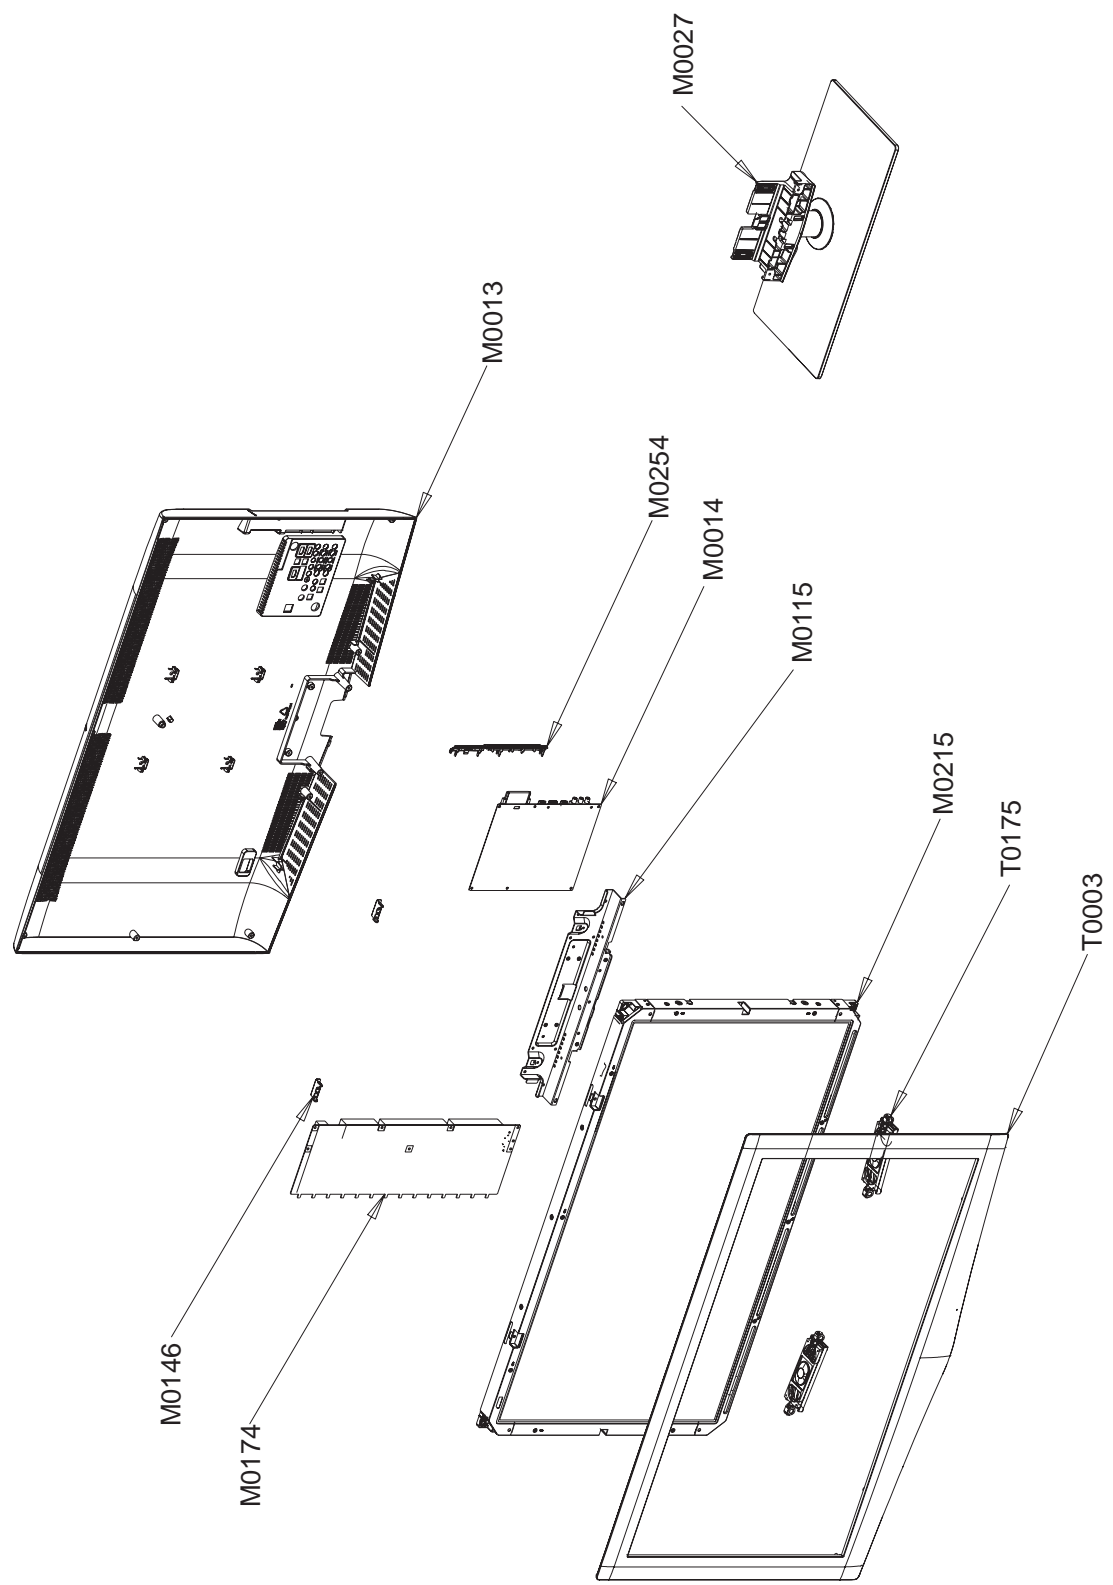

5-5-1. LE32B65* Parts List

Location No.	Code No.	Description & Specification	Q'ty	S.A/S.N.A	Remark
T0003	BN96-09486B	ASSY COVER P-FRONT;32,LB650,EO,PC(CLR)+P	1	S.A	
M0215	BN07-00641A	LCD-PANEL;T315HW02 V3	1	S.A	
M0215	BN81-02346A	A/S-T CON T315HW02_V3;T315HW02_V3	1	S.A	
T0175	BN96-09463A	ASSY SPEAKER P;8ohm,4pin,10W,R:200 / L:4	1	S.A	
M0115	BN61-04820A	BRACKET-STAND LINK;B650-32,SECC,T1.2	1	S.N.A	
M0146	BN61-04818A	BRACKET-PANEL TOP;B650-32,SECC,T1.2	2	S.N.A	
M0174	BN44-00261A	IP BOARD-IP;PSIV161C01A,H32F1_9SS,0.12mA	1	S.A	
M0014	BN94-02583A	ASSY PCB MAIN;LE32B653T5WXXC	1	S.A	
M0254	BN61-04800A	HOLDER-SIDE AV;EO,ABS+PMMA,HB,BK23,H/GLO	1	S.N.A	
M0013	BN96-09502A	ASSY COVER P-REAR;32,LB650,EO,ABS+PMMA,H	1	S.A	
M0027	BN96-09497A	ASSY STAND P-BASE;32,LB650,TEMPERED GLAS	1	S.A	


5-6. LE37B65* Exploded View

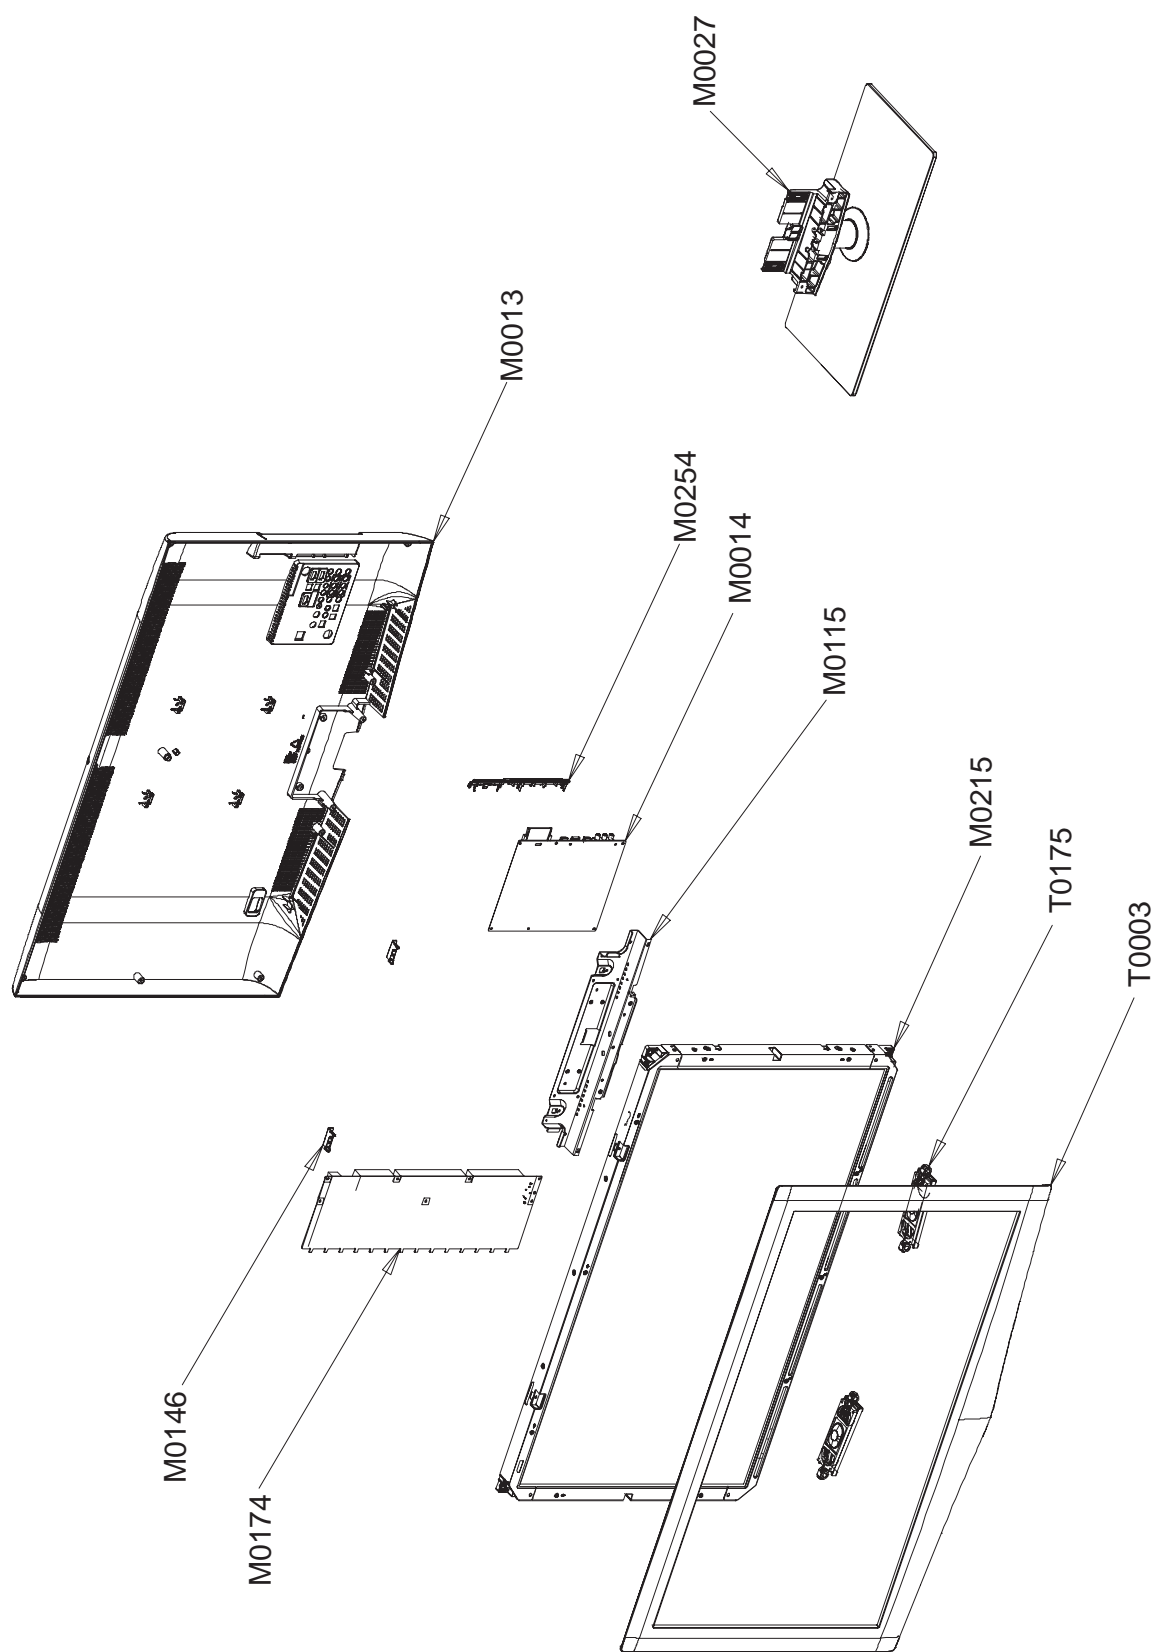

5-6-1. LE37B65* Parts List

Location No.	Code No.	Description & Specification	Q'ty	S.A/S.N.A	Remark
T0003	BN96-09487B	ASSY COVER P-FRONT;37,LB650,EO,PC(CLR)+P	1	S.A	
M0215	BN07-00644A	LCD-PANEL;T370HW02 VE	1	S.A	
T0175	BN96-09463C	ASSY SPEAKER P;8ohm,4pin,10W,R:250/ L:60	1	S.A	
M0115	BN61-04918A	BRACKET-STAND LINK;40, B610,SECC,T1.6	1	S.N.A	
M0174	BN44-00262B	IP BOARD;B109-801GP,H37F1_9DF,0.1mA,10mA	1	S.A	
M0146	BN61-04818A	BRACKET-PANEL TOP;B650-32,SECC,T1.2	2	S.N.A	
M0014	BN94-02583B	ASSY PCB MAIN;LE37B653T5WXXC	1	S.A	
M0254	BN61-04800A	HOLDER-SIDE AV;EO,ABS+PMMA,HB,BK23,H/GLO	1	S.N.A	
M0013	BN96-09504A	ASSY COVER P-REAR;37,LB650,EO,ABS+PMMA,H	1	S.A	
M0027	BN96-10691A	ASSY STAND P-BASE;37,40,LB650,TEMPERED G	1	S.A	


5-7. LE40B65* Exploded View

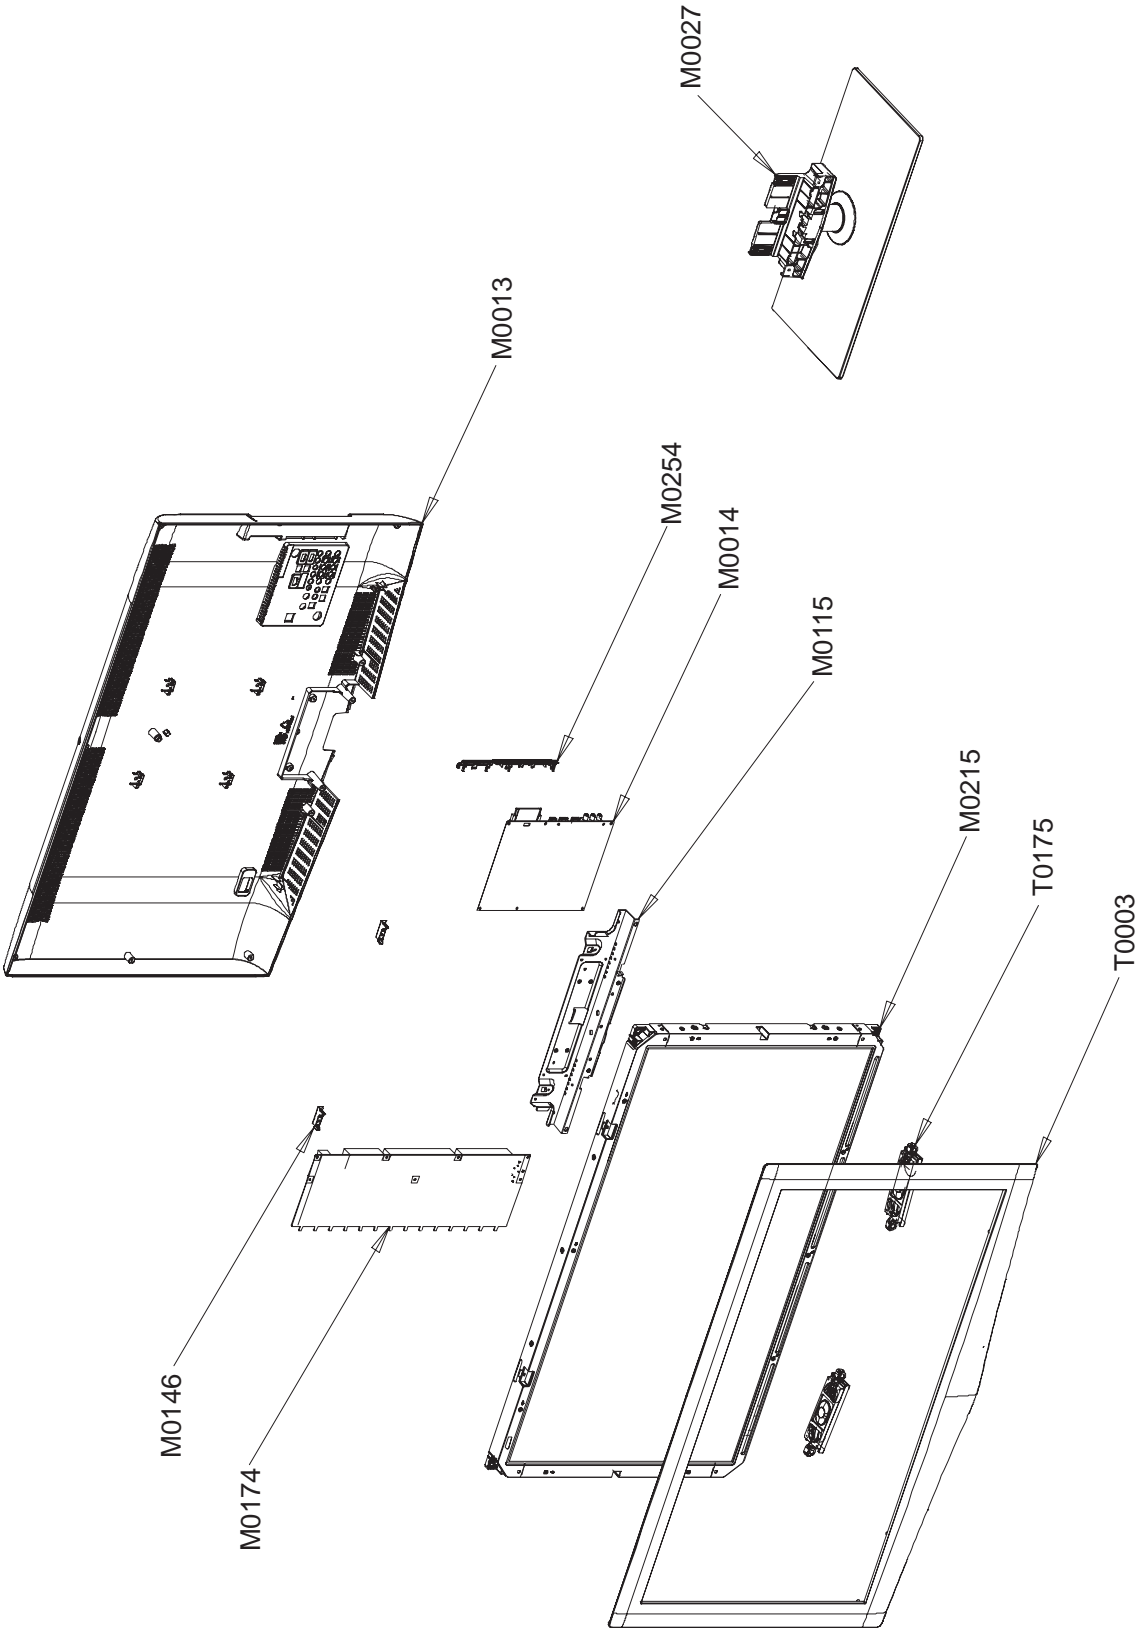

5-7-1. LE40B65* Parts List

Location No.	Code No.	Description & Specification	Q'ty	S.A/S.N.A	Remark
T0003	BN96-09489B	ASSY COVER P-FRONT;40,LB650,EO,PC(CLR)+P	1	S.A	
M0215	BN07-00646A	LCD-PANEL;T400HW02 V5	1	S.A	
T0175	BN96-09463C	ASSY SPEAKER P;8ohm,4pin,10W,R:250/ L:60	1	S.A	
M0115	BN61-04918A	BRACKET-STAND LINK;40, B610,SECC,T1.6	1	S.N.A	
M0174	BN44-00264A	IP BOARD;PSIV231I01A,H40F1_9SS,0.11mA,11	1	S.A	
T0101	BN61-04816A	BRACKET-WALL;40, B610,SECC,T1.2	4	S.N.A	
M0146	BN61-04818A	BRACKET-PANEL TOP;B650-32,SECC,T1.2	2	S.N.A	
M0014	BN94-02583C	ASSY PCB MAIN;LE40B653T5WXXC	1	S.A	
M0254	BN61-04800A	HOLDER-SIDE AV;EO,ABS+PMMA,HB,BK23,H/GLO	1	S.N.A	
M0013	BN96-09506A	ASSY COVER P-REAR;40,LB650,EO,ABS+PMMA,H	1	S.A	
M0027	BN96-10691A	ASSY STAND P-BASE;37,40,LB650,TEMPERED G	1	S.A	


5-8. LE46B65* Exploded View

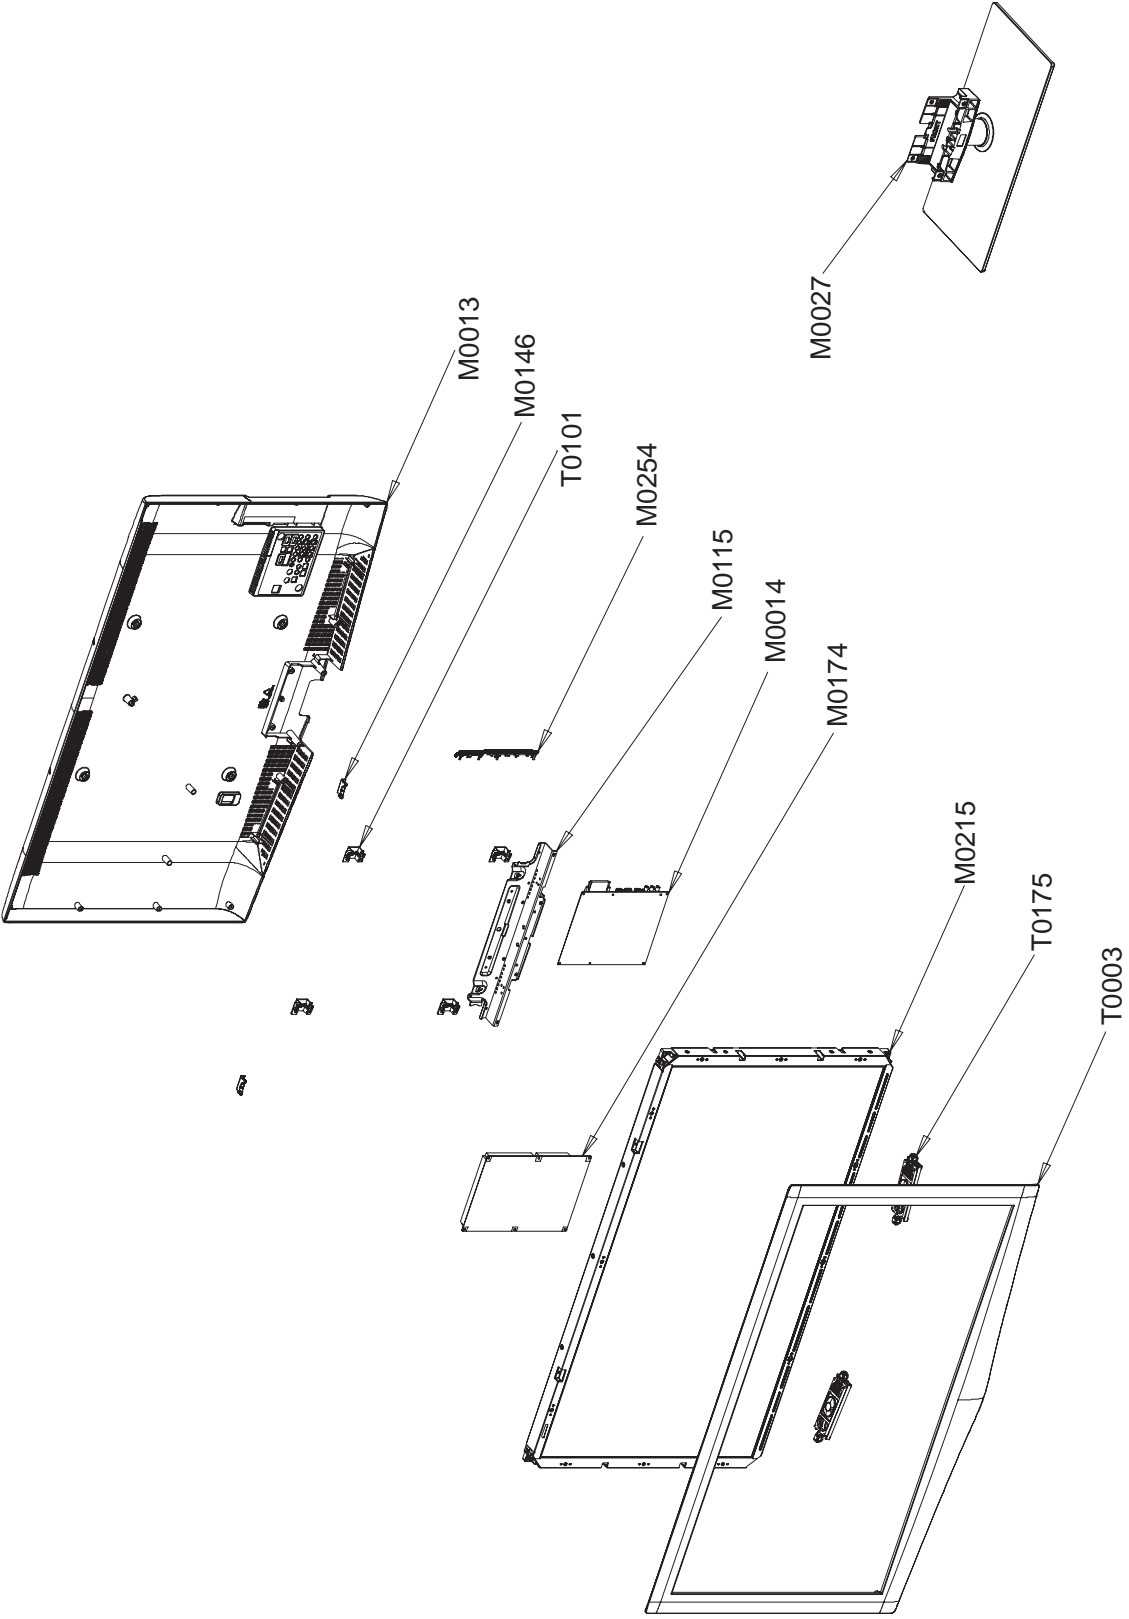

5-8-1. LE46B65* Parts List

Location No.	Code No.	Description & Specification	Q'ty	S.A/S.N.A	Remark
T0003	BN96-09490B	ASSY COVER P-FRONT;46,LB650,EO,PC(CLR)+P	1	S.A	
M0215	BN07-00666A	LCD-PANEL;V460H1-LH5	1	S.A	
T0175	BN96-09463D	ASSY SPEAKER P;8ohm,4pin,10W,R:250/ L:70	1	S.A	
M0115	BN61-04788A	BRACKET-STAND LINK;46, B610,SECC,T2.0	1	S.N.A	
M0174	BN44-00265A	IP BOARD;PSIV281609A,I46F1_9SS,0.1mA,10.	1	S.A	
T0101	BN61-04817A	BRACKET-WALL;46, B610,SECC,T1.6	4	S.N.A	
M0146	BN61-04818A	BRACKET-PANEL TOP;B650-32,SECC,T1.2	2	S.N.A	
M0014	BN94-02583D	ASSY PCB MAIN;LE46B653T5WXXC	1	S.A	
M0254	BN61-04800A	HOLDER-SIDE AV;EO,ABS+PMMA,HB,BK23,H/GLO	1	S.N.A	
M0013	BN96-09508A	ASSY COVER P-REAR;46,LB650,EO,ABS+PMMA,H	1	S.A	
M0027	BN96-09501A	ASSY STAND P-BASE;46,LB650,TEMPERED GLAS	1	S.A	


5-9. LE55B65* Exploded View

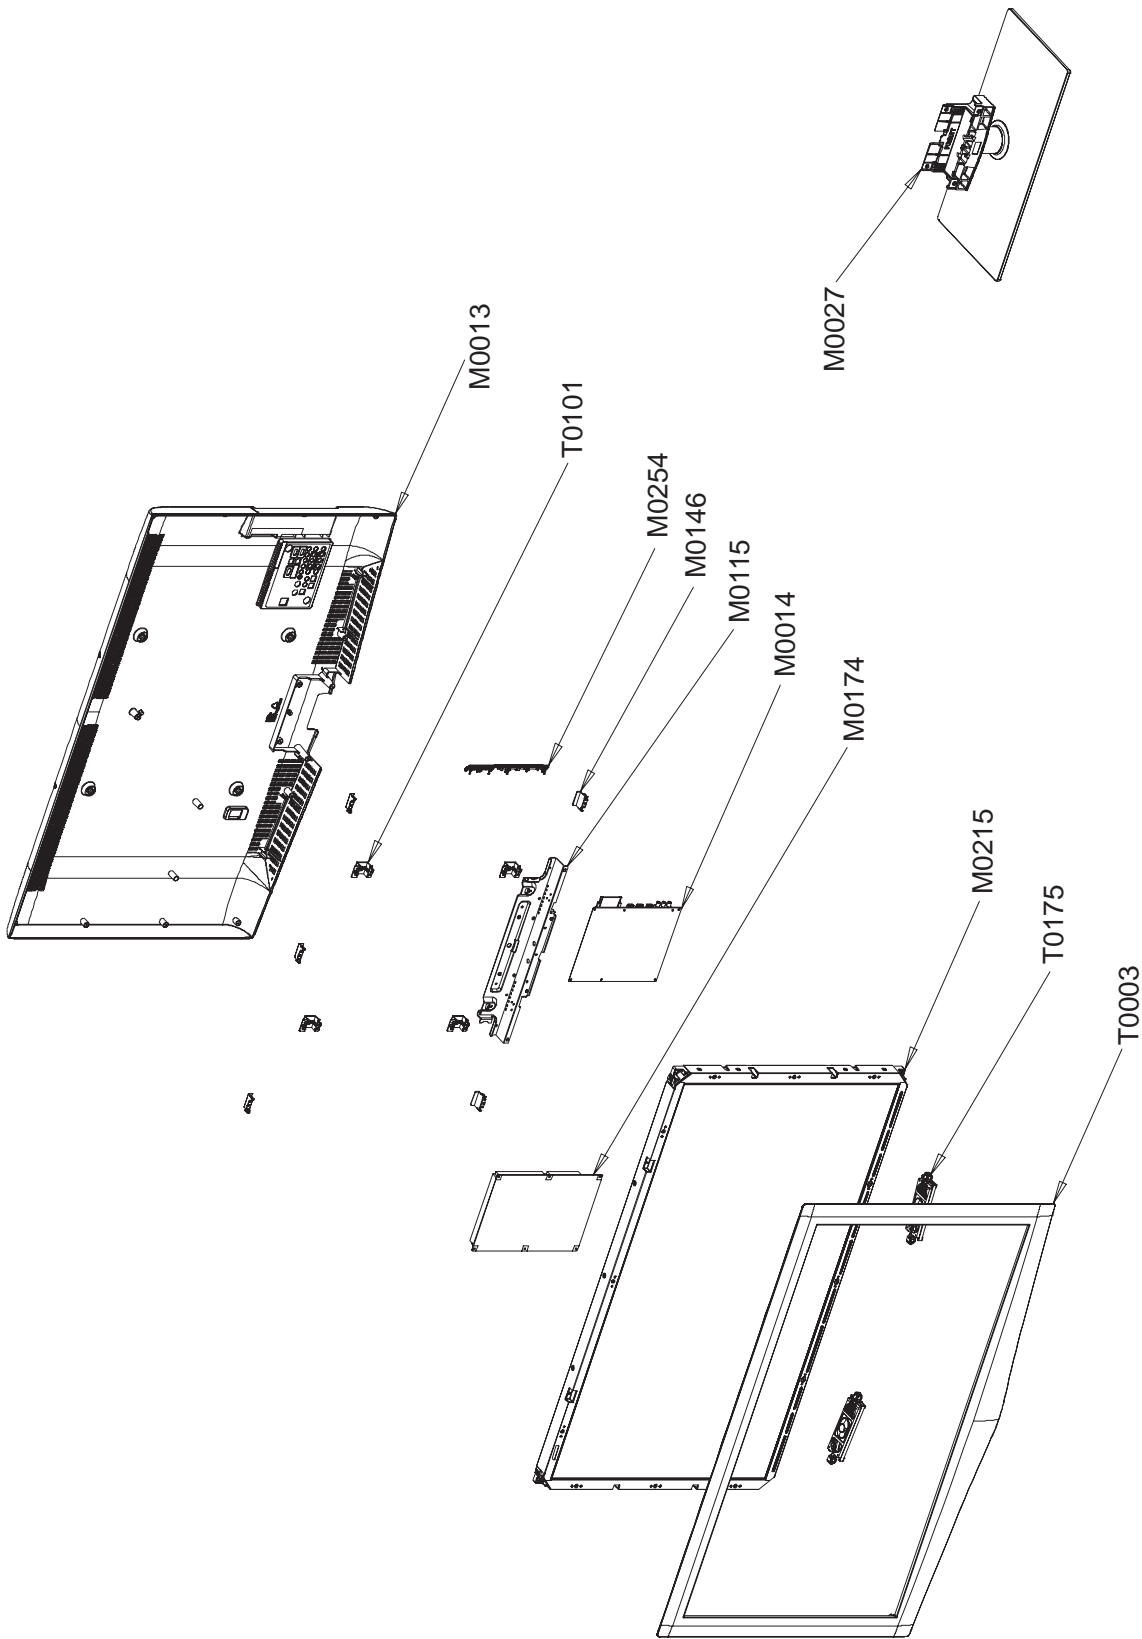

5-9-1. LE55B65* Parts List

Location No.	Code No.	Description & Specification	Q'ty	S.A/S.N.A	Remark
T0003	BN96-09491B	ASSY COVER P-FRONT;55,LB650,EO,PC(CLR)+P	1	S.A	
M0215	BN07-00695A	LCD-PANEL;V546H1-L01	1	S.A	
M0215	BN81-02395A	A/S-T CON V546H1-LH1;V546H1-LH1	1	S.A	
T0175	BN96-09466A	ASSY SPEAKER P;8ohm,4pin,15W,R:800 / L:8	1	S.A	
M0115	BN61-04788A	BRACKET-STAND LINK;46, B610,SECC,T2.0	1	S.N.A	
M0174	BN44-00268A	IP BOARD-IP;I55F2_9HS,I55F2_9HS,5.5mA,6.	1	S.A	
T0101	BN61-04817A	BRACKET-WALL;46, B610,SECC,T1.6	4	S.N.A	
M0146	BN61-04819A	BRACKET-PANEL TOP;B650-46,SECC,T1.2	5	S.N.A	
M0014	BN94-02583E	ASSY PCB MAIN;LE55B653T5WXXC	1	S.A	
M0254	BN61-04800A	HOLDER-SIDE AV;EO,ABS+PMMA,HB,BK23,H/GLO	1	S.N.A	
M0013	BN96-09510A	ASSY COVER P-REAR;55,LB650,EO,ABS+PMMA,H	1	S.N.A	
M0027	BN96-10606A	ASSY STAND P-BASE;55,LB650,TEMPERED GLAS	1	S.N.A	


5-10. LE40B75* Exploded View

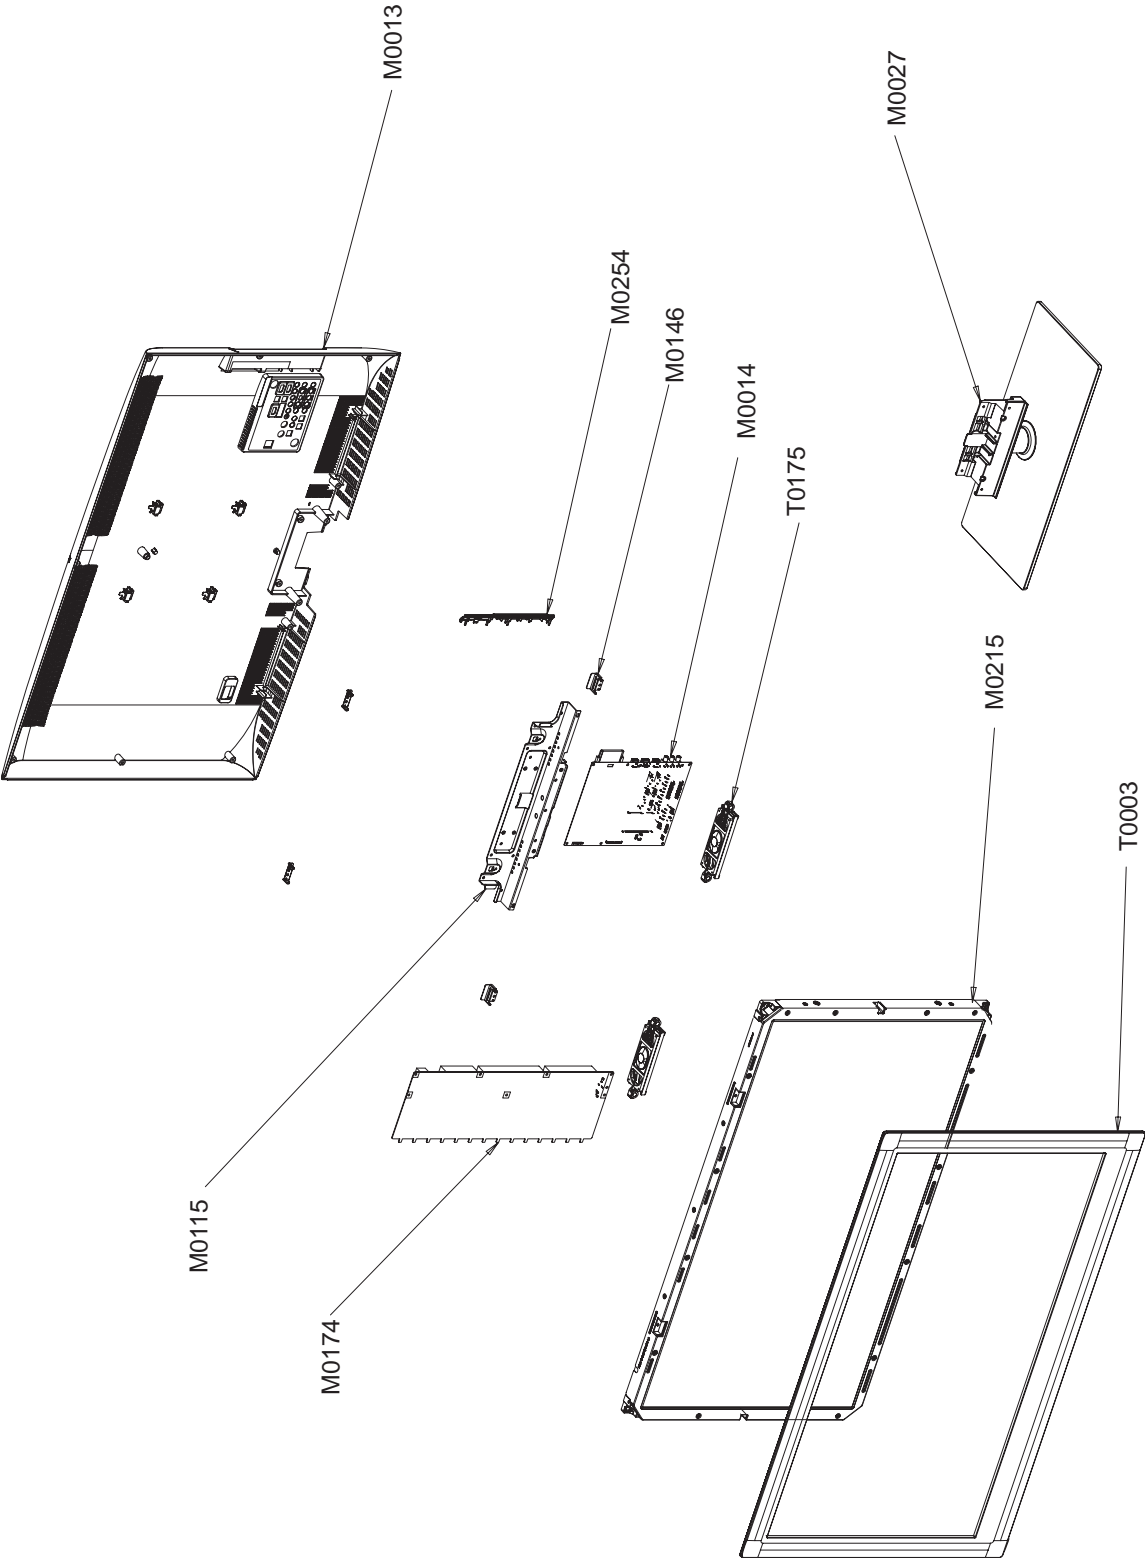

5-10-1. LE40B75* Parts List

Location No.	Code No.	Description & Specification	Q'ty	S.A/S.N.A	Remark
T0003	BN96-09632B	ASSY COVER P-FRONT;40,LB750,EO,PC(CLR)+P	1	S.A	
M0215	BN07-00694B	LCD-PANEL;LTF400HG03	1	S.A	
M0215	BN81-02355A	A/S-T CON LTF400HG01;LTF400HG01	1	S.N.A	
T0175	BN96-09463C	ASSY SPEAKER P;8ohm,4pin,10W,R:250/ L:60	1	S.A	
M0115	BN61-04918A	BRACKET-STAND LINK;40, B610,SECC,T1.6	1	S.N.A	
M0174	BN44-00284A	IP BOARD;PSIV231I01A,H40F1_9SS,0.11mA,11	1	S.A	
M0146	BN61-03056A	BRACKET-PANEL TOP;TULIP52,SECC,T1.2	2	S.N.A	
M0014	BN94-02663D	ASSY PCB MAIN;LE40B750U1WXXC	1	S.A	
M0254	BN61-04800A	HOLDER-SIDE AV;EO,ABS+PMMA,HB,BK23,H/GLO	1	S.N.A	
M0013	BN96-09652A	ASSY COVER P-REAR;40,LB650,EO,ABS+PMMA,H	1	S.A	
M0027	BN96-09475A	ASSY STAND P-BASE;40,LB750,BLACK,CLEAR N	1	S.A	


5-11. LE46B75* Exploded View

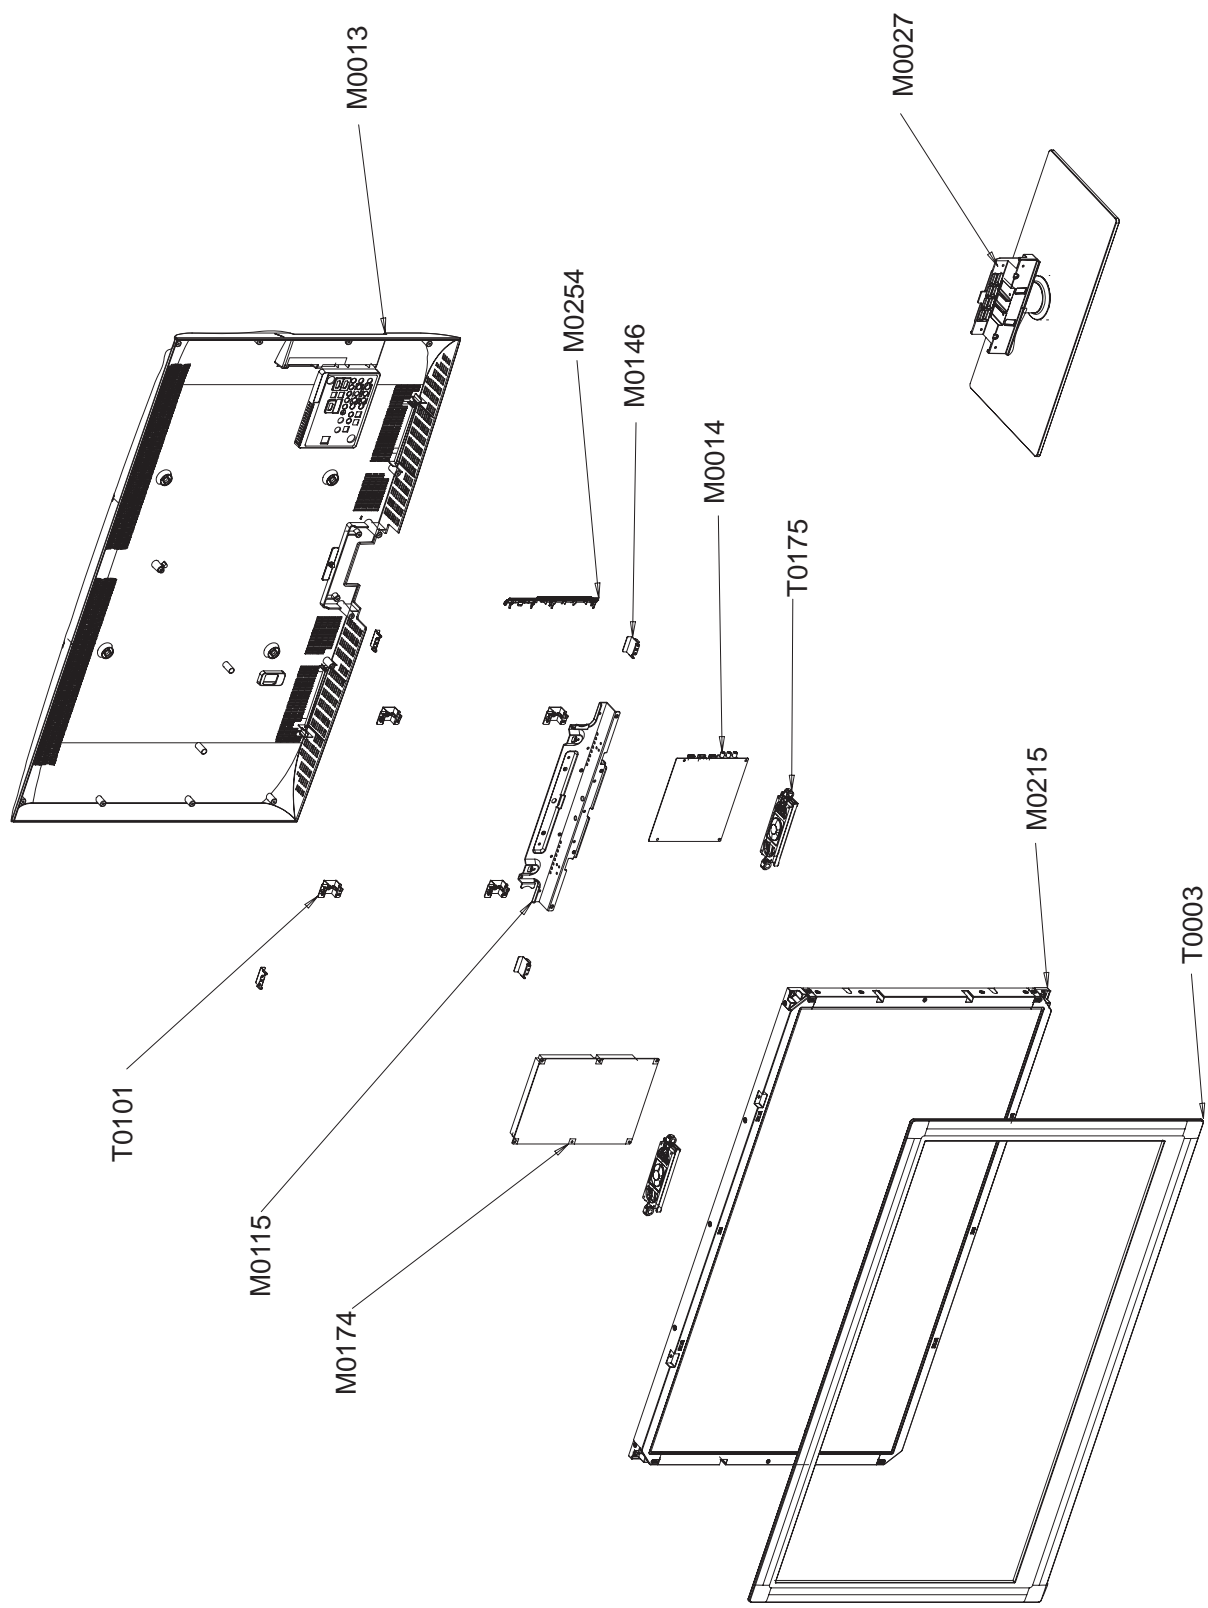

5-11-1. LE46B75* Parts List

Location No.	Code No.	Description & Specification	Q'ty	S.A/S.N.A	Remark
T0003	BN96-09633B	ASSY COVER P-FRONT;46,LB750,EO,PC(CLR)+P	1	S.A	
M0215	BN07-00637A	LCD-PANEL;LTF460HG01	1	S.A	
M0215	BN81-02354A	A/S-T CON LTF460HG01;LTF460HG01	1	S.A	
T0175	BN96-09463C	ASSY SPEAKER P;8ohm,4pin,10W,R:250/ L:60	1	S.A	
M0115	BN61-04788A	BRACKET-STAND LINK;46, B610,SECC,T2.0	1	S.N.A	
M0174	BN44-00266A	IP BOARD;IP-321609F,I46F2_9SS,0.1mA,10.5	1	S.A	
T0101	BN61-04817A	BRACKET-WALL;46, B610,SECC,T1.6	4	S.N.A	
M0146	BN61-04818A	BRACKET-PANEL TOP;B650-32,SECC,T1.2	2	S.N.A	
M0014	BN94-02663E	ASSY PCB MAIN;LE46B750U1WXXC	1	S.A	
M0254	BN61-04800A	HOLDER-SIDE AV;EO,ABS+PMMA,HB,BK23,H/GLO	1	S.N.A	
M0013	BN96-09653A	ASSY COVER P-REAR;46,LB750,EO,PC/ABS+REC	1	S.A	
M0027	BN96-09478A	ASSY STAND P-BASE;46,LB750,BLACK,CLEAR N	1	S.A	

5-12. LE52B75* Exploded View

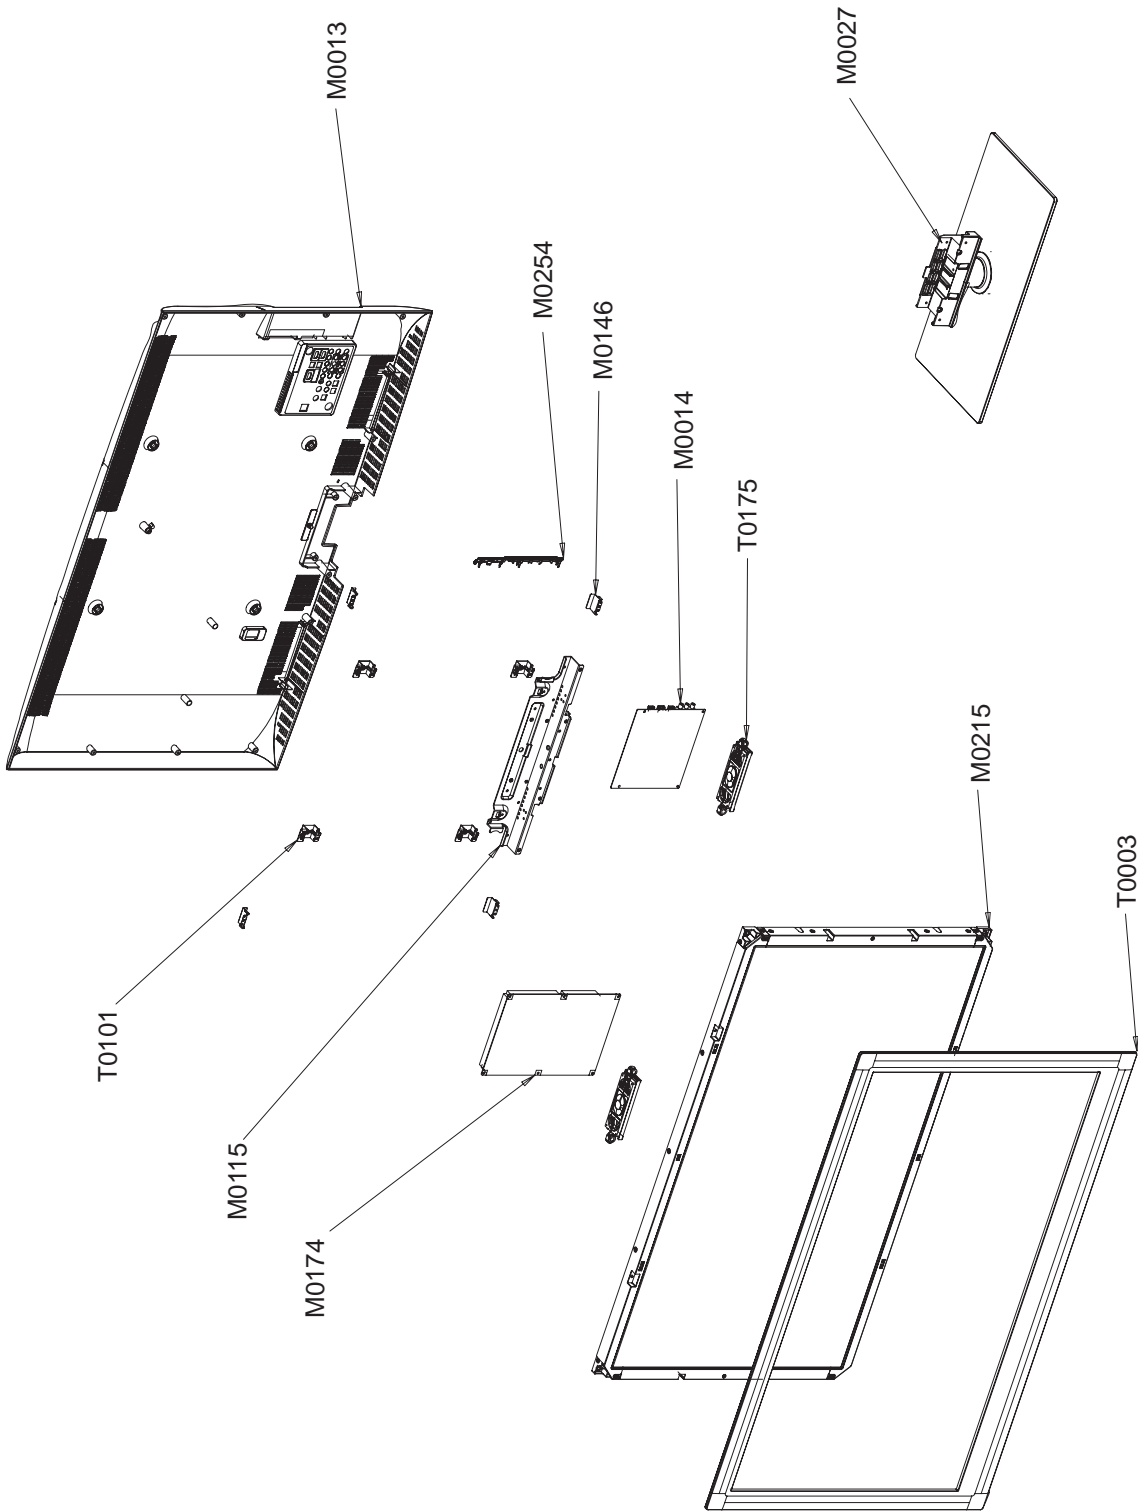

5-12-1. LE52B75* Parts List

Location No.	Code No.	Description & Specification	Q'ty	S.A/S.N.A	Remark
T0003	BN96-09635B	ASSY COVER P-FRONT;52,LB750,EO,PC(CLR)+P	1	S.A	
M0215	BN07-00696A	LCD-PANEL;LTF520HH01	1	S.A	
M0215	BN81-02356A	A/S-T CON LTF520HH01;LTF520HH01	1	S.A	
T0175	BN96-09463D	ASSY SPEAKER P;8ohm,4pin,10W,R:250/ L:70	1	S.A	
M0115	BN61-04788A	BRACKET-STAND LINK;46, B610,SECC,T2.0	1	S.N.A	
M0174	BN44-00287A	IP BOARD;IP-361609F,I52F2_9SS,146mA,166m	1	S.A	
T0101	BN61-04817A	BRACKET-WALL;46, B610,SECC,T1.6	4	S.N.A	
M0146	BN61-04819A	BRACKET-PANEL TOP;B650-46,SECC,T1.2	4	S.N.A	
M0014	BN94-02663F	ASSY PCB MAIN;LE52B750U1WXXC	1	S.A	
M0254	BN61-04800A	HOLDER-SIDE AV;EO,ABS+PMMA,HB,BK23,H/GLO	1	S.N.A	
M0013	BN96-09654A	ASSY COVER P-REAR;52,LB750,EO,PC/ABS+REC	1	S.A	
M0027	BN96-09481A	ASSY STAND P-BASE;52,LB750,TEMPERED GLAS	1	S.A	

5-13. LE32B55*A Parts List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
		LE32B550A5WXXC	LE32B550A5W,N68A/32AA5-G5K,32,LCD-TV,SPA			
0.1	M0001	BN90-01919A	ASSY COVER FRONT;32,LB550,EO,CHARCOAL GR	1	S.N.A	
..2	T0175	BN96-09463A	ASSY SPEAKER P;8ohm,4pin,10W,R:200 / L:4	1	S.A	
..2	T0003	BN96-09553A	ASSY COVER P-FRONT;32,LB550,EO,PC(CLR)+P	1	S.N.A	
...3	T0069	BN60-00027N	SPACER-FELT;L650 32,FELT,383,0.5,20	2	S.N.A	
...3	T0069	BN60-00027T	SPACER-FELT;L650 32,FELT,700,0.5,20	2	S.N.A	
...3		BN61-04661A	BRACKET-STOPPER;L650,SK-5,T0.4,Plating,H	4	S.N.A	
...3		BN61-04692A	BOSS-PRIMER;#94,clear,35cps	0.58	S.N.A	
...3	CCM1	BN63-02183E	COVER-SHEET;Rhcm,PE Vinyl,T0.05,750mm,20	0.694	S.N.A	
...3	M0112	BN63-04139P	COVER-FRONT;32,LB550,EO,PC(CLR)+PC(C/GRA	1	S.A	
....4		BN81-00116D	RESIN-TOC;PC V0,TTP01,CLR,TN-1030(NP),TH	0.656	S.N.A	
....4		BN81-00265E	RESIN;ToC PC, TGR02,TN-1030S, LD046,TH30	0.787	S.N.A	
...3	CCM1	BN63-05199B	COVER-SHEET;AMBER,PE,T0.08,W65mm,200M,CL	2.5	S.N.A	
...3	CCM1	BN63-05199E	COVER-SHEET;AMBER,PE,T0.08,W85mm,200M,CL	1	S.N.A	
...3		BN96-06846A	ASSY HOLDER P-BOSS TOP;32,L650A,,ABS,HB,	1	S.N.A	
....4		BN61-03791A	HOLDER-BOSS TOP;32,L650,ABS,HB,-,-,-,WH1	1	S.N.A	
....5		BN81-00116F	RESIN;ABS HB,WHT,HF-0680U,W91902,-,-,-	111.65	S.N.A	
....4		BN61-04731A	BOSS-TAPE;AMBER,ACRYL,T1.1,W8.0mm,WHITE,	0.77	S.N.A	
....4		BN61-04731B	BOSS-TAPE;AMBER,ACRYL,T1.1,W12.0mm,WHITE	0.05	S.N.A	
....4		BN61-04692A	BOSS-PRIMER;#94,clear,35cps	0.2	S.N.A	
...3		BN96-07658A	ASSY HOLDER P-BOSS SIDE;32,L650,,PC V1 R	2	S.N.A	
....4		BN61-04074C	HOLDER-BOSS SIDE;AMBER 32",PC V1 RECYCLE	1	S.N.A	
....4		BN61-04731B	BOSS-TAPE;AMBER,ACRYL,T1.1,W12.0mm,WHITE	0.08	S.N.A	
....4		BN61-04692A	BOSS-PRIMER;#94,clear,35cps	0.04	S.N.A	
...3		BN96-09562A	ASSY HOLDER P-BOSS BOTTOM;32,LB610,ABS,H	1	S.N.A	
....4		BN61-04692A	BOSS-PRIMER;#94,clear,35cps	0.3	S.N.A	
....4		BN61-04731B	BOSS-TAPE;AMBER,ACRYL,T1.1,W12.0mm,WHITE	0.74	S.N.A	
....4		BN61-04999A	HOLDER-BOSS BOTTOM;32,LB610,ABS,HB,WH12	1	S.N.A	
....5		BN81-00116F	RESIN;ABS HB,WHT,HF-0680U,W91902,-,-,-	0.2	S.N.A	
...3	M0175	BN96-10382B	ASSY BOARD P-TOUCH FUNCTION&IR;LN40B610A	1	S.A	
0.1	M0216	BN90-01936B	ASSY STAND;32,LB610,CHARCOAL GRAY,GRAY N	1	S.N.A	
..2	T0920	BN61-04988A	GUIDE-STAND;32,B610,PC+GF 20%	1	S.N.A	
...3		BN81-00204H	RESIN;Trirex,3025G20 BK,ABS+PC G/F 20%,4	0.21	S.N.A	
..2	M0027	BN96-09497B	ASSY STAND P-BASE;32,LB650,TEMPERED GLAS	1	S.A	
...3	M0081	6003-001003	SCREW-TAPTITE;BH,+,B,M4,L12,ZPC(BLK),SWR	3	S.N.A	
...3		BN61-04692A	BOSS-PRIMER;#94,clear,35cps	0.1	S.N.A	
...3		BN61-04731B	BOSS-TAPE;AMBER,ACRYL,T1.1,W12.0mm,WHITE	0.95	S.N.A	
...3		BN61-04841A	BRACKET-STAND BOTTOM;B650 40,SECC,T2.0	1	S.N.A	
...3		BN61-04855A	BRACKET-SWIVEL BOTTOM;B650 40,SECC,T2.0	1	S.N.A	
...3		BN61-05238A	HOLDER-SWIVEL RING TOP;LB700 40,POM HB,A	1	S.N.A	
...3		BN61-05248B	GUIDE-STAND NECK;LB650,32,PC,C/GRAY(TP27	1	S.N.A	
...3		BN61-05254A	HOLDER-SWIVEL RING BOTTOM;LB700 40,POM H	1	S.N.A	
...3		BN63-05530A	COVER-STAND GLASS;32,LB650,GLASS,T8.0,CH	1	S.A	
....4	CCM1	BN63-04755A	COVER-SHEET;AMBER,PE,T0.05,W150mm,200M,6	0.56	S.N.A	
...3	T0056	BN63-05537A	COVER-DECORATION;UB7000 40inch,ABS,PMMA,	1	S.N.A	
....4		BN81-00204P	RESIN-HIGH GLOSS;HAM 8560,SF-0505,K21294	0.01	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
...3	M0126	BN73-00203A	RUBBER-FOOT;LB7000 46inch,CR RUBBER,T7.0	4	S.N.A	
0.1	M0002	BN90-01941A	ASSY COVER REAR;32,LB550,EO	1	S.N.A	
..2	T0081	6002-001294	SCREW-TAPPING;BH,+,M4,L16,ZPC(BLK)	9	S.N.A	
..2	T0081	6002-001294	SCREW-TAPPING;BH,+,M4,L16,ZPC(BLK)	1	S.N.A	
..2	M0013	BN96-09609A	ASSY COVER P-REAR;32,LB550,EO,HIPS,HB,BK	1	S.A	
...3	T0069	AA63-60131N	SPACER-FELT;L2,FELT,280*10,BLK,T0.5	2	S.N.A	
...3	T0101	BN61-04816A	BRACKET-WALL;40, B610,SECC,T1.2	4	S.N.A	
...3	M0006	BN63-05363A	COVER-REAR;32,B610,EO,HIPS,HB,BK500	1	S.N.A	
...4		BN81-00199H	RESIN;HIPS HB,BK500,HF-1690H,K2901	1.78	S.N.A	
...3	T0071	BN64-01028B	INLAY-TERMINAL;LB550 32,EO,PS SHEET,T0.3	1	S.N.A	
...3	T0064	BN65-00002A	CLAMPER CORE;BORDEAUX,LDPE,-,-,BLK,-	1	S.N.A	
0.1		BN91-03375A	ASSY LCD-AUO;LN32B530P7FXZA,AUO	1	S.N.A	
..2	M0215	BN07-00640A	LCD-PANEL;T315HW02 V2	1	S.A	
...3		BN81-02345A	A/S-T CON T315HW02_V2;T315HW02_V2	1	S.N.A	
0.1	M0112	BN91-03749A	ASSY SHIELD;LE32B550A5WXXC	1	S.N.A	
..2	M0081	6003-000337	SCREW-TAPTITE;BH,+,S,M4,L10,ZPC(BLK),SWR	4	S.N.A	
..2	M0081	6003-000337	SCREW-TAPTITE;BH,+,S,M4,L10,ZPC(BLK),SWR	7	S.N.A	
..2	M0081	6003-000337	SCREW-TAPTITE;BH,+,S,M4,L10,ZPC(BLK),SWR	4	S.N.A	
..2	M0081	6003-001188	SCREW-TAPTITE;BH,+,B,M4,L10,ZPC(WHT),S	4	S.N.A	
..2	M0081	6003-001188	SCREW-TAPTITE;BH,+,B,M4,L10,ZPC(WHT),S	2	S.N.A	
..2	M0081	6003-001439	SCREW-TAPTITE;BH,+,S,M4,L8,ZPC(WHT),SW	1	S.N.A	
..2	M2893	BN39-01099J	LEAD CONNECTOR;LB5P,LB5K,UL1007#26,30P,6	1	S.A	
..2	M0174	BN44-00261B	IP BOARD-IP;H32F1_9DY,H32F1_9DY,0.12mA,1	1	S.A	
..2	M0254	BN61-04801C	HOLDER-SIDE AV;EO,HIPS,HB,BK500,1USB,1HD	1	S.N.A	
...3		BN81-00199H	RESIN;HIPS HB,BK500,HF-1690H,K2901	0.01	S.N.A	
..2	M0115	BN61-04820A	BRACKET-STAND LINK;B650-32,SECC,T1.2	1	S.N.A	
..2	M0146	BN61-04980A	BRACKET-PANEL TOP;B550-3 32,SECC,T1.2	2	S.N.A	
..2		BN63-05259A	COVER-MAIN;EO,ABS+PMMA,HB,BK23,H/GLOSSY	1	S.N.A	
...3		BN81-00204P	RESIN-HIGH GLOSS;HAM 8560,SF-0505,K21294	0.015	S.N.A	
..2	M0230	BN96-10076A	ASSY CABLE P-FPCB LVDS;LA46A650A1,FPCB L	1	S.A	
0.1	M0017	BN91-03753A	ASSY CHASSIS;LE32B550A5WXXC	1	S.N.A	
..2	M0014	BN94-02668A	ASSY PCB MAIN;LE32B550A5WXXC	1	S.A	
...3	T0245	0202-001608	SOLDER-WIRE FLUX;LFC7-107,D0.8,99.3Sn/0.	0.25	S.N.A	
...3	CN3010	3701-001388	CONNECTOR-HDMI;20P,Phosphor Bronze,ANGLE	1	S.A	
...3	CN3011	3701-001480	CONNECTOR-DSUB;15P,3R,FEMAIL,STAMPED PIN	1	S.A	
...3	CN906	3707-001081	CONNECTOR-OPTICAL;STRAIGHT,SPDIF	1	S.A	
...3	CN8001_EU	3709-001551	CONNECTOR-CARD SLOT;68P,1.27mm,DIP,AU50U	1	S.A	
...3	CN330	3711-003847	HEADER-BOARD TO CABLE;BOX,12P,1R,2mm,ANG	1	S.A	
...3	CN1001	3711-005884	HEADER-BOARD TO BOARD;BOX,30P,2R,2mm,ANG	1	S.A	
...3	CN330	3711-006715	HEADER-BOARD TO CABLE;BOX,4P,1R,2.5mm,AN	1	S.N.A	
...3	JA330	3722-001061	JACK-PHONE;1P,3.6PI,AG,BLK,N	1	S.A	
...3	JA330	3722-001061	JACK-PHONE;1P,3.6PI,AG,BLK,N	1	S.A	
...3	JA330	3722-001061	JACK-PHONE;1P,3.6PI,AG,BLK,N	1	S.A	
...3	JA330	3722-001061	JACK-PHONE;1P,3.6PI,AG,BLK,N	1	S.A	
...3	CN7006	3722-002546	JACK-USB;4P/1C,AU,BLK,ANGLE,A type	1	S.N.A	
...3	JA333	3722-002635	JACK-PIN;3P,Sn,YEL/WHT/RED,ANGLE	1	S.A	
...3	CN3002_EU	3722-002681	JACK-SCART;42P,SN,BLK	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
...3	JA333	3722-002691	JACK-PIN;2P,Ni,WHT/RED,STRAIGHT	1	S.A	
...3	JA333	3722-002691	JACK-PIN;2P,Ni,WHT/RED,STRAIGHT	1	S.A	
...3	JA333	3722-002703	JACK-PIN;3P,Ni,GRN/BLU/RED,STRAIGHT	1	S.A	
...3	CIS3	BN40-00145A	TUNER;TDHG6-K12A,TDHG6-K12A,DVB-TC,164CH	1	S.A	
...3	T0174	BN97-03216A	ASSY SMD;LE32B550A5WXXC	1	S.N.A	
....4	SUB05	0202-001477	SOLDER-CREAM;LST309-M,-,D20~45um,96.5Sn/	1	S.N.A	
....4	D4003	0401-000133	DIODE-SWITCHING;RLS4148,75V,150mA,LL-34,	1	S.A	
....4	D4004	0401-000133	DIODE-SWITCHING;RLS4148,75V,150mA,LL-34,	1	S.A	
....4	D4100	0401-000133	DIODE-SWITCHING;RLS4148,75V,150mA,LL-34,	1	S.A	
....4	D4228	0401-000133	DIODE-SWITCHING;RLS4148,75V,150mA,LL-34,	1	S.A	
....4	D3001	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3002	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3051	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3054	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3061	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3062	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3063	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3076	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3077	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3079	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3080	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D4008	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D4010	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3811	0401-001099	DIODE-SWITCHING;1N4148WS,75V,150mA,SOD-3	1	S.N.A	
....4	D0254	0402-001207	DIODE-SCHOTTKY;UPS5819,40V,1000MA,DO-216	1	S.A	
....4	D4001	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D5100	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D3003_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3004_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3005_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3006_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3007_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3008_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3009_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3011	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3015	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3016_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3018	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3019	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3020	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3021	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3022_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3023	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3024	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3026_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3032	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3033	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3034	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3035	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3036	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3037	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	D3038	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3039	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3045	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3052	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3056	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3057	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3058	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3060	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3065	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3066	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3067	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3068	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3069	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3073	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3074	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3075	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3350	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3776	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3777_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3778_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3779_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D0254	0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	1	S.A	
....4	D0254	0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	1	S.A	
....4	D0254	0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	1	S.A	
....4	D0254	0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	1	S.A	
....4	D0254	0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	1	S.A	
....4	D0254	0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	1	S.A	
....4	D0254	0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	1	S.A	
....4	D7001_650	0406-001200	DIODE-TVS;RCLAMP0504F,6/-V,150W,SC-70	1	S.A	
....4	D7002	0406-001200	DIODE-TVS;RCLAMP0504F,6/-V,150W,SC-70	1	S.A	
....4	D3751	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D3752	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D3753	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D3754	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D3755	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D3756	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D3757	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D3758	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D8001_CI	0407-000114	DIODE-ARRAY;- ,80V,100mA,CA2-3,SOT-23,TP	1	S.N.A	
....4	D8002_CI	0407-000114	DIODE-ARRAY;- ,80V,100mA,CA2-3,SOT-23,TP	1	S.N.A	
....4	D8003_CI	0407-000114	DIODE-ARRAY;- ,80V,100mA,CA2-3,SOT-23,TP	1	S.N.A	
....4	D8004_CI	0407-000114	DIODE-ARRAY;- ,80V,100mA,CA2-3,SOT-23,TP	1	S.N.A	
....4	D8005_CI	0407-000114	DIODE-ARRAY;- ,80V,100mA,CA2-3,SOT-23,TP	1	S.N.A	
....4	D8006_EU	0407-000114	DIODE-ARRAY;- ,80V,100mA,CA2-3,SOT-23,TP	1	S.N.A	
....4	Q4003	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150MW,SOT-23	1	S.A	
....4	Q4005	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150MW,SOT-23	1	S.A	
....4	Q4020	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150MW,SOT-23	1	S.A	
....4	Q1001_60HZ	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q1002_LCD	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3007	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3008	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	Q3009	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3010	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3810	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3811	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q4004	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q4009	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q4011	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3001_EU	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	
....4	Q3002_EU	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	
....4	Q7601_LCD	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	
....4	Q7602_LCD	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-001916	FET-SILICON;Si4800BDY,N,30V,9A,0.03ohm,2	1	S.A	
....4	Q409	0505-002169	FET-SILICON;Si4435BDY-T1-E3,P,-30V,-9.1A	1	S.N.A	
....4	IC104	0801-002095	IC-CMOS LOGIC;74LCX245,TRANSCEIVER,TSSOP	1	S.A	
....4	IC104	0801-002172	IC-CMOS LOGIC;74LCX16244,BUFFER/LINE DRI	1	S.A	
....4	IC104	0801-002172	IC-CMOS LOGIC;74LCX16244,BUFFER/LINE DRI	1	S.A	
....4	IC104	0801-002630	IC-CMOS LOGIC;74AHCT1G08,2-INPUT AND GAT	1	S.A	
....4	IC104	0801-002780	IC-CMOS LOGIC;74LVC1G17,SCHMITT-TRIGGER	1	S.N.A	
....4	IC7009	0904-002119	IC-I/O SUPPORT CHIP;PCF8574TS,8Bit,SSOP,	1	S.A	
....4	IC7008	1001-000164	IC-ANALOG MULTIPLEX;74HC4052,CMOS,SOP,16	1	S.A	
....4	IC106	1001-001177	IC-VIDEO SWITCH;TEA6425D,VIDEO SWITCH ,S	1	S.A	
....4	IC106	1001-001573	IC-VIDEO SWITCH;SiI9287CNUTR,QFN,72P,10x	1	S.A	
....4	IC107	1002-001482	IC-D/A CONVERTER;WM8521H9GED/R,16bit,SOI	1	S.A	
....4	IC3001	1006-001266	IC-LINE TRANSCEIVER;SP3232EEY,TSSOP,16P,	1	S.A	
....4	IC112	1103-000129	IC-EEPROM;24C02,2Kbit,256x8Bit,SOP,8P,5x	1	S.A	
....4	IC112	1103-000129	IC-EEPROM;24C02,2Kbit,256x8Bit,SOP,8P,5x	1	S.A	
....4	IC112	1103-001310	IC-EEPROM;24LC02B,256X8BIT,SOIC,8P,3.91X	1	S.N.A	
....4	IC112	1103-001385	IC-EEPROM;AT24C256,256Kbit,32Kx8,SOP,8P,	1	S.A	
....4	IC7003	1105-001859	IC-DDR2 SDRAM;K4T1G164QD-ZCE7,DDR2,1Gbit	1	S.A	
....4	IC7004	1105-001859	IC-DDR2 SDRAM;K4T1G164QD-ZCE7,DDR2,1Gbit	1	S.A	
....4	IC7005	1105-001859	IC-DDR2 SDRAM;K4T1G164QD-ZCE7,DDR2,1Gbit	1	S.A	
....4	IC7006	1105-001859	IC-DDR2 SDRAM;K4T1G164QD-ZCE7,DDR2,1Gbit	1	S.A	
....4	T0124	1201-002796	IC-POWER AMP;STA339BWS,PSSO,36P,10.3x7.5	1	S.A	
....4	T0087	1203-001815	IC-POSI.FIXED REG.;78M09,TO-252,3P,-,PLA	1	S.A	
....4	T0087	1203-001816	IC-POSI.FIXED REG.;78M08,TO-252,3P,-,PLA	1	S.A	
....4	T0087	1203-002842	IC-POSI.FIXED REG.;AP1117D-33A,TO-252,3P	1	S.A	
....4	IC012	1203-002995	IC-POSI.ADJUST REG.;AP1117D-A,TO-252,3P,	1	S.A	
....4	IC012	1203-002995	IC-POSI.ADJUST REG.;AP1117D-A,TO-252,3P,	1	S.A	
....4	IC012	1203-002995	IC-POSI.ADJUST REG.;AP1117D-A,TO-252,3P,	1	S.A	
....4	IC4005	1203-004363	IC-VOL. DETECTOR;RT9818C-29PV,SOT-23,3P,	1	S.A	
....4	IC4004	1203-004364	IC-VOL. DETECTOR;RT9818C-42PV,SOT-23,3P,	1	S.A	
....4	IC1007	1203-004879	IC-DC/DC CONVERTER;MP8668DL,QFN,14P,3x4mm	1	S.A	
....4	T0087	1203-005134	IC-POSI.FIXED REG.;RT9167A-33PB,SOT-23-5	1	S.A	
....4	IC1006	1203-005538	IC-DC/DC CONVERTER;AOZ1021HAIL,SOP,8P,4.	1	S.A	
....4	IC5006	1203-005559	IC-BACKLIGHT DRIVER;MP3302DJ,TSOT23,5P,2	1	S.A	
....4	T0087	1203-005713	IC-POSI.FIXED REG.;S-1172B33-E6T1G,HSOP,	1	S.A	
....4	IC118	1204-003010	IC-VIDEO PROCESS;SDP84,PBGA,324P,23x23mm	1	S.A	
....4	IC7001	1204-003011	IC-DECODER;SDP83,PBGA,729P,34x34mm,PLAST	1	S.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	IC3011	1205-003201	IC-BUS SWITCH;TC7WB125FK,SSOP,8P,2x2.3mm	1	S.A	
....4	IC2001	1205-003352	IC-CODEC;WM8593SEFT/V,TQFP,64P,10x10mm,P	1	S.A	
....4	IC8006_EU	1205-003479	IC-SWITCH;TPS2051BDBVR,SOT-23,5P,2.9x1.6	1	S.A	
....4	IC7007	1205-003681	IC-SWITCH;TPS2069DGN,MSOP,8P,3.05x4.98mm	1	S.A	
....4	IC5010	1209-001830	IC-PLL;IDT6V10012PGG,TSSOP,20P,6.5x4.4mm	1	S.A	
....4	D4110	1405-001185	VARISTOR;24Vdc,1.6x0.8x0.36mm,TP	1	S.A	
....4	D3010	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3012_EU	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3013	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3014_EU	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3017	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3025	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3027	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3028	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3029	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3030	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3031	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3040	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3041	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3042	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3050	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3053	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3055	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3059	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3064	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3070	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3071	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3072	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3078	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3081	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3097	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3098	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3099	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4011	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4012	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4013	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4014	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4015	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4016	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4017	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4018	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D7003_650	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D7004	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	R7120	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7121	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7122	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7123	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7152	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7153	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7154	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7155	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R7162	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7163	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7164	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7165	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7169	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7170	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7171	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7172	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R5101	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R2058	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R2059	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R2060	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R2061	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R4155	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	1	S.A	
....4	R7050	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7053	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7056	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7058	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7062	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7066	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7069	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7070	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3007	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3034_EU	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3036_EU	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3062	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3070	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3071	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3078_EU	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3120	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3191	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3192	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3205	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3206	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3207	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3243	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3254	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3255	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3320	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3999	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4042	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4049	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4050	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4087	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5022	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7114	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7132	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7143	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7605_LCD	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8311_EU	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1031_LCD	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R1072	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3010_EU	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3021_EU	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3022_EU	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3035	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3037	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3072	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3073	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3081	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3082	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3138	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3139	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3189	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3190	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3227	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3228	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4081	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6028	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6066	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7045	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7072	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7195	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7196	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7602_LCD	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R2054	2007-000141	R-CHIP;2.2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4085	2007-000141	R-CHIP;2.2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5030	2007-000141	R-CHIP;2.2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1030_LCD	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1060	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1070	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3520	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3522	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3524	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3526	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4016	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4018	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4020	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4066	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4071	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4074	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4077	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4551	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4552	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4553	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4554	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4755	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4756	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5017	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6015	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6021	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6023	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R6038	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6048	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6053	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6100	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6101	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6102	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7017	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7033	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7034	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7036	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7037	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7064	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7156	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7174	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7352	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7353_OP	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7356	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7357_OP	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3044_EU	2007-000146	R-CHIP;6.8Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3067_EU	2007-000146	R-CHIP;6.8Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1013	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1015	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1023_LCD	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R2023	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R2027	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3168	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3252	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3253	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3310	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3311	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4017	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4019	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4023	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4027	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4078	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4150	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4152	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5111	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7103	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7351	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7411_LCD	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7600_LCD	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7601_LCD	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7603_LCD	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7604_LCD	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8012	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8014_EU	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8015_EU	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8020_EU	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3028_EU	2007-000149	R-CHIP;12Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R3032_EU	2007-000149	R-CHIP;12Kohm,5%,1/16W,TP,1005	1	S.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R3027_EU	2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3033_EU	2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4021	2007-000155	R-CHIP;27Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1011	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R2019	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3040_EU	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3042_EU	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3058_EU	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3060_EU	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3126	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3136	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3201	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3204	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3521	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3523	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3525	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3527	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3820	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4151	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5110	2007-000159	R-CHIP;56Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3111	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3112	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3113	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3114	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5038	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3038_EU	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3049_EU	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3077_EU	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3103_OP	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3125	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3169	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3170	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3200	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3202	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3203	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3220	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3250	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3251	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3258	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3259	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3284	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3285	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3289	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3290	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3400	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3410_OP	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3450	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3451	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3452	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3453	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3500	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R3751_EU	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3752_EU	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3753_EU	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3811_OP	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3860	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4041	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4084	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4086	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4250	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5006	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5007	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5011	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5033	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5035	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6013	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6061	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6068	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7002	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7003	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7004	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7007	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7014	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7015	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7018	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7035	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7038	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7048	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7073	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7074	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7075	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7076	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7077	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7078	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7079	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7080	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7081	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7082	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7083	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7084	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7089	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7090	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7091	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7092	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7093	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7094	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7095	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7096	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7097	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7098	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7099	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7100	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R7101	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7102	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7104	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7118	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7119	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7128	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7129	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7130	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7133	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7134	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7135	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7141	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7142	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7144	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7161	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7167	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7168	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7177	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7201	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7202	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7229_60HZ	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7234	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7235_60HZ	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7236	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7237	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7238	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7242_60HZ	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7284_LCD	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8016_EU	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3288	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3300	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3301	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3302	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3303	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4038	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R2047	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3240	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3244	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4036	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4750	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4751	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4752	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4850	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4851	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5216	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5217	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5218	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6031	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6125	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6126	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6211	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R6212	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6213	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6214	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6215	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6216	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7115	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7159	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7175	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7650	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7651	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8021	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3008	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3083	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3256	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3257	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4039	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4040	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6184	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6810	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6811	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6812	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6813	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6814	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6815	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6816	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6817	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6818	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6819	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6820	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6821	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6822	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6823	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6824	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6825	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6826	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6827	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6828	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6829	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6830	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6831	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6832	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6833	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6834	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6835	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6836	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6837	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6838	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6839	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6840	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6841	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6842	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R6843	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6844	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6845	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7310	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1018	2007-000239	R-CHIP;1.5Kohm,1%,1/10W,TP,1608	1	S.N.A	
....4	R6089	2007-000259	R-CHIP;1.6Kohm,5%,1/10W,TP,1608	1	S.A	
....4	R5112	2007-000287	R-CHIP;100ohm,1%,1/10W,TP,1608	1	S.N.A	
....4	R7105	2007-000287	R-CHIP;100ohm,1%,1/10W,TP,1608	1	S.N.A	
....4	R7147	2007-000287	R-CHIP;100ohm,1%,1/10W,TP,1608	1	S.N.A	
....4	R1800	2007-000343	R-CHIP;120ohm,1%,1/10W,TP,1608	1	S.N.A	
....4	R2064	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R2065	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R2066	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R2067	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R2068	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R2069	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R2070	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R2071	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R5001	2007-000402	R-CHIP;150ohm,5%,1/10W,TP,1608	1	S.A	
....4	R3001_EU	2007-000458	R-CHIP;18Kohm,5%,1/10W,TP,1608	1	S.A	
....4	R3055_EU	2007-000458	R-CHIP;18Kohm,5%,1/10W,TP,1608	1	S.A	
....4	R1801	2007-000536	R-CHIP;200ohm,1%,1/10W,TP,1608	1	S.A	
....4	R5031	2007-000566	R-CHIP;220Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5026	2007-000591	R-CHIP;22ohm,1%,1/10W,TP,1608	1	S.A	
....4	R5041	2007-000591	R-CHIP;22ohm,1%,1/10W,TP,1608	1	S.A	
....4	R5052_STU	2007-000606	R-CHIP;240ohm,1%,1/10W,TP,1608	1	S.A	
....4	R5053_STU	2007-000606	R-CHIP;240ohm,1%,1/10W,TP,1608	1	S.A	
....4	R5045	2007-000669	R-CHIP;2Kohm,1%,1/10W,TP,1608	1	S.N.A	
....4	R7160	2007-000729	R-CHIP;300ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R7176	2007-000729	R-CHIP;300ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R5044	2007-000755	R-CHIP;330Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R5039	2007-000758	R-CHIP;330Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5037	2007-000763	R-CHIP;330ohm,1%,1/10W,TP,1608	1	S.N.A	
....4	R1012	2007-000828	R-CHIP;39Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R3004_EU	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3005_EU	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4015	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6067	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1026_60HZ	2007-000939	R-CHIP;47Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R1014	2007-001179	R-CHIP;8.2Kohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R3722	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8028_EU	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3721	2007-001305	R-CHIP;120ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3723	2007-001305	R-CHIP;120ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7194	2007-001308	R-CHIP;200ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7410_LCD	2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7190	2007-001329	R-CHIP;7.5Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R7191	2007-001329	R-CHIP;7.5Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R3810	2007-001333	R-CHIP;18Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1004	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R1007	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R1008	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R1009	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R5056	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R5102	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R1021	2007-002899	R-CHIP;10ohm,1%,1/10W,TP,1608	1	S.A	
....4	R1017	2007-002900	R-CHIP;11Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R5070	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5210	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5211	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5213	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5214	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5215	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1006_60HZ	2007-007107	R-CHIP;100Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R1010	2007-007107	R-CHIP;100Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R5034	2007-007107	R-CHIP;100Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R2057	2007-007136	R-CHIP;4.7Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R8013_EU	2007-007136	R-CHIP;4.7Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R1019	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R1024_60HZ	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R4028	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R4030	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R4089	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R4156	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R4753	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R4754	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R2055	2007-007197	R-CHIP;3.3ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R2056	2007-007197	R-CHIP;3.3ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7193	2007-007222	R-CHIP;6.04Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R1016	2007-007312	R-CHIP;20Kohm,1%,1/16W,TP,1005	1	S.A	
....4	R1022	2007-007312	R-CHIP;20Kohm,1%,1/16W,TP,1005	1	S.A	
....4	R1020	2007-007318	R-CHIP;1Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R5036	2007-007469	R-CHIP;110ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R7116	2007-007797	R-CHIP;44.2ohm,1%,1/10W,TP,1608	1	S.A	
....4	R7117	2007-007797	R-CHIP;44.2ohm,1%,1/10W,TP,1608	1	S.A	
....4	R3002_EU	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3006_EU	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3009	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3011	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3012	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3029	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3030	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3031	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3045	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3047_EU	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3050	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3057_EU	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3137	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3208	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3209	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3210	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3241	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R3242	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R5032	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R6280	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R6281	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R6282	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	RA5005	2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA5006	2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA8006	2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA8007	2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA8008	2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA2001	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA2002	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA2003	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA2007	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA4001	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA4044	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA4045	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA4048	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA4051	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA5004	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA6013	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7002	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7003	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7004	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7005	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7006	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7007	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7008	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7009	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7010	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7011	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7012	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7039	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7041	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7042	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7043	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7044	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7045	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7046	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7047	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7048	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7049	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7050	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7051	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7052	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7062	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7500	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7501	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA8017_CI	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA8018_CI	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA8019_CI	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	RA5003	2011-001344	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA7056	2011-001344	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA7057	2011-001344	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA2004	2011-001345	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA2005	2011-001345	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA2006	2011-001345	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA8010_EU	2011-001345	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA6018	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7013	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7014	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7015	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7020	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7038	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7040	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7053	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7054	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7061	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7502	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7503	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA3011	2011-001397	R-NETWORK;47Kohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA3012	2011-001397	R-NETWORK;47Kohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA3035	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3650_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3651_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3652_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3653_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3654_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3655_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3666_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3667_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3668_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3669_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3670_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3671_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3672_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3673_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3674_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3675_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA5013	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3006	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,-,4P,TP,1010	1	S.N.A	
....4	RA3007	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,-,4P,TP,1010	1	S.N.A	
....4	RA3008	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,-,4P,TP,1010	1	S.N.A	
....4	RA3009	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,-,4P,TP,1010	1	S.N.A	
....4	RA3016	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,-,4P,TP,1010	1	S.N.A	
....4	RA4010	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,-,4P,TP,1010	1	S.N.A	
....4	RA4046	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,-,4P,TP,1010	1	S.N.A	
....4	RA6020	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,-,4P,TP,1010	1	S.N.A	
....4	RA2008	2011-001497	R-NETWORK;470ohm,5%,1/16W,L,CHIP,4P,TP,1	1	S.N.A	
....4	RA3018	2011-001497	R-NETWORK;470ohm,5%,1/16W,L,CHIP,4P,TP,1	1	S.N.A	
....4	RA6019	2011-001506	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,4P,TP,1	1	S.N.A	
....4	RA6119	2011-001506	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,4P,TP,1	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	RA8011_EU	2011-001506	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,4P,TP,1	1	S.N.A	
....4	RA3015	2011-001519	R-NETWORK;33OHM,5%,1/16W,L,CHIP,4P,TP,1.	1	S.N.A	
....4	RA4018	2011-001519	R-NETWORK;33OHM,5%,1/16W,L,CHIP,4P,TP,1.	1	S.N.A	
....4	RA5012	2011-001519	R-NETWORK;33OHM,5%,1/16W,L,CHIP,4P,TP,1.	1	S.N.A	
....4	RA3017	2011-001527	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,4P,TP,	1	S.N.A	
....4	RA6021	2011-001527	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,4P,TP,	1	S.N.A	
....4	RA7034	2011-001527	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,4P,TP,	1	S.N.A	
....4	RA7065	2011-001527	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,4P,TP,	1	S.N.A	
....4	RA3014	2011-001586	R-NETWORK;1Kohm,5%,1/16W,L,CHIP-V,4P,TP,	1	S.A	
....4	RA3031	2011-001586	R-NETWORK;1Kohm,5%,1/16W,L,CHIP-V,4P,TP,	1	S.A	
....4	RA3036	2011-001586	R-NETWORK;1Kohm,5%,1/16W,L,CHIP-V,4P,TP,	1	S.A	
....4	RA6022	2011-001586	R-NETWORK;1Kohm,5%,1/16W,L,CHIP-V,4P,TP,	1	S.A	
....4	RA3010	2011-001587	R-NETWORK;100ohm,5%,1/16W,L,CHIP-V,4P,TP	1	S.A	
....4	RA3013	2011-001587	R-NETWORK;100ohm,5%,1/16W,L,CHIP-V,4P,TP	1	S.A	
....4	RA4016	2011-001587	R-NETWORK;100ohm,5%,1/16W,L,CHIP-V,4P,TP	1	S.A	
....4	RA4017	2011-001587	R-NETWORK;100ohm,5%,1/16W,L,CHIP-V,4P,TP	1	S.A	
....4	RA3030_EU	2011-001588	R-NETWORK;75ohm,5%,1/16W,L,CHIP-V,4P,TP,	1	S.A	
....4	RA6009	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA6010	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA6011	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA6012	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA7060	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA7079	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA7600	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA7601	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA7900	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA3032	2011-001590	R-NETWORK;47Kohm,5%,1/16W,L,CHIP-V,4P,TP	1	S.A	
....4	RA3072	2011-001590	R-NETWORK;47Kohm,5%,1/16W,L,CHIP-V,4P,TP	1	S.A	
....4	C2080	2203-000125	C-CER,CHIP;1.2nF,10%,50V,X7R,TP,1608,-	1	S.A	
....4	C2081	2203-000125	C-CER,CHIP;1.2nF,10%,50V,X7R,TP,1608,-	1	S.A	
....4	C2082	2203-000125	C-CER,CHIP;1.2nF,10%,50V,X7R,TP,1608,-	1	S.A	
....4	C2083	2203-000125	C-CER,CHIP;1.2nF,10%,50V,X7R,TP,1608,-	1	S.A	
....4	C2040	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3001	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3002_EU	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3013	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3015	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3021	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3022	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3029	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3033_EU	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3045	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3066	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3250	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3251	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C2036	2203-000280	C-CER,CHIP;0.01nF,0.5pF,50V,C0G,1608	1	S.A	
....4	C7137	2203-000384	C-CER,CHIP;0.015nF,5%,50V,C0G,1608	1	S.N.A	
....4	C1001	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C1029	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C1041_LCD	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C1768	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C2033	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C2034	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C4003	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C4012	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C4025	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C6090	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C1027	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C3014_EU	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C3016_EU	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C3024	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C3025	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C5001	2203-000550	C-CER,CHIP;0.02nF,5%,50V,C0G,1005	1	S.N.A	
....4	C5002	2203-000550	C-CER,CHIP;0.02nF,5%,50V,C0G,1005	1	S.N.A	
....4	C2070	2203-000575	C-CER,CHIP;220nF,10%,25V,X7R,TP,2012	1	S.N.A	
....4	C2071	2203-000575	C-CER,CHIP;220nF,10%,25V,X7R,TP,2012	1	S.N.A	
....4	C2072	2203-000575	C-CER,CHIP;220nF,10%,25V,X7R,TP,2012	1	S.N.A	
....4	C2073	2203-000575	C-CER,CHIP;220nF,10%,25V,X7R,TP,2012	1	S.N.A	
....4	C2074	2203-000575	C-CER,CHIP;220nF,10%,25V,X7R,TP,2012	1	S.N.A	
....4	C2075	2203-000575	C-CER,CHIP;220nF,10%,25V,X7R,TP,2012	1	S.N.A	
....4	C5100	2203-000585	C-CER,CHIP;0.22nF,10%,50V,X7R,1005	1	S.A	
....4	C4009	2203-000679	C-CER,CHIP;0.027nF,5%,50V,C0G,1005	1	S.A	
....4	C4010	2203-000679	C-CER,CHIP;0.027nF,5%,50V,C0G,1005	1	S.A	
....4	C5003	2203-000697	C-CER,CHIP;0.002NF,0.25PF,50V,C0G,TP,160	1	S.A	
....4	C5004	2203-000697	C-CER,CHIP;0.002NF,0.25PF,50V,C0G,TP,160	1	S.A	
....4	C7048	2203-000761	C-CER,CHIP;330nF,10%,16V,X7R,TP,2012,-	1	S.N.A	
....4	C3006	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C3007	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C3008	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C3011_EU	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C3012_EU	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C3018	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C3019	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C3020	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C1120	2203-000995	C-CER,CHIP;0.047nF,5%,50V,C0G,1005	1	S.A	
....4	C3017	2203-000995	C-CER,CHIP;0.047nF,5%,50V,C0G,1005	1	S.A	
....4	C3023_EU	2203-000995	C-CER,CHIP;0.047nF,5%,50V,C0G,1005	1	S.A	
....4	C4018	2203-000995	C-CER,CHIP;0.047nF,5%,50V,C0G,1005	1	S.A	
....4	C4020	2203-000995	C-CER,CHIP;0.047nF,5%,50V,C0G,1005	1	S.A	
....4	C2038	2203-001126	C-CER,CHIP;0.68nF,10%,50V,X7R,1608	1	S.N.A	
....4	C5031	2203-001412	C-CER,CHIP;0.03nF,5%,50V,NP0,TP,1005	1	S.N.A	
....4	C5035	2203-001412	C-CER,CHIP;0.03nF,5%,50V,NP0,TP,1005	1	S.N.A	
....4	C5036	2203-001412	C-CER,CHIP;0.03nF,5%,50V,NP0,TP,1005	1	S.N.A	
....4	C5037	2203-001412	C-CER,CHIP;0.03nF,5%,50V,NP0,TP,1005	1	S.N.A	
....4	C5038	2203-001412	C-CER,CHIP;0.03nF,5%,50V,NP0,TP,1005	1	S.N.A	
....4	C5039_OP	2203-001596	C-CER,CHIP;2200nF,+80-20%,50V,Y5V,2012	1	S.A	
....4	C5060_OP	2203-001596	C-CER,CHIP;2200nF,+80-20%,50V,Y5V,2012	1	S.A	
....4	C1005	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C1007	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C1008	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C2006	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C2007	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C4008	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C4011	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C4019	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C4021	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C4022	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C4024	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C4100	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C5023	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C6061	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C6077	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C6099	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C6113	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C6114	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C7018	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C7136	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C7139_LCD	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C5010	2203-002494	C-CER,CHIP;470nF,10%,16V,X7R,2012	1	S.N.A	
....4	C7050	2203-005138	C-CER,CHIP;1.8nF,10%,50V,X7R,1005	1	S.A	
....4	C7051	2203-005138	C-CER,CHIP;1.8nF,10%,50V,X7R,1005	1	S.A	
....4	C7052	2203-005138	C-CER,CHIP;1.8nF,10%,50V,X7R,1005	1	S.A	
....4	C1004	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C1022	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C1024	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C1045_60HZ	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C1048_LCD	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C1148_LCD	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C1149_LCD	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C1150_LCD	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2047	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2048	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2049	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2050	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2051	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2052	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2060	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2061	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2062	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2063	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2066	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2067	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2068	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2069	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2076	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2077	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2078	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2079	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C5021	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6056	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6057	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6058	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6059	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C6062	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6063	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6073	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6074	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6075	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6078	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6094	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6095	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6096	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6100	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7011	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7017	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7049	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7114	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7115	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7121	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7122	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7009	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7016	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7025	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7029	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7059	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7063	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7065	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7073	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7096	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7105	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7106	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7148	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7157	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7173	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7205	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7210	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C3063	2203-005393	C-CER,CHIP;0.005nF,0.1pF,50V,NP0,TP,1005	1	S.N.A	
....4	C3811	2203-005493	C-CER,CHIP;220nF,+80-20%,16V,Y5V,1005	1	S.A	
....4	C6044	2203-005493	C-CER,CHIP;220nF,+80-20%,16V,Y5V,1005	1	S.A	
....4	C6045	2203-005493	C-CER,CHIP;220nF,+80-20%,16V,Y5V,1005	1	S.A	
....4	C7053	2203-005659	C-CER,CHIP;0.18nF,5%,50V,NP0,1005	1	S.N.A	
....4	C1032	2203-005834	C-CER,CHIP;22000nF,+80-20%,10V,Y5V,3216	1	S.A	
....4	C1035	2203-005834	C-CER,CHIP;22000nF,+80-20%,10V,Y5V,3216	1	S.A	
....4	C1036	2203-005834	C-CER,CHIP;22000nF,+80-20%,10V,Y5V,3216	1	S.A	
....4	C5025	2203-005834	C-CER,CHIP;22000nF,+80-20%,10V,Y5V,3216	1	S.A	
....4	C5034	2203-005834	C-CER,CHIP;22000nF,+80-20%,10V,Y5V,3216	1	S.A	
....4	C2041	2203-005968	C-CER,CHIP;4.7NF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C6091	2203-005968	C-CER,CHIP;4.7NF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C5337	2203-006104	C-CER,CHIP;1000nF,10%,50V,X7R,3225	1	S.A	
....4	C3997	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C3998	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C6098	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C1019	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.N.A	
....4	C1025	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C1028	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.N.A	
....4	C1060	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.N.A	
....4	C7084	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.N.A	
....4	C7310	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.N.A	
....4	C7601_LCD	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.N.A	
....4	C1002	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1003	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1006	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1012	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1014	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1030	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1034	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1070	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1071	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1080	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1091	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1092	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1801	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C2037	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C2039	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C2042	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C2043	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C2044	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C2045	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3046	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3051	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3054	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3055	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3056	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3057	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3065	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3070	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3071	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3072	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3100	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3101	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3102	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4002	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4006	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4013	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4014	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4016	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4023	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4026	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4050	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4103	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5011	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5020	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5024	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5027	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5070	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C5071	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5072	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5073	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5112	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6027	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6028	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6033	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6042	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6043	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6048	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6052	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6053	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6064	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6065	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6066	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6067	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6068	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6069	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6070	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6079	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6080	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6081	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6082	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6083	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6084	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6085	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6086	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6087	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6088	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6089	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6101	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6105	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6109	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6110	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6111	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6112	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6115	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6116	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6153	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7012	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7013	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7019	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7020	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7034	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7038	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7043	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7054	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7055	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7056	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7062	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7064	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C7068	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7069	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7074	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7075	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7078	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7081	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7083	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7086	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7087	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7088	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7094	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7095	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7098	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7099	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7107	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7112	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7113	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7116	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7117	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7134	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7140	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7142	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7143	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7146	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7147	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7149	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7152	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7160	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7161	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7164	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7165	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7168	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7169	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7172	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7176	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7177	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7180	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7181	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7185	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7200	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7201	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7202	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7203	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7206	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7211	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7220	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7221	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7222	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7223	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7224	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7225	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C7226	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7227	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7228	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7301	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7302	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7400	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7402	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7403	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7404	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7405	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7406	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7407	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7408	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7409	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7410	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7411	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7412	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7413	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7414	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7416	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7417	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7418	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7419	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7420	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7423	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7750	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7751	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7752	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7753	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7754	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7755	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7756	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7757	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7758	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7759	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7760	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7761	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7770	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7771	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7772	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7773	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7880	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7881	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7900	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7901	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8001	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8002	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8003	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8004	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8007_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8011_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C8012	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8013_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8014_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8015_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8016_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8017_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8018_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8019_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1047_60HZ	2203-006307	C-CER,CHIP;1000nF,10%,25V,X5R,2012	1	S.N.A	
....4	C5012	2203-006336	C-CER,CHIP;10000nF,10%,25V,X5R,3216	1	S.A	
....4	C1017	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C1020	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C1021	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C1023	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C1031	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C1033	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C1050	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2001	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2003	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2005	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2011	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2014	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2031	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2032	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2035	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2046	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2055	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2064	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2065	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3009_EU	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3010_EU	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3037	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3043	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3053	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3067	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3068	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3069	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3073	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3810	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C4001	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C4015	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C5005	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C5018	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C5028	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C5032	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C5111	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C5336	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6001	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6011	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6022	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6029	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C6030	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6031	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6032	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6046	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6049	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6050	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6054	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6055	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6071	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6072	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6092	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6093	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7001	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7004	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7005	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7006	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7007	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7008	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7021	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7108	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7110	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7130	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7132	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7133	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C8010_EU	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2084	2203-006382	C-CER,CHIP;10000nF,10%,25V,X7R,TP,3225	1	S.N.A	
....4	C2085	2203-006382	C-CER,CHIP;10000nF,10%,25V,X7R,TP,3225	1	S.N.A	
....4	C2086	2203-006382	C-CER,CHIP;10000nF,10%,25V,X7R,TP,3225	1	S.N.A	
....4	C2087	2203-006382	C-CER,CHIP;10000nF,10%,25V,X7R,TP,3225	1	S.N.A	
....4	C1040_LCD	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C1042_LCD	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2019	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2020	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2021	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2022	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2023	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2024	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2025	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2026	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2027	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2028	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2029	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2030	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C3103	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C3104	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C3105	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C3106	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C3320	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C3321	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C4004	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6005	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C6014	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6040	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6041	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6060	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6076	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6097	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6851	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6852	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6853	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6854	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7003	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7028	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7030	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7037	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7039	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7040	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7072	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7089	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7097	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7141	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7156	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7204	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7209	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C1013	2203-006618	C-CER,CHIP;2200nF,+80-20%,16V,Y5V,-,1608	1	S.N.A	
....4	C1016	2203-006618	C-CER,CHIP;2200nF,+80-20%,16V,Y5V,-,1608	1	S.N.A	
....4	C2004	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C2008	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C2009	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C2010	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C2056	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C2057	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C2059	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C3077	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C4005	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C5016	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C2053	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C2054	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C3038	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C3039	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C3047	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C3048	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C3058	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C3062	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C3999	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C1015	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (1	S.N.A	
....4	C1018	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (1	S.N.A	
....4	C2002	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (1	S.N.A	
....4	C2058	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (1	S.N.A	
....4	C5022	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (1	S.N.A	
....4	C6047	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (1	S.N.A	
....4	C2012	2402-001128	C-AL,SMD;100##F,20%,16V,-,TP,6.3X5.7mm	1	S.A	

5. Exploded View & Part List

[illegible]

5. Exploded View & Part List

[illegible]

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
...3	T0066	BP62-00016B	HEAT SINK-ES;SUNRAY,A6063,T2.0,36.2,36.2	1	S.N.A	
...3	T0066	BP62-00017A	HEAT SINK-ES;SP-50L2HX,A6063S,T2.0,26.2,	1	S.N.A	
0.1	M0045	BN92-04489A	ASSY ACCESSORY;LE32B550A5WXXC	1	S.N.A	
..2	M0045	BN96-10545A	ASSY ACCESSORY-MANUAL;LE32B550A5WXXC	1	S.A	
...3	T0524	6902-000110	BAG PE;LDPE,T0.05,W250,L400,TRP,28,2,-,9	1	S.N.A	
...3	T0210	AA68-03242Q	MANUAL FLYER-01,SAFETY GUIDE;comm,Samsun	1	S.N.A	
...3	T0175	BN68-00514E	MANUAL FLYER-01,WARRANTY CARD;comm,Samsu	1	S.N.A	
...3		BN68-00907D	MANUAL FLYER-WEEE BATTERY;COMM,SAMSUNG,2	1	S.N.A	
...3		BN68-01894A	MANUAL FLYER-QSG;COMM,SAMSUNG,9Langs,W.E	1	S.N.A	
...3	T0511	BN68-01962B	MANUAL USERS;COMM,SAMSUNG,Tur,W.EUROPE,W	1	S.N.A	
...3		BN96-10410A	ASSY MANUAL P-USB;B550,USB,SAMSUNG,W.EUR	1	S.N.A	
....4	T0511	BN68-01962A	MANUAL USERS;COMM,SAMSUNG,9Langs,W.EUROP	1	S.N.A	
..2	M0045	BN96-10545B	ASSY ACCESSORY-CABEL;LE32B550A5WXXC	1	S.A	
...3	T0268	3903-000145	CBF-POWER CORD;DT,EU,FP3/YES,U(IEC C13-R	1	S.A	
...3	T0524	6902-000110	BAG PE;LDPE,T0.05,W250,L400,TRP,28,2,-,9	1	S.N.A	
...3	M9889	BN63-01798B	CLOTH-CLEAN;cloth,180,200,sea blue,ToC	1	S.N.A	
...3	T0531	BN63-05371B	COVER-BOTTOM;32,LB610,HIPS,HB,BK500	1	S.A	
....4		BN81-00199H	RESIN;HIPS HB,BK500,HF-1690H,K2901	0.05	S.N.A	
...3	M0560	BN96-01800E	ASSY ACCESSORY-SCREW ZIPPER;32,LB650,GUI	1	S.N.A	
....4	T0081	6002-001294	SCREW-TAPPING;BH,+,M4,L16,ZPC(BLK)	4	S.N.A	
....4	T0081	6002-001294	SCREW-TAPPING;BH,+,M4,L16,ZPC(BLK)	4	S.N.A	
....4		6902-000683	BAG ZIPPER;LDPE,T0.05,W60,L60,TRP,-,-,4-	1	S.N.A	
...3	T0074	BN59-00862A	REMOCON;LCD550,TM950,EUROPE,48	1	S.A	
0.1	M0019	BN92-04490A	ASSY LABEL;LE32B550A5WXXC	1	S.N.A	
0.1	M0003	BN92-04671A	ASSY BOX;32,LB550,EO,CHARCOAL GRAY	1	S.N.A	
..2		BN69-03502B	BOX-SET;32LB550-1,CB,A-01, DW3, AB,YEL,W	1	S.N.A	
0.1	M0113	BN92-04676A	ASSY P/MATERIAL;32,LB610	1	S.N.A	
..2	T0524	6902-000519	BAG PE;HDPE/NITRON,T0.015/T0.05(DOUBLE),	1	S.N.A	
..2	T0003	6902-000604	BAG WRAPPING;LDPE,T0.02,W500,L10000,TRP,	5.85	S.N.A	
..2	T0214	BN74-00008A	TAPE-OPP MASKING;OPP-2,T0.05,W100,L800M,	2.08	S.N.A	
.....5	IC520	0903-001552	IC-MICROCONTROLLER;WT61P8-RG480WT,LQFP,4	1	S.A	

5-14. LE37B55*A Parts List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
		LE37B551A6WXXC	LE37B551A6W,N68A/37AA6-G5K,37,LCD-TV,SPA			
0.1	M0001	BN90-01920B	ASSY COVER FRONT;37,LB551,EO,ROSE BLACK	1	S.N.A	
..2	T0175	BN96-09463C	ASSY SPEAKER P;8ohm,4pin,10W,R:250/ L:60	1	S.A	
..2	T0003	BN96-09554B	ASSY COVER P-FRONT;37,LB551,EO,PC(CLR)+P	1	S.A	
...3	T0069	AA60-00171C	SPACER-FELT;L3,FELT,460,T0.5,20	2	S.N.A	
...3	T0069	BN60-00027F	SPACER-FELT;L650-37,FELT,820,0.5,20	2	S.N.A	
...3		BN61-04661A	BRACKET-STOPPER;L650,SK-5,T0.4,Plating,H	4	S.N.A	
...3		BN61-04692A	BOSS-PRIMER;#94,clear,35cps	0.8	S.N.A	
...3	CCM1	BN63-02183E	COVER-SHEET;Rhcm,PE Vinyl,T0.05,750mm,20	0.768	S.N.A	
...3	M0112	BN63-04140D	COVER-FRONT;37,LB551,EO,PC(CLR)+PC(ROSE	1	S.N.A	
....4		BN81-00116D	RESIN-TOC;PC V0,TTP01,CLR,TN-1030(NP),TH	752.4	S.N.A	
....4		BN81-00116U	RESIN-TOC;PC V1, TRD03,Light Rose Black,	0.783	S.N.A	
...3	CCM1	BN63-05199B	COVER-SHEET;AMBER,PE,T0.08,W65mm,200M,CL	2.8	S.N.A	
...3	CCM1	BN63-05199E	COVER-SHEET;AMBER,PE,T0.08,W85mm,200M,CL	1.2	S.N.A	
...3		BN96-06847A	ASSY HOLDER P-BOSS TOP;37,L650A,,ABS,HB,	1	S.N.A	
....4		BN61-03806A	HOLDER-BOSS TOP;37,L650,ABS,HB,-,-,-,WH1	1	S.N.A	
....5		BN81-00116F	RESIN;ABS HB,WHT,HF-0680U,W91902,-,-,-	120.45	S.N.A	
....4		BN61-04731A	BOSS-TAPE;AMBER,ACRYL,T1.1,W8.0mm,WHITE	0.88	S.N.A	
....4		BN61-04731C	BOSS-TAPE;AMBER,ACRYL,T1.1,W16.0mm,WHITE	0.04	S.N.A	
....4		BN61-04692A	BOSS-PRIMER;#94,clear,35cps	0.3	S.N.A	
...3		BN96-07657A	ASSY HOLDER P-BOSS SIDE;37,L650,,PC V1 R	2	S.N.A	
....4		BN61-04076B	HOLDER-BOSS SIDE;AMBER 37",PC V1 RECYCLE	1	S.N.A	
....4		BN61-04731A	BOSS-TAPE;AMBER,ACRYL,T1.1,W8.0mm,WHITE	0.21	S.N.A	
....4		BN61-04692A	BOSS-PRIMER;#94,clear,35cps	0.05	S.N.A	
...3		BN96-09563A	ASSY HOLDER P-BOSS BOTTOM;37,LB610,ABS,H	1	S.N.A	
....4		BN61-04692A	BOSS-PRIMER;#94,clear,35cps	0.4	S.N.A	
....4		BN61-04731C	BOSS-TAPE;AMBER,ACRYL,T1.1,W16.0mm,WHITE	0.86	S.N.A	
....4		BN61-04985A	HOLDER-BOSS BOTTOM;37,B610,ABS,HB,WH12	1	S.N.A	
....5		BN81-00116F	RESIN;ABS HB,WHT,HF-0680U,W91902,-,-,-	0.25	S.N.A	
...3	M0175	BN96-10382B	ASSY BOARD P-TOUCH FUNCTION&IR;LN40B610A	1	S.A	
0.1	M0216	BN90-01937B	ASSY STAND;37,LB610,ROSE BLACK	1	S.N.A	
..2	M0027	BN96-09608B	ASSY STAND P-BASE;37,LB610,TEMPERED GLAS	1	S.A	
...3	B/S/STAND+	6003-001003	SCREW-TAPTYPE;BH,+,B,M4,L12,ZPC(BLK),SWR	3	S.N.A	
...3	G/STAND+G/	6003-001003	SCREW-TAPTYPE;BH,+,B,M4,L12,ZPC(BLK),SWR	4	S.N.A	
...3		BN61-04692A	BOSS-PRIMER;#94,clear,35cps	0.1	S.N.A	
...3		BN61-04731B	BOSS-TAPE;AMBER,ACRYL,T1.1,W12.0mm,WHITE	0.95	S.N.A	
...3	T0920	BN61-04989A	GUIDE-STAND;37,B610,PC+GF 20%	1	S.N.A	
....4		BN81-00204H	RESIN;Trirex,3025G20 BK,ABS+PC G/F 20%,4	0.31	S.N.A	
...3	M0126	BN73-00203A	RUBBER-FOOT;LB7000 46inch,CR RUBBER,T7.0	4	S.N.A	
...3		BN61-05240A	HOLDER-SWIVEL RING TOP;LB700 46,POM HB,A	1	S.N.A	
...3		BN61-05244A	BRACKET-SWIVEL BOTTOM;LB700 46,HGI,T3.0	1	S.N.A	
...3		BN61-05251A	GUIDE-STAND NECK;LB700 46,PC,CLEAR(TP27)	1	S.N.A	
....4		BN61-05268A	HOLDER-INSERT;46 LB750,PC, EXTRUSION,CLE	1	S.N.A	
....4		BN81-00116J	RESIN;PC CLEAR,SC-1220R/70918,HF-1130R,	0.15	S.N.A	
...3		BN61-05492A	BRACKET-STAND BOTTOM;B650 40,SECC,T2.0	1	S.N.A	
...3		BN61-05493A	HOLDER-SWIVEL RING BOTTOM;LB650 40,Aceta	1	S.N.A	
...3	T0056	BN63-05538A	COVER-DECORATION;UB7000 46inch,ABS,PMMA,	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
...4		BN81-00204P	RESIN-HIGH GLOSS;HAM 8560,SF-0505,K21294	0.013	S.N.A	
...3		BN63-05781B	COVER-STAND GLASS;37,40,LB650,GLASS,T8.0	1	S.A	
...3	CCM1	BN63-04755A	COVER-SHEET;AMBER,PE,T0.05,W150mm,200M,6	1.14	S.N.A	
0.1	M0002	BN90-01942A	ASSY COVER REAR;37,LB550,EO	1	S.N.A	
..2	T0081	6002-001294	SCREW-TAPPING;BH,+,M4,L16,ZPC(BLK)	11	S.N.A	
..2	T0081	6002-001294	SCREW-TAPPING;BH,+,M4,L16,ZPC(BLK)	1	S.N.A	
..2	T0081	6002-001294	SCREW-TAPPING;BH,+,M4,L16,ZPC(BLK)	1	S.N.A	
..2	M0013	BN96-09611A	ASSY COVER P-REAR;37,LB550,EO,HIPS,HB,BK	1	S.A	
...3	T0101	BN61-04816A	BRACKET-WALL;40, B610,SECC,T1.2	4	S.N.A	
...3	M0006	BN63-05364A	COVER-REAR;37,LB610,HIPS,HB,BK500,EO	1	S.N.A	
...4		BN81-00199H	RESIN;HIPS HB,BK500,HF-1690H,K2901	2.4	S.N.A	
...3	T0071	BN64-01028B	INLAY-TERMINAL;LB550 32,EO,PS SHEET,T0.3	1	S.N.A	
...3	T0064	BN65-00002A	CLAMPER CORE;BORDEAUX,LDPE,-,-,BLK,-	1	S.N.A	
...3	T0069	AA63-60131N	SPACER-FELT;L2,FELT,280*10,BLK,T0.5	4	S.N.A	
0.1		BN91-03376A	ASSY LCD-AUO;LN37B530P7FXZA,AUO	1	S.N.A	
..2	M0215	BN07-00643A	LCD-PANEL;T370HW02 VC	1	S.A	
...3		BN81-02368A	A/S-T CON T370HW02_VC;T370HW02_VC	1	S.A	
0.1	M0112	BN91-03750A	ASSY SHIELD;LE37B550A5WXXC	1	S.N.A	
..2	BR/LINK+PA	6003-000337	SCREW-TAPTYPE;BH,+,S,M4,L10,ZPC(BLK),SWR	4	S.N.A	
..2	BR/LINK+H/	6003-001188	SCREW-TAPTYPE;BH,+,B,M4,L10,ZPC(WHT),S	4	S.N.A	
..2	BR/TOP+H/B	6003-001188	SCREW-TAPTYPE;BH,+,B,M4,L10,ZPC(WHT),S	2	S.N.A	
..2	GROUND	6003-001439	SCREW-TAPTYPE;BH,+,S,M4,L8,ZPC(WHT),SW	1	S.N.A	
..2	M2893	BN39-01099K	LEAD CONNECTOR;LB5P,LB5K,UL1007#26,30P,7	1	S.A	
..2	M0174	BN44-00262A	IP BOARD;PSIV181E01A,H37F1_9SS,0.1mA,10m	1	S.A	
..2	M0146	BN61-03414A	BRACKET-PANEL TOP;PEONY52,SECC T1.2	2	S.A	
..2	M0254	BN61-04801C	HOLDER-SIDE AV;EO,HIPS,HB,BK500,1USB,1HD	1	S.N.A	
...3		BN81-00199H	RESIN;HIPS HB,BK500,HF-1690H,K2901	0.01	S.N.A	
..2	M0115	BN61-04918A	BRACKET-STAND LINK;40, B610,SECC,T1.6	1	S.N.A	
..2		BN63-05259A	COVER-MAIN;EO,ABS+PMMA,HB,BK23,H/GLOSSY	1	S.N.A	
...3		BN81-00204P	RESIN-HIGH GLOSS;HAM 8560,SF-0505,K21294	0.015	S.N.A	
..2	M0230	BN96-10076A	ASSY CABLE P-FPCB LVDS;LA46A650A1,FPCB L	1	S.A	
..2	T0081	6001-002284	SCREW-MACHINE;BH,+,M4,L8,ZPC(WHT),SWRCH1	6	S.A	
..2	T0081	6001-002284	SCREW-MACHINE;BH,+,M4,L8,ZPC(WHT),SWRCH1	4	S.A	
0.1	M0017	BN91-03753B	ASSY CHASSIS;LE37B550A5WXXC	1	S.N.A	
..2	M0014	BN94-02668B	ASSY PCB MAIN;LE37B550A5WXXC	1	S.A	
...3	T0245	0202-001608	SOLDER-WIRE FLUX;LFC7-107,D0.8,99.3Sn/0.	0.25	S.N.A	
...3	CN3010	3701-001388	CONNECTOR-HDMI;20P,Phosphor Bronze,ANGLE	1	S.A	
...3	CN3011	3701-001480	CONNECTOR-DSUB;15P,3R,FEMAIL,STAMPED PIN	1	S.A	
...3	CN906	3707-001081	CONNECTOR-OPTICAL;STRAIGHT,SPDIF	1	S.A	
...3	CN8001_EU	3709-001551	CONNECTOR-CARD SLOT;68P,1.27mm,DIP,AU50U	1	S.A	
...3	CN330	3711-003847	HEADER-BOARD TO CABLE;BOX,12P,1R,2mm,ANG	1	S.A	
...3	CN1001	3711-005884	HEADER-BOARD TO BOARD;BOX,30P,2R,2mm,ANG	1	S.A	
...3	CN330	3711-006715	HEADER-BOARD TO CABLE;BOX,4P,1R,2.5mm,AN	1	S.N.A	
...3	JA330	3722-001061	JACK-PHONE;1P,3.6PI,AG,BLK,N	1	S.A	
...3	JA330	3722-001061	JACK-PHONE;1P,3.6PI,AG,BLK,N	1	S.A	
...3	JA330	3722-001061	JACK-PHONE;1P,3.6PI,AG,BLK,N	1	S.A	
...3	JA330	3722-001061	JACK-PHONE;1P,3.6PI,AG,BLK,N	1	S.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
...3	CN7006	3722-002546	JACK-USB;4P/1C,AU,BLK,ANGLE,A type	1	S.N.A	
...3	JA333	3722-002635	JACK-PIN;3P,Sn,YEL/WHT/RED,ANGLE	1	S.A	
...3	CN3002_EU	3722-002681	JACK-SCART;42P,SN,BLK	1	S.A	
...3	JA333	3722-002691	JACK-PIN;2P,Ni,WHT/RED,STRAIGHT	1	S.A	
...3	JA333	3722-002691	JACK-PIN;2P,Ni,WHT/RED,STRAIGHT	1	S.A	
...3	JA333	3722-002703	JACK-PIN;3P,Ni,GRN/BLU/RED,STRAIGHT	1	S.A	
...3	CIS3	BN40-00145A	TUNER;TDHG6-K12A,TDHG6-K12A,DVB-TC,164CH	1	S.A	
...3	T0174	BN97-03216B	ASSY SMD;LE37B550A5WXXC	1	S.N.A	
...4	SUB05	0202-001477	SOLDER-CREAM;LST309-M,D20~45um,96.5Sn/3A	1	S.N.A	
...4	D4003	0401-001049	DIODE-SWITCHING;LS4148,75V,150mA,SOD-80,	1	S.A	
...4	D4004	0401-001049	DIODE-SWITCHING;LS4148,75V,150mA,SOD-80,	1	S.A	
...4	D4100	0401-001049	DIODE-SWITCHING;LS4148,75V,150mA,SOD-80,	1	S.A	
...4	D4228	0401-001049	DIODE-SWITCHING;LS4148,75V,150mA,SOD-80,	1	S.A	
...4	D3001	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
...4	D3002	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
...4	D3051	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
...4	D3054	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
...4	D3061	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
...4	D3062	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
...4	D3063	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
...4	D3076	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
...4	D3077	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
...4	D3079	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
...4	D3080	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
...4	D4008	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
...4	D4010	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
...4	D0254	0402-001207	DIODE-SCHOTTKY;UPS5819,40V,1000MA,DO-216	1	S.A	
...4	D4001	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
...4	D5100	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
...4	D3003_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
...4	D3004_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
...4	D3005_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
...4	D3006_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
...4	D3007_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
...4	D3008_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
...4	D3009_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
...4	D3011	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
...4	D3015	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
...4	D3016_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
...4	D3018	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
...4	D3019	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
...4	D3020	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
...4	D3021	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
...4	D3022_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
...4	D3023	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
...4	D3024	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
...4	D3026_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
...4	D3032	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
...4	D3033	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
...4	D3034	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
...4	D3035	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	D3036	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3037	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3038	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3039	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3045	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3052	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3056	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3057	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3058	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3060	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3065	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3066	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3067	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3068	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3069	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3073	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3074	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3075	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3350	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3776	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3777_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3778_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3779_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D0254	0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	1	S.A	
....4	D0254	0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	1	S.A	
....4	D0254	0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	1	S.A	
....4	D0254	0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	1	S.A	
....4	D7001_650	0406-001200	DIODE-TVS;RCLAMP0504F,6/-V,150W,SC-70	1	S.A	
....4	D7002	0406-001200	DIODE-TVS;RCLAMP0504F,6/-V,150W,SC-70	1	S.A	
....4	D3751	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D3752	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D3753	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D3754	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D3755	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D3756	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D3757	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D3758	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D7900	0407-000114	DIODE-ARRAY;- ,80V,100mA,CA2-3,SOT-23,TP	1	S.N.A	
....4	D8001_CI	0407-000114	DIODE-ARRAY;- ,80V,100mA,CA2-3,SOT-23,TP	1	S.N.A	
....4	D8002_CI	0407-000114	DIODE-ARRAY;- ,80V,100mA,CA2-3,SOT-23,TP	1	S.N.A	
....4	D8003_CI	0407-000114	DIODE-ARRAY;- ,80V,100mA,CA2-3,SOT-23,TP	1	S.N.A	
....4	D8004_CI	0407-000114	DIODE-ARRAY;- ,80V,100mA,CA2-3,SOT-23,TP	1	S.N.A	
....4	D8005_CI	0407-000114	DIODE-ARRAY;- ,80V,100mA,CA2-3,SOT-23,TP	1	S.N.A	
....4	D8006_EU	0407-000114	DIODE-ARRAY;- ,80V,100mA,CA2-3,SOT-23,TP	1	S.N.A	
....4	Q4003	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150MW,SOT-23	1	S.A	
....4	Q4005	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150MW,SOT-23	1	S.A	
....4	Q4020	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150MW,SOT-23	1	S.A	
....4	Q1001_60HZ	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q1002_LCD	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3007	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	Q3008	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3009	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3010	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q4004	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q4009	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q4011	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3001_EU	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	
....4	Q3002_EU	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	
....4	Q7601_LCD	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	
....4	Q7602_LCD	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-001916	FET-SILICON;Si4800BDY,N,30V,9A,0.03ohm,2	1	S.A	
....4	Q409	0505-002169	FET-SILICON;Si4435BDY-T1-E3,P,-30V,-9.1A	1	S.N.A	
....4	IC104	0801-002095	IC-CMOS LOGIC;74LCX245,TRANSCEIVER,TSSOP	1	S.A	
....4	IC104	0801-002172	IC-CMOS LOGIC;74LCX16244,BUFFER/LINE DRI	1	S.A	
....4	IC104	0801-002172	IC-CMOS LOGIC;74LCX16244,BUFFER/LINE DRI	1	S.A	
....4	IC104	0801-002630	IC-CMOS LOGIC;74AHCT1G08,2-INPUT AND GAT	1	S.A	
....4	IC104	0801-002780	IC-CMOS LOGIC;74LVC1G17,SCHMITT-TRIGGER	1	S.N.A	
....4	IC7008	1001-000164	IC-ANALOG MULTIPLEX;74HC4052,CMOS,SOP,16	1	S.A	
....4	IC106	1001-001177	IC-VIDEO SWITCH;TEA6425D,VIDEO SWITCH,SO	1	S.A	
....4	IC106	1001-001573	IC-VIDEO SWITCH;SiI9287ACNUTR,QFN,72P,10	1	S.A	
....4	IC107	1002-001482	IC-D/A CONVERTER;WM8521H9GED/R,16bit,SOI	1	S.A	
....4	IC3001	1006-001266	IC-LINE TRANSCEIVER;SP3232EEY,TSSOP,16P,	1	S.A	
....4	IC112	1103-000129	IC-EEPROM;24C02,2Kbit,256x8,SOP,8P,5x4mm	1	S.A	
....4	IC112	1103-000129	IC-EEPROM;24C02,2Kbit,256x8,SOP,8P,5x4mm	1	S.A	
....4	IC112	1103-001310	IC-EEPROM;24LC02B,256X8BIT,SOIC,8P,3.91X	1	S.N.A	
....4	IC112	1103-001385	IC-EEPROM;AT24C256,256Kbit,32Kx8,SOP,8P,	1	S.A	
....4	T0124	1201-002796	IC-POWER AMP;STA339BWS,PSSO,36P,10.3x7.5	1	S.A	
....4	T0087	1203-001815	IC-POSI.FIXED REG.;78M09,TO-252,3P,PLAST	1	S.A	
....4	T0087	1203-001816	IC-POSI.FIXED REG.;78M08,TO-252,3P,-,PLA	1	S.A	
....4	T0087	1203-002842	IC-POSI.FIXED REG.;AP1117D-33A,TO-252,3P	1	S.A	
....4	T0087	1203-002842	IC-POSI.FIXED REG.;AP1117D-33A,TO-252,3P	1	S.A	
....4	IC012	1203-002995	IC-POSI.ADJUST REG.;AP1117D-A,TO-252,3P,	1	S.A	
....4	IC012	1203-002995	IC-POSI.ADJUST REG.;AP1117D-A,TO-252,3P,	1	S.A	
....4	IC4005	1203-004363	IC-VOL. DETECTOR;RT9818C-29PV,SOT-23,3P,	1	S.A	
....4	IC4004	1203-004364	IC-VOL. DETECTOR;RT9818C-42PV,SOT-23,3P,	1	S.A	
....4	IC1007	1203-004879	IC-DC/DC CONVERTER;MP8668DL,QFN,14P,3x4m	1	S.A	
....4	T0087	1203-005134	IC-POSI.FIXED REG.;RT9167A-33PB,SOT-23-5	1	S.A	
....4	IC1006	1203-005538	IC-DC/DC CONVERTER;AOZ1021HAIL,SOP,8P,4.	1	S.A	
....4	IC5006	1203-005559	IC-BACKLIGHT DRIVER;MP3302DJ,TSOT23,5P,2	1	S.A	
....4	IC118	1204-003010	IC-VIDEO PROCESS;SDP84,PBGA,324P,23x23mm	1	S.A	
....4	IC7001	1204-003011	IC-DECODER;SDP83,PBGA,729P,34x34mm,PLAST	1	S.A	
....4	IC3011	1205-003201	IC-BUS SWITCH;TC7WB125FK,SSOP,8P,2x2.3mm	1	S.A	
....4	IC2001	1205-003352	IC-CODEC;WM8593SEFT/V,TQFP,64P,10x10mm,P	1	S.A	
....4	IC8006_EU	1205-003479	IC-SWITCH;TPS2051BDBVR,SOT-23,5P,2.9x1.6	1	S.A	
....4	IC5010	1209-001830	IC-PLL;IDT6V10012PGG,TSSOP,20P,6.5x4.4mm	1	S.A	
....4	D4110	1405-001185	VARISTOR;24Vdc,1.6x0.8x0.36mm,TP	1	S.A	
....4	D3010	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3012_EU	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	D3013	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3014_EU	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3017	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3025	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3027	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3028	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3029	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3030	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3031	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3040	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3041	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3042	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3050	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3053	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3055	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3059	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3064	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3070	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3071	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3072	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3078	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3081	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3097	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3098	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3099	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4011	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4012	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4013	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4014	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4015	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4016	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4017	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4018	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D7003_650	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D7004	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	R7120	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7121	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7122	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7123	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7152	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7153	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7154	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7155	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7162	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7163	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7164	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7165	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7169	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7170	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7171	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7172	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R1005	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R1801	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R5101	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R2058	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R2059	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R2060	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R2061	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R4155	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	1	S.A	
....4	R7050	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7053	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7056	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7058	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7062	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7066	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7069	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7070	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3007	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3034_EU	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3036_EU	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3062	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3070	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3071	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3078_EU	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3120	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3191	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3192	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3205	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3206	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3207	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3243	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3254	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3255	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3320	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3999	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4042	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4049	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4050	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4087	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5022	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7114	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7132	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7143	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7605_LCD	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8311_EU	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1031_LCD	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1072	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3010_EU	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3021_EU	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3022_EU	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3035	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3037	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R3072	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3073	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3081	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3082	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3138	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3139	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3189	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3190	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3227	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3228	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4081	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6028	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6066	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7045	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7072	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7195	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7196	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7602_LCD	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R2054	2007-000141	R-CHIP;2.2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4019	2007-000141	R-CHIP;2.2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4085	2007-000141	R-CHIP;2.2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5030	2007-000141	R-CHIP;2.2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1030_LCD	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1060	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3520	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3522	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3524	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3526	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4016	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4018	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4020	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4066	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4071	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4074	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4077	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4551	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4552	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4553	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4554	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4755	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4756	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5017	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6015	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6021	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6023	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6038	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6048	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6053	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6100	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6101	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6102	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R7017	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7033	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7034	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7036	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7037	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7064	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7156	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7174	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7352	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7353_OP	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7356	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7357_OP	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7800	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3044_EU	2007-000146	R-CHIP;6.8Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3067_EU	2007-000146	R-CHIP;6.8Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1013	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1015	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1023_LCD	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1073	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R2023	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R2027	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3168	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3252	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3253	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3310	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3311	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4017	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4023	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4027	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4078	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4150	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4152	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5111	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7103	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7351	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7411_LCD	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7600_LCD	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7601_LCD	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7603_LCD	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7604_LCD	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8012	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8014_EU	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8015_EU	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8020_EU	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3028_EU	2007-000149	R-CHIP;12Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R3032_EU	2007-000149	R-CHIP;12Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R3027_EU	2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3033_EU	2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4021	2007-000155	R-CHIP;27Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1006_60HZ	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1011	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R2019	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3040_EU	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3042_EU	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3058_EU	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3060_EU	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3126	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3136	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3201	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3204	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3521	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3523	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3525	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3527	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3820	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4151	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5110	2007-000159	R-CHIP;56Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5038	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3038_EU	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3049_EU	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3077_EU	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3103_OP	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3125	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3169	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3170	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3200	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3202	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3203	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3220	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3250	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3251	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3258	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3259	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3284	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3285	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3289	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3290	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3400	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3450	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3451	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3452	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3453	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3500	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3751_EU	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3752_EU	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3753_EU	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3860	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4041	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4084	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4086	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4250	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5006	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R5007	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5011	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5033	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5035	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6013	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6061	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6068	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7002	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7003	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7004	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7007	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7014	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7015	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7018	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7035	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7038	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7048	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7079	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7080	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7081	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7082	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7083	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7084	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7104	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7118	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7119	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7133	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7134	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7135	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7141	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7142	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7144	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7161	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7167	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7168	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7177	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7201	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7202	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7229_60HZ	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7234	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7235_60HZ	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7242_60HZ	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7284_LCD	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7333_60HZ	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8016_EU	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3288	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3300	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3301	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3302	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3303	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3722	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R4038	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R2047	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3240	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3244	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4036	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4750	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4751	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4752	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4850	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4851	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5216	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5217	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5218	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6031	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6125	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6126	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6211	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6212	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6213	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6214	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6215	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6216	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7115	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7159	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7175	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7650	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7651	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8021	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3008	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3083	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3256	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3257	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4039	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4040	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6184	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6810	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6811	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6812	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6813	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6814	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6815	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6816	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6817	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6818	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6819	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6820	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6821	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6822	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6823	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6824	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6825	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R6826	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6827	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6828	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6829	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6830	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6831	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6832	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6833	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6834	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6835	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6836	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6837	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6838	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6839	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6840	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6841	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6842	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6843	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6844	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6845	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7310	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1018	2007-000239	R-CHIP;1.5Kohm,1%,1/10W,TP,1608	1	S.N.A	
....4	R6089	2007-000259	R-CHIP;1.6Kohm,5%,1/10W,TP,1608	1	S.A	
....4	R5112	2007-000287	R-CHIP;100ohm,1%,1/10W,TP,1608	1	S.N.A	
....4	R7105	2007-000287	R-CHIP;100ohm,1%,1/10W,TP,1608	1	S.N.A	
....4	R7147	2007-000287	R-CHIP;100ohm,1%,1/10W,TP,1608	1	S.N.A	
....4	R2064	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R2065	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R2066	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R2067	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R2068	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R2069	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R2070	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R2071	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R5001	2007-000402	R-CHIP;150ohm,5%,1/10W,TP,1608	1	S.A	
....4	R3001_EU	2007-000458	R-CHIP;18Kohm,5%,1/10W,TP,1608	1	S.A	
....4	R3055_EU	2007-000458	R-CHIP;18Kohm,5%,1/10W,TP,1608	1	S.A	
....4	R5031	2007-000566	R-CHIP;220Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5026	2007-000591	R-CHIP;22ohm,1%,1/10W,TP,1608	1	S.A	
....4	R5052_STU	2007-000606	R-CHIP;240ohm,1%,1/10W,TP,1608	1	S.A	
....4	R5053_STU	2007-000606	R-CHIP;240ohm,1%,1/10W,TP,1608	1	S.A	
....4	R5045	2007-000669	R-CHIP;2Kohm,1%,1/10W,TP,1608	1	S.N.A	
....4	R7160	2007-000729	R-CHIP;300ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R7176	2007-000729	R-CHIP;300ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R5044	2007-000755	R-CHIP;330Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R5039	2007-000758	R-CHIP;330Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5037	2007-000763	R-CHIP;330ohm,1%,1/10W,TP,1608	1	S.N.A	
....4	R3004_EU	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3005_EU	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4015	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6067	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R1026_60HZ	2007-000939	R-CHIP;47Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R1014	2007-001179	R-CHIP;8.2Kohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R8028_EU	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7194	2007-001308	R-CHIP;200ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3111	2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3112	2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3113	2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3114	2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7410_LCD	2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1004	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R1007	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R1008	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R1009	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R5056	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R5102	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R1021	2007-002899	R-CHIP;10ohm,1%,1/10W,TP,1608	1	S.A	
....4	R1017	2007-002900	R-CHIP;11Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R3721	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3723	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5070	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5210	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5213	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5214	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5215	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1010	2007-007107	R-CHIP;100Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R5034	2007-007107	R-CHIP;100Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R2057	2007-007136	R-CHIP;4.7Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R8013_EU	2007-007136	R-CHIP;4.7Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R1019	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R1024_60HZ	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R4028	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R4030	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R4089	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R4156	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R4753	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R4754	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R2055	2007-007197	R-CHIP;3.3ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R2056	2007-007197	R-CHIP;3.3ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7193	2007-007222	R-CHIP;6.04Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R1016	2007-007312	R-CHIP;20Kohm,1%,1/16W,TP,1005	1	S.A	
....4	R1022	2007-007312	R-CHIP;20Kohm,1%,1/16W,TP,1005	1	S.A	
....4	R5036	2007-007469	R-CHIP;110ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R7116	2007-007797	R-CHIP;44.2ohm,1%,1/10W,TP,1608	1	S.A	
....4	R7117	2007-007797	R-CHIP;44.2ohm,1%,1/10W,TP,1608	1	S.A	
....4	R3002_EU	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3006_EU	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3009	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3011	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3012	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3029	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3030	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R3031	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3045	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3047_EU	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3050	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3057_EU	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3137	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3208	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3209	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3210	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3241	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3242	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R5032	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R6280	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R6281	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R6282	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	RA5005	2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA5006	2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA8006	2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA8007	2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA8008	2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA2001	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA2002	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA2003	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA2007	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA4001	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA4044	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA4045	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA4048	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA4051	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA5004	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA6013	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7002	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7003	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7004	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7005	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7006	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7007	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7008	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7009	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7010	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7011	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7012	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7039	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7041	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7042	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7043	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7044	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7045	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7046	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7047	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7048	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	RA7049	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7050	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7051	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7052	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7062	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7500	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7501	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA8017_CI	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA8018_CI	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA8019_CI	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA5003	2011-001344	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA7056	2011-001344	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA7057	2011-001344	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA2004	2011-001345	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA2005	2011-001345	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA2006	2011-001345	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA8010_EU	2011-001345	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA6018	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7013	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7014	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7015	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7020	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7038	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7040	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7053	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7054	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7061	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7502	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7503	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA3011	2011-001397	R-NETWORK;47Kohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA3012	2011-001397	R-NETWORK;47Kohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA3035	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,4P,T,1010	1	S.N.A	
....4	RA3650_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,4P,T,1010	1	S.N.A	
....4	RA3651_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,4P,T,1010	1	S.N.A	
....4	RA3652_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,4P,T,1010	1	S.N.A	
....4	RA3653_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,4P,T,1010	1	S.N.A	
....4	RA3654_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,4P,T,1010	1	S.N.A	
....4	RA3655_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,4P,T,1010	1	S.N.A	
....4	RA3666_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,4P,T,1010	1	S.N.A	
....4	RA3667_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,4P,T,1010	1	S.N.A	
....4	RA3668_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,4P,T,1010	1	S.N.A	
....4	RA3669_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,4P,T,1010	1	S.N.A	
....4	RA3670_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,4P,T,1010	1	S.N.A	
....4	RA3671_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,4P,T,1010	1	S.N.A	
....4	RA3672_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,4P,T,1010	1	S.N.A	
....4	RA3673_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,4P,T,1010	1	S.N.A	
....4	RA3674_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,4P,T,1010	1	S.N.A	
....4	RA3675_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,4P,T,1010	1	S.N.A	
....4	RA5013	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,4P,T,1010	1	S.N.A	
....4	RA3006	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,4P,TP,1010	1	S.N.A	
....4	RA3007	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,4P,TP,1010	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	RA3008	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,4P,TP,1010	1	S.N.A	
....4	RA3009	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,4P,TP,1010	1	S.N.A	
....4	RA3016	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,4P,TP,1010	1	S.N.A	
....4	RA4010	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,4P,TP,1010	1	S.N.A	
....4	RA4046	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,4P,TP,1010	1	S.N.A	
....4	RA6020	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,4P,TP,1010	1	S.N.A	
....4	RA2008	2011-001497	R-NETWORK;470ohm,5%,1/16W,L,CHIP,4P,TP,1	1	S.N.A	
....4	RA3018	2011-001497	R-NETWORK;470ohm,5%,1/16W,L,CHIP,4P,TP,1	1	S.N.A	
....4	RA6019	2011-001506	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,4P,TP,1	1	S.N.A	
....4	RA6119	2011-001506	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,4P,TP,1	1	S.N.A	
....4	RA8011_EU	2011-001506	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,4P,TP,1	1	S.N.A	
....4	RA3015	2011-001519	R-NETWORK;33OHM,5%,1/16W,L,CHIP,4P,TP,1.	1	S.N.A	
....4	RA4018	2011-001519	R-NETWORK;33OHM,5%,1/16W,L,CHIP,4P,TP,1.	1	S.N.A	
....4	RA5012	2011-001519	R-NETWORK;33OHM,5%,1/16W,L,CHIP,4P,TP,1.	1	S.N.A	
....4	RA3017	2011-001527	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,4P,TP,	1	S.N.A	
....4	RA6021	2011-001527	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,4P,TP,	1	S.N.A	
....4	RA7034	2011-001527	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,4P,TP,	1	S.N.A	
....4	RA7065	2011-001527	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,4P,TP,	1	S.N.A	
....4	RA3014	2011-001586	R-NETWORK;1Kohm,5%,1/16W,L,CHIP-V,4P,TP,	1	S.A	
....4	RA3031	2011-001586	R-NETWORK;1Kohm,5%,1/16W,L,CHIP-V,4P,TP,	1	S.A	
....4	RA3036	2011-001586	R-NETWORK;1Kohm,5%,1/16W,L,CHIP-V,4P,TP,	1	S.A	
....4	RA6022	2011-001586	R-NETWORK;1Kohm,5%,1/16W,L,CHIP-V,4P,TP,	1	S.A	
....4	RA3010	2011-001587	R-NETWORK;100ohm,5%,1/16W,L,CHIP-V,4P,TP	1	S.A	
....4	RA3013	2011-001587	R-NETWORK;100ohm,5%,1/16W,L,CHIP-V,4P,TP	1	S.A	
....4	RA4016	2011-001587	R-NETWORK;100ohm,5%,1/16W,L,CHIP-V,4P,TP	1	S.A	
....4	RA4017	2011-001587	R-NETWORK;100ohm,5%,1/16W,L,CHIP-V,4P,TP	1	S.A	
....4	RA3030_EU	2011-001588	R-NETWORK;75ohm,5%,1/16W,L,CHIP-V,4P,TP,	1	S.A	
....4	RA6009	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA6010	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA6011	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA6012	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA7060	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA7079	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA7600	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA7601	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA7900	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA3032	2011-001590	R-NETWORK;47Kohm,5%,1/16W,L,CHIP-V,4P,TP	1	S.A	
....4	RA3072	2011-001590	R-NETWORK;47Kohm,5%,1/16W,L,CHIP-V,4P,TP	1	S.A	
....4	C2080	2203-000125	C-CER,CHIP;1.2nF,10%,50V,X7R,TP,1608,-	1	S.A	
....4	C2081	2203-000125	C-CER,CHIP;1.2nF,10%,50V,X7R,TP,1608,-	1	S.A	
....4	C2082	2203-000125	C-CER,CHIP;1.2nF,10%,50V,X7R,TP,1608,-	1	S.A	
....4	C2083	2203-000125	C-CER,CHIP;1.2nF,10%,50V,X7R,TP,1608,-	1	S.A	
....4	C2040	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3001	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3002_EU	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3013	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3015	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3021	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3022	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3029	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3033_EU	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C3045	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3066	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3250	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3251	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C2036	2203-000280	C-CER,CHIP;0.01nF,0.5pF,50V,C0G,1608	1	S.A	
....4	C7137	2203-000384	C-CER,CHIP;0.015nF,5%,50V,C0G,1608	1	S.N.A	
....4	C1001	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C1029	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C1041_LCD	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C1768	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C2033	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C2034	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C4003	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C4012	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C4025	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C6090	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C1027	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C3014_EU	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C3016_EU	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C3024	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C3025	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C5001	2203-000550	C-CER,CHIP;0.02nF,5%,50V,C0G,1005	1	S.N.A	
....4	C5002	2203-000550	C-CER,CHIP;0.02nF,5%,50V,C0G,1005	1	S.N.A	
....4	C2070	2203-000575	C-CER,CHIP;220nF,10%,25V,X7R,TP,2012	1	S.N.A	
....4	C2071	2203-000575	C-CER,CHIP;220nF,10%,25V,X7R,TP,2012	1	S.N.A	
....4	C2072	2203-000575	C-CER,CHIP;220nF,10%,25V,X7R,TP,2012	1	S.N.A	
....4	C2073	2203-000575	C-CER,CHIP;220nF,10%,25V,X7R,TP,2012	1	S.N.A	
....4	C2074	2203-000575	C-CER,CHIP;220nF,10%,25V,X7R,TP,2012	1	S.N.A	
....4	C2075	2203-000575	C-CER,CHIP;220nF,10%,25V,X7R,TP,2012	1	S.N.A	
....4	C5100	2203-000585	C-CER,CHIP;0.22nF,10%,50V,X7R,1005	1	S.A	
....4	C4009	2203-000679	C-CER,CHIP;0.027nF,5%,50V,C0G,1005	1	S.A	
....4	C4010	2203-000679	C-CER,CHIP;0.027nF,5%,50V,C0G,1005	1	S.A	
....4	C5003	2203-000697	C-CER,CHIP;0.002NF,0.25PF,50V,C0G,TP,160	1	S.A	
....4	C5004	2203-000697	C-CER,CHIP;0.002NF,0.25PF,50V,C0G,TP,160	1	S.A	
....4	C7048	2203-000761	C-CER,CHIP;330nF,10%,16V,X7R,TP,2012,-	1	S.N.A	
....4	C3006	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C3007	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C3008	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C3011_EU	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C3012_EU	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C3018	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C3019	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C3020	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C1120	2203-000995	C-CER,CHIP;0.047nF,5%,50V,C0G,1005	1	S.A	
....4	C3017	2203-000995	C-CER,CHIP;0.047nF,5%,50V,C0G,1005	1	S.A	
....4	C3023_EU	2203-000995	C-CER,CHIP;0.047nF,5%,50V,C0G,1005	1	S.A	
....4	C4018	2203-000995	C-CER,CHIP;0.047nF,5%,50V,C0G,1005	1	S.A	
....4	C4020	2203-000995	C-CER,CHIP;0.047nF,5%,50V,C0G,1005	1	S.A	
....4	C2038	2203-001126	C-CER,CHIP;0.68nF,10%,50V,X7R,1608	1	S.N.A	
....4	C5035	2203-001412	C-CER,CHIP;0.03nF,5%,50V,NP0,TP,1005	1	S.N.A	
....4	C5036	2203-001412	C-CER,CHIP;0.03nF,5%,50V,NP0,TP,1005	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C5037	2203-001412	C-CER,CHIP;0.03nF,5%,50V,NP0,TP,1005	1	S.N.A	
....4	C5038	2203-001412	C-CER,CHIP;0.03nF,5%,50V,NP0,TP,1005	1	S.N.A	
....4	C5039_OP	2203-001596	C-CER,CHIP;2200nF,+80-20%,50V,Y5V,2012	1	S.A	
....4	C5060_OP	2203-001596	C-CER,CHIP;2200nF,+80-20%,50V,Y5V,2012	1	S.A	
....4	C1005	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C1007	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C1008	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C2006	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C2007	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C4008	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C4011	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C4019	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C4021	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C4022	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C4024	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C4100	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C5023	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C6061	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C6077	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C6099	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C6113	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C6114	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C7018	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C7136	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C7139_LCD	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C5010	2203-002494	C-CER,CHIP;470nF,10%,16V,X7R,2012	1	S.N.A	
....4	C7050	2203-005138	C-CER,CHIP;1.8nF,10%,50V,X7R,1005	1	S.A	
....4	C7051	2203-005138	C-CER,CHIP;1.8nF,10%,50V,X7R,1005	1	S.A	
....4	C7052	2203-005138	C-CER,CHIP;1.8nF,10%,50V,X7R,1005	1	S.A	
....4	C1004	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C1022	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C1024	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C1045_60HZ	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C1048_LCD	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C1148_LCD	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C1149_LCD	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C1150_LCD	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2047	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2048	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2049	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2050	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2051	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2052	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2060	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2061	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2062	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2063	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2066	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2067	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2068	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2069	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C2076	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2077	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2078	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2079	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C5021	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6056	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6057	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6058	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6059	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6062	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6063	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6073	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6074	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6075	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6078	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6094	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6095	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6096	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6100	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7011	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7017	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7049	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7114	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7115	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7121	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7122	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7009	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7016	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7025	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7029	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7059	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7063	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7065	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7073	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7096	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7105	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7106	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7148	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7157	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7173	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7205	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7210	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C3063	2203-005393	C-CER,CHIP;0.005nF,0.1pF,50V,NP0,TP,1005	1	S.N.A	
....4	C6044	2203-005493	C-CER,CHIP;220nF,+80-20%,16V,Y5V,1005	1	S.A	
....4	C6045	2203-005493	C-CER,CHIP;220nF,+80-20%,16V,Y5V,1005	1	S.A	
....4	C7053	2203-005659	C-CER,CHIP;0.18nF,5%,50V,NP0,1005	1	S.N.A	
....4	C1032	2203-005834	C-CER,CHIP;22000nF,+80-20%,10V,Y5V,3216	1	S.A	
....4	C1035	2203-005834	C-CER,CHIP;22000nF,+80-20%,10V,Y5V,3216	1	S.A	
....4	C1036	2203-005834	C-CER,CHIP;22000nF,+80-20%,10V,Y5V,3216	1	S.A	
....4	C5025_OP	2203-005834	C-CER,CHIP;22000nF,+80-20%,10V,Y5V,3216	1	S.A	
....4	C5034	2203-005834	C-CER,CHIP;22000nF,+80-20%,10V,Y5V,3216	1	S.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C2041	2203-005968	C-CER,CHIP;4.7NF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C6091	2203-005968	C-CER,CHIP;4.7NF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C5337	2203-006104	C-CER,CHIP;1000nF,10%,50V,X7R,3225	1	S.A	
....4	C3997	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C3998	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C6098	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C1013	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.N.A	
....4	C1019	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.N.A	
....4	C1025	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.N.A	
....4	C1028	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.N.A	
....4	C1060	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.N.A	
....4	C7084	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.N.A	
....4	C7310	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.N.A	
....4	C7601_LCD	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.N.A	
....4	C1002	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1003	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1006	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1012	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1014	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1030	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1034	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1070	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1071	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1080	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1090	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1091	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1092	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1801	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C2037	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C2039	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C2042	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C2043	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C2044	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C2045	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3046	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3051	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3054	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3055	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3056	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3057	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3065	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3070	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3071	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3072	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3100	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3101	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3102	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4002	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4006	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4013	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4014	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C4016	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4023	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4026	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4050	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4103	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5011	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5020	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5024	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5027	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5070	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5071	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5072	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5073	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5112	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6027	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6028	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6033	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6042	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6043	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6048	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6052	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6053	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6064	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6065	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6066	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6067	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6068	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6069	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6070	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6079	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6080	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6081	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6082	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6083	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6084	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6085	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6086	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6087	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6088	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6089	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6101	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6105	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6109	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6110	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6111	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6112	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6115	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6116	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6153	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7012	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7013	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C7019	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7020	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7034	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7038	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7043	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7054	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7055	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7056	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7062	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7064	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7068	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7069	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7074	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7075	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7078	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7081	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7083	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7086	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7087	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7088	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7094	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7095	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7098	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7099	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7107	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7112	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7113	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7116	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7117	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7134	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7140	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7142	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7143	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7146	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7147	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7149	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7152	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7160	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7161	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7164	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7165	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7168	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7169	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7172	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7176	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7177	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7180	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7181	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7185	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7200	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7201	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C7202	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7203	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7206	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7211	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7220	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7221	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7222	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7223	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7224	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7225	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7226	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7227	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7228	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7301	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7302	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7400	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7402	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7403	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7404	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7405	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7406	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7407	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7408	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7409	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7410	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7411	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7412	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7413	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7414	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7416	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7417	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7418	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7419	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7420	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7423	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7750	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7751	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7752	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7753	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7754	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7755	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7756	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7757	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7758	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7759	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7760	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7761	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7770	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7771	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7772	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7773	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C7880	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7881	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7900	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7901	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8001	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8002	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8003	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8004	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8007_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8011_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8012	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8013_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8014_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8015_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8016_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8017_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8018_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8019_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5012	2203-006336	C-CER,CHIP;10000nF,10%,25V,X5R,3216	1	S.A	
....4	C1016	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C1017	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C1020	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C1021	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C1023	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C1031	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C1033	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C1050	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2001	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2003	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2005	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2011	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2014	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2031	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2032	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2035	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2046	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2055	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2064	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2065	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3009_EU	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3010_EU	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3037	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3043	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3053	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3067	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3068	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3069	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3073	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3810	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C4001	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C4015	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C5005	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C5018	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C5028	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C5032	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C5111	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C5336	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6001	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6011	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6022	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6029	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6030	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6031	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6032	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6046	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6049	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6050	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6054	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6055	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6071	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6072	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6092	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6093	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7001	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7004	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7005	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7006	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7007	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7008	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7021	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7108	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7110	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7130	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7132	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7133	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C8010_EU	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2084	2203-006382	C-CER,CHIP;10000nF,10%,25V,X7R,TP,3225	1	S.N.A	
....4	C2085	2203-006382	C-CER,CHIP;10000nF,10%,25V,X7R,TP,3225	1	S.N.A	
....4	C2086	2203-006382	C-CER,CHIP;10000nF,10%,25V,X7R,TP,3225	1	S.N.A	
....4	C2087	2203-006382	C-CER,CHIP;10000nF,10%,25V,X7R,TP,3225	1	S.N.A	
....4	C1040_LCD	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C1042_LCD	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2019	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2020	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2021	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2022	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2023	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2024	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2025	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2026	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2027	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2028	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C2029	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2030	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C3103	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C3104	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C3105	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C3106	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C3320	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C3321	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C4004	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6005	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6014	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6040	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6041	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6060	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6076	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6097	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6851	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6852	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6853	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6854	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7003	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7028	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7030	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7037	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7039	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7040	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7072	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7089	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7097	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7141	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7156	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7204	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7209	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2004	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C2008	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C2009	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C2010	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C2056	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C2057	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C2059	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C3077	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C4005	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C5016	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C2053	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C2054	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C3038	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C3039	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C3047	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C3048	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C3058	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C3062	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	

5. Exploded View & Part List

[illegible]

5. Exploded View & Part List

[illegible]

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	CN330	3711-005939	HEADER-BOARD TO CABLE;BOX,3P,1R,2mm,SMD-	1	S.N.A	
....4	T0077	BN41-01167A	PCB MAIN;Chelsea-Arsnal,FR-4,4,1.2T,192x	1	S.N.A	
....4	M0018	BN97-03212A	ASSY MICOM;KFG1G16U2C-DIB6,N68A,2008.11.	1	S.N.A	
....5	IC7002	1107-001818	IC-NAND FLASH;KFG1G16U2C-DIB6,1024Mbit,6	1	S.A	
....4	M0018	BN97-03213A	ASSY MICOM;WT61P8-RG480WT,N68A,2008.11.2	1	S.N.A	
....5	IC520	0903-001552	IC-MICROCONTROLLER;WT61P8-RG480WT,LQFP,4	1	S.N.A	
....4	T0010	BP27-00002A	COIL CHOKE;SLF6028T-220MR77,22uF,20%,,,,	1	S.A	
....4	IC7007	1205-003733	IC-SWITCH;AP2191MPG-13,MSOP-8L-EP,8P,2.9	1	S.A	
....4	IC012	1203-005756	IC-POS1.ADJUST REG.;AP7173-SP,SOP-8L-EP,	1	S.A	
....4	R1012	2007-000803	R-CHIP;36Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R1071	2007-007316	R-CHIP;3.3Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R1070	2007-007671	R-CHIP;11Kohm,1%,1/16W,TP,1005	1	S.A	
....4	R1020	2007-008593	R-CHIP;750ohm,1%,1/16W,TP,1005	1	S.A	
....4	IC7003	1105-001931	IC-DDR2 SDRAM;K4T51163Q,DDR2-800,512Mbit	1	S.N.A	
....4	IC7004	1105-001931	IC-DDR2 SDRAM;K4T51163Q,DDR2-800,512Mbit	1	S.N.A	
....4	IC7005	1105-001931	IC-DDR2 SDRAM;K4T51163Q,DDR2-800,512Mbit	1	S.N.A	
....4	IC7006	1105-001931	IC-DDR2 SDRAM;K4T51163Q,DDR2-800,512Mbit	1	S.N.A	
....4	C1047_60HZ	2203-001391	C-CER,CHIP;150nF,10%,25V,X7R,TP,2012	1	S.A	
....4	R1800	2007-000608	R-CHIP;240ohm,5%,1/10W,TP,1608	1	S.A	
....4	R7190	2007-007698	R-CHIP;5.1Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R7191	2007-007698	R-CHIP;5.1Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R5041	2007-001042	R-CHIP;56ohm,1%,1/10W,TP,1608	1	S.N.A	
...3	T0066	BN62-00042A	HEAT SINK-ES;30*30*5,Ceramic,T1.5,TAPE	1	S.A	
...3	T0066	BN62-00043A	HEAT SINK-ES;40*40*5,Ceramic,T1.5,TAPE	1	S.A	
0.1	M0045	BN92-04489B	ASSY ACCESSORY;LE37B550A5WXXC,40	1	S.N.A	
..2	M0045	BN96-10545A	ASSY ACCESSORY-MANUAL;LE32B550A5WXXC	1	S.A	
...3	T0524	6902-000110	BAG PE;LDPE,T0.05,W250,L400,TRP,28,2,-,9	1	S.N.A	
...3		AA68-03242Q	MANUAL FLYER-02,SAFETY GUIDE;comm,Samsun	1	S.N.A	
...3	T0076	BN68-00514E	MANUAL FLYER-02,WARRANTY CARD;comm,Samsu	1	S.N.A	
...3		BN68-00907D	MANUAL FLYER-WEEE BATTERY;COMM,SAMSUNG,2	1	S.N.A	
...3		BN68-01894A	MANUAL FLYER-QSG;COMM,SAMSUNG,9Langs,W.E	1	S.N.A	
...3		BN96-10410A	ASSY MANUAL P-USB;B550,USB,SAMSUNG,W.EUR	1	S.N.A	
....4		BN59-00893A	S/W DRIVER-USB;HANIL 512,E-manual,HANIL,	1	S.N.A	
..2	M0045	BN96-10545C	ASSY ACCESSORY-CABEL;LE37B550A5WXXC	1	S.A	
...3	T0268	3903-000145	CBF-POWER CORD;DT,EU,FP3/YES,U(IEC C13-R	1	S.A	
...3	T0524	6902-000110	BAG PE;LDPE,T0.05,W250,L400,TRP,28,2,-,9	1	S.N.A	
...3	M9889	BN63-01798B	CLOTH-CLEAN;cloth,180,200,sea blue,ToC	1	S.N.A	
...3	T0531	BN63-05372B	COVER-BOTTOM;37,LB610,HIPS,HB,BK500	1	S.A	
....4		BN81-00199H	RESIN;HIPS HB,BK500,HF-1690H,K2901	0.05	S.N.A	
...3	M0560	BN96-01800A	ASSY ACCESSORY-SCREW ZIPPER;ROME32,-,-,-	1	S.N.A	
....4	T0081	6002-001294	SCREW-TAPPING;BH,+,,M4,L16,ZPC(BLK)	4	S.N.A	
....4	ACCESSORY	6902-000683	BAG ZIPPER;LDPE,T0.05,W60,L60,TRP,-,-,4-	1	S.N.A	
...3	T0074	BN59-00862A	REMOCON;LCD550,TM950,EUROPE,48	1	S.A	
...3		BN61-05596A	HOLDER-WIRE CABLE;LED TV,LDPE,T1.1,L150,	1	S.N.A	
0.1	M0003	BN92-04670B	ASSY BOX;37,LB550,EO,ROSE BLACK	1	S.N.A	
..2	M0521	BN69-03489A	BOX-SET,IN;37LB450,CB,C-01,DW1,YEL,W1470	1	S.N.A	
..2		BN69-03499B	BOX-SET,OUT;37LB550-2,CB,C-01,DW2,YEL,W1	1	S.N.A	
0.1	M0113	BN92-04675A	ASSY P/MATERIAL;37,LB610	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
..2	T0003	6902-000604	BAG WRAPPING;LDPE,T0.02,W500,L10000,TRP,	6	S.N.A	
..2	T0524	6902-001043	BAG PE;HDPE/NITRON,T0.015/T0.5,W1200,L80	1	S.N.A	
..2	T0214	AA61-20285C	HOLDER-BOX;CORAL,PP,BLACK,HB,17.5g	4	S.N.A	
..2	T0214	BN74-00008A	TAPE-OPP MASKING;OPP-2,T0.05,W100,L800M,	1.33	S.N.A	
0.1	M0019	BN92-04490A	ASSY LABEL;LE32B550A5WXXC	1	S.N.A	
...3	M9889	BN63-01798B	CLOTH-CLEAN;cloth,180,200,sea blue,ToC	1	S.N.A	
...3	T0531	BN63-05372B	COVER-BOTTOM;37,LB610,HIPS,HB,BK500	1	S.A	
....4		BN81-00199H	RESIN;HIPS HB,BK500,HF-1690H,K2901	0.05	S.N.A	
...3	M0560	BN96-01800A	ASSY ACCESSORY-SCREW ZIPPER;ROME32,-,-,-	1	S.N.A	
....4	T0081	6002-001294	SCREW-TAPPING;BH,+,,M4,L16,ZPC(BLK)	4	S.N.A	
....4	ACCESSORY	6902-000683	BAG ZIPPER;LDPE,T0.05,W60,L60,TRP,-,-,4-	1	S.N.A	
...3	T0074	BN59-00862A	REMOCON;LCD550,TM950,EUROPE,48	1	S.A	
0.1	M0019	BN92-04490A	ASSY LABEL;LE32B550A5WXXC	1	S.N.A	
0.1	M0003	BN92-04670A	ASSY BOX;37,LB550,EO,CHARCOAL GRAY	1	S.N.A	
..2	M0521	BN69-03489A	BOX-SET,IN;37LB450,CB,C-01,DW1,YEL,W1470	1	S.N.A	
..2		BN69-03499A	BOX-SET,OUT;37LB550,CB,C-01,DW2,YEL,W117	1	S.N.A	
0.1	M0113	BN92-04675A	ASSY P/MATERIAL;37,LB610	1	S.N.A	
..2	T0003	6902-000604	BAG WRAPPING;LDPE,T0.02,W500,L10000,TRP,	6	S.N.A	
..2	T0524	6902-001043	BAG PE;HDPE/NITRON,T0.015/T0.5,W1200,L80	1	S.N.A	
..2	T0214	AA61-20285C	HOLDER-BOX;CORAL,PP,BLACK,HB	4	S.N.A	
..2	T0214	BN74-00008A	TAPE-OPP MASKING;OPP-2,T0.05,W100,L800M,	1.33	S.N.A	

5-15. LE40B55*A Parts List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
		LE40B550A5WXXC	LE40B550A5W,N68A/40AA5-G5K,40,LCD-TV,SPA			
0.1	M0001	BN90-01921B	ASSY COVER FRONT;40,LB550,E0,CHARCOAL GR	1	S.N.A	
..2	T0175	BN96-09463C	ASSY SPEAKER P;8ohm,4pin,10W,R:250/ L:60	1	S.A	
..2	T0003	BN96-09555B	ASSY COVER P-FRONT;40,LB550,E0,PC(CLR)+P	1	S.A	
...3	T0069	BN60-00027G	SPACER-FELT;L650-40,FELT,890,0.5,20	2	S.N.A	
...3	T0069	BN60-00027P	SPACER-FELT;L650 40,FELT,502,0.5,20	2	S.N.A	
...3		BN61-04661A	BRACKET-STOPPER;L650,SK-5,T0.4,Plating,H	4	S.N.A	
...3		BN61-04692A	BOSS-PRIMER;#94,clear,35cps	0.8	S.N.A	
...3	CCM1	BN63-02183E	COVER-SHEET;Rhcm,PE Vinyl,T0.05,750mm,20	0.814	S.N.A	
...3	CCM1	BN63-05199B	COVER-SHEET;AMBER,PE,T0.08,W65mm,200M,CL	3	S.N.A	
...3	CCM1	BN63-05199F	COVER-SHEET;AMBER,PE,T0.08,W95mm,200M,CL	1.2	S.N.A	
...3	M0112	BN63-05727B	COVER-FRONT;40,LB550,E0,PC(CLR)+PC(C/GRA	1	S.N.A	
....4		BN81-00116D	RESIN-TOC;PC V0,TTP01,CLR,TN-1030(NP),TH	0.843	S.N.A	
....4		BN81-00265E	RESIN;ToC PC, TGR02,TN-1030S, LD046,TH30	0.924	S.N.A	
...3		BN96-06850A	ASSY HOLDER P-BOSS TOP;40,L650A,,ABS,HB,	1	S.N.A	
....4		BN61-03809A	HOLDER-BOSS TOP;40,L650,ABS,HB,-,-,-,WH1	1	S.N.A	
....5		BN81-00116F	RESIN;ABS HB,WHT,HF-0680U,W91902,-,-,-	137.5	S.N.A	
....4		BN61-04731A	BOSS-TAPE;AMBER,ACRYL,T1.1,W8.0mm,WHITE,	0.92	S.N.A	
....4		BN61-04731B	BOSS-TAPE;AMBER,ACRYL,T1.1,W12.0mm,WHITE	0.04	S.N.A	
....4		BN61-04692A	BOSS-PRIMER;#94,clear,35cps	0.3	S.N.A	
...3		BN96-07656A	ASSY HOLDER P-BOSS SIDE;40,L650,,PC V1 R	2	S.N.A	
....4		BN61-04079D	HOLDER-BOSS SIDE;AMBER 40",PC V1 RECYCLE	1	S.N.A	
....4		BN61-04731A	BOSS-TAPE;AMBER,ACRYL,T1.1,W8.0mm,WHITE,	0.07	S.N.A	
....4		BN61-04692A	BOSS-PRIMER;#94,clear,35cps	0.05	S.N.A	
...3		BN96-09564A	ASSY HOLDER P-BOSS BOTTOM;40,LB610,ABS,H	1	S.N.A	
....4		BN61-04692A	BOSS-PRIMER;#94,clear,35cps	0.4	S.N.A	
....4		BN61-04731D	BOSS-TAPE;AMBER,ACRYL,T1.1,W20.0mm,WHITE	0.92	S.N.A	
....4		BN61-04986A	HOLDER-BOSS BOTTOM;40, B610,ABS,HB,WH12	1	S.N.A	
....5		BN81-00116F	RESIN;ABS HB,WHT,HF-0680U,W91902,-,-,-	0.3	S.N.A	
...3	M0175	BN96-10382B	ASSY BOARD P-TOUCH FUNCTION&IR;LN40B610A	1	S.A	
0.1	M0216	BN90-01938A	ASSY STAND;40,LB610,CHARCOAL GRAY,GRAY N	1	S.N.A	
..2	M0027	BN96-09610A	ASSY STAND P-BASE;40,LB610,TEMPERED GLAS	1	S.A	
...3	M0081	6003-001003	SCREW-TAPTITE;BH,+,B,M4,L12,ZPC(BLK),SWR	3	S.N.A	
...3	M0081	6003-001003	SCREW-TAPTITE;BH,+,B,M4,L12,ZPC(BLK),SWR	4	S.N.A	
...3		BN61-04692A	BOSS-PRIMER;#94,clear,35cps	0.1	S.N.A	
...3		BN61-04731B	BOSS-TAPE;AMBER,ACRYL,T1.1,W12.0mm,WHITE	0.95	S.N.A	
...3	T0920	BN61-04990A	GUIDE-STAND;40, B610,PC+GF 20%	1	S.N.A	
....4		BN81-00204H	RESIN;Tirrex,3025G20 BK,ABS+PC G/F 20%,4	0.36	S.N.A	
...3	M0126	BN73-00203A	RUBBER-FOOT;LB7000 46inch,CR RUBBER,T7.0	4	S.N.A	
...3		BN61-05240A	HOLDER-SWIVEL RING TOP;LB700 46,POM HB,A	1	S.N.A	
...3		BN61-05244A	BRACKET-SWIVEL BOTTOM;LB700 46,HGI,T3.0	1	S.N.A	
...3		BN61-05251B	GUIDE-STAND NECK;LB700 46,PC,C/GRAY(TP27	1	S.N.A	
...3		BN61-05492A	BRACKET-STAND BOTTOM;B650 40,SECC,T2.0	1	S.N.A	
...3		BN61-05493A	HOLDER-SWIVEL RING BOTTOM;LB650 40,Aceta	1	S.N.A	
...3	T0056	BN63-05538A	COVER-DECORATION;UB7000 46inch,ABS,PMMA,	1	S.N.A	
....4		BN81-00204P	RESIN-HIGH GLOSS;HAM 8560,SF-0505,K21294	0.013	S.N.A	
...3		BN63-05781A	COVER-STAND GLASS;37,40,LB650,GLASS,8.0,	1	S.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	CCM1	BN63-04755A	COVER-SHEET;AMBER,PE,T0.05,W150mm,200M,6	0.57	S.N.A	
0.1	M0002	BN90-01943A	ASSY COVER REAR;40,LB550,EO	1	S.N.A	
..2	T0081	6002-001294	SCREW-TAPPING;BH,+,,M4,L16,ZPC(BLK)	9	S.N.A	
..2	T0081	6002-001294	SCREW-TAPPING;BH,+,,M4,L16,ZPC(BLK)	1	S.N.A	
..2	T0081	6002-001294	SCREW-TAPPING;BH,+,,M4,L16,ZPC(BLK)	1	S.N.A	
..2	M0013	BN96-09613A	ASSY COVER P-REAR;40,LB550,EO,HIPS,HB,BK	1	S.A	
...3	T0069	AA60-00091J	SPACER-FELT;-FELT,330X10,-,-,BLK,T0.5,-	4	S.N.A	
...3	T0101	BN61-04816A	BRACKET-WALL;40, B610,SECC,T1.2	4	S.N.A	
...3	M0006	BN63-05365A	COVER-REAR;40, B610,HIPS,HB,BK500	1	S.N.A	
....4		BN81-00199H	RESIN;HIPS HB,BK500,HF-1690H,K2901	2.77	S.N.A	
...3	T0071	BN64-01028B	INLAY-TERMINAL;LB550 32,EO,PS SHEET,T0.3	1	S.N.A	
...3	T0064	BN65-00002A	CLAMPER CORE;BORDEAUX,LDPE,-,-,BLK,-	1	S.N.A	
0.1	T0852	BN91-03377A	ASSY LCD-CMO;LN40B530P7FXZA,CMO	1	S.N.A	
..2	M0215	BN07-00661A	LCD-PANEL;V400H1-L05	1	S.A	
...3	M0215	BN81-02390A	A/S-T CON V400H1-L05;V400H1-L05	1	S.A	
0.1	M0112	BN91-03751A	ASSY SHIELD;LE40B550A5WXXC	1	S.N.A	
..2	M0081	6003-000337	SCREW-TAPTITE;BH,+,,S,M4,L10,ZPC(BLK),SWR	4	S.N.A	
..2	M0081	6003-000337	SCREW-TAPTITE;BH,+,,S,M4,L10,ZPC(BLK),SWR	4	S.N.A	
..2	M0081	6003-000337	SCREW-TAPTITE;BH,+,,S,M4,L10,ZPC(BLK),SWR	4	S.N.A	
..2	M0081	6003-001188	SCREW-TAPTITE;BH,+,-,B,M4,L10,ZPC(WHT),S	4	S.N.A	
..2	M0081	6003-001188	SCREW-TAPTITE;BH,+,-,B,M4,L10,ZPC(WHT),S	2	S.N.A	
..2	M0081	6003-001439	SCREW-TAPTITE;BH,+,-,S,M4,L8,ZPC(WHT),SW	1	S.N.A	
..2	M2893	BN39-01099K	LEAD CONNECTOR;LB5P,LB5K,UL1007#26,30P,7	1	S.A	
..2	M0174	BN44-00264C	IP BOARD;H40F1_9HS,H40F1_9HS,0.11mA,11mA	1	S.A	
..2	M0146	BN61-03414A	BRACKET-PANEL TOP;PEONY52,SECC T1.2	2	S.A	
..2	M0254	BN61-04801C	HOLDER-SIDE AV;EO,HIPS,HB,BK500,1USB,1HD	1	S.N.A	
...3		BN81-00199H	RESIN;HIPS HB,BK500,HF-1690H,K2901	0.01	S.N.A	
..2	M0115	BN61-04918A	BRACKET-STAND LINK;40, B610,SECC,T1.6	1	S.N.A	
..2		BN63-05259A	COVER-MAIN;EO,ABS+PMMA,HB,BK23,H/GLOSSY	1	S.N.A	
...3		BN81-00204P	RESIN-HIGH GLOSS;HAM 8560,SF-0505,K21294	0.015	S.N.A	
..2	M0230	BN96-10076A	ASSY CABLE P-FPCB LVDS;LA46A650A1,FPCB L	1	S.A	
0.1	M0017	BN91-03753C	ASSY CHASSIS;LE40B550A5WXXC	1	S.N.A	
..2	M0014	BN94-02668C	ASSY PCB MAIN;LE40B550A5WXXC	1	S.A	
...3	T0245	0202-001608	SOLDER-WIRE FLUX;LFC7-107,D0.8,99.3Sn/0.	0.25	S.N.A	
...3	CN3010	3701-001388	CONNECTOR-HDMI;20P,Phosphor Bronze,ANGLE	1	S.A	
...3	CN3011	3701-001480	CONNECTOR-DSUB;15P,3R,FEMAIL,STAMPED PIN	1	S.A	
...3	CN906	3707-001081	CONNECTOR-OPTICAL;STRAIGHT,SPDIF	1	S.A	
...3	CN8001_EU	3709-001551	CONNECTOR-CARD SLOT;68P,1.27mm,DIP,AU50U	1	S.A	
...3	CN330	3711-003847	HEADER-BOARD TO CABLE;BOX,12P,1R,2mm,ANG	1	S.A	
...3	CN1001	3711-005884	HEADER-BOARD TO BOARD;BOX,30P,2R,2mm,ANG	1	S.A	
...3	CN330	3711-006715	HEADER-BOARD TO CABLE;BOX,4P,1R,2.5mm,AN	1	S.N.A	
...3	JA330	3722-001061	JACK-PHONE;1P,3.6PI,AG,BLK,N	1	S.A	
...3	JA330	3722-001061	JACK-PHONE;1P,3.6PI,AG,BLK,N	1	S.A	
...3	JA330	3722-001061	JACK-PHONE;1P,3.6PI,AG,BLK,N	1	S.A	
...3	JA330	3722-001061	JACK-PHONE;1P,3.6PI,AG,BLK,N	1	S.A	
...3	CN7006	3722-002546	JACK-USB;4P/1C,AU,BLK,ANGLE,A type	1	S.N.A	
...3	JA333	3722-002635	JACK-PIN;3P,Sn,YEL/WHT/RED,ANGLE	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
...3	CN3002_EU	3722-002681	JACK-SCART;42P,SN,BLK	1	S.A	
...3	JA333	3722-002691	JACK-PIN;2P,Ni,WHT/RED,STRAIGHT	1	S.A	
...3	JA333	3722-002691	JACK-PIN;2P,Ni,WHT/RED,STRAIGHT	1	S.A	
...3	JA333	3722-002703	JACK-PIN;3P,Ni,GRN/BLU/RED,STRAIGHT	1	S.A	
...3	CIS3	BN40-00145A	TUNER;TDHG6-K12A,TDHG6-K12A,DVB-TC,164CH	1	S.A	
...3	T0174	BN97-03216C	ASSY SMD;LE40B550A5WXXC	1	S.N.A	
....4	SUB05	0202-001477	SOLDER-CREAM;LST309-M,-,D20~45um,96.5Sn/	1	S.N.A	
....4	D4003	0401-000133	DIODE-SWITCHING;RLS4148,75V,150mA,LL-34,	1	S.A	
....4	D4004	0401-000133	DIODE-SWITCHING;RLS4148,75V,150mA,LL-34,	1	S.A	
....4	D4100	0401-000133	DIODE-SWITCHING;RLS4148,75V,150mA,LL-34,	1	S.A	
....4	D4228	0401-000133	DIODE-SWITCHING;RLS4148,75V,150mA,LL-34,	1	S.A	
....4	D3001	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3002	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3051	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3054	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3061	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3062	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3063	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3076	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3077	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3079	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3080	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D4008	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D4010	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3811	0401-001099	DIODE-SWITCHING;1N4148WS,75V,150mA,SOD-3	1	S.N.A	
....4	D0254	0402-001207	DIODE-SCHOTTKY;UPS5819,40V,1000MA,DO-216	1	S.A	
....4	D4001	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D5100	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D3003_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3004_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3005_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3006_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3007_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3008_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3009_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3011	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3015	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3016_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3018	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3019	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3020	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3021	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3022_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3023	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3024	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3026_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3032	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3033	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3034	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3035	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3036	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	D3037	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3038	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3039	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3045	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3052	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3056	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3057	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3058	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3060	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3065	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3066	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3067	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3068	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3069	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3073	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3074	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3075	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3350	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3776	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3777_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3778_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3779_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D0254	0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	1	S.A	
....4	D0254	0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	1	S.A	
....4	D0254	0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	1	S.A	
....4	D0254	0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	1	S.A	
....4	D0254	0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	1	S.A	
....4	D0254	0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	1	S.A	
....4	D0254	0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	1	S.A	
....4	D7001_650	0406-001200	DIODE-TVS;RCLAMP0504F,6/-V,150W,SC-70	1	S.A	
....4	D7002	0406-001200	DIODE-TVS;RCLAMP0504F,6/-V,150W,SC-70	1	S.A	
....4	D3751	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D3752	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D3753	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D3754	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D3755	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D3756	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D3757	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D3758	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D8001_CI	0407-000114	DIODE-ARRAY;-80V,100mA,CA2-3,SOT-23,TP	1	S.N.A	
....4	D8002_CI	0407-000114	DIODE-ARRAY;-80V,100mA,CA2-3,SOT-23,TP	1	S.N.A	
....4	D8003_CI	0407-000114	DIODE-ARRAY;-80V,100mA,CA2-3,SOT-23,TP	1	S.N.A	
....4	D8004_CI	0407-000114	DIODE-ARRAY;-80V,100mA,CA2-3,SOT-23,TP	1	S.N.A	
....4	D8005_CI	0407-000114	DIODE-ARRAY;-80V,100mA,CA2-3,SOT-23,TP	1	S.N.A	
....4	D8006_EU	0407-000114	DIODE-ARRAY;-80V,100mA,CA2-3,SOT-23,TP	1	S.N.A	
....4	Q4003	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150MW,SOT-23	1	S.A	
....4	Q4005	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150MW,SOT-23	1	S.A	
....4	Q4020	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150MW,SOT-23	1	S.A	
....4	Q1001_60HZ	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q1002_LCD	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3007	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	Q3008	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3009	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3010	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3810	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3811	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q4004	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q4009	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q4011	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3001_EU	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	
....4	Q3002_EU	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	
....4	Q7601_LCD	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	
....4	Q7602_LCD	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-001916	FET-SILICON;Si4800BDY,N,30V,9A,0.03ohm,2	1	S.A	
....4	Q409	0505-002169	FET-SILICON;Si4435BDY-T1-E3,P,-30V,-9.1A	1	S.N.A	
....4	IC104	0801-002095	IC-CMOS LOGIC;74LCX245,TRANSCEIVER,TSSOP	1	S.A	
....4	IC104	0801-002172	IC-CMOS LOGIC;74LCX16244,BUFFER/LINE DRI	1	S.A	
....4	IC104	0801-002172	IC-CMOS LOGIC;74LCX16244,BUFFER/LINE DRI	1	S.A	
....4	IC104	0801-002630	IC-CMOS LOGIC;74AHCT1G08,2-INPUT AND GAT	1	S.A	
....4	IC104	0801-002780	IC-CMOS LOGIC;74LVC1G17,SCHMITT-TRIGGER	1	S.N.A	
....4	IC7009	0904-002119	IC-I/O SUPPORT CHIP;PCF8574TS,8Bit,SSOP,	1	S.A	
....4	IC7008	1001-000164	IC-ANALOG MULTIPLEX;74HC4052,CMOS,SOP,16	1	S.A	
....4	IC106	1001-001177	IC-VIDEO SWITCH;TEA6425D,VIDEO SWITCH ,S	1	S.A	
....4	IC106	1001-001573	IC-VIDEO SWITCH;SiI9287CNUTR,QFN,72P,10x	1	S.A	
....4	IC107	1002-001482	IC-D/A CONVERTER;WM8521H9GED/R,16bit,SOI	1	S.A	
....4	IC3001	1006-001266	IC-LINE TRANSCEIVER;SP3232EEY,TSSOP,16P,	1	S.A	
....4	IC112	1103-000129	IC-EEPROM;24C02,2Kbit,256x8Bit,SOP,8P,5x	1	S.A	
....4	IC112	1103-000129	IC-EEPROM;24C02,2Kbit,256x8Bit,SOP,8P,5x	1	S.A	
....4	IC112	1103-001310	IC-EEPROM;24LC02B,256X8BIT,SOIC,8P,3.91X	1	S.N.A	
....4	IC112	1103-001385	IC-EEPROM;AT24C256,256Kbit,32Kx8,SOP,8P,	1	S.A	
....4	IC7003	1105-001859	IC-DDR2 SDRAM;K4T1G164QD-ZCE7,DDR2,1Gbit	1	S.A	
....4	IC7004	1105-001859	IC-DDR2 SDRAM;K4T1G164QD-ZCE7,DDR2,1Gbit	1	S.A	
....4	IC7005	1105-001859	IC-DDR2 SDRAM;K4T1G164QD-ZCE7,DDR2,1Gbit	1	S.A	
....4	IC7006	1105-001859	IC-DDR2 SDRAM;K4T1G164QD-ZCE7,DDR2,1Gbit	1	S.A	
....4	T0124	1201-002796	IC-POWER AMP;STA339BWS,PSSO,36P,10.3x7.5	1	S.A	
....4	T0087	1203-001815	IC-POSI.FIXED REG.;78M09,TO-252,3P,-,PLA	1	S.A	
....4	T0087	1203-001816	IC-POSI.FIXED REG.;78M08,TO-252,3P,-,PLA	1	S.A	
....4	T0087	1203-002842	IC-POSI.FIXED REG.;AP1117D-33A,TO-252,3P	1	S.A	
....4	IC012	1203-002995	IC-POSI.ADJUST REG.;AP1117D-A,TO-252,3P,	1	S.A	
....4	IC012	1203-002995	IC-POSI.ADJUST REG.;AP1117D-A,TO-252,3P,	1	S.A	
....4	IC012	1203-002995	IC-POSI.ADJUST REG.;AP1117D-A,TO-252,3P,	1	S.A	
....4	IC4005	1203-004363	IC-VOL. DETECTOR;RT9818C-29PV,SOT-23,3P,	1	S.A	
....4	IC4004	1203-004364	IC-VOL. DETECTOR;RT9818C-42PV,SOT-23,3P,	1	S.A	
....4	IC1007	1203-004879	IC-DC/DC CONVERTER;MP8668DL,QFN,14P,3x4mm	1	S.A	
....4	T0087	1203-005134	IC-POSI.FIXED REG.;RT9167A-33PB,SOT-23-5	1	S.A	
....4	IC1006	1203-005538	IC-DC/DC CONVERTER;AOZ1021HAIL,SOP,8P,4.	1	S.A	
....4	IC5006	1203-005559	IC-BACKLIGHT DRIVER;MP3302DJ,TSOT23,5P,2	1	S.A	
....4	T0087	1203-005713	IC-POSI.FIXED REG.;S-1172B33-E6T1G,HSOP,	1	S.A	
....4	IC118	1204-003010	IC-VIDEO PROCESS;SDP84,PBGA,324P,23x23mm	1	S.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	IC7001	1204-003011	IC-DECODER;SDP83,PBGA,729P,34x34mm,PLAST	1	S.A	
....4	IC3011	1205-003201	IC-BUS SWITCH;TC7WB125FK,SSOP,8P,2x2.3mm	1	S.A	
....4	IC2001	1205-003352	IC-CODEC;WM8593SEFT/V,TQFP,64P,10x10mm,P	1	S.A	
....4	IC8006_EU	1205-003479	IC-SWITCH;TPS2051BDBVR,SOT-23,5P,2.9x1.6	1	S.A	
....4	IC7007	1205-003681	IC-SWITCH;TPS2069DGN,MSOP,8P,3.05x4.98mm	1	S.A	
....4	IC5010	1209-001830	IC-PLL;IDT6V10012PGG,TSSOP,20P,6.5x4.4mm	1	S.A	
....4	D4110	1405-001185	VARISTOR;24Vdc,1.6x0.8x0.36mm,TP	1	S.A	
....4	D3010	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3012_EU	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3013	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3014_EU	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3017	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3025	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3027	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3028	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3029	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3030	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3031	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3040	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3041	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3042	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3050	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3053	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3055	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3059	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3064	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3070	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3071	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3072	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3078	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3081	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3097	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3098	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3099	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4011	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4012	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4013	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4014	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4015	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4016	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4017	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4018	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D7003_650	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D7004	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	R7120	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7121	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7122	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7123	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7152	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7153	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7154	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R7155	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7162	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7163	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7164	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7165	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7169	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7170	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7171	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7172	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R5101	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R2058	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R2059	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R2060	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R2061	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R4155	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	1	S.A	
....4	R7050	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7053	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7056	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7058	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7062	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7066	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7069	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7070	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3007	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3034_EU	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3036_EU	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3062	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3070	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3071	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3078_EU	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3120	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3191	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3192	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3205	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3206	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3207	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3243	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3254	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3255	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3320	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3999	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4042	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4049	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4050	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4087	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5022	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7114	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7132	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7143	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7605_LCD	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8311_EU	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R1031_LCD	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1072	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3010_EU	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3021_EU	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3022_EU	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3035	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3037	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3072	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3073	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3081	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3082	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3138	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3139	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3189	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3190	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3227	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3228	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4081	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6028	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6066	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7045	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7072	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7195	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7196	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7602_LCD	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R2054	2007-000141	R-CHIP;2.2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4085	2007-000141	R-CHIP;2.2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5030	2007-000141	R-CHIP;2.2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1030_LCD	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1060	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1070	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3520	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3522	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3524	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3526	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4016	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4018	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4020	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4066	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4071	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4074	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4077	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4551	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4552	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4553	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4554	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4755	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4756	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5017	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6015	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6021	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R6023	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6038	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6048	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6053	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6100	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6101	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6102	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7017	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7033	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7034	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7036	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7037	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7064	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7156	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7174	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7352	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7353_OP	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7356	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7357_OP	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3044_EU	2007-000146	R-CHIP;6.8Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3067_EU	2007-000146	R-CHIP;6.8Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1013	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1015	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1023_LCD	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R2023	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R2027	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3168	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3252	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3253	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3310	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3311	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4017	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4019	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4023	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4027	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4078	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4150	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4152	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5111	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7103	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7351	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7411_LCD	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7600_LCD	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7601_LCD	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7603_LCD	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7604_LCD	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8012	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8014_EU	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8015_EU	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8020_EU	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3028_EU	2007-000149	R-CHIP;12Kohm,5%,1/16W,TP,1005	1	S.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R3032_EU	2007-000149	R-CHIP;12Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R3027_EU	2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3033_EU	2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4021	2007-000155	R-CHIP;27Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1011	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R2019	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3040_EU	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3042_EU	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3058_EU	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3060_EU	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3126	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3136	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3201	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3204	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3521	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3523	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3525	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3527	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3820	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4151	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5110	2007-000159	R-CHIP;56Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3111	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3112	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3113	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3114	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5038	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3038_EU	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3049_EU	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3077_EU	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3103_OP	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3125	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3169	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3170	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3200	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3202	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3203	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3220	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3250	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3251	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3258	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3259	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3284	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3285	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3289	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3290	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3400	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3410_OP	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3450	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3451	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3452	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3453	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R3500	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3751_EU	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3752_EU	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3753_EU	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3811_OP	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3860	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4041	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4084	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4086	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4250	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5006	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5007	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5011	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5033	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5035	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6013	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6061	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6068	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7002	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7003	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7004	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7007	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7014	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7015	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7018	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7035	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7038	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7048	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7073	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7074	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7075	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7076	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7077	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7078	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7079	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7080	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7081	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7082	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7083	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7084	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7089	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7090	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7091	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7092	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7093	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7094	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7095	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7096	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7097	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7098	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7099	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R7100	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7101	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7102	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7104	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7118	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7119	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7128	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7129	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7130	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7133	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7134	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7135	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7141	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7142	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7144	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7161	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7167	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7168	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7177	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7201	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7202	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7229_60HZ	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7234	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7235_60HZ	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7236	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7237	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7238	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7242_60HZ	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7284_LCD	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8016_EU	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3288	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3300	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3301	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3302	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3303	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4038	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R2047	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3240	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3244	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4036	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4750	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4751	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4752	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4850	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4851	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5216	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5217	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5218	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6031	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6125	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6126	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R6211	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6212	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6213	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6214	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6215	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6216	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7115	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7159	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7175	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7650	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7651	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8021	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3008	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3083	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3256	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3257	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4039	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4040	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6184	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6810	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6811	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6812	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6813	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6814	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6815	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6816	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6817	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6818	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6819	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6820	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6821	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6822	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6823	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6824	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6825	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6826	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6827	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6828	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6829	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6830	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6831	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6832	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6833	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6834	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6835	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6836	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6837	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6838	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6839	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6840	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6841	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R6842	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6843	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6844	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6845	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7310	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1018	2007-000239	R-CHIP;1.5Kohm,1%,1/10W,TP,1608	1	S.N.A	
....4	R6089	2007-000259	R-CHIP;1.6Kohm,5%,1/10W,TP,1608	1	S.A	
....4	R5112	2007-000287	R-CHIP;100ohm,1%,1/10W,TP,1608	1	S.N.A	
....4	R7105	2007-000287	R-CHIP;100ohm,1%,1/10W,TP,1608	1	S.N.A	
....4	R7147	2007-000287	R-CHIP;100ohm,1%,1/10W,TP,1608	1	S.N.A	
....4	R1800	2007-000343	R-CHIP;120ohm,1%,1/10W,TP,1608	1	S.N.A	
....4	R2064	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R2065	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R2066	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R2067	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R2068	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R2069	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R2070	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R2071	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R5001	2007-000402	R-CHIP;150ohm,5%,1/10W,TP,1608	1	S.A	
....4	R3001_EU	2007-000458	R-CHIP;18Kohm,5%,1/10W,TP,1608	1	S.A	
....4	R3055_EU	2007-000458	R-CHIP;18Kohm,5%,1/10W,TP,1608	1	S.A	
....4	R1801	2007-000536	R-CHIP;200ohm,1%,1/10W,TP,1608	1	S.A	
....4	R5031	2007-000566	R-CHIP;220Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5026	2007-000591	R-CHIP;22ohm,1%,1/10W,TP,1608	1	S.A	
....4	R5041	2007-000591	R-CHIP;22ohm,1%,1/10W,TP,1608	1	S.A	
....4	R5052_STU	2007-000606	R-CHIP;240ohm,1%,1/10W,TP,1608	1	S.A	
....4	R5053_STU	2007-000606	R-CHIP;240ohm,1%,1/10W,TP,1608	1	S.A	
....4	R5045	2007-000669	R-CHIP;2Kohm,1%,1/10W,TP,1608	1	S.N.A	
....4	R7160	2007-000729	R-CHIP;300ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R7176	2007-000729	R-CHIP;300ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R5044	2007-000755	R-CHIP;330Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R5039	2007-000758	R-CHIP;330Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5037	2007-000763	R-CHIP;330ohm,1%,1/10W,TP,1608	1	S.N.A	
....4	R1012	2007-000828	R-CHIP;39Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R3004_EU	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3005_EU	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4015	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6067	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1026_60HZ	2007-000939	R-CHIP;47Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R1014	2007-001179	R-CHIP;8.2Kohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R3722	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8028_EU	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3721	2007-001305	R-CHIP;120ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3723	2007-001305	R-CHIP;120ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7194	2007-001308	R-CHIP;200ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7410_LCD	2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7190	2007-001329	R-CHIP;7.5Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R7191	2007-001329	R-CHIP;7.5Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R3810	2007-001333	R-CHIP;18Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1004	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R1007	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R1008	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R1009	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R5056	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R5102	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R1021	2007-002899	R-CHIP;10ohm,1%,1/10W,TP,1608	1	S.A	
....4	R1017	2007-002900	R-CHIP;11Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R5070	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5210	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5211	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5213	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5214	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5215	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1006_60HZ	2007-007107	R-CHIP;100Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R1010	2007-007107	R-CHIP;100Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R5034	2007-007107	R-CHIP;100Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R2057	2007-007136	R-CHIP;4.7Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R8013_EU	2007-007136	R-CHIP;4.7Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R1019	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R1024_60HZ	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R4028	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R4030	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R4089	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R4156	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R4753	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R4754	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R2055	2007-007197	R-CHIP;3.3ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R2056	2007-007197	R-CHIP;3.3ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7193	2007-007222	R-CHIP;6.04Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R1016	2007-007312	R-CHIP;20Kohm,1%,1/16W,TP,1005	1	S.A	
....4	R1022	2007-007312	R-CHIP;20Kohm,1%,1/16W,TP,1005	1	S.A	
....4	R1020	2007-007318	R-CHIP;1Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R5036	2007-007469	R-CHIP;110ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R7116	2007-007797	R-CHIP;44.2ohm,1%,1/10W,TP,1608	1	S.A	
....4	R7117	2007-007797	R-CHIP;44.2ohm,1%,1/10W,TP,1608	1	S.A	
....4	R3002_EU	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3006_EU	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3009	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3011	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3012	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3029	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3030	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3031	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3045	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3047_EU	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3050	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3057_EU	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3137	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3208	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3209	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3210	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R3241	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3242	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R5032	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R6280	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R6281	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R6282	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	RA5005	2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA5006	2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA8006	2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA8007	2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA8008	2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA2001	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA2002	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA2003	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA2007	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA4001	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA4044	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA4045	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA4048	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA4051	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA5004	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA6013	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7002	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7003	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7004	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7005	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7006	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7007	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7008	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7009	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7010	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7011	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7012	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7039	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7041	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7042	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7043	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7044	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7045	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7046	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7047	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7048	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7049	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7050	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7051	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7052	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7062	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7500	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7501	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA8017_CI	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA8018_CI	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	RA8019_CI	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA5003	2011-001344	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA7056	2011-001344	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA7057	2011-001344	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA2004	2011-001345	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA2005	2011-001345	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA2006	2011-001345	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA8010_EU	2011-001345	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA6018	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7013	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7014	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7015	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7020	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7038	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7040	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7053	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7054	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7061	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7502	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7503	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA3011	2011-001397	R-NETWORK;47Kohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA3012	2011-001397	R-NETWORK;47Kohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA3035	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3650_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3651_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3652_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3653_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3654_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3655_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3666_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3667_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3668_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3669_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3670_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3671_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3672_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3673_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3674_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3675_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA5013	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3006	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,-,4P,TP,1010	1	S.N.A	
....4	RA3007	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,-,4P,TP,1010	1	S.N.A	
....4	RA3008	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,-,4P,TP,1010	1	S.N.A	
....4	RA3009	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,-,4P,TP,1010	1	S.N.A	
....4	RA3016	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,-,4P,TP,1010	1	S.N.A	
....4	RA4010	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,-,4P,TP,1010	1	S.N.A	
....4	RA4046	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,-,4P,TP,1010	1	S.N.A	
....4	RA6020	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,-,4P,TP,1010	1	S.N.A	
....4	RA2008	2011-001497	R-NETWORK;470ohm,5%,1/16W,L,CHIP,4P,TP,1	1	S.N.A	
....4	RA3018	2011-001497	R-NETWORK;470ohm,5%,1/16W,L,CHIP,4P,TP,1	1	S.N.A	
....4	RA6019	2011-001506	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,4P,TP,1	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	RA6119	2011-001506	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,4P,TP,1	1	S.N.A	
....4	RA8011_EU	2011-001506	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,4P,TP,1	1	S.N.A	
....4	RA3015	2011-001519	R-NETWORK;33OHM,5%,1/16W,L,CHIP,4P,TP,1.	1	S.N.A	
....4	RA4018	2011-001519	R-NETWORK;33OHM,5%,1/16W,L,CHIP,4P,TP,1.	1	S.N.A	
....4	RA5012	2011-001519	R-NETWORK;33OHM,5%,1/16W,L,CHIP,4P,TP,1.	1	S.N.A	
....4	RA3017	2011-001527	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,4P,TP,	1	S.N.A	
....4	RA6021	2011-001527	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,4P,TP,	1	S.N.A	
....4	RA7034	2011-001527	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,4P,TP,	1	S.N.A	
....4	RA7065	2011-001527	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,4P,TP,	1	S.N.A	
....4	RA3014	2011-001586	R-NETWORK;1Kohm,5%,1/16W,L,CHIP-V,4P,TP,	1	S.A	
....4	RA3031	2011-001586	R-NETWORK;1Kohm,5%,1/16W,L,CHIP-V,4P,TP,	1	S.A	
....4	RA3036	2011-001586	R-NETWORK;1Kohm,5%,1/16W,L,CHIP-V,4P,TP,	1	S.A	
....4	RA6022	2011-001586	R-NETWORK;1Kohm,5%,1/16W,L,CHIP-V,4P,TP,	1	S.A	
....4	RA3010	2011-001587	R-NETWORK;100ohm,5%,1/16W,L,CHIP-V,4P,TP	1	S.A	
....4	RA3013	2011-001587	R-NETWORK;100ohm,5%,1/16W,L,CHIP-V,4P,TP	1	S.A	
....4	RA4016	2011-001587	R-NETWORK;100ohm,5%,1/16W,L,CHIP-V,4P,TP	1	S.A	
....4	RA4017	2011-001587	R-NETWORK;100ohm,5%,1/16W,L,CHIP-V,4P,TP	1	S.A	
....4	RA3030_EU	2011-001588	R-NETWORK;75ohm,5%,1/16W,L,CHIP-V,4P,TP,	1	S.A	
....4	RA6009	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA6010	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA6011	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA6012	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA7060	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA7079	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA7600	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA7601	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA7900	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA3032	2011-001590	R-NETWORK;47Kohm,5%,1/16W,L,CHIP-V,4P,TP	1	S.A	
....4	RA3072	2011-001590	R-NETWORK;47Kohm,5%,1/16W,L,CHIP-V,4P,TP	1	S.A	
....4	C2080	2203-000125	C-CER,CHIP;1.2nF,10%,50V,X7R,TP,1608,-	1	S.A	
....4	C2081	2203-000125	C-CER,CHIP;1.2nF,10%,50V,X7R,TP,1608,-	1	S.A	
....4	C2082	2203-000125	C-CER,CHIP;1.2nF,10%,50V,X7R,TP,1608,-	1	S.A	
....4	C2083	2203-000125	C-CER,CHIP;1.2nF,10%,50V,X7R,TP,1608,-	1	S.A	
....4	C2040	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3001	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3002_EU	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3013	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3015	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3021	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3022	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3029	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3033_EU	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3045	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3066	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3250	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3251	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C2036	2203-000280	C-CER,CHIP;0.01nF,0.5pF,50V,C0G,1608	1	S.A	
....4	C7137	2203-000384	C-CER,CHIP;0.015nF,5%,50V,C0G,1608	1	S.N.A	
....4	C1001	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C1029	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C1041_LCD	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C1768	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C2033	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C2034	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C4003	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C4012	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C4025	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C6090	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C1027	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C3014_EU	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C3016_EU	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C3024	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C3025	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C5001	2203-000550	C-CER,CHIP;0.02nF,5%,50V,C0G,1005	1	S.N.A	
....4	C5002	2203-000550	C-CER,CHIP;0.02nF,5%,50V,C0G,1005	1	S.N.A	
....4	C2070	2203-000575	C-CER,CHIP;220nF,10%,25V,X7R,TP,2012	1	S.N.A	
....4	C2071	2203-000575	C-CER,CHIP;220nF,10%,25V,X7R,TP,2012	1	S.N.A	
....4	C2072	2203-000575	C-CER,CHIP;220nF,10%,25V,X7R,TP,2012	1	S.N.A	
....4	C2073	2203-000575	C-CER,CHIP;220nF,10%,25V,X7R,TP,2012	1	S.N.A	
....4	C2074	2203-000575	C-CER,CHIP;220nF,10%,25V,X7R,TP,2012	1	S.N.A	
....4	C2075	2203-000575	C-CER,CHIP;220nF,10%,25V,X7R,TP,2012	1	S.N.A	
....4	C5100	2203-000585	C-CER,CHIP;0.22nF,10%,50V,X7R,1005	1	S.A	
....4	C4009	2203-000679	C-CER,CHIP;0.027nF,5%,50V,C0G,1005	1	S.A	
....4	C4010	2203-000679	C-CER,CHIP;0.027nF,5%,50V,C0G,1005	1	S.A	
....4	C5003	2203-000697	C-CER,CHIP;0.002NF,0.25PF,50V,C0G,TP,160	1	S.A	
....4	C5004	2203-000697	C-CER,CHIP;0.002NF,0.25PF,50V,C0G,TP,160	1	S.A	
....4	C7048	2203-000761	C-CER,CHIP;330nF,10%,16V,X7R,TP,2012,-	1	S.N.A	
....4	C3006	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C3007	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C3008	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C3011_EU	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C3012_EU	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C3018	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C3019	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C3020	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C1120	2203-000995	C-CER,CHIP;0.047nF,5%,50V,C0G,1005	1	S.A	
....4	C3017	2203-000995	C-CER,CHIP;0.047nF,5%,50V,C0G,1005	1	S.A	
....4	C3023_EU	2203-000995	C-CER,CHIP;0.047nF,5%,50V,C0G,1005	1	S.A	
....4	C4018	2203-000995	C-CER,CHIP;0.047nF,5%,50V,C0G,1005	1	S.A	
....4	C4020	2203-000995	C-CER,CHIP;0.047nF,5%,50V,C0G,1005	1	S.A	
....4	C2038	2203-001126	C-CER,CHIP;0.68nF,10%,50V,X7R,1608	1	S.N.A	
....4	C5031	2203-001412	C-CER,CHIP;0.03nF,5%,50V,NP0,TP,1005	1	S.N.A	
....4	C5035	2203-001412	C-CER,CHIP;0.03nF,5%,50V,NP0,TP,1005	1	S.N.A	
....4	C5036	2203-001412	C-CER,CHIP;0.03nF,5%,50V,NP0,TP,1005	1	S.N.A	
....4	C5037	2203-001412	C-CER,CHIP;0.03nF,5%,50V,NP0,TP,1005	1	S.N.A	
....4	C5038	2203-001412	C-CER,CHIP;0.03nF,5%,50V,NP0,TP,1005	1	S.N.A	
....4	C5039_OP	2203-001596	C-CER,CHIP;2200nF,+80-20%,50V,Y5V,2012	1	S.A	
....4	C5060_OP	2203-001596	C-CER,CHIP;2200nF,+80-20%,50V,Y5V,2012	1	S.A	
....4	C1005	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C1007	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C1008	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C2006	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C2007	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C4008	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C4011	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C4019	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C4021	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C4022	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C4024	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C4100	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C5023	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C6061	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C6077	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C6099	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C6113	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C6114	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C7018	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C7136	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C7139_LCD	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C5010	2203-002494	C-CER,CHIP;470nF,10%,16V,X7R,2012	1	S.N.A	
....4	C7050	2203-005138	C-CER,CHIP;1.8nF,10%,50V,X7R,1005	1	S.A	
....4	C7051	2203-005138	C-CER,CHIP;1.8nF,10%,50V,X7R,1005	1	S.A	
....4	C7052	2203-005138	C-CER,CHIP;1.8nF,10%,50V,X7R,1005	1	S.A	
....4	C1004	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C1022	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C1024	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C1045_60HZ	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C1048_LCD	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C1148_LCD	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C1149_LCD	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C1150_LCD	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2047	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2048	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2049	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2050	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2051	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2052	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2060	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2061	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2062	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2063	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2066	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2067	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2068	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2069	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2076	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2077	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2078	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2079	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C5021	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6056	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6057	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6058	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C6059	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6062	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6063	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6073	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6074	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6075	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6078	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6094	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6095	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6096	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6100	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7011	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7017	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7049	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7114	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7115	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7121	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7122	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7009	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7016	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7025	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7029	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7059	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7063	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7065	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7073	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7096	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7105	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7106	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7148	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7157	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7173	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7205	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7210	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C3063	2203-005393	C-CER,CHIP;0.005nF,0.1pF,50V,NP0,TP,1005	1	S.N.A	
....4	C3811	2203-005493	C-CER,CHIP;220nF,+80-20%,16V,Y5V,1005	1	S.A	
....4	C6044	2203-005493	C-CER,CHIP;220nF,+80-20%,16V,Y5V,1005	1	S.A	
....4	C6045	2203-005493	C-CER,CHIP;220nF,+80-20%,16V,Y5V,1005	1	S.A	
....4	C7053	2203-005659	C-CER,CHIP;0.18nF,5%,50V,NP0,1005	1	S.N.A	
....4	C1032	2203-005834	C-CER,CHIP;22000nF,+80-20%,10V,Y5V,3216	1	S.A	
....4	C1035	2203-005834	C-CER,CHIP;22000nF,+80-20%,10V,Y5V,3216	1	S.A	
....4	C1036	2203-005834	C-CER,CHIP;22000nF,+80-20%,10V,Y5V,3216	1	S.A	
....4	C5025	2203-005834	C-CER,CHIP;22000nF,+80-20%,10V,Y5V,3216	1	S.A	
....4	C5034	2203-005834	C-CER,CHIP;22000nF,+80-20%,10V,Y5V,3216	1	S.A	
....4	C2041	2203-005968	C-CER,CHIP;4.7NF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C6091	2203-005968	C-CER,CHIP;4.7NF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C5337	2203-006104	C-CER,CHIP;1000nF,10%,50V,X7R,3225	1	S.A	
....4	C3997	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C3998	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C6098	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C1019	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C1025	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.N.A	
....4	C1028	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.N.A	
....4	C1060	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.N.A	
....4	C7084	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.N.A	
....4	C7310	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.N.A	
....4	C7601_LCD	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.N.A	
....4	C1002	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1003	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1006	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1012	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1014	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1030	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1034	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1070	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1071	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1080	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1091	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1092	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1801	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C2037	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C2039	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C2042	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C2043	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C2044	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C2045	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3046	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3051	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3054	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3055	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3056	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3057	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3065	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3070	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3071	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3072	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3100	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3101	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3102	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4002	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4006	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4013	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4014	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4016	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4023	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4026	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4050	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4103	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5011	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5020	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5024	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5027	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C5070	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5071	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5072	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5073	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5112	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6027	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6028	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6033	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6042	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6043	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6048	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6052	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6053	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6064	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6065	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6066	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6067	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6068	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6069	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6070	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6079	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6080	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6081	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6082	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6083	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6084	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6085	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6086	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6087	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6088	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6089	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6101	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6105	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6109	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6110	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6111	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6112	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6115	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6116	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6153	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7012	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7013	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7019	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7020	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7034	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7038	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7043	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7054	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7055	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7056	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7062	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C7064	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7068	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7069	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7074	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7075	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7078	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7081	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7083	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7086	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7087	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7088	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7094	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7095	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7098	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7099	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7107	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7112	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7113	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7116	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7117	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7134	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7140	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7142	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7143	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7146	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7147	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7149	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7152	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7160	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7161	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7164	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7165	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7168	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7169	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7172	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7176	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7177	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7180	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7181	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7185	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7200	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7201	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7202	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7203	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7206	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7211	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7220	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7221	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7222	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7223	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7224	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C7225	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7226	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7227	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7228	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7301	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7302	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7400	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7402	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7403	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7404	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7405	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7406	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7407	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7408	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7409	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7410	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7411	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7412	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7413	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7414	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7416	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7417	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7418	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7419	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7420	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7423	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7750	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7751	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7752	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7753	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7754	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7755	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7756	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7757	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7758	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7759	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7760	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7761	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7770	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7771	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7772	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7773	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7880	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7881	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7900	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7901	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8001	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8002	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8003	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8004	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8007_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C8011_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8012	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8013_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8014_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8015_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8016_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8017_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8018_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8019_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1047_60HZ	2203-006307	C-CER,CHIP;1000nF,10%,25V,X5R,2012	1	S.N.A	
....4	C5012	2203-006336	C-CER,CHIP;10000nF,10%,25V,X5R,3216	1	S.A	
....4	C1017	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C1020	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C1021	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C1023	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C1031	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C1033	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C1050	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2001	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2003	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2005	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2011	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2014	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2031	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2032	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2035	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2046	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2055	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2064	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2065	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3009_EU	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3010_EU	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3037	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3043	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3053	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3067	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3068	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3069	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3073	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3810	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C4001	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C4015	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C5005	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C5018	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C5028	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C5032	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C5111	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C5336	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6001	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6011	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6022	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C6029	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6030	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6031	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6032	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6046	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6049	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6050	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6054	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6055	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6071	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6072	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6092	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6093	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7001	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7004	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7005	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7006	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7007	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7008	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7021	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7108	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7110	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7130	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7132	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7133	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C8010_EU	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2084	2203-006382	C-CER,CHIP;10000nF,10%,25V,X7R,TP,3225	1	S.N.A	
....4	C2085	2203-006382	C-CER,CHIP;10000nF,10%,25V,X7R,TP,3225	1	S.N.A	
....4	C2086	2203-006382	C-CER,CHIP;10000nF,10%,25V,X7R,TP,3225	1	S.N.A	
....4	C2087	2203-006382	C-CER,CHIP;10000nF,10%,25V,X7R,TP,3225	1	S.N.A	
....4	C1040_LCD	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C1042_LCD	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2019	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2020	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2021	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2022	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2023	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2024	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2025	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2026	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2027	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2028	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2029	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2030	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C3103	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C3104	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C3105	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C3106	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C3320	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C3321	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C4004	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C6005	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6014	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6040	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6041	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6060	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6076	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6097	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6851	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6852	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6853	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6854	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7003	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7028	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7030	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7037	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7039	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7040	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7072	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7089	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7097	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7141	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7156	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7204	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7209	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C1013	2203-006618	C-CER,CHIP;2200nF,+80-20%,16V,Y5V,-,1608	1	S.N.A	
....4	C1016	2203-006618	C-CER,CHIP;2200nF,+80-20%,16V,Y5V,-,1608	1	S.N.A	
....4	C2004	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C2008	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C2009	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C2010	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C2056	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C2057	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C2059	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C3077	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C4005	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C5016	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C2053	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C2054	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C3038	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C3039	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C3047	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C3048	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C3058	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C3062	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C3999	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C1015	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (1	S.N.A	
....4	C1018	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (1	S.N.A	
....4	C2002	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (1	S.N.A	
....4	C2058	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (1	S.N.A	
....4	C5022	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (1	S.N.A	
....4	C6047	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (1	S.N.A	

5. Exploded View & Part List

[illegible]

5. Exploded View & Part List

[illegible]

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
...4	T0010	BP27-00002A	COIL CHOKE;SLF6028T-220MR77,22uF,20%,,,,,	1	S.A	
...3	T0066	BP62-00016B	HEAT SINK-ES;SUNRAY,A6063,T2.0,36.2,36.2	1	S.N.A	
...3	T0066	BP62-00017A	HEAT SINK-ES;SP-50L2HX,A6063S,T2.0,26.2,	1	S.N.A	
0.1	M0045	BN92-04489D	ASSY ACCESSORY;LE40B551A6WXXC	1	S.N.A	
..2	M0045	BN96-10545A	ASSY ACCESSORY-MANUAL;LE32B550A5WXXC	1	S.A	
...3	T0524	6902-000110	BAG PE;LDPE,T0.05,W250,L400,TRP,28,2,-,9	1	S.N.A	
...3	T0210	AA68-03242Q	MANUAL FLYER-01,SAFETY GUIDE;comm,Samsun	1	S.N.A	
...3	T0175	BN68-00514E	MANUAL FLYER-01,WARRANTY CARD;comm,Samsu	1	S.N.A	
...3		BN68-00907D	MANUAL FLYER-WEEE BATTERY;COMM,SAMSUNG,2	1	S.N.A	
...3		BN68-01894A	MANUAL FLYER-QSG;COMM,SAMSUNG,9Langs,W.E	1	S.N.A	
...3	T0511	BN68-01962B	MANUAL USERS;COMM,SAMSUNG,Tur,W.EUROPE,W	1	S.N.A	
...3		BN96-10410A	ASSY MANUAL P-USB;B550,USB,SAMSUNG,W.EUR	1	S.N.A	
...4	T0511	BN68-01962A	MANUAL USERS;COMM,SAMSUNG,9Langs,W.EUROPE	1	S.N.A	
..2	M0045	BN96-10545E	ASSY ACCESSORY-CABEL;LE40B550A5WXXC	1	S.A	
...3	T0268	3903-000145	CBF-POWER CORD;DT,EU,FP3/YES,U(IEC C13-R	1	S.A	
...3	T0524	6902-000110	BAG PE;LDPE,T0.05,W250,L400,TRP,28,2,-,9	1	S.N.A	
...3	M9889	BN63-01798B	CLOTH-CLEAN;cloth,180,200,sea blue,ToC	1	S.N.A	
...3	T0531	BN63-05373B	COVER-BOTTOM;40,LB610,HIPS,HB,BK500	1	S.A	
...4		BN81-00199H	RESIN;HIPS HB,BK500,HF-1690H,K2901	0.05	S.N.A	
...3	M0560	BN96-01800A	ASSY ACCESSORY-SCREW ZIPPER;ROME32,-,-,-	1	S.N.A	
...4	T0081	6002-001294	SCREW-TAPPING;BH,+,,M4,L16,ZPC(BLK)	4	S.N.A	
...4	ACCESSORY	6902-000683	BAG ZIPPER;LDPE,T0.05,W60,L60,TRP,-,-,4-	1	S.N.A	
...3	T0074	BN59-00862A	REMOCON;LCD550,TM950,EUROPE,48	1	S.A	
0.1	M0019	BN92-04490A	ASSY LABEL;LE32B550A5WXXC	1	S.N.A	
0.1	M0003	BN92-04669B	ASSY BOX;40,LB550,EO,CHARCOAL GRAY	1	S.N.A	
..2	M0521	BN69-03475A	BOX-SET,IN;40LB450,CB,C-01,DW2,YEL,W1525	1	S.N.A	
..2		BN69-03476D	BOX-SET,OUT;40LB550-1,CB,C-03,DW2,YEL,W1	1	S.N.A	
0.1	M0113	BN92-04674A	ASSY P/MATERIAL;40,LB610	1	S.N.A	
..2	T0003	6902-000604	BAG WRAPPING;LDPE,T0.02,W500,L10000,TRP,	7	S.N.A	
..2	T0524	6902-001043	BAG PE;HDPE/NITRON,T0.015/T0.5,W1200,L80	1	S.N.A	
..2	T0214	AA61-20285C	HOLDER-BOX;CORAL,PP,BLACK,HB	4	S.N.A	
..2	T0214	BN74-00008A	TAPE-OPP MASKING;OPP-2,T0.05,W100,L800M,	1.39	S.N.A	

5-16. LE46B55*A Parts List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
		LE46B550A5WXXC	LE46B550A5W,N68A/46AA5-G5K,46,LCD-TV,SPA			
0.1	M0001	BN90-01922B	ASSY COVER FRONT;46,LB550,EO,CHARCOAL GR	1	S.N.A	
..2	T0175	BN96-09463D	ASSY SPEAKER P;8ohm,4pin,10W,R:250/ L:70	1	S.A	
..2	T0003	BN96-09556B	ASSY COVER P-FRONT;46,LB550,EO,PC(CLR)+P	1	S.A	
...3	T0069	BN60-00027H	SPACER-FELT;L650-46,FELT,1020,0.5,20	2	S.N.A	
...3	T0069	BN60-00027Q	SPACER-FELT;L650 46,FELT,570,0.5,20	2	S.N.A	
...3		BN61-04661A	BRACKET-STOPPER;L650,SK-5,T0.4,Plating,H	4	S.N.A	
...3		BN61-04692A	BOSS-PRIMER;#94,clear,35cps	0.8	S.N.A	
...3	CCM1	BN63-02183F	COVER-SHEET;Rhcm,PE Vinyl,T0.05,900mm,20	0.898	S.N.A	
...3	CCM1	BN63-05199B	COVER-SHEET;AMBER,PE,T0.08,W65mm,200M,CL	3.2	S.N.A	
...3	CCM1	BN63-05199F	COVER-SHEET;AMBER,PE,T0.08,W95mm,200M,CL	1.4	S.N.A	
...3	M0112	BN63-05725B	COVER-FRONT;46,LB550,EO,PC(CLR)+PC(C/GRA	1	S.N.A	
....4		BN81-00116D	RESIN-TOC;PC V0,TTP01,CLR,TN-1030(NP),TH	0.957	S.N.A	
....4		BN81-00265E	RESIN;ToC PC, TGR02,TN-1030S, LD046,TH30	1.118	S.N.A	
...3		BN96-09565A	ASSY HOLDER P-BOSS BOTTOM;46,LB610,ABS,H	1	S.N.A	
....4		BN61-04692A	BOSS-PRIMER;#94,clear,35cps	0.4	S.N.A	
....4		BN61-04731D	BOSS-TAPE;AMBER,ACRYL,T1.1,W20.0mm,WHITE	1.06	S.N.A	
....4		BN61-04987A	HOLDER-BOSS BOTTOM;46, B610,ABS,HB,WH12	1	S.N.A	
.....5		BN81-00116F	RESIN;ABS HB,WHT,HF-0680U,W91902,-,-,-	357.5	S.N.A	
...3		BN96-09571A	ASSY HOLDER P-BOSS TOP;46,LB610,ABS,HB,W	1	S.N.A	
....4		BN61-04692A	BOSS-PRIMER;#94,clear,35cps	0.3	S.N.A	
....4		BN61-04731A	BOSS-TAPE;AMBER,ACRYL,T1.1,W8.0mm,WHITE,	1.11	S.N.A	
....4		BN61-04731B	BOSS-TAPE;AMBER,ACRYL,T1.1,W12.0mm,WHITE	0.05	S.N.A	
....4		BN61-05082A	HOLDER-BOSS TOP;46, B610,ABS,HB,WH12	1	S.N.A	
.....5		BN81-00116F	RESIN;ABS HB,WHT,HF-0680U,W91902,-,-,-	203.5	S.N.A	
...3		BN96-09572A	ASSY HOLDER P-BOSS SIDE;46,LB610,PMMA+AB	2	S.N.A	
....4		BN61-04692A	BOSS-PRIMER;#94,clear,35cps	0.05	S.N.A	
....4		BN61-04731A	BOSS-TAPE;AMBER,ACRYL,T1.1,W8.0mm,WHITE,	0.26	S.N.A	
....4		BN61-05014A	HOLDER-BOSS SIDE;46, B610,PMMA+ABS,BK23	1	S.N.A	
.....5		BN81-00204P	RESIN-HIGH GLOSS;HAM 8560,SF-0505,K21294	0.045	S.N.A	
...3	M0175	BN96-10382B	ASSY BOARD P-TOUCH FUNCTION&IR;LN40B610A	1	S.A	
0.1	M0216	BN90-01939A	ASSY STAND;46,LB610,CHARCOAL GRAY,GRAY N	1	S.N.A	
..2	M0027	BN96-09612A	ASSY STAND P-BASE;46,LB610,TEMPERED GLAS	1	S.A	
...3	M0081	6003-001003	SCREW-TAPTITE;BH,+,B,M4,L12,ZPC(BLK),SWR	6	S.N.A	
...3	M0081	6003-001003	SCREW-TAPTITE;BH,+,B,M4,L12,ZPC(BLK),SWR	4	S.N.A	
...3		BN61-04692A	BOSS-PRIMER;#94,clear,35cps	0.001	S.N.A	
...3		BN61-04731B	BOSS-TAPE;AMBER,ACRYL,T1.1,W12.0mm,WHITE	1	S.N.A	
...3	T0920	BN61-04991A	GUIDE-STAND;LB610 46,PC+GF 20%	1	S.N.A	
....4		BN81-00204H	RESIN;Trirex,3025G20 BK,ABS+PC G/F 20%,4	463.1	S.N.A	
...3		BN61-05240A	HOLDER-SWIVEL RING TOP;LB700 46,POM HB,A	1	S.N.A	
...3		BN61-05243A	BRACKET-STAND BOTTOM;LB700 46,HGI,T3.0	1	S.N.A	
...3		BN61-05244A	BRACKET-SWIVEL BOTTOM;LB700 46,HGI,T3.0	1	S.N.A	
...3		BN61-05251B	GUIDE-STAND NECK;LB700 46,PC,C/GRAY(TP27	1	S.N.A	
...3		BN61-05255A	HOLDER-SWIVEL RING BOTTOM;LB700 46,POM H	1	S.N.A	
...3		BN63-05227A	COVER-ATSND/GLASS;46,LB650,GLASS,T8.0,CH	1	S.N.A	
....4	CCM1	BN63-04755A	COVER-SHEET;AMBER,PE,T0.05,W150mm,200M,6	0.62	S.N.A	
...3	T0056	BN63-05538A	COVER-DECORATION;UB7000 46inch,ABS,PMMA,	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4		BN81-00204P	RESIN-HIGH GLOSS;HAM 8560,SF-0505,K21294	0.013	S.N.A	
...3	M0126	BN73-00203A	RUBBER-FOOT;LB7000 46inch,CR RUBBER,T7.0	4	S.N.A	
...3	M0126	BN73-00204A	RUBBER-FOOT;42LB650,RUBBER,16*33,60,2.0	4	S.N.A	
0.1	M0002	BN90-01944A	ASSY COVER REAR;46,LB550,EO	1	S.N.A	
..2	T0081	6002-001294	SCREW-TAPPING;BH,+,M4,L16,ZPC(BLK)	12	S.N.A	
..2	T0081	6002-001294	SCREW-TAPPING;BH,+,M4,L16,ZPC(BLK)	1	S.N.A	
..2	T0081	6002-001294	SCREW-TAPPING;BH,+,M4,L16,ZPC(BLK)	1	S.N.A	
..2	M0013	BN96-09615A	ASSY COVER P-REAR;46,LB550,EO,HIPS,HB,BK	1	S.A	
...3	T0069	AA60-00091J	SPACER-FELT;-FELT,330X10,-,-,BLK,T0.5,-	4	S.N.A	
...3	M0006	BN63-05366A	COVER-REAR;46,B610,EO,HIPS,HB,BK500	1	S.N.A	
....4		BN81-00199H	RESIN;HIPS HB,BK500,HF-1690H,K2901	3.883	S.N.A	
...3	T0071	BN64-01028B	INLAY-TERMINAL;LB550 32,EO,PS SHEET,T0.3	1	S.N.A	
...3	T0064	BN65-00002A	CLAMPER CORE;BORDEAUX,LDPE,-,-,BLK,-	1	S.N.A	
0.1	T0852	BN91-03671C	ASSY LCD-CMO;LE46B530P7WXXC	1	S.N.A	
..2	M0215	BN07-00668A	LCD-PANEL;V460H1-L06	1	S.A	
...3		BN81-02394A	A/S-T CON V460H1-L06;V460H1-L06	1	S.N.A	
...3		BN81-02397A	A/S-BB-L V460H1-L06;V460H1-L06	1	S.N.A	
0.1	M0112	BN91-03752A	ASSY SHIELD;LE46B550A5WXXC	1	S.N.A	
..2	M0081	6003-000337	SCREW-TAPTITE;BH,+,S,M4,L10,ZPC(BLK),SWR	4	S.N.A	
..2	M0081	6003-000337	SCREW-TAPTITE;BH,+,S,M4,L10,ZPC(BLK),SWR	4	S.N.A	
..2	M0081	6003-000337	SCREW-TAPTITE;BH,+,S,M4,L10,ZPC(BLK),SWR	4	S.N.A	
..2	M0081	6003-000337	SCREW-TAPTITE;BH,+,S,M4,L10,ZPC(BLK),SWR	4	S.N.A	
..2	M0081	6003-001439	SCREW-TAPTITE;BH,+,S,M4,L8,ZPC(WHT),SW	1	S.N.A	
..2	M2893	BN39-00830B	LEAD CONNECTOR;LNT4642HX/XAA,UL1061#28,7	1	S.A	
..2	M2893	BN39-01021C	LEAD CONNECTOR;LH40MG,UL1617#22,2P,1100m	1	S.A	
..2	M2893	BN39-01024A	LEAD CONNECTOR;LN46A550P1FXZA,UL1007#26,	1	S.A	
..2	M2893	BN39-01099K	LEAD CONNECTOR;LB5P,LB5K,UL1007#26,30P,7	1	S.A	
..2	M0174	BN44-00265B	IP BOARD;I46F1_9HS,I46F1_9HS,0.1mA,10.5m	1	S.A	
..2	M0115	BN61-04788A	BRACKET-STAND LINK;46, B610,SECC,T2.0	1	S.N.A	
..2	M0254	BN61-04801C	HOLDER-SIDE AV;EO,HIPS,HB,BK500,1USB,1HD	1	S.N.A	
...3		BN81-00199H	RESIN;HIPS HB,BK500,HF-1690H,K2901	0.01	S.N.A	
..2	T0101	BN61-04817A	BRACKET-WALL;46, B610,SECC,T1.6	4	S.N.A	
..2		BN63-05259A	COVER-MAIN;EO,ABS+PMMA,HB,BK23,H/GLOSSY	1	S.N.A	
...3		BN81-00204P	RESIN-HIGH GLOSS;HAM 8560,SF-0505,K21294	0.015	S.N.A	
..2	M0230	BN96-10075A	ASSY CABLE P-FPCB LVDS;LA46A650A1,FPCB L	1	S.A	
..2	M0081	6003-001003	SCREW-TAPTITE;BH,+,B,M4,L12,ZPC(BLK),SWR	4	S.N.A	
..2	M0081	6003-001003	SCREW-TAPTITE;BH,+,B,M4,L12,ZPC(BLK),SWR	2	S.N.A	
0.1	M0017	BN91-03753D	ASSY CHASSIS;LE46B550A5WXXC	1	S.N.A	
..2	M0014	BN94-02668D	ASSY PCB MAIN;LE46B550A5WXXC	1	S.N.A	
...3	T0245	0202-001608	SOLDER-WIRE FLUX;LFC7-107,D0.8,99.3Sn/0.	0.25	S.N.A	
...3	CN3010	3701-001388	CONNECTOR-HDMI;20P,Phosphor Bronze,ANGLE	1	S.A	
...3	CN3011	3701-001480	CONNECTOR-DSUB;15P,3R,FEMAIL,STAMPED PIN	1	S.A	
...3	CN906	3707-001081	CONNECTOR-OPTICAL;STRAIGHT,SPDIF	1	S.A	
...3	CN8001_EU	3709-001551	CONNECTOR-CARD SLOT;68P,1.27mm,DIP,AU50U	1	S.A	
...3	CN330	3711-003847	HEADER-BOARD TO CABLE;BOX,12P,1R,2mm,ANG	1	S.A	
...3	CN1001	3711-005884	HEADER-BOARD TO BOARD;BOX,30P,2R,2mm,ANG	1	S.A	
...3	CN330	3711-006715	HEADER-BOARD TO CABLE;BOX,4P,1R,2.5mm,AN	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
...3	JA330	3722-001061	JACK-PHONE;1P,3.6PI,AG,BLK,N	1	S.A	
...3	JA330	3722-001061	JACK-PHONE;1P,3.6PI,AG,BLK,N	1	S.A	
...3	JA330	3722-001061	JACK-PHONE;1P,3.6PI,AG,BLK,N	1	S.A	
...3	JA330	3722-001061	JACK-PHONE;1P,3.6PI,AG,BLK,N	1	S.A	
...3	CN7006	3722-002546	JACK-USB;4P/1C,AU,BLK,ANGLE,A type	1	S.N.A	
...3	JA333	3722-002635	JACK-PIN;3P,Sn,YEL/WHT/RED,ANGLE	1	S.A	
...3	CN3002_EU	3722-002681	JACK-SCART;42P,SN,BLK	1	S.A	
...3	JA333	3722-002691	JACK-PIN;2P,Ni,WHT/RED,STRAIGHT	1	S.A	
...3	JA333	3722-002691	JACK-PIN;2P,Ni,WHT/RED,STRAIGHT	1	S.A	
...3	JA333	3722-002703	JACK-PIN;3P,Ni,GRN/BLU/RED,STRAIGHT	1	S.A	
...3	CIS3	BN40-00145A	TUNER;TDHG6-K12A,TDHG6-K12A,DVB-TC,164CH	1	S.A	
...3	T0174	BN97-03216D	ASSY SMD;LE46B550A5WXXC	1	S.N.A	
...4	SUB05	0202-001477	SOLDER-CREAM;LST309-M,-,D20~45um,96.5Sn/	1	S.N.A	
...4	D4003	0401-000133	DIODE-SWITCHING;RLS4148,75V,150mA,LL-34,	1	S.A	
...4	D4004	0401-000133	DIODE-SWITCHING;RLS4148,75V,150mA,LL-34,	1	S.A	
...4	D4100	0401-000133	DIODE-SWITCHING;RLS4148,75V,150mA,LL-34,	1	S.A	
...4	D4228	0401-000133	DIODE-SWITCHING;RLS4148,75V,150mA,LL-34,	1	S.A	
...4	D3001	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
...4	D3002	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
...4	D3051	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
...4	D3054	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
...4	D3061	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
...4	D3062	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
...4	D3063	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
...4	D3076	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
...4	D3077	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
...4	D3079	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
...4	D3080	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
...4	D4008	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
...4	D4010	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
...4	D3811	0401-001099	DIODE-SWITCHING;1N4148WS,75V,150mA,SOD-3	1	S.N.A	
...4	D0254	0402-001207	DIODE-SCHOTTKY;UPS5819,40V,1000MA,DO-216	1	S.A	
...4	D4001	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
...4	D5100	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
...4	D3003_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
...4	D3004_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
...4	D3005_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
...4	D3006_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
...4	D3007_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
...4	D3008_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
...4	D3009_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
...4	D3011	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
...4	D3015	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
...4	D3016_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
...4	D3018	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
...4	D3019	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
...4	D3020	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
...4	D3021	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
...4	D3022_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
...4	D3023	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
...4	D3024	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	D3026_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3032	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3033	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3034	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3035	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3036	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3037	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3038	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3039	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3045	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3052	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3056	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3057	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3058	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3060	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3065	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3066	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3067	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3068	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3069	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3073	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3074	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3075	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3350	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3776	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3777_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3778_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3779_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D0254	0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	1	S.A	
....4	D0254	0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	1	S.A	
....4	D0254	0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	1	S.A	
....4	D0254	0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	1	S.A	
....4	D0254	0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	1	S.A	
....4	D0254	0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	1	S.A	
....4	D0254	0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	1	S.A	
....4	D7001_650	0406-001200	DIODE-TVS;RCLAMP0504F,6/-V,150W,SC-70	1	S.A	
....4	D7002	0406-001200	DIODE-TVS;RCLAMP0504F,6/-V,150W,SC-70	1	S.A	
....4	D3751	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D3752	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D3753	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D3754	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D3755	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D3756	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D3757	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D3758	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D8001_CI	0407-000114	DIODE-ARRAY;- ,80V,100mA,CA2-3,SOT-23,TP	1	S.N.A	
....4	D8002_CI	0407-000114	DIODE-ARRAY;- ,80V,100mA,CA2-3,SOT-23,TP	1	S.N.A	
....4	D8003_CI	0407-000114	DIODE-ARRAY;- ,80V,100mA,CA2-3,SOT-23,TP	1	S.N.A	
....4	D8004_CI	0407-000114	DIODE-ARRAY;- ,80V,100mA,CA2-3,SOT-23,TP	1	S.N.A	
....4	D8005_CI	0407-000114	DIODE-ARRAY;- ,80V,100mA,CA2-3,SOT-23,TP	1	S.N.A	
....4	D8006_EU	0407-000114	DIODE-ARRAY;- ,80V,100mA,CA2-3,SOT-23,TP	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	Q4003	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150MW,SOT-23	1	S.A	
....4	Q4005	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150MW,SOT-23	1	S.A	
....4	Q4020	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150MW,SOT-23	1	S.A	
....4	Q1001_60HZ	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q1002_LCD	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3007	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3008	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3009	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3010	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3810	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3811	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q4004	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q4009	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q4011	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3001_EU	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	
....4	Q3002_EU	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	
....4	Q7601_LCD	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	
....4	Q7602_LCD	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-001916	FET-SILICON;Si4800BDY,N,30V,9A,0.03ohm,2	1	S.A	
....4	Q409	0505-002169	FET-SILICON;Si4435BDY-T1-E3,P,-30V,-9.1A	1	S.N.A	
....4	IC104	0801-002095	IC-CMOS LOGIC;74LCX245,TRANSCEIVER,TSSOP	1	S.A	
....4	IC104	0801-002172	IC-CMOS LOGIC;74LCX16244,BUFFER/LINE DRI	1	S.A	
....4	IC104	0801-002172	IC-CMOS LOGIC;74LCX16244,BUFFER/LINE DRI	1	S.A	
....4	IC104	0801-002630	IC-CMOS LOGIC;74AHCT1G08,2-INPUT AND GAT	1	S.A	
....4	IC104	0801-002780	IC-CMOS LOGIC;74LVC1G17,SCHMITT-TRIGGER	1	S.N.A	
....4	IC7009	0904-002119	IC-I/O SUPPORT CHIP;PCF8574TS,8Bit,SSOP,	1	S.A	
....4	IC7008	1001-000164	IC-ANALOG MULTIPLEX;74HC4052,CMOS,SOP,16	1	S.A	
....4	IC106	1001-001177	IC-VIDEO SWITCH;TEA6425D,VIDEO SWITCH ,S	1	S.A	
....4	IC106	1001-001573	IC-VIDEO SWITCH;SiI9287CNUTR,QFN,72P,10x	1	S.A	
....4	IC107	1002-001482	IC-D/A CONVERTER;WM8521H9GED/R,16bit,SOI	1	S.A	
....4	IC3001	1006-001266	IC-LINE TRANSCEIVER;SP3232EEY,TSSOP,16P,	1	S.A	
....4	IC112	1103-000129	IC-EEPROM;24C02,2Kbit,256x8Bit,SOP,8P,5x	1	S.A	
....4	IC112	1103-000129	IC-EEPROM;24C02,2Kbit,256x8Bit,SOP,8P,5x	1	S.A	
....4	IC112	1103-001310	IC-EEPROM;24LC02B,256X8BIT,SOIC,8P,3.91X	1	S.N.A	
....4	IC112	1103-001385	IC-EEPROM;AT24C256,256Kbit,32Kx8,SOP,8P,	1	S.A	
....4	IC7003	1105-001859	IC-DDR2 SDRAM;K4T1G164QD-ZCE7,DDR2,1Gbit	1	S.A	
....4	IC7004	1105-001859	IC-DDR2 SDRAM;K4T1G164QD-ZCE7,DDR2,1Gbit	1	S.A	
....4	IC7005	1105-001859	IC-DDR2 SDRAM;K4T1G164QD-ZCE7,DDR2,1Gbit	1	S.A	
....4	IC7006	1105-001859	IC-DDR2 SDRAM;K4T1G164QD-ZCE7,DDR2,1Gbit	1	S.A	
....4	T0124	1201-002796	IC-POWER AMP;STA339BWS,PSSO,36P,10.3x7.5	1	S.A	
....4	T0087	1203-001815	IC-POS.FIXED REG.;78M09,TO-252,3P,-,PLA	1	S.A	
....4	T0087	1203-001816	IC-POS.FIXED REG.;78M08,TO-252,3P,-,PLA	1	S.A	
....4	T0087	1203-002842	IC-POS.FIXED REG.;AP1117D-33A,TO-252,3P	1	S.A	
....4	IC012	1203-002995	IC-POS.ADJUST REG.;AP1117D-A,TO-252,3P,	1	S.A	
....4	IC012	1203-002995	IC-POS.ADJUST REG.;AP1117D-A,TO-252,3P,	1	S.A	
....4	IC012	1203-002995	IC-POS.ADJUST REG.;AP1117D-A,TO-252,3P,	1	S.A	
....4	IC4005	1203-004363	IC-VOL. DETECTOR;RT9818C-29PV,SOT-23,3P,	1	S.A	
....4	IC4004	1203-004364	IC-VOL. DETECTOR;RT9818C-42PV,SOT-23,3P,	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	IC1007	1203-004879	IC-DC/DC CONVERTER;MP8668DL,QFN,14P,3x4mm	1	S.A	
....4	T0087	1203-005134	IC-POSI.FIXED REG.;RT9167A-33PB,SOT-23-5	1	S.A	
....4	IC1006	1203-005538	IC-DC/DC CONVERTER;AOZ1021HAIL,SOP,8P,4.	1	S.A	
....4	IC5006	1203-005559	IC-BACKLIGHT DRIVER;MP3302DJ,TSOT23,5P,2	1	S.A	
....4	T0087	1203-005713	IC-POSI.FIXED REG.;S-1172B33-E6T1G,HSOP,	1	S.A	
....4	IC118	1204-003010	IC-VIDEO PROCESS;SDP84,PBGA,324P,23x23mm	1	S.A	
....4	IC7001	1204-003011	IC-DECODER;SDP83,PBGA,729P,34x34mm,PLAST	1	S.A	
....4	IC3011	1205-003201	IC-BUS SWITCH;TC7WB125FK,SSOP,8P,2x2.3mm	1	S.A	
....4	IC2001	1205-003352	IC-CODEC;WM8593SEFT/V,TQFP,64P,10x10mm,P	1	S.A	
....4	IC8006_EU	1205-003479	IC-SWITCH;TPS2051BDBVR,SOT-23,5P,2.9x1.6	1	S.A	
....4	IC7007	1205-003681	IC-SWITCH;TPS2069DGN,MSOP,8P,3.05x4.98mm	1	S.A	
....4	IC5010	1209-001830	IC-PLL;IDT6V10012PGG,TSSOP,20P,6.5x4.4mm	1	S.A	
....4	D4110	1405-001185	VARISTOR;24Vdc,1.6x0.8x0.36mm,TP	1	S.A	
....4	D3010	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3012_EU	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3013	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3014_EU	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3017	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3025	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3027	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3028	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3029	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3030	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3031	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3040	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3041	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3042	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3050	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3053	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3055	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3059	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3064	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3070	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3071	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3072	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3078	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3081	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3097	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3098	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3099	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4011	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4012	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4013	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4014	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4015	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4016	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4017	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4018	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D7003_650	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D7004	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	R7120	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R7121	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7122	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7123	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7152	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7153	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7154	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7155	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7162	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7163	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7164	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7165	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7169	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7170	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7171	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7172	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R5101	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R2058	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R2059	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R2060	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R2061	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R4155	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	1	S.A	
....4	R7050	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7053	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7056	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7058	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7062	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7066	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7069	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7070	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3007	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3034_EU	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3036_EU	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3062	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3070	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3071	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3078_EU	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3120	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3191	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3192	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3205	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3206	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3207	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3243	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3254	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3255	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3320	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3999	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4042	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4049	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4050	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4087	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R5022	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7114	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7132	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7143	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7605_LCD	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8311_EU	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1031_LCD	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1072	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3010_EU	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3021_EU	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3022_EU	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3035	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3037	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3072	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3073	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3081	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3082	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3138	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3139	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3189	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3190	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3227	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3228	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4081	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6028	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6066	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7045	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7072	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7195	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7196	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7602_LCD	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R2054	2007-000141	R-CHIP;2.2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4085	2007-000141	R-CHIP;2.2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5030	2007-000141	R-CHIP;2.2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1030_LCD	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1060	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1070	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3520	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3522	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3524	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3526	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4016	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4018	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4020	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4066	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4071	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4074	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4077	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4551	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4552	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4553	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R4554	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4755	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4756	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5017	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6015	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6021	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6023	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6038	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6048	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6053	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6100	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6101	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6102	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7017	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7033	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7034	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7036	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7037	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7064	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7156	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7174	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7352	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7353_OP	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7356	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7357_OP	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3044_EU	2007-000146	R-CHIP;6.8Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3067_EU	2007-000146	R-CHIP;6.8Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1013	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1015	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1023_LCD	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R2023	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R2027	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3168	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3252	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3253	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3310	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3311	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4017	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4019	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4023	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4027	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4078	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4150	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4152	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5111	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7103	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7351	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7411_LCD	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7600_LCD	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7601_LCD	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7603_LCD	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R7604_LCD	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8012	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8014_EU	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8015_EU	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8020_EU	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3028_EU	2007-000149	R-CHIP;12Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R3032_EU	2007-000149	R-CHIP;12Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R3027_EU	2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3033_EU	2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4021	2007-000155	R-CHIP;27Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1011	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R2019	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3040_EU	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3042_EU	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3058_EU	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3060_EU	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3126	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3136	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3201	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3204	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3521	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3523	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3525	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3527	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3820	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4151	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5110	2007-000159	R-CHIP;56Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3111	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3112	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3113	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3114	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5038	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3038_EU	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3049_EU	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3077_EU	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3103_OP	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3125	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3169	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3170	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3200	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3202	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3203	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3220	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3250	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3251	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3258	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3259	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3284	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3285	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3289	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3290	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R3400	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3410_OP	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3450	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3451	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3452	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3453	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3500	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3751_EU	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3752_EU	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3753_EU	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3811_OP	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3860	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4041	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4084	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4086	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4250	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5006	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5007	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5011	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5033	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5035	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6013	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6061	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6068	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7002	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7003	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7004	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7007	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7014	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7015	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7018	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7035	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7038	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7048	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7073	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7074	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7075	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7076	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7077	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7078	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7079	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7080	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7081	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7082	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7083	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7084	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7089	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7090	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7091	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7092	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7093	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R7094	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7095	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7096	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7097	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7098	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7099	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7100	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7101	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7102	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7104	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7118	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7119	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7128	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7129	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7130	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7133	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7134	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7135	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7141	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7142	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7144	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7161	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7167	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7168	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7177	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7201	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7202	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7229_60HZ	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7234	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7235_60HZ	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7236	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7237	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7238	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7242_60HZ	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7284_LCD	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8016_EU	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3288	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3300	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3301	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3302	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3303	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4038	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R2047	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3240	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3244	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4036	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4750	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4751	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4752	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4850	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4851	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R5216	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5217	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5218	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6031	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6125	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6126	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6211	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6212	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6213	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6214	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6215	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6216	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7115	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7159	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7175	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7650	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7651	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8021	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3008	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3083	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3256	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3257	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4039	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4040	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6184	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6810	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6811	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6812	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6813	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6814	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6815	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6816	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6817	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6818	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6819	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6820	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6821	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6822	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6823	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6824	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6825	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6826	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6827	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6828	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6829	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6830	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6831	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6832	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6833	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6834	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6835	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R6836	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6837	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6838	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6839	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6840	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6841	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6842	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6843	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6844	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6845	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7310	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1018	2007-000239	R-CHIP;1.5Kohm,1%,1/10W,TP,1608	1	S.N.A	
....4	R6089	2007-000259	R-CHIP;1.6Kohm,5%,1/10W,TP,1608	1	S.A	
....4	R5112	2007-000287	R-CHIP;100ohm,1%,1/10W,TP,1608	1	S.N.A	
....4	R7105	2007-000287	R-CHIP;100ohm,1%,1/10W,TP,1608	1	S.N.A	
....4	R7147	2007-000287	R-CHIP;100ohm,1%,1/10W,TP,1608	1	S.N.A	
....4	R1800	2007-000343	R-CHIP;120ohm,1%,1/10W,TP,1608	1	S.N.A	
....4	R2064	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R2065	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R2066	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R2067	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R2068	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R2069	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R2070	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R2071	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R5001	2007-000402	R-CHIP;150ohm,5%,1/10W,TP,1608	1	S.A	
....4	R3001_EU	2007-000458	R-CHIP;18Kohm,5%,1/10W,TP,1608	1	S.A	
....4	R3055_EU	2007-000458	R-CHIP;18Kohm,5%,1/10W,TP,1608	1	S.A	
....4	R1801	2007-000536	R-CHIP;200ohm,1%,1/10W,TP,1608	1	S.A	
....4	R5031	2007-000566	R-CHIP;220Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5026	2007-000591	R-CHIP;22ohm,1%,1/10W,TP,1608	1	S.A	
....4	R5041	2007-000591	R-CHIP;22ohm,1%,1/10W,TP,1608	1	S.A	
....4	R5052_STU	2007-000606	R-CHIP;240ohm,1%,1/10W,TP,1608	1	S.A	
....4	R5053_STU	2007-000606	R-CHIP;240ohm,1%,1/10W,TP,1608	1	S.A	
....4	R5045	2007-000669	R-CHIP;2Kohm,1%,1/10W,TP,1608	1	S.N.A	
....4	R7160	2007-000729	R-CHIP;300ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R7176	2007-000729	R-CHIP;300ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R5044	2007-000755	R-CHIP;330Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R5039	2007-000758	R-CHIP;330Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5037	2007-000763	R-CHIP;330ohm,1%,1/10W,TP,1608	1	S.N.A	
....4	R1012	2007-000828	R-CHIP;39Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R3004_EU	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3005_EU	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4015	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6067	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1026_60HZ	2007-000939	R-CHIP;47Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R1014	2007-001179	R-CHIP;8.2Kohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R3722	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8028_EU	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3721	2007-001305	R-CHIP;120ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3723	2007-001305	R-CHIP;120ohm,5%,1/16W,TP,1005	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R7194	2007-001308	R-CHIP;200ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7410_LCD	2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7190	2007-001329	R-CHIP;7.5Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R7191	2007-001329	R-CHIP;7.5Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R3810	2007-001333	R-CHIP;18Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1004	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R1007	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R1008	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R1009	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R5056	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R5102	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R1021	2007-002899	R-CHIP;10ohm,1%,1/10W,TP,1608	1	S.A	
....4	R1017	2007-002900	R-CHIP;11Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R5070	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5210	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5211	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5213	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5214	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5215	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1006_60HZ	2007-007107	R-CHIP;100Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R1010	2007-007107	R-CHIP;100Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R5034	2007-007107	R-CHIP;100Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R2057	2007-007136	R-CHIP;4.7Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R8013_EU	2007-007136	R-CHIP;4.7Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R1019	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R1024_60HZ	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R4028	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R4030	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R4089	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R4156	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R4753	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R4754	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R2055	2007-007197	R-CHIP;3.3ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R2056	2007-007197	R-CHIP;3.3ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7193	2007-007222	R-CHIP;6.04Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R1016	2007-007312	R-CHIP;20Kohm,1%,1/16W,TP,1005	1	S.A	
....4	R1022	2007-007312	R-CHIP;20Kohm,1%,1/16W,TP,1005	1	S.A	
....4	R1020	2007-007318	R-CHIP;1Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R5036	2007-007469	R-CHIP;110ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R7116	2007-007797	R-CHIP;44.2ohm,1%,1/10W,TP,1608	1	S.A	
....4	R7117	2007-007797	R-CHIP;44.2ohm,1%,1/10W,TP,1608	1	S.A	
....4	R3002_EU	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3006_EU	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3009	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3011	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3012	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3029	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3030	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3031	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3045	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3047_EU	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R3050	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3057_EU	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3137	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3208	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3209	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3210	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3241	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3242	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R5032	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R6280	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R6281	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R6282	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	RA5005	2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA5006	2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA8006	2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA8007	2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA8008	2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA2001	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA2002	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA2003	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA2007	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA4001	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA4044	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA4045	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA4048	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA4051	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA5004	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA6013	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7002	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7003	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7004	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7005	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7006	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7007	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7008	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7009	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7010	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7011	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7012	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7039	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7041	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7042	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7043	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7044	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7045	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7046	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7047	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7048	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7049	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7050	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7051	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	RA7052	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7062	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7500	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7501	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA8017_CI	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA8018_CI	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA8019_CI	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA5003	2011-001344	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA7056	2011-001344	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA7057	2011-001344	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA2004	2011-001345	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA2005	2011-001345	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA2006	2011-001345	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA8010_EU	2011-001345	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA6018	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7013	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7014	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7015	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7020	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7038	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7040	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7053	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7054	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7061	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7502	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7503	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA3011	2011-001397	R-NETWORK;47Kohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA3012	2011-001397	R-NETWORK;47Kohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA3035	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3650_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3651_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3652_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3653_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3654_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3655_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3666_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3667_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3668_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3669_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3670_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3671_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3672_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3673_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3674_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3675_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA5013	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3006	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,-,4P,TP,1010	1	S.N.A	
....4	RA3007	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,-,4P,TP,1010	1	S.N.A	
....4	RA3008	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,-,4P,TP,1010	1	S.N.A	
....4	RA3009	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,-,4P,TP,1010	1	S.N.A	
....4	RA3016	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,-,4P,TP,1010	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	RA4010	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,-,4P,TP,1010	1	S.N.A	
....4	RA4046	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,-,4P,TP,1010	1	S.N.A	
....4	RA6020	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,-,4P,TP,1010	1	S.N.A	
....4	RA2008	2011-001497	R-NETWORK;470ohm,5%,1/16W,L,CHIP,4P,TP,1	1	S.N.A	
....4	RA3018	2011-001497	R-NETWORK;470ohm,5%,1/16W,L,CHIP,4P,TP,1	1	S.N.A	
....4	RA6019	2011-001506	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,4P,TP,1	1	S.N.A	
....4	RA6119	2011-001506	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,4P,TP,1	1	S.N.A	
....4	RA8011_EU	2011-001506	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,4P,TP,1	1	S.N.A	
....4	RA3015	2011-001519	R-NETWORK;33OHM,5%,1/16W,L,CHIP,4P,TP,1.	1	S.N.A	
....4	RA4018	2011-001519	R-NETWORK;33OHM,5%,1/16W,L,CHIP,4P,TP,1.	1	S.N.A	
....4	RA5012	2011-001519	R-NETWORK;33OHM,5%,1/16W,L,CHIP,4P,TP,1.	1	S.N.A	
....4	RA3017	2011-001527	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,4P,TP,	1	S.N.A	
....4	RA6021	2011-001527	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,4P,TP,	1	S.N.A	
....4	RA7034	2011-001527	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,4P,TP,	1	S.N.A	
....4	RA7065	2011-001527	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,4P,TP,	1	S.N.A	
....4	RA3014	2011-001586	R-NETWORK;1Kohm,5%,1/16W,L,CHIP-V,4P,TP,	1	S.A	
....4	RA3031	2011-001586	R-NETWORK;1Kohm,5%,1/16W,L,CHIP-V,4P,TP,	1	S.A	
....4	RA3036	2011-001586	R-NETWORK;1Kohm,5%,1/16W,L,CHIP-V,4P,TP,	1	S.A	
....4	RA6022	2011-001586	R-NETWORK;1Kohm,5%,1/16W,L,CHIP-V,4P,TP,	1	S.A	
....4	RA3010	2011-001587	R-NETWORK;100ohm,5%,1/16W,L,CHIP-V,4P,TP	1	S.A	
....4	RA3013	2011-001587	R-NETWORK;100ohm,5%,1/16W,L,CHIP-V,4P,TP	1	S.A	
....4	RA4016	2011-001587	R-NETWORK;100ohm,5%,1/16W,L,CHIP-V,4P,TP	1	S.A	
....4	RA4017	2011-001587	R-NETWORK;100ohm,5%,1/16W,L,CHIP-V,4P,TP	1	S.A	
....4	RA3030_EU	2011-001588	R-NETWORK;75ohm,5%,1/16W,L,CHIP-V,4P,TP,	1	S.A	
....4	RA6009	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA6010	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA6011	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA6012	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA7060	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA7079	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA7600	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA7601	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA7900	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA3032	2011-001590	R-NETWORK;47Kohm,5%,1/16W,L,CHIP-V,4P,TP	1	S.A	
....4	RA3072	2011-001590	R-NETWORK;47Kohm,5%,1/16W,L,CHIP-V,4P,TP	1	S.A	
....4	C2080	2203-000125	C-CER,CHIP;1.2nF,10%,50V,X7R,TP,1608,-	1	S.A	
....4	C2081	2203-000125	C-CER,CHIP;1.2nF,10%,50V,X7R,TP,1608,-	1	S.A	
....4	C2082	2203-000125	C-CER,CHIP;1.2nF,10%,50V,X7R,TP,1608,-	1	S.A	
....4	C2083	2203-000125	C-CER,CHIP;1.2nF,10%,50V,X7R,TP,1608,-	1	S.A	
....4	C2040	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3001	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3002_EU	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3013	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3015	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3021	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3022	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3029	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3033_EU	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3045	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3066	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3250	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C3251	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C2036	2203-000280	C-CER,CHIP;0.01nF,0.5pF,50V,C0G,1608	1	S.A	
....4	C7137	2203-000384	C-CER,CHIP;0.015nF,5%,50V,C0G,1608	1	S.N.A	
....4	C1001	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C1029	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C1041_LCD	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C1768	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C2033	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C2034	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C4003	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C4012	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C4025	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C6090	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C1027	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C3014_EU	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C3016_EU	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C3024	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C3025	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C5001	2203-000550	C-CER,CHIP;0.02nF,5%,50V,C0G,1005	1	S.N.A	
....4	C5002	2203-000550	C-CER,CHIP;0.02nF,5%,50V,C0G,1005	1	S.N.A	
....4	C2070	2203-000575	C-CER,CHIP;220nF,10%,25V,X7R,TP,2012	1	S.N.A	
....4	C2071	2203-000575	C-CER,CHIP;220nF,10%,25V,X7R,TP,2012	1	S.N.A	
....4	C2072	2203-000575	C-CER,CHIP;220nF,10%,25V,X7R,TP,2012	1	S.N.A	
....4	C2073	2203-000575	C-CER,CHIP;220nF,10%,25V,X7R,TP,2012	1	S.N.A	
....4	C2074	2203-000575	C-CER,CHIP;220nF,10%,25V,X7R,TP,2012	1	S.N.A	
....4	C2075	2203-000575	C-CER,CHIP;220nF,10%,25V,X7R,TP,2012	1	S.N.A	
....4	C5100	2203-000585	C-CER,CHIP;0.22nF,10%,50V,X7R,1005	1	S.A	
....4	C4009	2203-000679	C-CER,CHIP;0.027nF,5%,50V,C0G,1005	1	S.A	
....4	C4010	2203-000679	C-CER,CHIP;0.027nF,5%,50V,C0G,1005	1	S.A	
....4	C5003	2203-000697	C-CER,CHIP;0.002NF,0.25PF,50V,C0G,TP,160	1	S.A	
....4	C5004	2203-000697	C-CER,CHIP;0.002NF,0.25PF,50V,C0G,TP,160	1	S.A	
....4	C7048	2203-000761	C-CER,CHIP;330nF,10%,16V,X7R,TP,2012,-	1	S.N.A	
....4	C3006	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C3007	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C3008	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C3011_EU	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C3012_EU	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C3018	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C3019	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C3020	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C1120	2203-000995	C-CER,CHIP;0.047nF,5%,50V,C0G,1005	1	S.A	
....4	C3017	2203-000995	C-CER,CHIP;0.047nF,5%,50V,C0G,1005	1	S.A	
....4	C3023_EU	2203-000995	C-CER,CHIP;0.047nF,5%,50V,C0G,1005	1	S.A	
....4	C4018	2203-000995	C-CER,CHIP;0.047nF,5%,50V,C0G,1005	1	S.A	
....4	C4020	2203-000995	C-CER,CHIP;0.047nF,5%,50V,C0G,1005	1	S.A	
....4	C2038	2203-001126	C-CER,CHIP;0.68nF,10%,50V,X7R,1608	1	S.N.A	
....4	C5031	2203-001412	C-CER,CHIP;0.03nF,5%,50V,NP0,TP,1005	1	S.N.A	
....4	C5035	2203-001412	C-CER,CHIP;0.03nF,5%,50V,NP0,TP,1005	1	S.N.A	
....4	C5036	2203-001412	C-CER,CHIP;0.03nF,5%,50V,NP0,TP,1005	1	S.N.A	
....4	C5037	2203-001412	C-CER,CHIP;0.03nF,5%,50V,NP0,TP,1005	1	S.N.A	
....4	C5038	2203-001412	C-CER,CHIP;0.03nF,5%,50V,NP0,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C5039_OP	2203-001596	C-CER,CHIP;2200nF,+80-20%,50V,Y5V,2012	1	S.A	
....4	C5060_OP	2203-001596	C-CER,CHIP;2200nF,+80-20%,50V,Y5V,2012	1	S.A	
....4	C1005	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C1007	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C1008	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C2006	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C2007	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C4008	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C4011	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C4019	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C4021	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C4022	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C4024	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C4100	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C5023	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C6061	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C6077	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C6099	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C6113	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C6114	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C7018	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C7136	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C7139_LCD	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C5010	2203-002494	C-CER,CHIP;470nF,10%,16V,X7R,2012	1	S.N.A	
....4	C7050	2203-005138	C-CER,CHIP;1.8nF,10%,50V,X7R,1005	1	S.A	
....4	C7051	2203-005138	C-CER,CHIP;1.8nF,10%,50V,X7R,1005	1	S.A	
....4	C7052	2203-005138	C-CER,CHIP;1.8nF,10%,50V,X7R,1005	1	S.A	
....4	C1004	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C1022	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C1024	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C1045_60HZ	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C1048_LCD	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C1148_LCD	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C1149_LCD	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C1150_LCD	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2047	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2048	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2049	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2050	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2051	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2052	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2060	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2061	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2062	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2063	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2066	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2067	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2068	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2069	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2076	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2077	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C2078	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2079	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C5021	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6056	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6057	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6058	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6059	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6062	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6063	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6073	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6074	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6075	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6078	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6094	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6095	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6096	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6100	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7011	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7017	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7049	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7114	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7115	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7121	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7122	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7009	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7016	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7025	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7029	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7059	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7063	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7065	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7073	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7096	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7105	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7106	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7148	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7157	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7173	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7205	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7210	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C3063	2203-005393	C-CER,CHIP;0.005nF,0.1pF,50V,NP0,TP,1005	1	S.N.A	
....4	C3811	2203-005493	C-CER,CHIP;220nF,+80-20%,16V,Y5V,1005	1	S.A	
....4	C6044	2203-005493	C-CER,CHIP;220nF,+80-20%,16V,Y5V,1005	1	S.A	
....4	C6045	2203-005493	C-CER,CHIP;220nF,+80-20%,16V,Y5V,1005	1	S.A	
....4	C7053	2203-005659	C-CER,CHIP;0.18nF,5%,50V,NP0,1005	1	S.N.A	
....4	C1032	2203-005834	C-CER,CHIP;22000nF,+80-20%,10V,Y5V,3216	1	S.A	
....4	C1035	2203-005834	C-CER,CHIP;22000nF,+80-20%,10V,Y5V,3216	1	S.A	
....4	C1036	2203-005834	C-CER,CHIP;22000nF,+80-20%,10V,Y5V,3216	1	S.A	
....4	C5025	2203-005834	C-CER,CHIP;22000nF,+80-20%,10V,Y5V,3216	1	S.A	
....4	C5034	2203-005834	C-CER,CHIP;22000nF,+80-20%,10V,Y5V,3216	1	S.A	
....4	C2041	2203-005968	C-CER,CHIP;4.7NF,10%,50V,X7R,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C6091	2203-005968	C-CER,CHIP;4.7NF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C5337	2203-006104	C-CER,CHIP;1000nF,10%,50V,X7R,3225	1	S.A	
....4	C3997	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C3998	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C6098	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C1019	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.N.A	
....4	C1025	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.N.A	
....4	C1028	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.N.A	
....4	C1060	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.N.A	
....4	C7084	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.N.A	
....4	C7310	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.N.A	
....4	C7601_LCD	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.N.A	
....4	C1002	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1003	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1006	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1012	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1014	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1030	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1034	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1070	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1071	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1080	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1091	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1092	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1801	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C2037	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C2039	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C2042	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C2043	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C2044	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C2045	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3046	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3051	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3054	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3055	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3056	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3057	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3065	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3070	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3071	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3072	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3100	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3101	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3102	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4002	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4006	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4013	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4014	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4016	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4023	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4026	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C4050	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4103	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5011	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5020	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5024	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5027	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5070	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5071	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5072	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5073	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5112	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6027	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6028	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6033	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6042	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6043	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6048	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6052	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6053	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6064	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6065	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6066	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6067	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6068	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6069	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6070	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6079	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6080	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6081	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6082	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6083	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6084	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6085	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6086	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6087	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6088	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6089	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6101	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6105	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6109	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6110	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6111	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6112	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6115	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6116	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6153	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7012	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7013	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7019	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7020	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7034	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C7038	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7043	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7054	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7055	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7056	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7062	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7064	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7068	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7069	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7074	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7075	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7078	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7081	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7083	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7086	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7087	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7088	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7094	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7095	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7098	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7099	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7107	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7112	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7113	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7116	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7117	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7134	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7140	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7142	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7143	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7146	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7147	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7149	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7152	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7160	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7161	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7164	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7165	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7168	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7169	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7172	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7176	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7177	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7180	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7181	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7185	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7200	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7201	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7202	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7203	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7206	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C7211	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7220	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7221	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7222	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7223	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7224	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7225	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7226	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7227	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7228	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7301	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7302	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7400	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7402	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7403	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7404	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7405	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7406	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7407	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7408	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7409	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7410	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7411	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7412	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7413	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7414	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7416	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7417	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7418	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7419	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7420	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7423	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7750	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7751	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7752	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7753	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7754	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7755	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7756	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7757	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7758	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7759	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7760	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7761	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7770	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7771	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7772	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7773	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7880	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7881	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7900	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C7901	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8001	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8002	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8003	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8004	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8007_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8011_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8012	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8013_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8014_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8015_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8016_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8017_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8018_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8019_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1047_60HZ	2203-006307	C-CER,CHIP;1000nF,10%,25V,X5R,2012	1	S.N.A	
....4	C5012	2203-006336	C-CER,CHIP;10000nF,10%,25V,X5R,3216	1	S.A	
....4	C1017	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C1020	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C1021	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C1023	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C1031	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C1033	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C1050	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2001	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2003	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2005	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2011	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2014	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2031	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2032	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2035	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2046	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2055	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2064	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2065	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3009_EU	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3010_EU	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3037	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3043	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3053	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3067	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3068	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3069	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3073	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3810	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C4001	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C4015	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C5005	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C5018	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C5028	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C5032	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C5111	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C5336	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6001	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6011	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6022	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6029	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6030	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6031	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6032	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6046	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6049	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6050	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6054	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6055	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6071	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6072	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6092	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6093	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7001	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7004	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7005	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7006	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7007	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7008	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7021	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7108	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7110	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7130	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7132	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7133	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C8010_EU	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2084	2203-006382	C-CER,CHIP;10000nF,10%,25V,X7R,TP,3225	1	S.N.A	
....4	C2085	2203-006382	C-CER,CHIP;10000nF,10%,25V,X7R,TP,3225	1	S.N.A	
....4	C2086	2203-006382	C-CER,CHIP;10000nF,10%,25V,X7R,TP,3225	1	S.N.A	
....4	C2087	2203-006382	C-CER,CHIP;10000nF,10%,25V,X7R,TP,3225	1	S.N.A	
....4	C1040_LCD	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C1042_LCD	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2019	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2020	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2021	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2022	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2023	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2024	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2025	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2026	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2027	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2028	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2029	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2030	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C3103	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C3104	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C3105	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C3106	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C3320	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C3321	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C4004	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6005	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6014	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6040	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6041	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6060	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6076	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6097	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6851	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6852	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6853	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6854	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7003	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7028	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7030	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7037	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7039	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7040	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7072	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7089	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7097	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7141	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7156	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7204	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7209	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C1013	2203-006618	C-CER,CHIP;2200nF,+80-20%,16V,Y5V,-,1608	1	S.N.A	
....4	C1016	2203-006618	C-CER,CHIP;2200nF,+80-20%,16V,Y5V,-,1608	1	S.N.A	
....4	C2004	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C2008	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C2009	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C2010	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C2056	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C2057	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C2059	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C3077	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C4005	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C5016	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C2053	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C2054	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C3038	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C3039	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C3047	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C3048	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C3058	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C3062	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C3999	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C1015	2203-007176	C-CER,CHIP;1000nF,10%,16V,X5R,TP,2012 (1	S.N.A	
....4	C1018	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (1	S.N.A	
....4	C2002	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (1	S.N.A	
....4	C2058	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (1	S.N.A	
....4	C5022	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (1	S.N.A	
....4	C6047	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (1	S.N.A	
....4	C2012	2402-001128	C-AL,SMD;100##F,20%,16V,-,TP,6.3X5.7mm	1	S.A	
....4	C2013	2402-001128	C-AL,SMD;100##F,20%,16V,-,TP,6.3X5.7mm	1	S.A	
....4	C5030	2402-001210	C-POLYMER AL CHIP;100uF,20%,10V,WT,TP,7.	1	S.A	
....4	CA2001	2503-001051	C-NETWORK;100NFX4,20%,16V,-,2012, 4ARRAY	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-001239	INDUCTOR-SMD;3.3uH,10%,1608	1	S.A	
....4	T0052	2703-003559	INDUCTOR-SMD;4.7uH,20%,8080	1	S.A	
....4	T0052	2703-003628	INDUCTOR-SMD;1.5uH,20%,2020	1	S.A	
....4	L2001	2704-000018	INDUCTOR-SMD-ARRAY;15uH,2000mA,2,0.124oh	1	S.N.A	
....4	L2002	2704-000018	INDUCTOR-SMD-ARRAY;15uH,2000mA,2,0.124oh	1	S.N.A	
....4	X202	2801-003326	CRYSTAL-SMD;24MHZ,30PPM,28-ABX,20PF,50OH	1	S.A	
....4	X202	2801-003773	CRYSTAL-SMD;12MHz,30ppm,28-AAN,20pF,50oh	1	S.A	
....4	X202	2801-004629	CRYSTAL-SMD;27MHz,20ppm,12pF,50ohm,TP	1	S.A	
....4	F103	2901-001506	FILTER-EMI SMD;5V,0.13A,0pF,2x1x0.5mm,TP	1	S.A	
....4	F103	2901-001506	FILTER-EMI SMD;5V,0.13A,0pF,2x1x0.5mm,TP	1	S.A	
....4	T0568	3301-000314	BEAD-SMD;120ohm,1.6x0.8x0.8mm,-,-,-	1	S.N.A	
....4	T0568	3301-000314	BEAD-SMD;120ohm,1.6x0.8x0.8mm,-,-,-	1	S.N.A	
....4	T0568	3301-001145	BEAD-SMD;60ohm,4516,TP,70ohm/45MHz,82ohm	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	

5. Exploded View & Part List

[illegible]

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	CN330	3711-005939	HEADER-BOARD TO CABLE;BOX,3P,1R,2mm,SMD-	1	S.N.A	
....4	T0077	BN41-01167A	PCB MAIN;Chelsea-Arsnal,FR-4,4,1.2T,192x	1	S.N.A	
....4	M0018	BN97-03212A	ASSY MICOM;KFG1G16U2C-DIB6,N68A,2008.11.	1	S.N.A	
....5	IC7002	1107-001818	IC-NAND FLASH;KFG1G16U2C-DIB6,1024Mbit,6	1	S.A	
....4	M0018	BN97-03213A	ASSY MICOM;WT61P8-RG480WT,N68A,2008.11.2	1	S.N.A	
....5	IC520	0903-001552	IC-MICROCONTROLLER;WT61P8-RG480WT,LQFP,4	1	S.N.A	
....4	T0010	BP27-00002A	COIL CHOKE;SLF6028T-220MR77,22uF,20%,,,,	1	S.A	
...3	T0066	BP62-00016B	HEAT SINK-ES;SUNRAY,A6063,T2.0,36.2,36.2	1	S.N.A	
...3	T0066	BP62-00017A	HEAT SINK-ES;SP-50L2HX,A6063S,T2.0,26.2,	1	S.N.A	
0.1	M0045	BN92-04489C	ASSY ACCESSORY;LE46B550A5WXXC	1	S.N.A	
..2	M0045	BN96-10545A	ASSY ACCESSORY-MANUAL;LE32B550A5WXXC	1	S.A	
...3	T0524	6902-000110	BAG PE;LDPE,T0.05,W250,L400,TRP,28,2,-,9	1	S.N.A	
...3	T0210	AA68-03242Q	MANUAL FLYER-01,SAFETY GUIDE;comm,Samsun	1	S.N.A	
...3	T0175	BN68-00514E	MANUAL FLYER-01,WARRANTY CARD;comm,Samsu	1	S.N.A	
...3		BN68-00907D	MANUAL FLYER-WEEE BATTERY;COMM,SAMSUNG,2	1	S.N.A	
...3		BN68-01894A	MANUAL FLYER-QSG;COMM,SAMSUNG,9Langs,W.E	1	S.N.A	
...3	T0511	BN68-01962B	MANUAL USERS;COMM,SAMSUNG,Tur,W.EUROPE,W	1	S.N.A	
...3		BN96-10410A	ASSY MANUAL P-USB;B550,USB,SAMSUNG,W.EUR	1	S.N.A	
....4	T0511	BN68-01962A	MANUAL USERS;COMM,SAMSUNG,9Langs,W.EUROP	1	S.N.A	
..2	M0045	BN96-10545D	ASSY ACCESSORY-CABEL;LE46B550A5WXXC	1	S.A	
...3	T0268	3903-000145	CBF-POWER CORD;DT,EU,FP3/YES,U(IEC C13-R	1	S.A	
...3	T0524	6902-000110	BAG PE;LDPE,T0.05,W250,L400,TRP,28,2,-,9	1	S.N.A	
...3	M9889	BN63-01798B	CLOTH-CLEAN;cloth,180,200,sea blue,ToC	1	S.N.A	
...3	T0531	BN63-05374B	COVER-BOTTOM;46,LB610,HIPS,HB,BK500	1	S.A	
....4		BN81-00199H	RESIN;HIPS HB,BK500,HF-1690H,K2901	48.4	S.N.A	
...3	M0560	BN96-01800A	ASSY ACCESSORY-SCREW ZIPPER;ROME32,-,-,-	1	S.N.A	
....4	T0081	6002-001294	SCREW-TAPPING;BH,+,,M4,L16,ZPC(BLK)	4	S.N.A	
....4	ACCESSORY	6902-000683	BAG ZIPPER;LDPE,T0.05,W60,L60,TRP,-,-,4-	1	S.N.A	
...3	T0074	BN59-00862A	REMOCON;LCD550,TM950,EUROPE,48	1	S.A	
0.1	M0019	BN92-04490A	ASSY LABEL;LE32B550A5WXXC	1	S.N.A	
0.1	M0003	BN92-04668B	ASSY BOX;46,LB550,EO,CHARCOAL GRAY	1	S.N.A	
..2		BN69-03466D	BOX-SET,OUT;46LB550-1,CB,C-03,DW3,YEL,W1	1	S.N.A	
..2	M0521	BN69-03467A	BOX-SET,IN;46LB610,CB,C-01,DW1,ECT50,YEL	1	S.N.A	
0.1	M0113	BN92-04673A	ASSY P/MATERIAL;46,LB610	1	S.N.A	
..2	T0003	6902-000604	BAG WRAPPING;LDPE,T0.02,W500,L10000,TRP,	7.5	S.N.A	
..2	T0524	6902-000959	BAG PE;NITRON,T0.015/T0.5,W1400,L900,TRP	1	S.N.A	
..2	T0214	AA61-20285C	HOLDER-BOX;CORAL,PP,BLACK,HB	4	S.N.A	
..2	T0214	BN74-00008A	TAPE-OPP MASKING;OPP-2,T0.05,W100,L800M,	1.61	S.N.A	

5-17. LE32B65*A Parts List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
		LE32B653T5WXXC	LE32B653T5W,N68A/32BT5-G6T,32,LCD-TV,SPA			
0.1	M0001	BN90-01892B	ASSY COVER FRONT;32,LB650,EO,ROSE BLACK,	1	S.N.A	
..2	T0175	BN96-09463A	ASSY SPEAKER P;8ohm,4pin,10W,R:200 / L:4	1	S.A	
..2	T0003	BN96-09486B	ASSY COVER P-FRONT;32,LB650,EO,PC(CLR)+P	1	S.A	
...3	M0081	6003-001188	SCREW-TAPTITE;BH,+,-,B,M4,L10,ZPC(WHT),S	2	S.N.A	
...3	T0069	BN60-00027N	SPACER-FELT;L650 32,FELT,383,0.5,20	2	S.N.A	
...3	T0069	BN60-00027T	SPACER-FELT;L650 32,FELT,700,0.5,20	2	S.N.A	
...3		BN61-04661A	BRACKET-STOPPER;L650,SK-5,T0.4,Plating,H	6	S.N.A	
...3	CCM1	BN63-02183E	COVER-SHEET;Rhcm,PE Vinyl,T0.05,750mm,20	0.694	S.N.A	
...3	CCM1	BN63-05199B	COVER-SHEET;AMBER,PE,T0.08,W65mm,200M,CL	2.4	S.N.A	
...3	CCM1	BN63-05199G	COVER-SHEET;AMBER,PE,T0.08,W115mm,200M,C	1	S.N.A	
...3	M0112	BN63-05273B	COVER-FRONT;32,LB650,EO,PC(CLR)+PC(ROSE	1	S.N.A	
....4		BN81-00116D	RESIN-TOC;PC V0,TTP01,CLR,TN-1030(NP),TH	655.6	S.N.A	
....4		BN81-00116U	RESIN-TOC;PC V1, TRD03,Light Rose Black,	0.484	S.N.A	
...3		BN96-09505C	ASSY HOLDER P-BOSS SIDE RIGHT;32,LB650,P	1	S.N.A	
....4		BN61-04692A	BOSS-PRIMER;#94,clear,35cps	0.1	S.N.A	
....4		BN61-04731A	BOSS-TAPE;AMBER,ACRYL,T1.1,W8.0mm,WHITE,	0.03	S.N.A	
....4		BN61-04731F	BOSS-TAPE;AMBER,ACRYL,T1.1,W6.0mm,WHITE,	0.26	S.N.A	
....4		BN61-04842C	HOLDER-BOSS SIDE R;32,LB650,ABS+PMMA,HB,	1	S.N.A	
.....5		BN81-00204P	RESIN-HIGH GLOSS;HAM 8560,SF-0505,K21294	0.035	S.N.A	
...3		BN96-09505D	ASSY HOLDER P-BOSS SIDE LEFT;32,LB650,PM	1	S.N.A	
....4		BN61-04692A	BOSS-PRIMER;#94,clear,35cps	0.1	S.N.A	
....4		BN61-04731A	BOSS-TAPE;AMBER,ACRYL,T1.1,W8.0mm,WHITE,	0.03	S.N.A	
....4		BN61-04731F	BOSS-TAPE;AMBER,ACRYL,T1.1,W6.0mm,WHITE,	0.26	S.N.A	
....4		BN61-04842D	HOLDER-BOSS SIDE L;32,LB650,ABS+PMMA,HB,	1	S.N.A	
.....5		BN81-00204P	RESIN-HIGH GLOSS;HAM 8560,SF-0505,K21294	0.035	S.N.A	
...3		BN96-09517B	ASSY HOLDER P-BOSS BOTTOM;32,LB650,ABS,H	1	S.N.A	
....4		BN61-04692A	BOSS-PRIMER;#94,clear,35cps	0.3	S.N.A	
....4		BN61-04731B	BOSS-TAPE;AMBER,ACRYL,T1.1,W12.0mm,WHITE	0.52	S.N.A	
....4		BN61-04731D	BOSS-TAPE;AMBER,ACRYL,T1.1,W20.0mm,WHITE	0.06	S.N.A	
....4		BN61-04825B	HOLDER-BOSS BOTTOM;32,LB650,ABS,HB,WH12,	1	S.N.A	
.....5		BN81-00116F	RESIN;ABS HB,WHT,HF-0680U,W91902,-,-,-	191.9	S.N.A	
...3	M0175	BN96-10210B	ASSY BOARD P-TOUCH FUNCTION&IR;LN40B650T	1	S.A	
0.1	M0002	BN90-01908A	ASSY COVER REAR;32,LB650,EO	1	S.N.A	
..2	T0081	6002-001294	SCREW-TAPPING;BH,+,,M4,L16,ZPC(BLK)	9	S.N.A	
..2	T0081	6002-001294	SCREW-TAPPING;BH,+,,M4,L16,ZPC(BLK)	1	S.N.A	
..2	M0013	BN96-09502A	ASSY COVER P-REAR;32,LB650,EO,ABS+PMMA,H	1	S.A	
...3	T0069	AA63-60131N	SPACER-FELT;L2,FELT,280*10,BLK,T0.5	2	S.N.A	
...3	T0101	BN61-04816A	BRACKET-WALL;40, B610,SECC,T1.2	4	S.N.A	
...3	CCM1	BN63-02183E	COVER-SHEET;Rhcm,PE Vinyl,T0.05,750mm,20	0.9	S.N.A	
...3	M0006	BN63-05344A	COVER-REAR;32,LB650,EO,PMMA+ABS,HB,BK23,	1	S.N.A	
....4		BN81-00204P	RESIN-HIGH GLOSS;HAM 8560,SF-0505,K21294	,898.600	S.N.A	
...3	T0071	BN64-01028A	INLAY-TERMINAL;B530 (PAL-Chelsea),PS SHE	1	S.N.A	
...3	T0064	BN65-00002A	CLAMPER CORE;BORDEAUX,LDPE,-,-,BLK,-	1	S.N.A	
...3		BN63-02224B	FELT-VIBRATION;50E7,FELT,T0.5,679,10	1	S.N.A	
0.1	M0112	BN91-03501A	ASSY SHIELD;LE32B653T5WXXC	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
..2	M0081	6003-000337	SCREW-TAPTITE;BH,+,S,M4,L10,ZPC(BLK),SWR	4	S.N.A	
..2	M0081	6003-000337	SCREW-TAPTITE;BH,+,S,M4,L10,ZPC(BLK),SWR	4	S.N.A	
..2	M0081	6003-000337	SCREW-TAPTITE;BH,+,S,M4,L10,ZPC(BLK),SWR	5	S.N.A	
..2	M0081	6003-001188	SCREW-TAPTITE;BH,+,-,B,M4,L10,ZPC(WHT),S	3	S.N.A	
..2	M0081	6003-001188	SCREW-TAPTITE;BH,+,-,B,M4,L10,ZPC(WHT),S	2	S.N.A	
..2	M0081	6003-001439	SCREW-TAPTITE;BH,+,-,S,M4,L8,ZPC(WHT),SW	1	S.N.A	
..2	M2893	BN39-01099J	LEAD CONNECTOR;LB5P,LB5K,UL1007#26,30P,6	1	S.A	
..2	M0174	BN44-00261A	IP BOARD-IP;PSIV161C01A,H32F1_9SS,0.12mA	1	S.A	
..2	M0254	BN61-04800A	HOLDER-SIDE AV;EO,ABS+PMMA,HB,BK23,H/GLO	1	S.N.A	
...3		BN81-00204P	RESIN-HIGH GLOSS;HAM 8560,SF-0505,K21294	17.3	S.N.A	
..2	M0146	BN61-04818A	32	2	S.N.A	
..2	M0115	BN61-04820A	BRACKET-STAND LINK;B650-32,SECC,T1.2	1	S.N.A	
..2		BN63-05259A	COVER-MAIN;EO,ABS+PMMA,HB,BK23,H/GLOSSY	1	S.N.A	
...3		BN81-00204P	RESIN-HIGH GLOSS;HAM 8560,SF-0505,K21294	0.015	S.N.A	
..2	M0230	BN96-10077A	ASSY CABLE P-FPCB LVDS;LA46A650A1,FPCB L	1	S.A	
..2		BN61-05281A	HOLDER-CLAMP;LCD,NYLON 66,WHT	2	S.N.A	
0.1	M0017	BN91-03505A	ASSY CHASSIS;LE32B653T5WXXC	1	S.N.A	
..2	M0014	BN94-02583A	ASSY PCB MAIN;LE32B653T5WXXC	1	S.A	
...3	T0245	0202-001608	SOLDER-WIRE FLUX;LFC7-107,D0.8,99.3Sn/0.	0.25	S.N.A	
...3	CN3010	3701-001388	CONNECTOR-HDMI;20P,Phosphor Bronze,ANGLE	1	S.A	
...3	CN3011	3701-001480	CONNECTOR-DSUB;15P,3R,FEMAIL,STAMPED PIN	1	S.A	
...3	CN906	3707-001081	CONNECTOR-OPTICAL;STRAIGHT,SPDIF	1	S.A	
...3	CN8001_EU	3709-001551	CONNECTOR-CARD SLOT;68P,1.27mm,DIP,AU50U	1	S.A	
...3	CN330	3711-003847	HEADER-BOARD TO CABLE;BOX,12P,1R,2mm,ANG	1	S.A	
...3	CN1001	3711-005884	HEADER-BOARD TO BOARD;BOX,30P,2R,2mm,ANG	1	S.A	
...3	CN330	3711-006715	HEADER-BOARD TO CABLE;BOX,4P,1R,2.5mm,AN	1	S.N.A	
...3	JA330	3722-001061	JACK-PHONE;1P,3.6PI,AG,BLK,N	1	S.A	
...3	JA330	3722-001061	JACK-PHONE;1P,3.6PI,AG,BLK,N	1	S.A	
...3	JA330	3722-001061	JACK-PHONE;1P,3.6PI,AG,BLK,N	1	S.A	
...3	JA330	3722-001061	JACK-PHONE;1P,3.6PI,AG,BLK,N	1	S.A	
...3	CN9001_650	3722-002426	JACK-MODULAR;8P/8C,-,N,STRAIGHT,GRN/YEL,	1	S.A	
...3	CN7002_650	3722-002546	JACK-USB;4P/1C,AU,BLK,ANGLE,A type	1	S.N.A	
...3	CN7006	3722-002546	JACK-USB;4P/1C,AU,BLK,ANGLE,A type	1	S.N.A	
...3	JA333	3722-002635	JACK-PIN;3P,Sn,YEL/WHT/RED,ANGLE	1	S.A	
...3	CN3002_EU	3722-002681	JACK-SCART;42P,SN,BLK	1	S.A	
...3	JA333	3722-002691	JACK-PIN;2P,Ni,WHT/RED,STRAIGHT	1	S.A	
...3	JA333	3722-002691	JACK-PIN;2P,Ni,WHT/RED,STRAIGHT	1	S.A	
...3	JA333	3722-002703	JACK-PIN;3P,Ni,GRN/BLU/RED,STRAIGHT	1	S.A	
...3	CIS3	BN40-00145A	TUNER;TDHG6-K12A,TDHG6-K12A,DVB-TC,164CH	1	S.A	
...3	T0174	BN97-03100A	ASSY SMD;LE32B653T5WXXC	1	S.N.A	
...4	SUB05	0202-001477	SOLDER-CREAM;LST309-M,-,D20~45um,96.5Sn/	1	S.N.A	
...4	D4003	0401-000133	DIODE-SWITCHING;RLS4148,75V,150mA,LL-34,	1	S.A	
...4	D4004	0401-000133	DIODE-SWITCHING;RLS4148,75V,150mA,LL-34,	1	S.A	
...4	D4100	0401-000133	DIODE-SWITCHING;RLS4148,75V,150mA,LL-34,	1	S.A	
...4	D4228	0401-000133	DIODE-SWITCHING;RLS4148,75V,150mA,LL-34,	1	S.A	
...4	D3001	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
...4	D3002	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
...4	D3051	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
...4	D3054	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
...4	D3061	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	D3062	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3063	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3076	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3077	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3079	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3080	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D4008	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D4010	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D9001_650	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D9002_650	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D9003_650	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D9004_650	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D9007_650	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D9008_650	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3811	0401-001099	DIODE-SWITCHING;1N4148WS,75V,150mA,SOD-3	1	S.N.A	
....4	D0254	0402-001207	DIODE-SCHOTTKY;UPS5819,40V,1000MA,DO-216	1	S.A	
....4	D4001	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D5100	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D3003_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3004_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3005_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3006_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3007_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3008_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3009_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3011	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3015	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3016_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3018	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3019	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3020	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3021	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3022_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3023	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3024	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3026_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3032	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3033	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3034	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3035	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3036	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3037	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3038	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3039	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3045	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3052	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3056	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3057	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3058	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3060	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3065	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	D3066	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3067	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3068	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3069	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3073	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3074	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3075	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3350	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3776	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3777_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3778_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3779_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D0254	0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	1	S.A	
....4	D0254	0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	1	S.A	
....4	D0254	0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	1	S.A	
....4	D0254	0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	1	S.A	
....4	D0254	0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	1	S.A	
....4	D0254	0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	1	S.A	
....4	D0254	0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	1	S.A	
....4	D0254	0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	1	S.A	
....4	D7001_650	0406-001200	DIODE-TVS;RCLAMP0504F,6/-V,150W,SC-70	1	S.A	
....4	D7002	0406-001200	DIODE-TVS;RCLAMP0504F,6/-V,150W,SC-70	1	S.A	
....4	D3751	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D3752	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D3753	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D3754	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D3755	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D3756	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D3757	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D3758	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D8001_CI	0407-000114	DIODE-ARRAY;-80V,100mA,CA2-3,SOT-23,TP	1	S.N.A	
....4	D8002_CI	0407-000114	DIODE-ARRAY;-80V,100mA,CA2-3,SOT-23,TP	1	S.N.A	
....4	D8003_CI	0407-000114	DIODE-ARRAY;-80V,100mA,CA2-3,SOT-23,TP	1	S.N.A	
....4	D8004_CI	0407-000114	DIODE-ARRAY;-80V,100mA,CA2-3,SOT-23,TP	1	S.N.A	
....4	D8005_CI	0407-000114	DIODE-ARRAY;-80V,100mA,CA2-3,SOT-23,TP	1	S.N.A	
....4	D8006_EU	0407-000114	DIODE-ARRAY;-80V,100mA,CA2-3,SOT-23,TP	1	S.N.A	
....4	Q4003	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150MW,SOT-23	1	S.A	
....4	Q4005	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150MW,SOT-23	1	S.A	
....4	Q4020	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150MW,SOT-23	1	S.A	
....4	Q1002_LCD	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3007	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3008	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3009	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3010	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3810	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3811	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q4004	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q4009	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q4011	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q9001_650	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3001_EU	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	
....4	Q3002_EU	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	Q7601_LCD	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	
....4	Q7602_LCD	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-001916	FET-SILICON;Si4800BDY,N,30V,9A,0.03ohm,2	1	S.A	
....4	IC104	0801-002095	IC-CMOS LOGIC;74LCX245,TRANSCEIVER,TSSOP	1	S.A	
....4	IC104	0801-002172	IC-CMOS LOGIC;74LCX16244,BUFFER/LINE DRI	1	S.A	
....4	IC104	0801-002172	IC-CMOS LOGIC;74LCX16244,BUFFER/LINE DRI	1	S.A	
....4	IC104	0801-002630	IC-CMOS LOGIC;74AHCT1G08,2-INPUT AND GAT	1	S.A	
....4	IC104	0801-002780	IC-CMOS LOGIC;74LVC1G17,SCHMITT-TRIGGER	1	S.N.A	
....4	IC7009	0904-002119	IC-I/O SUPPORT CHIP;PCF8574TS,8Bit,SSOP,	1	S.A	
....4	IC7008	1001-000164	IC-ANALOG MULTIPLEX;74HC4052,CMOS,SOP,16	1	S.A	
....4	IC9003_650	1001-001109	IC-ANALOG SWITCH;FST3125M,BUS SWITCH & C	1	S.A	
....4	IC106	1001-001177	IC-VIDEO SWITCH;TEA6425D,VIDEO SWITCH ,S	1	S.A	
....4	IC106	1001-001573	IC-VIDEO SWITCH;Sil9287CNUTR,QFN,72P,10x	1	S.A	
....4	IC107	1002-001482	IC-D/A CONVERTER;WM8521H9GED/R,16bit,SOI	1	S.A	
....4	IC3001	1006-001266	IC-LINE TRANSCEIVER;SP3232EEY,TSSOP,16P,	1	S.A	
....4	IC112	1103-000129	IC-EEPROM;24C02,2Kbit,256x8Bit,SOP,8P,5x	1	S.A	
....4	IC112	1103-000129	IC-EEPROM;24C02,2Kbit,256x8Bit,SOP,8P,5x	1	S.A	
....4	IC112	1103-001310	IC-EEPROM;24LC02B,256X8BIT,SOIC,8P,3.91X	1	S.N.A	
....4	IC112	1103-001385	IC-EEPROM;AT24C256,256Kbit,32Kx8,SOP,8P,	1	S.A	
....4	IC112	1103-001415	IC-EEPROM;AT93C46D,1Kbit,128x8/64x16,SOP	1	S.N.A	
....4	IC7003	1105-001859	IC-DDR2 SDRAM;K4T1G164QD-ZCE7,DDR2,1Gbit	1	S.A	
....4	IC7004	1105-001859	IC-DDR2 SDRAM;K4T1G164QD-ZCE7,DDR2,1Gbit	1	S.A	
....4	IC7005	1105-001859	IC-DDR2 SDRAM;K4T1G164QD-ZCE7,DDR2,1Gbit	1	S.A	
....4	IC7006	1105-001859	IC-DDR2 SDRAM;K4T1G164QD-ZCE7,DDR2,1Gbit	1	S.A	
....4	T0124	1201-002796	IC-POWER AMP;STA339BWS,PSSO,36P,10.3x7.5	1	S.A	
....4	T0087	1203-001815	IC-POSI.FIXED REG.;78M09,TO-252,3P,-,PLA	1	S.A	
....4	T0087	1203-001816	IC-POSI.FIXED REG.;78M08,TO-252,3P,-,PLA	1	S.A	
....4	T0087	1203-002842	IC-POSI.FIXED REG.;AP1117D-33A,TO-252,3P	1	S.A	
....4	T0087	1203-002898	IC-POSI.FIXED REG.;G950T45R,TO-252,3P,6.	1	S.A	
....4	IC012	1203-002995	IC-POSI.ADJUST REG.;AP1117D-A,TO-252,3P,	1	S.A	
....4	IC012	1203-002995	IC-POSI.ADJUST REG.;AP1117D-A,TO-252,3P,	1	S.A	
....4	IC012	1203-002995	IC-POSI.ADJUST REG.;AP1117D-A,TO-252,3P,	1	S.A	
....4	IC4005	1203-004363	IC-VOL. DETECTOR;RT9818C-29PV,SOT-23,3P,	1	S.A	
....4	IC4004	1203-004364	IC-VOL. DETECTOR;RT9818C-42PV,SOT-23,3P,	1	S.A	
....4	IC1007	1203-004879	IC-DC/DC CONVERTER;MP8668DL,QFN,14P,3x4mm	1	S.A	
....4	T0087	1203-005134	IC-POSI.FIXED REG.;RT9167A-33PB,SOT-23-5	1	S.A	
....4	IC1006	1203-005538	IC-DC/DC CONVERTER;AOZ1021HAIL,SOP,8P,4.	1	S.A	
....4	IC5006	1203-005559	IC-BACKLIGHT DRIVER;MP3302DJ,TSOT23,5P,2	1	S.A	
....4	T0087	1203-005713	IC-POSI.FIXED REG.;S-1172B33-E6T1G,HSOP,	1	S.A	
....4	IC118	1204-003010	IC-VIDEO PROCESS;SDP84,PBGA,324P,23x23mm	1	S.A	
....4	IC7001	1204-003011	IC-DECODER;SDP83,PBGA,729P,34x34mm,PLAST	1	S.A	
....4	IC9002_650	1205-002941	IC-ETHERNET CONTROLLER;RTL8100CL-LF,LQFP	1	S.N.A	
....4	IC3011	1205-003201	IC-BUS SWITCH;TC7WB125FK,SSOP,8P,2x2.3mm	1	S.A	
....4	IC2001	1205-003352	IC-CODEC;WM8593SEFT/V,TQFP,64P,10x10mm,P	1	S.A	
....4	IC7010_650	1205-003479	IC-SWITCH;TPS2051BDBVR,SOT-23,5P,2.9x1.6	1	S.A	
....4	IC8006_EU	1205-003479	IC-SWITCH;TPS2051BDBVR,SOT-23,5P,2.9x1.6	1	S.A	
....4	IC7007	1205-003681	IC-SWITCH;TPS2069DGN,MSOP,8P,3.05x4.98mm	1	S.A	
....4	IC5010	1209-001830	IC-PLL;IDT6V10012PGG,TSSOP,20P,6.5x4.4mm	1	S.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	D4110	1405-001185	VARISTOR;24Vdc,1.6x0.8x0.36mm,TP	1	S.A	
....4	D3010	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3012_EU	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3013	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3014_EU	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3017	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3025	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3027	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3028	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3029	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3030	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3031	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3040	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3041	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3042	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3050	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3053	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3055	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3059	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3064	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3070	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3071	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3072	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3078	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3081	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3097	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3098	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3099	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4011	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4012	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4013	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4014	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4015	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4016	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4017	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4018	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D7003_650	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D7004	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	R7120	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7121	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7122	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7123	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7152	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7153	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7154	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7155	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7162	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7163	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7164	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7165	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7169	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R7170	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7171	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7172	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R5101	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R2058	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R2059	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R2060	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R2061	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R4155	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	1	S.A	
....4	R7050	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7053	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7056	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7058	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7062	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7066	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7069	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7070	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3007	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3034_EU	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3036_EU	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3062	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3070	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3071	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3078_EU	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3120	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3191	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3192	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3205	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3206	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3207	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3243	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3254	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3255	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3320	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3999	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4042	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4049	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4050	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4087	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5022	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7114	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7132	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7143	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7605_LCD	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8311_EU	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1031_LCD	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1072	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3010_EU	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3021_EU	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3022_EU	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3035	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R3037	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3072	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3073	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3081	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3082	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3138	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3139	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3189	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3190	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3227	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3228	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4081	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6028	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6066	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7045	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7072	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7195	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7196	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7602_LCD	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R9007_650	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R2054	2007-000141	R-CHIP;2.2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4085	2007-000141	R-CHIP;2.2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5030	2007-000141	R-CHIP;2.2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1030_LCD	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1060	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1070	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3520	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3522	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3524	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3526	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4016	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4018	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4020	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4066	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4071	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4074	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4077	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4551	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4552	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4553	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4554	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4755	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4756	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5017	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6015	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6021	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6023	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6038	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6048	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6053	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6100	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R6101	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6102	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7017	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7033	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7034	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7036	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7037	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7064	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7156	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7174	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7352	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7353_OP	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7356	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7357_OP	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3044_EU	2007-000146	R-CHIP;6.8Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3067_EU	2007-000146	R-CHIP;6.8Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1013	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1015	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1023_LCD	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R2023	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R2027	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3168	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3252	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3253	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3310	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3311	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4017	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4019	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4023	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4027	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4078	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4150	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4152	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5111	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7103	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7351	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7411_LCD	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7600_LCD	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7601_LCD	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7603_LCD	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7604_LCD	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8012	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8014_EU	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8015_EU	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8020_EU	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R9028_650	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3028_EU	2007-000149	R-CHIP;12Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R3032_EU	2007-000149	R-CHIP;12Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R3027_EU	2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3033_EU	2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4021	2007-000155	R-CHIP;27Kohm,5%,1/16W,TP,1005	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R1011	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R2019	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3040_EU	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3042_EU	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3058_EU	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3060_EU	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3126	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3136	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3201	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3204	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3521	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3523	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3525	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3527	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3820	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4151	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R9008_650	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R9029_650	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5110	2007-000159	R-CHIP;56Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3111	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3112	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3113	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3114	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5038	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3038_EU	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3049_EU	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3077_EU	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3103_OP	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3125	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3169	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3170	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3200	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3202	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3203	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3220	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3250	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3251	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3258	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3259	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3284	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3285	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3289	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3290	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3400	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3410_OP	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3450	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3451	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3452	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3453	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3500	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3751_EU	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R3752_EU	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3753_EU	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3811_OP	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3860	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4041	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4084	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4086	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4250	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5006	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5007	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5011	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5033	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5035	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6013	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6061	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6068	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7002	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7003	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7004	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7007	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7014	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7015	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7018	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7035	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7038	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7048	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7073	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7074	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7075	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7076	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7077	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7078	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7079	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7080	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7081	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7082	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7083	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7084	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7089	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7090	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7091	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7092	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7093	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7094	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7095	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7096	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7097	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7098	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7099	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7100	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7101	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
...4	R7102	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
...4	R7104	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
...4	R7118	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
...4	R7119	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
...4	R7128	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
...4	R7129	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
...4	R7130	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
...4	R7133	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
...4	R7134	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
...4	R7135	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
...4	R7141	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
...4	R7142	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
...4	R7144	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
...4	R7150_650	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
...4	R7151_650	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
...4	R7161	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
...4	R7167	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
...4	R7168	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
...4	R7177	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
...4	R7201	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
...4	R7202	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
...4	R7204_120H	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
...4	R7230_120H	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
...4	R7234	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
...4	R7236	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
...4	R7237	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
...4	R7238	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
...4	R7244_120H	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
...4	R7245_120H	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
...4	R7246_120H	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
...4	R7284_LCD	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
...4	R7294_120H	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
...4	R7295_120H	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
...4	R8016_EU	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
...4	R3288	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.N.A	
...4	R3300	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.N.A	
...4	R3301	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.N.A	
...4	R3302	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.N.A	
...4	R3303	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.N.A	
...4	R4038	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.N.A	
...4	R2047	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
...4	R3240	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
...4	R3244	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
...4	R4036	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
...4	R4750	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
...4	R4751	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
...4	R4752	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
...4	R4850	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
...4	R4851	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
...4	R5216	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
...4	R5217	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R5218	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6031	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6125	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6126	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6211	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6212	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6213	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6214	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6215	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6216	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7115	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7159	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7175	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7650	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7651	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8021	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3008	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3083	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3256	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3257	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4039	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4040	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6184	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6810	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6811	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6812	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6813	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6814	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6815	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6816	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6817	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6818	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6819	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6820	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6821	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6822	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6823	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6824	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6825	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6826	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6827	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6828	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6829	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6830	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6831	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6832	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6833	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6834	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6835	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6836	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6837	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R6838	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6839	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6840	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6841	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6842	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6843	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6844	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6845	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7310	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1018	2007-000239	R-CHIP;1.5Kohm,1%,1/10W,TP,1608	1	S.N.A	
....4	R6089	2007-000259	R-CHIP;1.6Kohm,5%,1/10W,TP,1608	1	S.A	
....4	R5112	2007-000287	R-CHIP;100ohm,1%,1/10W,TP,1608	1	S.N.A	
....4	R7105	2007-000287	R-CHIP;100ohm,1%,1/10W,TP,1608	1	S.N.A	
....4	R7147	2007-000287	R-CHIP;100ohm,1%,1/10W,TP,1608	1	S.N.A	
....4	R1800	2007-000343	R-CHIP;120ohm,1%,1/10W,TP,1608	1	S.N.A	
....4	R2064	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R2065	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R2066	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R2067	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R2068	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R2069	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R2070	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R2071	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R5001	2007-000402	R-CHIP;150ohm,5%,1/10W,TP,1608	1	S.A	
....4	R3001_EU	2007-000458	R-CHIP;18Kohm,5%,1/10W,TP,1608	1	S.A	
....4	R3055_EU	2007-000458	R-CHIP;18Kohm,5%,1/10W,TP,1608	1	S.A	
....4	R1801	2007-000536	R-CHIP;200ohm,1%,1/10W,TP,1608	1	S.A	
....4	R5031	2007-000566	R-CHIP;220Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5026	2007-000591	R-CHIP;22ohm,1%,1/10W,TP,1608	1	S.A	
....4	R5041	2007-000591	R-CHIP;22ohm,1%,1/10W,TP,1608	1	S.A	
....4	R5052_STU	2007-000606	R-CHIP;240ohm,1%,1/10W,TP,1608	1	S.A	
....4	R5053_STU	2007-000606	R-CHIP;240ohm,1%,1/10W,TP,1608	1	S.A	
....4	R5045	2007-000669	R-CHIP;2Kohm,1%,1/10W,TP,1608	1	S.N.A	
....4	R7160	2007-000729	R-CHIP;300ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R7176	2007-000729	R-CHIP;300ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R5044	2007-000755	R-CHIP;330Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R5039	2007-000758	R-CHIP;330Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5037	2007-000763	R-CHIP;330ohm,1%,1/10W,TP,1608	1	S.N.A	
....4	R1012	2007-000828	R-CHIP;39Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R3004_EU	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3005_EU	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4015	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6067	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R9018_650	2007-000982	R-CHIP;5.6Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R9030_650	2007-000982	R-CHIP;5.6Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R1014	2007-001179	R-CHIP;8.2Kohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R3722	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8028_EU	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R9022_650	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3721	2007-001305	R-CHIP;120ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3723	2007-001305	R-CHIP;120ohm,5%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R7194	2007-001308	R-CHIP;200ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7410_LCD	2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7190	2007-001329	R-CHIP;7.5Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R7191	2007-001329	R-CHIP;7.5Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R3810	2007-001333	R-CHIP;18Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1004	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R1007	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R1008	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R1009	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R5056	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R5102	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R9001_650	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R1021	2007-002899	R-CHIP;10ohm,1%,1/10W,TP,1608	1	S.A	
....4	R1017	2007-002900	R-CHIP;11Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R5070	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5210	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5211	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5213	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5214	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5215	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R9023_650	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R9024_650	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R9025_650	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R9026_650	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1010	2007-007107	R-CHIP;100Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R5034	2007-007107	R-CHIP;100Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R2057	2007-007136	R-CHIP;4.7Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R8013_EU	2007-007136	R-CHIP;4.7Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R1019	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R4028	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R4030	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R4089	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R4156	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R4753	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R4754	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R2055	2007-007197	R-CHIP;3.3ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R2056	2007-007197	R-CHIP;3.3ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7193	2007-007222	R-CHIP;6.04Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R1016	2007-007312	R-CHIP;20Kohm,1%,1/16W,TP,1005	1	S.A	
....4	R1022	2007-007312	R-CHIP;20Kohm,1%,1/16W,TP,1005	1	S.A	
....4	R1020	2007-007318	R-CHIP;1Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R5036	2007-007469	R-CHIP;110ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R7116	2007-007797	R-CHIP;44.2ohm,1%,1/10W,TP,1608	1	S.A	
....4	R7117	2007-007797	R-CHIP;44.2ohm,1%,1/10W,TP,1608	1	S.A	
....4	R3002_EU	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3006_EU	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3009	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3011	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3012	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3029	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3030	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R3031	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3045	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3047_EU	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3050	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3057_EU	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3137	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3208	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3209	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3210	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3241	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3242	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R5032	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R6280	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R6281	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R6282	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R9014_650	2007-008298	R-CHIP;49.9ohm,1%,1/16W,TP,1005	1	S.A	
....4	R9015_650	2007-008298	R-CHIP;49.9ohm,1%,1/16W,TP,1005	1	S.A	
....4	R9016_650	2007-008298	R-CHIP;49.9ohm,1%,1/16W,TP,1005	1	S.A	
....4	R9017_650	2007-008298	R-CHIP;49.9ohm,1%,1/16W,TP,1005	1	S.A	
....4	RA5005	2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA5006	2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA8006	2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA8007	2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA8008	2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA2001	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA2002	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA2003	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA2007	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA4001	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA4044	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA4045	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA4048	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA4051	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA5004	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA6013	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7002	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7003	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7004	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7005	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7006	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7007	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7008	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7009	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7010	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7011	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7012	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7039	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7041	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7042	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7043	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7044	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	RA7045	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7046	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7047	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7048	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7049	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7050	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7051	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7052	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7062	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7500	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7501	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA8017_CI	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA8018_CI	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA8019_CI	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA9001_650	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA5003	2011-001344	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA7056	2011-001344	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA7057	2011-001344	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA2004	2011-001345	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA2005	2011-001345	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA2006	2011-001345	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA8010_EU	2011-001345	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA6018	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7013	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7014	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7015	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7020	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7038	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7040	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7053	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7054	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7061	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7502	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7503	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA3011	2011-001397	R-NETWORK;47Kohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA3012	2011-001397	R-NETWORK;47Kohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA3035	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3650_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3651_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3652_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3653_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3654_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3655_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3666_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3667_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3668_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3669_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3670_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3671_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3672_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3673_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	RA3674_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3675_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA5013	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3006	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,-,4P,TP,1010	1	S.N.A	
....4	RA3007	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,-,4P,TP,1010	1	S.N.A	
....4	RA3008	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,-,4P,TP,1010	1	S.N.A	
....4	RA3009	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,-,4P,TP,1010	1	S.N.A	
....4	RA3016	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,-,4P,TP,1010	1	S.N.A	
....4	RA4010	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,-,4P,TP,1010	1	S.N.A	
....4	RA4046	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,-,4P,TP,1010	1	S.N.A	
....4	RA6020	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,-,4P,TP,1010	1	S.N.A	
....4	RA2008	2011-001497	R-NETWORK;470ohm,5%,1/16W,L,CHIP,4P,TP,1	1	S.N.A	
....4	RA3018	2011-001497	R-NETWORK;470ohm,5%,1/16W,L,CHIP,4P,TP,1	1	S.N.A	
....4	RA9003_650	2011-001497	R-NETWORK;470ohm,5%,1/16W,L,CHIP,4P,TP,1	1	S.N.A	
....4	RA6019	2011-001506	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,4P,TP,1	1	S.N.A	
....4	RA6119	2011-001506	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,4P,TP,1	1	S.N.A	
....4	RA8011_EU	2011-001506	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,4P,TP,1	1	S.N.A	
....4	RA3015	2011-001519	R-NETWORK;33OHM,5%,1/16W,L,CHIP,4P,TP,1.	1	S.N.A	
....4	RA4018	2011-001519	R-NETWORK;33OHM,5%,1/16W,L,CHIP,4P,TP,1.	1	S.N.A	
....4	RA5012	2011-001519	R-NETWORK;33OHM,5%,1/16W,L,CHIP,4P,TP,1.	1	S.N.A	
....4	RA3017	2011-001527	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,4P,TP,	1	S.N.A	
....4	RA6021	2011-001527	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,4P,TP,	1	S.N.A	
....4	RA7034	2011-001527	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,4P,TP,	1	S.N.A	
....4	RA7065	2011-001527	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,4P,TP,	1	S.N.A	
....4	RA7066_650	2011-001527	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,4P,TP,	1	S.N.A	
....4	RA3014	2011-001586	R-NETWORK;1Kohm,5%,1/16W,L,CHIP-V,4P,TP,	1	S.A	
....4	RA3031	2011-001586	R-NETWORK;1Kohm,5%,1/16W,L,CHIP-V,4P,TP,	1	S.A	
....4	RA3036	2011-001586	R-NETWORK;1Kohm,5%,1/16W,L,CHIP-V,4P,TP,	1	S.A	
....4	RA6022	2011-001586	R-NETWORK;1Kohm,5%,1/16W,L,CHIP-V,4P,TP,	1	S.A	
....4	RA3010	2011-001587	R-NETWORK;100ohm,5%,1/16W,L,CHIP-V,4P,TP	1	S.A	
....4	RA3013	2011-001587	R-NETWORK;100ohm,5%,1/16W,L,CHIP-V,4P,TP	1	S.A	
....4	RA4016	2011-001587	R-NETWORK;100ohm,5%,1/16W,L,CHIP-V,4P,TP	1	S.A	
....4	RA4017	2011-001587	R-NETWORK;100ohm,5%,1/16W,L,CHIP-V,4P,TP	1	S.A	
....4	RA3030_EU	2011-001588	R-NETWORK;75ohm,5%,1/16W,L,CHIP-V,4P,TP,	1	S.A	
....4	RA6009	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA6010	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA6011	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA6012	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA7060	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA7079	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA7600	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA7601	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA7900	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA3032	2011-001590	R-NETWORK;47Kohm,5%,1/16W,L,CHIP-V,4P,TP	1	S.A	
....4	RA3072	2011-001590	R-NETWORK;47Kohm,5%,1/16W,L,CHIP-V,4P,TP	1	S.A	
....4	C2080	2203-000125	C-CER,CHIP;1.2nF,10%,50V,X7R,TP,1608,-	1	S.A	
....4	C2081	2203-000125	C-CER,CHIP;1.2nF,10%,50V,X7R,TP,1608,-	1	S.A	
....4	C2082	2203-000125	C-CER,CHIP;1.2nF,10%,50V,X7R,TP,1608,-	1	S.A	
....4	C2083	2203-000125	C-CER,CHIP;1.2nF,10%,50V,X7R,TP,1608,-	1	S.A	
....4	C2040	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3001	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C3002_EU	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3013	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3015	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3021	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3022	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3029	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3033_EU	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3045	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3066	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3250	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3251	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C2036	2203-000280	C-CER,CHIP;0.01nF,0.5pF,50V,C0G,1608	1	S.A	
....4	C7137	2203-000384	C-CER,CHIP;0.015nF,5%,50V,C0G,1608	1	S.N.A	
....4	C9017_650	2203-000384	C-CER,CHIP;0.015nF,5%,50V,C0G,1608	1	S.N.A	
....4	C9019_650	2203-000384	C-CER,CHIP;0.015nF,5%,50V,C0G,1608	1	S.N.A	
....4	C1001	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C1029	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C1041_LCD	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C1768	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C2033	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C2034	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C4003	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C4012	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C4025	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C6090	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C1027	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C3014_EU	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C3016_EU	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C3024	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C3025	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C5001	2203-000550	C-CER,CHIP;0.02nF,5%,50V,C0G,1005	1	S.N.A	
....4	C5002	2203-000550	C-CER,CHIP;0.02nF,5%,50V,C0G,1005	1	S.N.A	
....4	C2070	2203-000575	C-CER,CHIP;220nF,10%,25V,X7R,TP,2012	1	S.N.A	
....4	C2071	2203-000575	C-CER,CHIP;220nF,10%,25V,X7R,TP,2012	1	S.N.A	
....4	C2072	2203-000575	C-CER,CHIP;220nF,10%,25V,X7R,TP,2012	1	S.N.A	
....4	C2073	2203-000575	C-CER,CHIP;220nF,10%,25V,X7R,TP,2012	1	S.N.A	
....4	C2074	2203-000575	C-CER,CHIP;220nF,10%,25V,X7R,TP,2012	1	S.N.A	
....4	C2075	2203-000575	C-CER,CHIP;220nF,10%,25V,X7R,TP,2012	1	S.N.A	
....4	C5100	2203-000585	C-CER,CHIP;0.22nF,10%,50V,X7R,1005	1	S.A	
....4	C4009	2203-000679	C-CER,CHIP;0.027nF,5%,50V,C0G,1005	1	S.A	
....4	C4010	2203-000679	C-CER,CHIP;0.027nF,5%,50V,C0G,1005	1	S.A	
....4	C5003	2203-000697	C-CER,CHIP;0.002NF,0.25PF,50V,C0G,TP,160	1	S.A	
....4	C5004	2203-000697	C-CER,CHIP;0.002NF,0.25PF,50V,C0G,TP,160	1	S.A	
....4	C7048	2203-000761	C-CER,CHIP;330nF,10%,16V,X7R,TP,2012,-	1	S.N.A	
....4	C3006	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C3007	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C3008	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C3011_EU	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C3012_EU	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C3018	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C3019	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C3020	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C1120	2203-000995	C-CER,CHIP;0.047nF,5%,50V,C0G,1005	1	S.A	
....4	C3017	2203-000995	C-CER,CHIP;0.047nF,5%,50V,C0G,1005	1	S.A	
....4	C3023_EU	2203-000995	C-CER,CHIP;0.047nF,5%,50V,C0G,1005	1	S.A	
....4	C4018	2203-000995	C-CER,CHIP;0.047nF,5%,50V,C0G,1005	1	S.A	
....4	C4020	2203-000995	C-CER,CHIP;0.047nF,5%,50V,C0G,1005	1	S.A	
....4	C2038	2203-001126	C-CER,CHIP;0.68nF,10%,50V,X7R,1608	1	S.N.A	
....4	C5031	2203-001412	C-CER,CHIP;0.03nF,5%,50V,NP0,TP,1005	1	S.N.A	
....4	C5035	2203-001412	C-CER,CHIP;0.03nF,5%,50V,NP0,TP,1005	1	S.N.A	
....4	C5036	2203-001412	C-CER,CHIP;0.03nF,5%,50V,NP0,TP,1005	1	S.N.A	
....4	C5037	2203-001412	C-CER,CHIP;0.03nF,5%,50V,NP0,TP,1005	1	S.N.A	
....4	C5038	2203-001412	C-CER,CHIP;0.03nF,5%,50V,NP0,TP,1005	1	S.N.A	
....4	C5039_OP	2203-001596	C-CER,CHIP;2200nF,+80-20%,50V,Y5V,2012	1	S.A	
....4	C5060_OP	2203-001596	C-CER,CHIP;2200nF,+80-20%,50V,Y5V,2012	1	S.A	
....4	C1005	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C1007	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C1008	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C2006	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C2007	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C4008	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C4011	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C4019	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C4021	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C4022	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C4024	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C4100	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C5023	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C6061	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C6077	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C6099	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C6113	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C6114	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C7018	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C7136	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C7139_LCD	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C5010	2203-002494	C-CER,CHIP;470nF,10%,16V,X7R,2012	1	S.N.A	
....4	C7050	2203-005138	C-CER,CHIP;1.8nF,10%,50V,X7R,1005	1	S.A	
....4	C7051	2203-005138	C-CER,CHIP;1.8nF,10%,50V,X7R,1005	1	S.A	
....4	C7052	2203-005138	C-CER,CHIP;1.8nF,10%,50V,X7R,1005	1	S.A	
....4	C1004	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C1022	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C1024	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C1048_LCD	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C1148_LCD	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C1149_LCD	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C1150_LCD	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2047	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2048	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2049	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2050	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2051	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C2052	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2060	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2061	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2062	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2063	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2066	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2067	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2068	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2069	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2076	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2077	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2078	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2079	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C5021	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6056	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6057	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6058	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6059	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6062	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6063	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6073	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6074	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6075	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6078	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6094	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6095	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6096	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6100	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7011	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7017	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7049	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7109_650	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7114	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7115	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7121	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7122	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7009	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7016	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7025	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7029	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7059	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7063	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7065	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7073	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7096	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7105	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7106	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7148	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7157	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7173	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7205	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C7210	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C3063	2203-005393	C-CER,CHIP;0.005nF,0.1pF,50V,NP0,TP,1005	1	S.N.A	
....4	C3811	2203-005493	C-CER,CHIP;220nF,+80-20%,16V,Y5V,1005	1	S.A	
....4	C6044	2203-005493	C-CER,CHIP;220nF,+80-20%,16V,Y5V,1005	1	S.A	
....4	C6045	2203-005493	C-CER,CHIP;220nF,+80-20%,16V,Y5V,1005	1	S.A	
....4	C7053	2203-005659	C-CER,CHIP;0.18nF,5%,50V,NP0,1005	1	S.N.A	
....4	C1032	2203-005834	C-CER,CHIP;22000nF,+80-20%,10V,Y5V,3216	1	S.A	
....4	C1035	2203-005834	C-CER,CHIP;22000nF,+80-20%,10V,Y5V,3216	1	S.A	
....4	C1036	2203-005834	C-CER,CHIP;22000nF,+80-20%,10V,Y5V,3216	1	S.A	
....4	C5025	2203-005834	C-CER,CHIP;22000nF,+80-20%,10V,Y5V,3216	1	S.A	
....4	C5034	2203-005834	C-CER,CHIP;22000nF,+80-20%,10V,Y5V,3216	1	S.A	
....4	C2041	2203-005968	C-CER,CHIP;4.7NF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C6091	2203-005968	C-CER,CHIP;4.7NF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C9020_650	2203-006039	C-CER,CHIP;1nF,10%,2000V,X7R,3216	1	S.A	
....4	C9021_650	2203-006039	C-CER,CHIP;1nF,10%,2000V,X7R,3216	1	S.A	
....4	C5337	2203-006104	C-CER,CHIP;1000nF,10%,50V,X7R,3225	1	S.A	
....4	C3997	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C3998	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C6098	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C1019	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.N.A	
....4	C1025	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.N.A	
....4	C1028	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.N.A	
....4	C1060	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.N.A	
....4	C7084	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.N.A	
....4	C7310	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.N.A	
....4	C7601_LCD	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.N.A	
....4	C1002	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1003	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1006	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1012	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1014	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1030	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1034	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1070	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1071	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1080	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1091	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1092	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1801	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C2037	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C2039	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C2042	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C2043	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C2044	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C2045	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3046	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3051	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3054	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3055	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3056	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3057	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C3065	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3070	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3071	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3072	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3100	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3101	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3102	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4002	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4006	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4013	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4014	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4016	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4023	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4026	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4050	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4103	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5011	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5020	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5024	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5027	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5070	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5071	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5072	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5073	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5112	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6027	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6028	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6033	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6042	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6043	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6048	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6052	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6053	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6064	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6065	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6066	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6067	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6068	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6069	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6070	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6079	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6080	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6081	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6082	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6083	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6084	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6085	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6086	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6087	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6088	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6089	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C6101	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6105	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6109	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6110	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6111	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6112	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6115	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6116	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6153	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7012	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7013	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7019	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7020	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7034	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7038	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7043	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7054	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7055	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7056	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7062	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7064	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7068	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7069	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7074	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7075	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7078	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7081	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7083	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7086	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7087	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7088	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7094	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7095	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7098	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7099	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7100_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7107	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7112	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7113	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7116	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7117	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7134	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7140	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7142	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7143	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7146	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7147	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7149	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7152	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7160	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7161	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C7164	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7165	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7168	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7169	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7172	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7176	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7177	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7180	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7181	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7185	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7200	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7201	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7202	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7203	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7206	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7211	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7220	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7221	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7222	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7223	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7224	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7225	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7226	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7227	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7228	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7301	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7302	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7400	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7402	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7403	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7404	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7405	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7406	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7407	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7408	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7409	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7410	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7411	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7412	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7413	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7414	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7416	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7417	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7418	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7419	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7420	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7423	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7750	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7751	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7752	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7753	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C7754	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7755	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7756	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7757	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7758	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7759	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7760	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7761	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7770	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7771	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7772	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7773	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7880	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7881	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7900	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7901	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8001	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8002	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8003	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8004	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8007_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8011_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8012	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8013_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8014_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8015_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8016_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8017_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8018_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8019_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9001_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9003_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9004_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9005_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9006_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9007_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9009_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9010_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9011_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9012_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9013_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9014_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9015_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9016_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9018_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9023_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9024_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9101_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9103_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9105_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9107_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C5012	2203-006336	C-CER,CHIP;10000nF,10%,25V,X5R,3216	1	S.A	
....4	C1017	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C1020	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C1021	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C1023	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C1031	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C1033	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C1050	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2001	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2003	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2005	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2011	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2014	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2031	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2032	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2035	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2046	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2055	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2064	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2065	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3009_EU	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3010_EU	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3037	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3043	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3053	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3067	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3068	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3069	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3073	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3810	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C4001	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C4015	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C5005	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C5018	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C5028	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C5032	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C5111	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C5336	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6001	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6011	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6022	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6029	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6030	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6031	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6032	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6046	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6049	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6050	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6054	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6055	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6071	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C6072	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6092	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6093	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7001	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7004	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7005	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7006	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7007	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7008	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7021	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7085_650	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7108	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7110	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7130	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7132	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7133	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C8010_EU	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C9002_650	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C9008_650	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C9022_650	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C9100_650	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C9102_650	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C9104_650	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C9106_650	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C9900_650	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2084	2203-006382	C-CER,CHIP;10000nF,10%,25V,X7R,TP,3225	1	S.N.A	
....4	C2085	2203-006382	C-CER,CHIP;10000nF,10%,25V,X7R,TP,3225	1	S.N.A	
....4	C2086	2203-006382	C-CER,CHIP;10000nF,10%,25V,X7R,TP,3225	1	S.N.A	
....4	C2087	2203-006382	C-CER,CHIP;10000nF,10%,25V,X7R,TP,3225	1	S.N.A	
....4	C1040_LCD	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C1042_LCD	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2019	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2020	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2021	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2022	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2023	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2024	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2025	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2026	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2027	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2028	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2029	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2030	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C3103	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C3104	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C3105	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C3106	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C3320	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C3321	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C4004	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6005	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C6014	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6040	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6041	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6060	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6076	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6097	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6851	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6852	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6853	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6854	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7003	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7028	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7030	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7037	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7039	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7040	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7072	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7089	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7097	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7141	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7156	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7204	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7209	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C1013	2203-006618	C-CER,CHIP;2200nF,+80-20%,16V,Y5V,-,1608	1	S.N.A	
....4	C1016	2203-006618	C-CER,CHIP;2200nF,+80-20%,16V,Y5V,-,1608	1	S.N.A	
....4	C2004	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C2008	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C2009	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C2010	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C2056	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C2057	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C2059	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C3077	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C4005	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C5016	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C2053	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C2054	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C3038	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C3039	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C3047	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C3048	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C3058	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C3062	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C3999	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C1015	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (1	S.N.A	
....4	C1018	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (1	S.N.A	
....4	C2002	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (1	S.N.A	
....4	C2058	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (1	S.N.A	
....4	C5022	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (1	S.N.A	
....4	C6047	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (1	S.N.A	
....4	C2012	2402-001128	C-AL,SMD;100##F,20%,16V,-,TP,6.3X5.7mm	1	S.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C2013	2402-001128	C-AL,SMD;100##F,20%,16V,-,TP,6.3X5.7mm	1	S.A	
....4	C5030	2402-001210	C-POLYMER AL CHIP;100uF,20%,10V,WT,TP,7.	1	S.A	
....4	CA2001	2503-001051	C-NETWORK;100NFX4,20%,16V,-,2012, 4ARRAY	1	S.A	
....4	T9001_650	2601-001056	TRANS-SMD,PULSE;350UH,-,1:1,1:1,12.7X6.7	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-001239	INDUCTOR-SMD;3.3uH,10%,1608	1	S.A	
....4	T0052	2703-003559	INDUCTOR-SMD;4.7uH,20%,8080	1	S.A	
....4	T0052	2703-003628	INDUCTOR-SMD;1.5uH,20%,2020	1	S.A	
....4	L2001	2704-000018	INDUCTOR-SMD-ARRAY;15uH,2000mA,2,0.124oh	1	S.N.A	
....4	L2002	2704-000018	INDUCTOR-SMD-ARRAY;15uH,2000mA,2,0.124oh	1	S.N.A	
....4	X202	2801-003326	CRYSTAL-SMD;24MHZ,30PPM,28-ABX,20PF,50OH	1	S.A	
....4	X202	2801-003773	CRYSTAL-SMD;12MHz,30ppm,28-AAN,20pF,50oh	1	S.A	
....4	X202	2801-004629	CRYSTAL-SMD;27MHz,20ppm,12pF,50ohm,TP	1	S.A	
....4	X202	2801-004734	CRYSTAL-SMD;25.000000MHz,20ppm,28-AAN,12	1	S.A	
....4	F103	2901-001506	FILTER-EMI SMD;5V,0.13A,0pF,2x1x0.5mm,TP	1	S.A	
....4	F103	2901-001506	FILTER-EMI SMD;5V,0.13A,0pF,2x1x0.5mm,TP	1	S.A	
....4	T0568	3301-000314	BEAD-SMD;120ohm,1.6x0.8x0.8mm,-,-,-	1	S.N.A	
....4	T0568	3301-000314	BEAD-SMD;120ohm,1.6x0.8x0.8mm,-,-,-	1	S.N.A	
....4	T0568	3301-001145	BEAD-SMD;60ohm,4516,TP,70ohm/45MHz,82ohm	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	

5. Exploded View & Part List

[illegible]

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	M0018	BN97-03213A	ASSY MICOM;WT61P8-RG480WT,N68A,2008.11.2	1	S.N.A	
....5	IC520	0903-001552	IC-MICROCONTROLLER;WT61P8-RG480WT,LQFP,4	1	S.N.A	
....4	T0010	BP27-00002A	COIL CHOKE;SLF6028T-220MR77,22uF,20%,,,,	1	S.A	
...3	T0066	BP62-00016B	HEAT SINK-ES;SUNRAY,A6063,T2.0,36.2,36.2	1	S.N.A	
...3	T0066	BP62-00017A	HEAT SINK-ES;SP-50L2HX,A6063S,T2.0,26.2,	1	S.N.A	
0.1		BN91-03829A	ASSY LCD-AUO;LE32B653T5WXXC	1	S.N.A	
..2	M0215	BN07-00641A	LCD-PANEL;T315HW02 V3	1	S.A	
...3	M0215	BN81-02346A	A/S-T CON T315HW02_V3;T315HW02_V3	1	S.A	
0.1	M0045	BN92-04322A	ASSY ACCESSORY;LE32B653T5WXXC	1	S.N.A	
..2	M0045	BN96-09731A	ASSY ACCESSORY-MANUAL;LE32B653T5WXXC	1	S.A	
...3	T0524	6902-000110	BAG PE;LDPE,T0.05,W250,L400,TRP,28,2,-,9	1	S.N.A	
...3	T0210	AA68-03242Q	MANUAL FLYER-01,SAFETY GUIDE;comm,Samsun	1	S.N.A	
...3	T0175	BN68-00514E	MANUAL FLYER-01,WARRANTY CARD;comm,Samsu	1	S.N.A	
...3		BN68-00907D	MANUAL FLYER-WEEE BATTERY;COMM,SAMSUNG,2	1	S.N.A	
...3	T0511	BN68-01900B	MANUAL USERS;COMM,SAMSUNG,Tur,W.EUROPE,W	1	S.N.A	
...3		BN68-01902A	MANUAL FLYER-QSG;COMM,SAMSUNG,9Langs,W.E	1	S.N.A	
...3		BN96-10241A	ASSY MANUAL P-USB;B650,USB,SAMSUNG,W.EUR	1	S.N.A	
....4	T0511	BN68-01900A	MANUAL USERS;COMM,SAMSUNG,9Langs,W.EUROP	1	S.N.A	
..2	M0045	BN96-09731B	ASSY ACCESSORY-CABEL;LE32B653T5WXXC	1	S.A	
...3	T0268	3903-000145	CBF-POWER CORD;DT,EU,FP3/YES,U(IEC C13-R	1	S.A	
...3	T0524	6902-000110	BAG PE;LDPE,T0.05,W250,L400,TRP,28,2,-,9	1	S.N.A	
...3	M9889	BN63-01798B	CLOTH-CLEAN;cloth,180,200,sea blue,ToC	1	S.N.A	
...3	T0531	BN63-05284B	COVER-BOTTOM;B650 32,HIPS,HB,BK500	1	S.A	
....4		BN81-00199H	RESIN;HIPS HB,BK500,HF-1690H,K2901	0.033	S.N.A	
...3	M0560	BN96-01800E	ASSY ACCESSORY-SCREW ZIPPER;32,LB650,GUI	1	S.N.A	
....4	T0081	6002-001294	SCREW-TAPPING;BH,+,M4,L16,ZPC(BLK)	4	S.N.A	
....4	T0081	6002-001294	SCREW-TAPPING;BH,+,M4,L16,ZPC(BLK)	4	S.N.A	
....4		6902-000683	BAG ZIPPER;LDPE,T0.05,W60,L60,TRP,-,-,4-	1	S.N.A	
...3	T0074	BN59-00861A	REMOCON;LCD650,TM960,EUROPE,49	1	S.A	
0.1	M0019	BN92-04323A	ASSY LABEL;LE32B653T5WXXC	1	S.N.A	
0.1	M0113	BN92-04608A	ASSY P/MATERIAL;32,LB650	1	S.N.A	
..2	T0524	6902-000519	BAG PE;HDPE/NITRON,T0.015/T0.05(DOUBLE),	1	S.N.A	
..2	T0003	6902-000604	BAG WRAPPING;LDPE,T0.02,W500,L10000,TRP,	4.3	S.N.A	
0.1	M0003	BN92-04614B	ASSY BOX;32BT5,EO,LB650	1	S.N.A	
..2		BN69-03514B	BOX-SET;32LB650,CB,A-01, DW3, AB,YEL,W88	1	S.N.A	
0.1	M0216	BN90-01903A	ASSY STAND;32,LB650,ROSE BLACK	1	S.N.A	
..2	T0920	BN61-04812A	GUIDE-STAND;32,PC+G/F 20%,BK500	1	S.N.A	
...3		BN81-00204H	RESIN;Trirex,3025G20 BK,ABS+PC G/F 20%,4	0.3	S.N.A	
..2	M0027	BN96-09497A	ASSY STAND P-BASE;32,LB650,TEMPERED GLAS	1	S.A	
...3	M0081	6003-001003	SCREW-TAPTITE;BH,+,B,M4,L12,ZPC(BLK),SWR	3	S.N.A	
...3		BN61-04692A	BOSS-PRIMER;#94,clear,35cps	0.1	S.N.A	
...3		BN61-04731B	BOSS-TAPE;AMBER,ACRYL,T1.1,W12.0mm,WHITE	0.95	S.N.A	
...3		BN61-04841A	BRACKET-STAND BOTTOM;B650 40,SECC,T2.0	1	S.N.A	
...3		BN61-04855A	BRACKET-SWIVEL BOTTOM;B650 40,SECC,T2.0	1	S.N.A	
...3		BN61-05238A	HOLDER-SWIVEL RING TOP;LB700 40,POM HB,A	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
...3		BN61-05254A	HOLDER-SWIVEL RING BOTTOM;LB700 40,POM H	1	S.N.A	
...3		BN63-05530B	COVER-STAND GLASS;32,LB650,GLASS,T8.0,RO	1	S.N.A	
...4	CCM1	BN63-04755A	COVER-SHEET;AMBER,PE,T0.05,W150mm,200M,6	0.56	S.N.A	
...3	T0056	BN63-05537A	COVER-DECORATION;UB7000 40inch,ABS,PMMA,	1	S.N.A	
...4		BN81-00204P	RESIN-HIGH GLOSS;HAM 8560,SF-0505,K21294	0.01	S.N.A	
...3	M0126	BN73-00203A	RUBBER-FOOT;LB7000 46inch,CR RUBBER,T7.0	4	S.N.A	
...3		BN61-05248A	GUIDE-STAND NECK;LB650,32,PC,CLEAR(TP27)	1	S.N.A	

5-18. LE37B65*A Parts List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
		LE37B653T5WXXC	LE37B653T5W,N68A/37BT5-G6T,37,LCD-TV,SPA			
0.1	M0001	BN90-01894B	ASSY COVER FRONT;37,LB650,EO,ROSE BLACK,	1	S.N.A	
..2	T0175	BN96-09463C	ASSY SPEAKER P;8ohm,4pin,10W,R:250/ L:60	1	S.A	
..2	T0003	BN96-09487B	ASSY COVER P-FRONT;37,LB650,EO,PC(CLR)+P	1	S.A	
...3	M0081	6003-001188	SCREW-TAPTITE;BH,+,-,B,M4,L10,ZPC(WHT),S	2	S.N.A	
...3	T0069	AA60-00171C	SPACER-FELT;L3,FELT,460,T0.5,20	2	S.N.A	
...3	T0069	BN60-00027F	SPACER-FELT;L650-37,FELT,820,0.5,20	2	S.N.A	
...3		BN61-04661A	BRACKET-STOPPER;L650,SK-5,T0.4,Plating,H	6	S.N.A	
...3	CCM1	BN63-02183E	COVER-SHEET;Rhcm,PE Vinyl,T0.05,750mm,20	0.768	S.N.A	
...3	CCM1	BN63-05199B	COVER-SHEET;AMBER,PE,T0.08,W65mm,200M,CL	2.6	S.N.A	
...3	CCM1	BN63-05199G	COVER-SHEET;AMBER,PE,T0.08,W115mm,200M,C	0.8	S.N.A	
...3	M0112	BN63-05272B	COVER-FRONT;37,LB650,EO,PC(CLR)+PC(ROSE	1	S.N.A	
....4		BN81-00116D	RESIN-TOC;PC V0,TTP01,CLR,TN-1030(NP),TH	752.4	S.N.A	
....4		BN81-00116U	RESIN-TOC;PC V1, TRD03,Light Rose Black,	565.4	S.N.A	
...3		BN96-09507C	ASSY HOLDER P-BOSS SIDE RIGHT;37,LB650,A	1	S.N.A	
....4		BN61-04692A	BOSS-PRIMER;#94,clear,35cps	0.1	S.N.A	
....4		BN61-04731A	BOSS-TAPE;AMBER,ACRYL,T1.1,W8.0mm,WHITE,	0.39	S.N.A	
....4		BN61-04731C	BOSS-TAPE;AMBER,ACRYL,T1.1,W16.0mm,WHITE	0.03	S.N.A	
....4		BN61-04843C	HOLDER-BOSS SIDE R;37,LB650,ABS+PMMA,HB,	1	S.N.A	
.....5		BN81-00204P	RESIN-HIGH GLOSS;HAM 8560,SF-0505,K21294	0.042	S.N.A	
...3		BN96-09507D	ASSY HOLDER P-BOSS SIDE LEFT;37,LB650,AB	1	S.N.A	
....4		BN61-04692A	BOSS-PRIMER;#94,clear,35cps	0.1	S.N.A	
....4		BN61-04731A	BOSS-TAPE;AMBER,ACRYL,T1.1,W8.0mm,WHITE,	0.39	S.N.A	
....4		BN61-04731C	BOSS-TAPE;AMBER,ACRYL,T1.1,W16.0mm,WHITE	0.03	S.N.A	
....4		BN61-04843D	HOLDER-BOSS SIDE L;37,LB650,ABS+PMMA,HB,	1	S.N.A	
.....5		BN81-00204P	RESIN-HIGH GLOSS;HAM 8560,SF-0505,K21294	0.042	S.N.A	
...3		BN96-09519B	ASSY HOLDER P-BOSS BOTTOM;37,LB650,ABS,H	1	S.N.A	
....4		BN61-04692A	BOSS-PRIMER;#94,clear,35cps	0.4	S.N.A	
....4		BN61-04731B	BOSS-TAPE;AMBER,ACRYL,T1.1,W12.0mm,WHITE	0.46	S.N.A	
....4		BN61-04731D	BOSS-TAPE;AMBER,ACRYL,T1.1,W20.0mm,WHITE	0.07	S.N.A	
....4		BN61-04826B	HOLDER-BOSS BOTTOM;37,LB650,ABS,HB,WH12,	1	S.N.A	
.....5		BN81-00116F	RESIN;ABS HB,WHT,HF-0680U,W91902,-,-,-	233.8	S.N.A	
...3	M0175	BN96-10210B	ASSY BOARD P-TOUCH FUNCTION&IR;LN40B650T	1	S.A	
0.1	M0002	BN90-01909A	ASSY COVER REAR;37,LB650,EO	1	S.N.A	
..2	T0081	6002-001294	SCREW-TAPPING;BH,+,,M4,L16,ZPC(BLK)	11	S.N.A	
..2	T0081	6002-001294	SCREW-TAPPING;BH,+,,M4,L16,ZPC(BLK)	1	S.N.A	
..2	T0081	6002-001294	SCREW-TAPPING;BH,+,,M4,L16,ZPC(BLK)	1	S.N.A	
..2	M0013	BN96-09504A	ASSY COVER P-REAR;37,LB650,EO,ABS+PMMA,H	1	S.A	
...3	T0069	AA63-60131N	SPACER-FELT;L2,FELT,280*10,BLK,T0.5	2	S.N.A	
...3	T0101	BN61-04816A	BRACKET-WALL;40, B610,SECC,T1.2	4	S.N.A	
...3	CCM1	BN63-02183E	COVER-SHEET;Rhcm,PE Vinyl,T0.05,750mm,20	0.99	S.N.A	
...3	M0006	BN63-05278A	COVER-REAR;37,LB650,EO,PMMA+ABS,HB,BK23,	1	S.N.A	
....4		BN81-00204P	RESIN-HIGH GLOSS;HAM 8560,SF-0505,K21294	2.391	S.N.A	
...3	T0071	BN64-01028A	INLAY-TERMINAL;B530 (PAL-Chelsea),PS SHE	1	S.N.A	
...3	T0064	BN65-00002A	CLAMPER CORE;BORDEAUX,LDPE,-,-,BLK,-	1	S.N.A	
...3	T0069	BP60-00015D	SPACER-FELT;617W,FELT,L760,T0.5,W10	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
0.1	M0112	BN91-03502A	ASSY SHIELD;LE37B653T5WXXC	1	S.N.A	
..2	M0081	6003-000337	SCREW-TAPTITE;BH,+,S,M4,L10,ZPC(BLK),SWR	4	S.N.A	
..2	M0081	6003-000337	SCREW-TAPTITE;BH,+,S,M4,L10,ZPC(BLK),SWR	4	S.N.A	
..2	M0081	6003-000337	SCREW-TAPTITE;BH,+,S,M4,L10,ZPC(BLK),SWR	5	S.N.A	
..2	M0081	6003-001188	SCREW-TAPTITE;BH,+,B,M4,L10,ZPC(WHT),S	3	S.N.A	
..2	M0081	6003-001188	SCREW-TAPTITE;BH,+,B,M4,L10,ZPC(WHT),S	2	S.N.A	
..2	M0081	6003-001439	SCREW-TAPTITE;BH,+,S,M4,L8,ZPC(WHT),SW	4	S.N.A	
..2	M2893	BN39-01099K	LEAD CONNECTOR;LB5P,LB5K,UL1007#26,30P,7	1	S.A	
..2	M0174	BN44-00262B	IP BOARD;B109-801GP,H37F1_9DF,0.1mA,10mA	1	S.A	
..2	M0254	BN61-04800A	HOLDER-SIDE AV;EO,ABS+PMMA,HB,BK23,H/GLO	1	S.N.A	
...3		BN81-00204P	RESIN-HIGH GLOSS;HAM 8560,SF-0505,K21294	17.3	S.N.A	
..2	M0146	BN61-04818A	BRACKET-PANEL TOP;B650-32,SECC,T1.2	2	S.N.A	
..2	M0115	BN61-04918A	BRACKET-STAND LINK;40, B610,SECC,T1.6	1	S.N.A	
..2		BN63-05259A	COVER-MAIN;EO,ABS+PMMA,HB,BK23,H/GLOSSY	1	S.N.A	
...3		BN81-00204P	RESIN-HIGH GLOSS;HAM 8560,SF-0505,K21294	0.015	S.N.A	
..2	M0230	BN96-10076A	ASSY CABLE P-FPCB LVDS;LA46A650A1,FPCB L	1	S.A	
0.1	M0017	BN91-03505B	ASSY CHASSIS;LE37B653T5WXXC	1	S.N.A	
..2	M0014	BN94-02583B	ASSY PCB MAIN;LE37B653T5WXXC	1	S.A	
...3	T0245	0202-001608	SOLDER-WIRE FLUX;LFC7-107,D0.8,99.3Sn/0.	0.25	S.N.A	
...3	CN3010	3701-001388	CONNECTOR-HDMI;20P,Phosphor Bronze,ANGLE	1	S.A	
...3	CN3011	3701-001480	CONNECTOR-DSUB;15P,3R,FEMAIL,STAMPED PIN	1	S.A	
...3	CN906	3707-001081	CONNECTOR-OPTICAL;STRAIGHT,SPDIF	1	S.A	
...3	CN8001_EU	3709-001551	CONNECTOR-CARD SLOT;68P,1.27mm,DIP,AU50U	1	S.A	
...3	CN330	3711-003847	HEADER-BOARD TO CABLE;BOX,12P,1R,2mm,ANG	1	S.A	
...3	CN1001	3711-005884	HEADER-BOARD TO BOARD;BOX,30P,2R,2mm,ANG	1	S.A	
...3	CN330	3711-006715	HEADER-BOARD TO CABLE;BOX,4P,1R,2.5mm,AN	1	S.N.A	
...3	JA330	3722-001061	JACK-PHONE;1P,3.6PI,AG,BLK,N	1	S.A	
...3	JA330	3722-001061	JACK-PHONE;1P,3.6PI,AG,BLK,N	1	S.A	
...3	JA330	3722-001061	JACK-PHONE;1P,3.6PI,AG,BLK,N	1	S.A	
...3	JA330	3722-001061	JACK-PHONE;1P,3.6PI,AG,BLK,N	1	S.A	
...3	CN9001_650	3722-002426	JACK-MODULAR;8P/8C,-,N,STRAIGHT,GRN/YEL,	1	S.A	
...3	CN7002_650	3722-002546	JACK-USB;4P/1C,AU,BLK,ANGLE,A type	1	S.N.A	
...3	CN7006	3722-002546	JACK-USB;4P/1C,AU,BLK,ANGLE,A type	1	S.N.A	
...3	JA333	3722-002635	JACK-PIN;3P,Sn,YEL/WHT/RED,ANGLE	1	S.A	
...3	CN3002_EU	3722-002681	JACK-SCART;42P,SN,BLK	1	S.A	
...3	JA333	3722-002691	JACK-PIN;2P,Ni,WHT/RED,STRAIGHT	1	S.A	
...3	JA333	3722-002691	JACK-PIN;2P,Ni,WHT/RED,STRAIGHT	1	S.A	
...3	JA333	3722-002703	JACK-PIN;3P,Ni,GRN/BLU/RED,STRAIGHT	1	S.A	
...3	CIS3	BN40-00145A	TUNER;TDHG6-K12A,TDHG6-K12A,DVB-TC,164CH	1	S.A	
...3	T0174	BN97-03100B	ASSY SMD;LE37B653T5WXXC	1	S.N.A	
....4	SUB05	0202-001477	SOLDER-CREAM;LST309-M,-,D20~45um,96.5Sn/	1	S.N.A	
....4	D4003	0401-000133	DIODE-SWITCHING;RLS4148,75V,150mA,LL-34,	1	S.A	
....4	D4004	0401-000133	DIODE-SWITCHING;RLS4148,75V,150mA,LL-34,	1	S.A	
....4	D4100	0401-000133	DIODE-SWITCHING;RLS4148,75V,150mA,LL-34,	1	S.A	
....4	D4228	0401-000133	DIODE-SWITCHING;RLS4148,75V,150mA,LL-34,	1	S.A	
....4	D3001	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3002	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3051	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3054	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3061	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	D3062	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3063	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3076	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3077	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3079	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3080	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D4008	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D4010	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D9001_650	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D9002_650	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D9003_650	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D9004_650	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D9007_650	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D9008_650	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3811	0401-001099	DIODE-SWITCHING;1N4148WS,75V,150mA,SOD-3	1	S.N.A	
....4	D0254	0402-001207	DIODE-SCHOTTKY;UPS5819,40V,1000MA,DO-216	1	S.A	
....4	D4001	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D5100	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D3003_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3004_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3005_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3006_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3007_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3008_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3009_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3011	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3015	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3016_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3018	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3019	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3020	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3021	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3022_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3023	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3024	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3026_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3032	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3033	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3034	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3035	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3036	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3037	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3038	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3039	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3045	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3052	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3056	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3057	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3058	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3060	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3065	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	D3066	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3067	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3068	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3069	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3073	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3074	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3075	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3350	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3776	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3777_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3778_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3779_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D0254	0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	1	S.A	
....4	D0254	0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	1	S.A	
....4	D0254	0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	1	S.A	
....4	D0254	0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	1	S.A	
....4	D0254	0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	1	S.A	
....4	D0254	0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	1	S.A	
....4	D0254	0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	1	S.A	
....4	D0254	0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	1	S.A	
....4	D7001_650	0406-001200	DIODE-TVS;RCLAMP0504F,6/-V,150W,SC-70	1	S.A	
....4	D7002	0406-001200	DIODE-TVS;RCLAMP0504F,6/-V,150W,SC-70	1	S.A	
....4	D3751	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D3752	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D3753	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D3754	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D3755	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D3756	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D3757	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D3758	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D8001_CI	0407-000114	DIODE-ARRAY;-80V,100mA,CA2-3,SOT-23,TP	1	S.N.A	
....4	D8002_CI	0407-000114	DIODE-ARRAY;-80V,100mA,CA2-3,SOT-23,TP	1	S.N.A	
....4	D8003_CI	0407-000114	DIODE-ARRAY;-80V,100mA,CA2-3,SOT-23,TP	1	S.N.A	
....4	D8004_CI	0407-000114	DIODE-ARRAY;-80V,100mA,CA2-3,SOT-23,TP	1	S.N.A	
....4	D8005_CI	0407-000114	DIODE-ARRAY;-80V,100mA,CA2-3,SOT-23,TP	1	S.N.A	
....4	D8006_EU	0407-000114	DIODE-ARRAY;-80V,100mA,CA2-3,SOT-23,TP	1	S.N.A	
....4	Q4003	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150MW,SOT-23	1	S.A	
....4	Q4005	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150MW,SOT-23	1	S.A	
....4	Q4020	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150MW,SOT-23	1	S.A	
....4	Q1002_LCD	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3007	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3008	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3009	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3010	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3810	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3811	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q4004	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q4009	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q4011	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q9001_650	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3001_EU	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	
....4	Q3002_EU	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	Q7601_LCD	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	
....4	Q7602_LCD	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-001916	FET-SILICON;Si4800BDY,N,30V,9A,0.03ohm,2	1	S.A	
....4	IC104	0801-002095	IC-CMOS LOGIC;74LCX245,TRANSCEIVER,TSSOP	1	S.A	
....4	IC104	0801-002172	IC-CMOS LOGIC;74LCX16244,BUFFER/LINE DRI	1	S.A	
....4	IC104	0801-002172	IC-CMOS LOGIC;74LCX16244,BUFFER/LINE DRI	1	S.A	
....4	IC104	0801-002630	IC-CMOS LOGIC;74AHCT1G08,2-INPUT AND GAT	1	S.A	
....4	IC104	0801-002780	IC-CMOS LOGIC;74LVC1G17,SCHMITT-TRIGGER	1	S.N.A	
....4	IC7009	0904-002119	IC-I/O SUPPORT CHIP;PCF8574TS,8Bit,SSOP,	1	S.A	
....4	IC7008	1001-000164	IC-ANALOG MULTIPLEX;74HC4052,CMOS,SOP,16	1	S.A	
....4	IC9003_650	1001-001109	IC-ANALOG SWITCH;FST3125M,BUS SWITCH & C	1	S.A	
....4	IC106	1001-001177	IC-VIDEO SWITCH;TEA6425D,VIDEO SWITCH ,S	1	S.A	
....4	IC106	1001-001573	IC-VIDEO SWITCH;Sil9287CNUTR,QFN,72P,10x	1	S.A	
....4	IC107	1002-001482	IC-D/A CONVERTER;WM8521H9GED/R,16bit,SOI	1	S.A	
....4	IC3001	1006-001266	IC-LINE TRANSCEIVER;SP3232EEY,TSSOP,16P,	1	S.A	
....4	IC112	1103-000129	IC-EEPROM;24C02,2Kbit,256x8Bit,SOP,8P,5x	1	S.A	
....4	IC112	1103-000129	IC-EEPROM;24C02,2Kbit,256x8Bit,SOP,8P,5x	1	S.A	
....4	IC112	1103-001310	IC-EEPROM;24LC02B,256X8BIT,SOIC,8P,3.91X	1	S.N.A	
....4	IC112	1103-001385	IC-EEPROM;AT24C256,256Kbit,32Kx8,SOP,8P,	1	S.A	
....4	IC112	1103-001415	IC-EEPROM;AT93C46D,1Kbit,128x8/64x16,SOP	1	S.N.A	
....4	IC7003	1105-001859	IC-DDR2 SDRAM;K4T1G164QD-ZCE7,DDR2,1Gbit	1	S.A	
....4	IC7004	1105-001859	IC-DDR2 SDRAM;K4T1G164QD-ZCE7,DDR2,1Gbit	1	S.A	
....4	IC7005	1105-001859	IC-DDR2 SDRAM;K4T1G164QD-ZCE7,DDR2,1Gbit	1	S.A	
....4	IC7006	1105-001859	IC-DDR2 SDRAM;K4T1G164QD-ZCE7,DDR2,1Gbit	1	S.A	
....4	T0124	1201-002796	IC-POWER AMP;STA339BWS,PSSO,36P,10.3x7.5	1	S.A	
....4	T0087	1203-001815	IC-POSI.FIXED REG.;78M09,TO-252,3P,-,PLA	1	S.A	
....4	T0087	1203-001816	IC-POSI.FIXED REG.;78M08,TO-252,3P,-,PLA	1	S.A	
....4	T0087	1203-002842	IC-POSI.FIXED REG.;AP1117D-33A,TO-252,3P	1	S.A	
....4	T0087	1203-002898	IC-POSI.FIXED REG.;G950T45R,TO-252,3P,6.	1	S.A	
....4	IC012	1203-002995	IC-POSI.ADJUST REG.;AP1117D-A,TO-252,3P,	1	S.A	
....4	IC012	1203-002995	IC-POSI.ADJUST REG.;AP1117D-A,TO-252,3P,	1	S.A	
....4	IC012	1203-002995	IC-POSI.ADJUST REG.;AP1117D-A,TO-252,3P,	1	S.A	
....4	IC4005	1203-004363	IC-VOL. DETECTOR;RT9818C-29PV,SOT-23,3P,	1	S.A	
....4	IC4004	1203-004364	IC-VOL. DETECTOR;RT9818C-42PV,SOT-23,3P,	1	S.A	
....4	IC1007	1203-004879	IC-DC/DC CONVERTER;MP8668DL,QFN,14P,3x4mm	1	S.A	
....4	T0087	1203-005134	IC-POSI.FIXED REG.;RT9167A-33PB,SOT-23-5	1	S.A	
....4	IC1006	1203-005538	IC-DC/DC CONVERTER;AOZ1021HAIL,SOP,8P,4.	1	S.A	
....4	IC5006	1203-005559	IC-BACKLIGHT DRIVER;MP3302DJ,TSOT23,5P,2	1	S.A	
....4	T0087	1203-005713	IC-POSI.FIXED REG.;S-1172B33-E6T1G,HSOP,	1	S.A	
....4	IC118	1204-003010	IC-VIDEO PROCESS;SDP84,PBGA,324P,23x23mm	1	S.A	
....4	IC7001	1204-003011	IC-DECODER;SDP83,PBGA,729P,34x34mm,PLAST	1	S.A	
....4	IC9002_650	1205-002941	IC-ETHERNET CONTROLLER;RTL8100CL-LF,LQFP	1	S.N.A	
....4	IC3011	1205-003201	IC-BUS SWITCH;TC7WB125FK,SSOP,8P,2x2.3mm	1	S.A	
....4	IC2001	1205-003352	IC-CODEC;WM8593SEFT/V,TQFP,64P,10x10mm,P	1	S.A	
....4	IC7010_650	1205-003479	IC-SWITCH;TPS2051BDBVR,SOT-23,5P,2.9x1.6	1	S.A	
....4	IC8006_EU	1205-003479	IC-SWITCH;TPS2051BDBVR,SOT-23,5P,2.9x1.6	1	S.A	
....4	IC7007	1205-003681	IC-SWITCH;TPS2069DGN,MSOP,8P,3.05x4.98mm	1	S.A	
....4	IC5010	1209-001830	IC-PLL;IDT6V10012PGG,TSSOP,20P,6.5x4.4mm	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	D4110	1405-001185	VARISTOR;24Vdc,1.6x0.8x0.36mm,TP	1	S.A	
....4	D3010	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3012_EU	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3013	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3014_EU	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3017	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3025	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3027	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3028	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3029	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3030	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3031	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3040	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3041	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3042	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3050	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3053	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3055	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3059	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3064	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3070	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3071	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3072	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3078	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3081	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3097	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3098	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3099	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4011	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4012	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4013	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4014	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4015	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4016	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4017	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4018	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D7003_650	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D7004	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	R7120	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7121	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7122	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7123	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7152	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7153	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7154	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7155	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7162	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7163	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7164	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7165	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7169	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R7170	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7171	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7172	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R5101	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R2058	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R2059	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R2060	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R2061	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R4155	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	1	S.A	
....4	R7050	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7053	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7056	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7058	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7062	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7066	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7069	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7070	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3007	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3034_EU	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3036_EU	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3062	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3070	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3071	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3078_EU	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3120	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3191	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3192	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3205	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3206	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3207	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3243	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3254	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3255	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3320	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3999	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4042	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4049	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4050	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4087	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5022	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7114	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7132	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7143	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7605_LCD	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8311_EU	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1031_LCD	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1072	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3010_EU	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3021_EU	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3022_EU	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3035	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R3037	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3072	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3073	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3081	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3082	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3138	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3139	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3189	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3190	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3227	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3228	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4081	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6028	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6066	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7045	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7072	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7195	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7196	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7602_LCD	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R9007_650	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R2054	2007-000141	R-CHIP;2.2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4085	2007-000141	R-CHIP;2.2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5030	2007-000141	R-CHIP;2.2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1030_LCD	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1060	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1070	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3520	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3522	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3524	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3526	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4016	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4018	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4020	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4066	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4071	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4074	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4077	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4551	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4552	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4553	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4554	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4755	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4756	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5017	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6015	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6021	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6023	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6038	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6048	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6053	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6100	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R6101	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6102	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7017	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7033	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7034	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7036	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7037	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7064	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7156	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7174	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7352	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7353_OP	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7356	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7357_OP	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3044_EU	2007-000146	R-CHIP;6.8Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3067_EU	2007-000146	R-CHIP;6.8Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1013	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1015	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1023_LCD	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R2023	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R2027	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3168	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3252	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3253	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3310	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3311	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4017	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4019	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4023	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4027	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4078	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4150	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4152	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5111	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7103	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7351	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7411_LCD	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7600_LCD	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7601_LCD	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7603_LCD	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7604_LCD	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8012	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8014_EU	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8015_EU	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8020_EU	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R9028_650	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3028_EU	2007-000149	R-CHIP;12Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R3032_EU	2007-000149	R-CHIP;12Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R3027_EU	2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3033_EU	2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4021	2007-000155	R-CHIP;27Kohm,5%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R1011	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R2019	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3040_EU	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3042_EU	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3058_EU	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3060_EU	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3126	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3136	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3201	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3204	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3521	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3523	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3525	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3527	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3820	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4151	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R9008_650	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R9029_650	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5110	2007-000159	R-CHIP;56Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3111	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3112	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3113	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3114	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5038	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3038_EU	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3049_EU	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3077_EU	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3103_OP	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3125	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3169	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3170	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3200	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3202	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3203	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3220	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3250	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3251	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3258	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3259	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3284	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3285	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3289	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3290	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3400	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3410_OP	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3450	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3451	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3452	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3453	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3500	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3751_EU	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R3752_EU	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3753_EU	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3811_OP	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3860	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4041	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4084	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4086	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4250	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5006	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5007	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5011	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5033	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5035	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6013	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6061	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6068	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7002	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7003	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7004	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7007	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7014	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7015	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7018	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7035	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7038	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7048	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7073	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7074	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7075	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7076	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7077	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7078	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7079	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7080	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7081	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7082	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7083	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7084	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7089	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7090	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7091	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7092	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7093	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7094	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7095	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7096	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7097	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7098	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7099	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7100	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7101	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R7102	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7104	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7118	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7119	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7128	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7129	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7130	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7133	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7134	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7135	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7141	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7142	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7144	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7150_650	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7151_650	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7161	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7167	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7168	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7177	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7201	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7202	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7204_120H	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7230_120H	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7234	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7236	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7237	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7238	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7244_120H	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7245_120H	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7246_120H	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7284_LCD	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7294_120H	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7295_120H	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8016_EU	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3288	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3300	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3301	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3302	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3303	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4038	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R2047	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3240	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3244	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4036	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4750	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4751	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4752	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4850	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4851	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5216	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5217	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R5218	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6031	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6125	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6126	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6211	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6212	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6213	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6214	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6215	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6216	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7115	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7159	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7175	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7650	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7651	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8021	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3008	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3083	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3256	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3257	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4039	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4040	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6184	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6810	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6811	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6812	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6813	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6814	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6815	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6816	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6817	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6818	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6819	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6820	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6821	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6822	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6823	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6824	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6825	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6826	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6827	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6828	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6829	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6830	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6831	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6832	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6833	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6834	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6835	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6836	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6837	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R6838	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6839	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6840	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6841	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6842	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6843	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6844	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6845	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7310	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1018	2007-000239	R-CHIP;1.5Kohm,1%,1/10W,TP,1608	1	S.N.A	
....4	R6089	2007-000259	R-CHIP;1.6Kohm,5%,1/10W,TP,1608	1	S.A	
....4	R5112	2007-000287	R-CHIP;100ohm,1%,1/10W,TP,1608	1	S.N.A	
....4	R7105	2007-000287	R-CHIP;100ohm,1%,1/10W,TP,1608	1	S.N.A	
....4	R7147	2007-000287	R-CHIP;100ohm,1%,1/10W,TP,1608	1	S.N.A	
....4	R1800	2007-000343	R-CHIP;120ohm,1%,1/10W,TP,1608	1	S.N.A	
....4	R2064	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R2065	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R2066	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R2067	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R2068	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R2069	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R2070	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R2071	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R5001	2007-000402	R-CHIP;150ohm,5%,1/10W,TP,1608	1	S.A	
....4	R3001_EU	2007-000458	R-CHIP;18Kohm,5%,1/10W,TP,1608	1	S.A	
....4	R3055_EU	2007-000458	R-CHIP;18Kohm,5%,1/10W,TP,1608	1	S.A	
....4	R1801	2007-000536	R-CHIP;200ohm,1%,1/10W,TP,1608	1	S.A	
....4	R5031	2007-000566	R-CHIP;220Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5026	2007-000591	R-CHIP;22ohm,1%,1/10W,TP,1608	1	S.A	
....4	R5041	2007-000591	R-CHIP;22ohm,1%,1/10W,TP,1608	1	S.A	
....4	R5052_STU	2007-000606	R-CHIP;240ohm,1%,1/10W,TP,1608	1	S.A	
....4	R5053_STU	2007-000606	R-CHIP;240ohm,1%,1/10W,TP,1608	1	S.A	
....4	R5045	2007-000669	R-CHIP;2Kohm,1%,1/10W,TP,1608	1	S.N.A	
....4	R7160	2007-000729	R-CHIP;300ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R7176	2007-000729	R-CHIP;300ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R5044	2007-000755	R-CHIP;330Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R5039	2007-000758	R-CHIP;330Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5037	2007-000763	R-CHIP;330ohm,1%,1/10W,TP,1608	1	S.N.A	
....4	R1012	2007-000828	R-CHIP;39Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R3004_EU	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3005_EU	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4015	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6067	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R9018_650	2007-000982	R-CHIP;5.6Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R9030_650	2007-000982	R-CHIP;5.6Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R1014	2007-001179	R-CHIP;8.2Kohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R3722	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8028_EU	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R9022_650	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3721	2007-001305	R-CHIP;120ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3723	2007-001305	R-CHIP;120ohm,5%,1/16W,TP,1005	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R7194	2007-001308	R-CHIP;200ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7410_LCD	2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7190	2007-001329	R-CHIP;7.5Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R7191	2007-001329	R-CHIP;7.5Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R3810	2007-001333	R-CHIP;18Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1004	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R1007	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R1008	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R1009	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R5056	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R5102	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R9001_650	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R1021	2007-002899	R-CHIP;10ohm,1%,1/10W,TP,1608	1	S.A	
....4	R1017	2007-002900	R-CHIP;11Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R5070	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5210	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5211	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5213	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5214	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5215	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R9023_650	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R9024_650	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R9025_650	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R9026_650	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1010	2007-007107	R-CHIP;100Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R5034	2007-007107	R-CHIP;100Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R2057	2007-007136	R-CHIP;4.7Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R8013_EU	2007-007136	R-CHIP;4.7Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R1019	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R4028	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R4030	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R4089	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R4156	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R4753	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R4754	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R2055	2007-007197	R-CHIP;3.3ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R2056	2007-007197	R-CHIP;3.3ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7193	2007-007222	R-CHIP;6.04Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R1016	2007-007312	R-CHIP;20Kohm,1%,1/16W,TP,1005	1	S.A	
....4	R1022	2007-007312	R-CHIP;20Kohm,1%,1/16W,TP,1005	1	S.A	
....4	R1020	2007-007318	R-CHIP;1Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R5036	2007-007469	R-CHIP;110ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R7116	2007-007797	R-CHIP;44.2ohm,1%,1/10W,TP,1608	1	S.A	
....4	R7117	2007-007797	R-CHIP;44.2ohm,1%,1/10W,TP,1608	1	S.A	
....4	R3002_EU	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3006_EU	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3009	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3011	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3012	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3029	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3030	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R3031	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3045	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3047_EU	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3050	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3057_EU	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3137	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3208	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3209	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3210	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3241	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3242	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R5032	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R6280	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R6281	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R6282	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R9014_650	2007-008298	R-CHIP;49.9ohm,1%,1/16W,TP,1005	1	S.A	
....4	R9015_650	2007-008298	R-CHIP;49.9ohm,1%,1/16W,TP,1005	1	S.A	
....4	R9016_650	2007-008298	R-CHIP;49.9ohm,1%,1/16W,TP,1005	1	S.A	
....4	R9017_650	2007-008298	R-CHIP;49.9ohm,1%,1/16W,TP,1005	1	S.A	
....4	RA5005	2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA5006	2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA8006	2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA8007	2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA8008	2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA2001	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA2002	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA2003	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA2007	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA4001	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA4044	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA4045	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA4048	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA4051	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA5004	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA6013	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7002	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7003	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7004	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7005	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7006	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7007	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7008	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7009	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7010	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7011	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7012	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7039	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7041	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7042	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7043	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7044	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	RA7045	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7046	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7047	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7048	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7049	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7050	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7051	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7052	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7062	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7500	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7501	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA8017_CI	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA8018_CI	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA8019_CI	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA9001_650	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA5003	2011-001344	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA7056	2011-001344	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA7057	2011-001344	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA2004	2011-001345	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA2005	2011-001345	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA2006	2011-001345	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA8010_EU	2011-001345	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA6018	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7013	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7014	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7015	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7020	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7038	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7040	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7053	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7054	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7061	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7502	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7503	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA3011	2011-001397	R-NETWORK;47Kohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA3012	2011-001397	R-NETWORK;47Kohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA3035	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3650_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3651_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3652_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3653_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3654_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3655_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3666_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3667_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3668_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3669_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3670_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3671_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3672_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3673_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	RA3674_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3675_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA5013	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3006	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,-,4P,TP,1010	1	S.N.A	
....4	RA3007	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,-,4P,TP,1010	1	S.N.A	
....4	RA3008	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,-,4P,TP,1010	1	S.N.A	
....4	RA3009	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,-,4P,TP,1010	1	S.N.A	
....4	RA3016	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,-,4P,TP,1010	1	S.N.A	
....4	RA4010	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,-,4P,TP,1010	1	S.N.A	
....4	RA4046	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,-,4P,TP,1010	1	S.N.A	
....4	RA6020	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,-,4P,TP,1010	1	S.N.A	
....4	RA2008	2011-001497	R-NETWORK;470ohm,5%,1/16W,L,CHIP,4P,TP,1	1	S.N.A	
....4	RA3018	2011-001497	R-NETWORK;470ohm,5%,1/16W,L,CHIP,4P,TP,1	1	S.N.A	
....4	RA9003_650	2011-001497	R-NETWORK;470ohm,5%,1/16W,L,CHIP,4P,TP,1	1	S.N.A	
....4	RA6019	2011-001506	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,4P,TP,1	1	S.N.A	
....4	RA6119	2011-001506	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,4P,TP,1	1	S.N.A	
....4	RA8011_EU	2011-001506	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,4P,TP,1	1	S.N.A	
....4	RA3015	2011-001519	R-NETWORK;33OHM,5%,1/16W,L,CHIP,4P,TP,1.	1	S.N.A	
....4	RA4018	2011-001519	R-NETWORK;33OHM,5%,1/16W,L,CHIP,4P,TP,1.	1	S.N.A	
....4	RA5012	2011-001519	R-NETWORK;33OHM,5%,1/16W,L,CHIP,4P,TP,1.	1	S.N.A	
....4	RA3017	2011-001527	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,4P,TP,	1	S.N.A	
....4	RA6021	2011-001527	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,4P,TP,	1	S.N.A	
....4	RA7034	2011-001527	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,4P,TP,	1	S.N.A	
....4	RA7065	2011-001527	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,4P,TP,	1	S.N.A	
....4	RA7066_650	2011-001527	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,4P,TP,	1	S.N.A	
....4	RA3014	2011-001586	R-NETWORK;1Kohm,5%,1/16W,L,CHIP-V,4P,TP,	1	S.A	
....4	RA3031	2011-001586	R-NETWORK;1Kohm,5%,1/16W,L,CHIP-V,4P,TP,	1	S.A	
....4	RA3036	2011-001586	R-NETWORK;1Kohm,5%,1/16W,L,CHIP-V,4P,TP,	1	S.A	
....4	RA6022	2011-001586	R-NETWORK;1Kohm,5%,1/16W,L,CHIP-V,4P,TP,	1	S.A	
....4	RA3010	2011-001587	R-NETWORK;100ohm,5%,1/16W,L,CHIP-V,4P,TP	1	S.A	
....4	RA3013	2011-001587	R-NETWORK;100ohm,5%,1/16W,L,CHIP-V,4P,TP	1	S.A	
....4	RA4016	2011-001587	R-NETWORK;100ohm,5%,1/16W,L,CHIP-V,4P,TP	1	S.A	
....4	RA4017	2011-001587	R-NETWORK;100ohm,5%,1/16W,L,CHIP-V,4P,TP	1	S.A	
....4	RA3030_EU	2011-001588	R-NETWORK;75ohm,5%,1/16W,L,CHIP-V,4P,TP,	1	S.A	
....4	RA6009	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA6010	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA6011	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA6012	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA7060	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA7079	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA7600	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA7601	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA7900	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA3032	2011-001590	R-NETWORK;47Kohm,5%,1/16W,L,CHIP-V,4P,TP	1	S.A	
....4	RA3072	2011-001590	R-NETWORK;47Kohm,5%,1/16W,L,CHIP-V,4P,TP	1	S.A	
....4	C2080	2203-000125	C-CER,CHIP;1.2nF,10%,50V,X7R,TP,1608,-	1	S.A	
....4	C2081	2203-000125	C-CER,CHIP;1.2nF,10%,50V,X7R,TP,1608,-	1	S.A	
....4	C2082	2203-000125	C-CER,CHIP;1.2nF,10%,50V,X7R,TP,1608,-	1	S.A	
....4	C2083	2203-000125	C-CER,CHIP;1.2nF,10%,50V,X7R,TP,1608,-	1	S.A	
....4	C2040	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3001	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C3002_EU	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3013	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3015	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3021	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3022	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3029	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3033_EU	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3045	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3066	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3250	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3251	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C2036	2203-000280	C-CER,CHIP;0.01nF,0.5pF,50V,C0G,1608	1	S.A	
....4	C7137	2203-000384	C-CER,CHIP;0.015nF,5%,50V,C0G,1608	1	S.N.A	
....4	C9017_650	2203-000384	C-CER,CHIP;0.015nF,5%,50V,C0G,1608	1	S.N.A	
....4	C9019_650	2203-000384	C-CER,CHIP;0.015nF,5%,50V,C0G,1608	1	S.N.A	
....4	C1001	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C1029	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C1041_LCD	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C1768	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C2033	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C2034	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C4003	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C4012	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C4025	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C6090	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C1027	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C3014_EU	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C3016_EU	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C3024	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C3025	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C5001	2203-000550	C-CER,CHIP;0.02nF,5%,50V,C0G,1005	1	S.N.A	
....4	C5002	2203-000550	C-CER,CHIP;0.02nF,5%,50V,C0G,1005	1	S.N.A	
....4	C2070	2203-000575	C-CER,CHIP;220nF,10%,25V,X7R,TP,2012	1	S.N.A	
....4	C2071	2203-000575	C-CER,CHIP;220nF,10%,25V,X7R,TP,2012	1	S.N.A	
....4	C2072	2203-000575	C-CER,CHIP;220nF,10%,25V,X7R,TP,2012	1	S.N.A	
....4	C2073	2203-000575	C-CER,CHIP;220nF,10%,25V,X7R,TP,2012	1	S.N.A	
....4	C2074	2203-000575	C-CER,CHIP;220nF,10%,25V,X7R,TP,2012	1	S.N.A	
....4	C2075	2203-000575	C-CER,CHIP;220nF,10%,25V,X7R,TP,2012	1	S.N.A	
....4	C5100	2203-000585	C-CER,CHIP;0.22nF,10%,50V,X7R,1005	1	S.A	
....4	C4009	2203-000679	C-CER,CHIP;0.027nF,5%,50V,C0G,1005	1	S.A	
....4	C4010	2203-000679	C-CER,CHIP;0.027nF,5%,50V,C0G,1005	1	S.A	
....4	C5003	2203-000697	C-CER,CHIP;0.002NF,0.25PF,50V,C0G,TP,160	1	S.A	
....4	C5004	2203-000697	C-CER,CHIP;0.002NF,0.25PF,50V,C0G,TP,160	1	S.A	
....4	C7048	2203-000761	C-CER,CHIP;330nF,10%,16V,X7R,TP,2012,-	1	S.N.A	
....4	C3006	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C3007	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C3008	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C3011_EU	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C3012_EU	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C3018	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C3019	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C3020	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C1120	2203-000995	C-CER,CHIP;0.047nF,5%,50V,C0G,1005	1	S.A	
....4	C3017	2203-000995	C-CER,CHIP;0.047nF,5%,50V,C0G,1005	1	S.A	
....4	C3023_EU	2203-000995	C-CER,CHIP;0.047nF,5%,50V,C0G,1005	1	S.A	
....4	C4018	2203-000995	C-CER,CHIP;0.047nF,5%,50V,C0G,1005	1	S.A	
....4	C4020	2203-000995	C-CER,CHIP;0.047nF,5%,50V,C0G,1005	1	S.A	
....4	C2038	2203-001126	C-CER,CHIP;0.68nF,10%,50V,X7R,1608	1	S.N.A	
....4	C5031	2203-001412	C-CER,CHIP;0.03nF,5%,50V,NP0,TP,1005	1	S.N.A	
....4	C5035	2203-001412	C-CER,CHIP;0.03nF,5%,50V,NP0,TP,1005	1	S.N.A	
....4	C5036	2203-001412	C-CER,CHIP;0.03nF,5%,50V,NP0,TP,1005	1	S.N.A	
....4	C5037	2203-001412	C-CER,CHIP;0.03nF,5%,50V,NP0,TP,1005	1	S.N.A	
....4	C5038	2203-001412	C-CER,CHIP;0.03nF,5%,50V,NP0,TP,1005	1	S.N.A	
....4	C5039_OP	2203-001596	C-CER,CHIP;2200nF,+80-20%,50V,Y5V,2012	1	S.A	
....4	C5060_OP	2203-001596	C-CER,CHIP;2200nF,+80-20%,50V,Y5V,2012	1	S.A	
....4	C1005	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C1007	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C1008	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C2006	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C2007	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C4008	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C4011	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C4019	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C4021	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C4022	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C4024	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C4100	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C5023	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C6061	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C6077	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C6099	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C6113	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C6114	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C7018	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C7136	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C7139_LCD	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C5010	2203-002494	C-CER,CHIP;470nF,10%,16V,X7R,2012	1	S.N.A	
....4	C7050	2203-005138	C-CER,CHIP;1.8nF,10%,50V,X7R,1005	1	S.A	
....4	C7051	2203-005138	C-CER,CHIP;1.8nF,10%,50V,X7R,1005	1	S.A	
....4	C7052	2203-005138	C-CER,CHIP;1.8nF,10%,50V,X7R,1005	1	S.A	
....4	C1004	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C1022	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C1024	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C1048_LCD	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C1148_LCD	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C1149_LCD	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C1150_LCD	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2047	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2048	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2049	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2050	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2051	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C2052	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2060	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2061	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2062	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2063	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2066	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2067	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2068	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2069	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2076	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2077	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2078	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2079	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C5021	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6056	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6057	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6058	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6059	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6062	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6063	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6073	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6074	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6075	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6078	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6094	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6095	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6096	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6100	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7011	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7017	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7049	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7109_650	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7114	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7115	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7121	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7122	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7009	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7016	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7025	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7029	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7059	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7063	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7065	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7073	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7096	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7105	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7106	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7148	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7157	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7173	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7205	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C7210	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C3063	2203-005393	C-CER,CHIP;0.005nF,0.1pF,50V,NP0,TP,1005	1	S.N.A	
....4	C3811	2203-005493	C-CER,CHIP;220nF,+80-20%,16V,Y5V,1005	1	S.A	
....4	C6044	2203-005493	C-CER,CHIP;220nF,+80-20%,16V,Y5V,1005	1	S.A	
....4	C6045	2203-005493	C-CER,CHIP;220nF,+80-20%,16V,Y5V,1005	1	S.A	
....4	C7053	2203-005659	C-CER,CHIP;0.18nF,5%,50V,NP0,1005	1	S.N.A	
....4	C1032	2203-005834	C-CER,CHIP;22000nF,+80-20%,10V,Y5V,3216	1	S.A	
....4	C1035	2203-005834	C-CER,CHIP;22000nF,+80-20%,10V,Y5V,3216	1	S.A	
....4	C1036	2203-005834	C-CER,CHIP;22000nF,+80-20%,10V,Y5V,3216	1	S.A	
....4	C5025	2203-005834	C-CER,CHIP;22000nF,+80-20%,10V,Y5V,3216	1	S.A	
....4	C5034	2203-005834	C-CER,CHIP;22000nF,+80-20%,10V,Y5V,3216	1	S.A	
....4	C2041	2203-005968	C-CER,CHIP;4.7NF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C6091	2203-005968	C-CER,CHIP;4.7NF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C9020_650	2203-006039	C-CER,CHIP;1nF,10%,2000V,X7R,3216	1	S.A	
....4	C9021_650	2203-006039	C-CER,CHIP;1nF,10%,2000V,X7R,3216	1	S.A	
....4	C5337	2203-006104	C-CER,CHIP;1000nF,10%,50V,X7R,3225	1	S.A	
....4	C3997	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C3998	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C6098	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C1019	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.N.A	
....4	C1025	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.N.A	
....4	C1028	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.N.A	
....4	C1060	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.N.A	
....4	C7084	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.N.A	
....4	C7310	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.N.A	
....4	C7601_LCD	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.N.A	
....4	C1002	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1003	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1006	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1012	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1014	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1030	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1034	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1070	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1071	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1080	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1091	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1092	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1801	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C2037	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C2039	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C2042	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C2043	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C2044	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C2045	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3046	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3051	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3054	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3055	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3056	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3057	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C3065	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3070	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3071	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3072	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3100	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3101	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3102	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4002	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4006	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4013	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4014	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4016	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4023	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4026	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4050	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4103	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5011	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5020	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5024	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5027	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5070	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5071	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5072	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5073	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5112	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6027	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6028	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6033	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6042	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6043	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6048	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6052	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6053	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6064	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6065	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6066	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6067	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6068	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6069	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6070	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6079	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6080	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6081	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6082	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6083	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6084	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6085	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6086	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6087	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6088	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6089	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C6101	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6105	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6109	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6110	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6111	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6112	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6115	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6116	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6153	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7012	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7013	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7019	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7020	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7034	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7038	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7043	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7054	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7055	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7056	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7062	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7064	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7068	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7069	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7074	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7075	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7078	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7081	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7083	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7086	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7087	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7088	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7094	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7095	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7098	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7099	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7100_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7107	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7112	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7113	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7116	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7117	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7134	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7140	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7142	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7143	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7146	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7147	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7149	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7152	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7160	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7161	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C7164	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7165	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7168	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7169	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7172	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7176	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7177	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7180	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7181	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7185	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7200	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7201	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7202	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7203	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7206	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7211	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7220	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7221	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7222	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7223	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7224	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7225	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7226	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7227	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7228	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7301	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7302	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7400	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7402	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7403	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7404	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7405	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7406	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7407	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7408	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7409	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7410	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7411	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7412	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7413	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7414	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7416	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7417	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7418	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7419	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7420	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7423	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7750	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7751	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7752	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7753	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C7754	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7755	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7756	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7757	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7758	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7759	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7760	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7761	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7770	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7771	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7772	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7773	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7880	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7881	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7900	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7901	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8001	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8002	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8003	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8004	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8007_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8011_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8012	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8013_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8014_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8015_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8016_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8017_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8018_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8019_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9001_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9003_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9004_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9005_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9006_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9007_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9009_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9010_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9011_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9012_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9013_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9014_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9015_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9016_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9018_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9023_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9024_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9101_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9103_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9105_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9107_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C5012	2203-006336	C-CER,CHIP;10000nF,10%,25V,X5R,3216	1	S.A	
....4	C1017	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C1020	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C1021	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C1023	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C1031	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C1033	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C1050	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2001	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2003	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2005	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2011	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2014	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2031	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2032	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2035	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2046	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2055	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2064	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2065	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3009_EU	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3010_EU	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3037	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3043	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3053	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3067	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3068	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3069	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3073	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3810	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C4001	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C4015	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C5005	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C5018	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C5028	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C5032	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C5111	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C5336	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6001	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6011	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6022	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6029	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6030	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6031	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6032	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6046	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6049	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6050	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6054	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6055	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6071	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C6072	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6092	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6093	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7001	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7004	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7005	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7006	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7007	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7008	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7021	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7085_650	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7108	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7110	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7130	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7132	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7133	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C8010_EU	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C9002_650	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C9008_650	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C9022_650	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C9100_650	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C9102_650	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C9104_650	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C9106_650	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C9900_650	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2084	2203-006382	C-CER,CHIP;10000nF,10%,25V,X7R,TP,3225	1	S.N.A	
....4	C2085	2203-006382	C-CER,CHIP;10000nF,10%,25V,X7R,TP,3225	1	S.N.A	
....4	C2086	2203-006382	C-CER,CHIP;10000nF,10%,25V,X7R,TP,3225	1	S.N.A	
....4	C2087	2203-006382	C-CER,CHIP;10000nF,10%,25V,X7R,TP,3225	1	S.N.A	
....4	C1040_LCD	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C1042_LCD	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2019	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2020	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2021	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2022	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2023	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2024	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2025	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2026	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2027	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2028	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2029	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2030	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C3103	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C3104	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C3105	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C3106	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C3320	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C3321	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C4004	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6005	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C6014	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6040	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6041	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6060	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6076	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6097	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6851	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6852	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6853	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6854	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7003	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7028	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7030	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7037	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7039	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7040	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7072	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7089	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7097	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7141	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7156	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7204	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7209	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C1013	2203-006618	C-CER,CHIP;2200nF,+80-20%,16V,Y5V,-,1608	1	S.N.A	
....4	C1016	2203-006618	C-CER,CHIP;2200nF,+80-20%,16V,Y5V,-,1608	1	S.N.A	
....4	C2004	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C2008	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C2009	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C2010	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C2056	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C2057	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C2059	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C3077	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C4005	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C5016	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C2053	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C2054	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C3038	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C3039	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C3047	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C3048	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C3058	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C3062	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C3999	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C1015	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (1	S.N.A	
....4	C1018	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (1	S.N.A	
....4	C2002	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (1	S.N.A	
....4	C2058	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (1	S.N.A	
....4	C5022	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (1	S.N.A	
....4	C6047	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (1	S.N.A	
....4	C2012	2402-001128	C-AL,SMD;100##F,20%,16V,-,TP,6.3X5.7mm	1	S.A	

5. Exploded View & Part List

[illegible]

5. Exploded View & Part List

[illegible]

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	M0018	BN97-03213A	ASSY MICOM;WT61P8-RG480WT,N68A,2008.11.2	1	S.N.A	
....5	IC520	0903-001552	IC-MICROCONTROLLER;WT61P8-RG480WT,LQFP,4	1	S.N.A	
....4	T0010	BP27-00002A	COIL CHOKE;SLF6028T-220MR77,22uF,20%,,,,	1	S.A	
...3	T0066	BP62-00016B	HEAT SINK-ES;SUNRAY,A6063,T2.0,36.2,36.2	1	S.N.A	
...3	T0066	BP62-00017A	HEAT SINK-ES;SP-50L2HX,A6063S,T2.0,26.2,	1	S.N.A	
0.1		BN91-03829B	ASSY LCD-AUO;LE37B653T5WXXC	1	S.N.A	
..2	M0215	BN07-00644A	LCD-PANEL;T370HW02 VE	1	S.A	
...3		BN81-02369A	A/S-T CON T370HW02_VE;T370HW02_VE	1	S.N.A	
0.1	M0045	BN92-04322B	ASSY ACCESSORY;LE37B653T5WXXC	1	S.N.A	
..2	M0045	BN96-09731A	ASSY ACCESSORY-MANUAL;LE32B653T5WXXC	1	S.A	
...3	T0524	6902-000110	BAG PE;LDPE,T0.05,W250,L400,TRP,28,2,-,9	1	S.N.A	
...3	T0210	AA68-03242Q	MANUAL FLYER-01,SAFETY GUIDE;comm,Samsun	1	S.N.A	
...3	T0175	BN68-00514E	MANUAL FLYER-01,WARRANTY CARD;comm,Samsu	1	S.N.A	
...3		BN68-00907D	MANUAL FLYER-WEEE BATTERY;COMM,SAMSUNG,2	1	S.N.A	
...3	T0511	BN68-01900B	MANUAL USERS;COMM,SAMSUNG,Tur,W.EUROPE,W	1	S.N.A	
...3		BN68-01902A	MANUAL FLYER-QSG;COMM,SAMSUNG,9Langs,W.E	1	S.N.A	
...3		BN96-10241A	ASSY MANUAL P-USB;B650,USB,SAMSUNG,W.EUR	1	S.N.A	
....4	T0511	BN68-01900A	MANUAL USERS;COMM,SAMSUNG,9Langs,W.EUROP	1	S.N.A	
..2	M0045	BN96-09731C	ASSY ACCESSORY-CABEL;LE37B653T5WXXC	1	S.A	
...3	T0268	3903-000145	CBF-POWER CORD;DT,EU,FP3/YES,U(IEC C13-R	1	S.A	
...3	T0524	6902-000110	BAG PE;LDPE,T0.05,W250,L400,TRP,28,2,-,9	1	S.N.A	
...3	M9889	BN63-01798B	CLOTH-CLEAN;cloth,180,200,sea blue,ToC	1	S.N.A	
...3	T0531	BN63-05285B	COVER-BOTTOM;B650 37,HIPS,HB,BK500	1	S.A	
....4		BN81-00199H	RESIN;HIPS HB,BK500,HF-1690H,K2901	50.6	S.N.A	
...3	M0560	BN96-01800A	ASSY ACCESSORY-SCREW ZIPPER;ROME32,-,-,-	1	S.N.A	
....4	T0081	6002-001294	SCREW-TAPPING;BH,+,,M4,L16,ZPC(BLK)	4	S.N.A	
....4	ACCESSORY	6902-000683	BAG ZIPPER;LDPE,T0.05,W60,L60,TRP,-,-,4-	1	S.N.A	
...3	T0074	BN59-00861A	REMOCON;LCD650,TM960,EUROPE,49	1	S.A	
0.1	M0113	BN92-04609A	ASSY P/MATERIAL;37,LB650	1	S.N.A	
..2	T0003	6902-000604	BAG WRAPPING;LDPE,T0.02,W500,L10000,TRP,	6	S.N.A	
..2	T0524	6902-001043	BAG PE;HDPE/NITRON,T0.015/T0.5,W1200,L80	1	S.N.A	
..2	T0214	AA61-20285C	HOLDER-BOX;CORAL,PP,BLACK,HB	4	S.N.A	
..2	T0214	BN74-00008A	TAPE-OPP MASKING;OPP-2,T0.05,W100,L800M,	1.33	S.N.A	
0.1	M0003	BN92-04615B	ASSY BOX;37BT5,EO,LB650	1	S.N.A	
..2	M0521	BN69-03489A	BOX-SET,IN;37LB450,CB,C-01,DW1,YEL,W1470	1	S.N.A	
..2		BN69-03537B	BOX-SET,OUT;37LB650 1/2,CB,C-01,DW2,YEL,	1	S.N.A	
0.1	M0019	BN92-04323A	ASSY LABEL;LE32B653T5WXXC	1	S.N.A	
0.1	M0216	BN90-02174A	ASSY STAND;37,40,LB650,ROSE BLACK	1	S.N.A	
..2	M0027	BN96-10691A	ASSY STAND P-BASE;37,40,LB650,TEMPERED G	1	S.N.A	
...3	M0081	6003-001003	SCREW-TAPTITE;BH,+,B,M4,L12,ZPC(BLK),SWR	3	S.N.A	
...3	M0081	6003-001003	SCREW-TAPTITE;BH,+,B,M4,L12,ZPC(BLK),SWR	4	S.N.A	
...3		BN61-04692A	BOSS-PRIMER;#94,clear,35cps	0.1	S.N.A	
...3		BN61-04731B	BOSS-TAPE;AMBER,ACRYL,T1.1,W12.0mm,WHITE	0.95	S.N.A	
...3	T0920	BN61-04813A	GUIDE-STAND;37,PC+G/F 20%,BK500	1	S.N.A	
....4		BN81-00204H	RESIN;Trirex,3025G20 BK,ABS+PC G/F 20%,4	0.38	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
...3		BN61-05240A	HOLDER-SWIVEL RING TOP;LB700 46,POM HB,A	1	S.N.A	
...3		BN61-05244A	BRACKET-SWIVEL BOTTOM;LB700 46,HGI,T3.0	1	S.N.A	
...3		BN61-05251A	GUIDE-STAND NECK;LB700 46,PC,CLEAR(TP27)	1	S.N.A	
...3		BN61-05492A	BRACKET-STAND BOTTOM;B650 40,SECC,T2.0	1	S.N.A	
...3		BN61-05493A	HOLDER-SWIVEL RING BOTTOM;LB650 40,Aceta	1	S.N.A	
...3	T0056	BN63-05538A	COVER-DECORATION;UB7000 46inch,ABS,PMMA,	1	S.N.A	
....4		BN81-00204P	RESIN-HIGH GLOSS;HAM 8560,SF-0505,K21294	0.013	S.N.A	
...3		BN63-05781B	COVER-STAND GLASS;37,40,LB650,GLASS,T8.0	1	S.A	
...4	CCM1	BN63-04755A	COVER-SHEET;AMBER,PE,T0.05,W150mm,200M,6	0.57	S.N.A	
...3	M0126	BN73-00203A	RUBBER-FOOT;LB7000 46inch,CR RUBBER,T7.0	4	S.N.A	

5-19. LE40B65*A Parts List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
		LE40B653T5WXXC	LE40B653T5W,N68A/40BT5-G6T,40,LCD-TV,SPA			
0.1	M0001	BN90-01896B	ASSY COVER FRONT;40,LB650,EO,ROSE BLACK,	1	S.N.A	
..2	T0175	BN96-09463C	ASSY SPEAKER P;8ohm,4pin,10W,R:250/ L:60	1	S.A	
..2	T0003	BN96-09489B	ASSY COVER P-FRONT;40,LB650,EO,PC(CLR)+P	1	S.A	
...3	M0081	6003-001188	SCREW-TAPTITE;BH,+,-,B,M4,L10,ZPC(WHT),S	2	S.N.A	
...3	T0069	BN60-00027G	SPACER-FELT;L650-40,FELT,890,0.5,20	2	S.N.A	
...3	T0069	BN60-00027P	SPACER-FELT;L650 40,FELT,502,0.5,20	2	S.N.A	
...3		BN61-04661A	BRACKET-STOPPER;L650,SK-5,T0.4,Plating,H	7	S.N.A	
...3	CCM1	BN63-02183E	COVER-SHEET;Rhcm,PE Vinyl,T0.05,750mm,20	0.814	S.N.A	
...3	CCM1	BN63-05199B	COVER-SHEET;AMBER,PE,T0.08,W65mm,200M,CL	2.8	S.N.A	
...3	CCM1	BN63-05199G	COVER-SHEET;AMBER,PE,T0.08,W115mm,200M,C	1.2	S.N.A	
...3	M0112	BN63-05274B	COVER-FRONT;40,LB650,EO,PC(CLR)+PC(ROSE	1	S.N.A	
....4		BN81-00116D	RESIN-TOC;PC V0,TTP01,CLR,TN-1030(NP),TH	842.6	S.N.A	
....4		BN81-00116U	RESIN-TOC;PC V1, TRD03,Light Rose Black,	668.8	S.N.A	
...3		BN96-09509C	ASSY HOLDER P-BOSS SIDE RIGHT;40,LB650,A	1	S.N.A	
....4		BN61-04692A	BOSS-PRIMER;#94,clear,35cps	0.1	S.N.A	
....4		BN61-04731D	BOSS-TAPE;AMBER,ACRYL,T1.1,W20.0mm,WHITE	0.03	S.N.A	
....4		BN61-04731F	BOSS-TAPE;AMBER,ACRYL,T1.1,W6.0mm,WHITE,	0.27	S.N.A	
....4		BN61-04805C	HOLDER-BOSS SIDE R;40,LB650,ABS+PMMA,HB,	1	S.N.A	
.....5		BN81-00204P	RESIN-HIGH GLOSS;HAM 8560,SF-0505,K21294	0.05	S.N.A	
...3		BN96-09509D	ASSY HOLDER P-BOSS SIDE LEFT;40,LB650,AB	1	S.N.A	
....4		BN61-04692A	BOSS-PRIMER;#94,clear,35cps	0.1	S.N.A	
....4		BN61-04731D	BOSS-TAPE;AMBER,ACRYL,T1.1,W20.0mm,WHITE	0.03	S.N.A	
....4		BN61-04731F	BOSS-TAPE;AMBER,ACRYL,T1.1,W6.0mm,WHITE,	0.27	S.N.A	
....4		BN61-04805D	HOLDER-BOSS SIDE L;40,LB650,ABS+PMMA,HB,	1	S.N.A	
.....5		BN81-00204P	RESIN-HIGH GLOSS;HAM 8560,SF-0505,K21294	0.05	S.N.A	
...3		BN96-09520B	ASSY HOLDER P-BOSS BOTTOM;40,LB650,ABS,H	1	S.N.A	
....4		BN61-04692A	BOSS-PRIMER;#94,clear,35cps	0.4	S.N.A	
....4		BN61-04731B	BOSS-TAPE;AMBER,ACRYL,T1.1,W12.0mm,WHITE	0.69	S.N.A	
....4		BN61-04731D	BOSS-TAPE;AMBER,ACRYL,T1.1,W20.0mm,WHITE	0.08	S.N.A	
....4		BN61-04827B	HOLDER-BOSS BOTTOM;40,LB650,ABS,HB,WH12,	1	S.N.A	
.....5		BN81-00116F	RESIN;ABS HB,WHT,HF-0680U,W91902,-,-,-	0.302	S.N.A	
...3	M0175	BN96-10210B	ASSY BOARD P-TOUCH FUNCTION&IR;LN40B650T	1	S.A	
0.1	M0002	BN90-01910A	ASSY COVER REAR;40,LB650,EO	1	S.N.A	
..2	T0081	6002-001294	SCREW-TAPPING;BH,+,,M4,L16,ZPC(BLK)	9	S.N.A	
..2	T0081	6002-001294	SCREW-TAPPING;BH,+,,M4,L16,ZPC(BLK)	1	S.N.A	
..2	T0081	6002-001294	SCREW-TAPPING;BH,+,,M4,L16,ZPC(BLK)	1	S.N.A	
..2	M0013	BN96-09506A	ASSY COVER P-REAR;40,LB650,EO,ABS+PMMA,H	1	S.A	
...3	T0069	AA60-00091J	SPACER-FELT;- ,FELT,330X10,-,-,BLK,T0.5,-	2	S.N.A	
...3	T0101	BN61-04816A	BRACKET-WALL;40, B610,SECC,T1.2	4	S.N.A	
...3	CCM1	BN63-02183E	COVER-SHEET;Rhcm,PE Vinyl,T0.05,750mm,20	1	S.N.A	
...3	M0006	BN63-05279A	COVER-REAR;40,LB650,EO,PMMA+ABS,HB,BK23,	1	S.N.A	
....4		BN81-00204P	RESIN-HIGH GLOSS;HAM 8560,SF-0505,K21294	2.769	S.N.A	
...3	T0071	BN64-01028A	INLAY-TERMINAL;B530 (PAL-Chelsea),PS SHE	1	S.N.A	
...3	T0064	BN65-00002A	CLAMPER CORE;BORDEAUX,LDPE,-,-,BLK,-	1	S.N.A	
...3		BN63-02224A	FELT-VIBRATION;63P5,FELT,T0.5,850,10	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
0.1	M0112	BN91-03503A	ASSY SHIELD;LE40B653T5WXXC	1	S.N.A	
..2	M0081	6003-000337	SCREW-TAPTITE;BH,+,S,M4,L10,ZPC(BLK),SWR	4	S.N.A	
..2	M0081	6003-000337	SCREW-TAPTITE;BH,+,S,M4,L10,ZPC(BLK),SWR	4	S.N.A	
..2	M0081	6003-000337	SCREW-TAPTITE;BH,+,S,M4,L10,ZPC(BLK),SWR	5	S.N.A	
..2	M0081	6003-001188	SCREW-TAPTITE;BH,+,B,M4,L10,ZPC(WHT),S	3	S.N.A	
..2	M0081	6003-001188	SCREW-TAPTITE;BH,+,B,M4,L10,ZPC(WHT),S	2	S.N.A	
..2	M0081	6003-001439	SCREW-TAPTITE;BH,+,S,M4,L8,ZPC(WHT),SW	1	S.N.A	
..2	M2893	BN39-01099K	LEAD CONNECTOR;LB5P,LB5K,UL1007#26,30P,7	1	S.A	
..2	M0174	BN44-00264A	IP BOARD;PSIV231I01A,H40F1_9SS,0.11mA,11	1	S.A	
..2	M0254	BN61-04800A	HOLDER-SIDE AV;EO,ABS+PMMA,HB,BK23,H/GLO	1	S.N.A	
...3		BN81-00204P	RESIN-HIGH GLOSS;HAM 8560,SF-0505,K21294	17.3	S.N.A	
..2	M0146	BN61-04818A	BRACKET-PANEL TOP;B650-32,SECC,T1.2	2	S.N.A	
..2	M0115	BN61-04918A	BRACKET-STAND LINK;40, B610,SECC,T1.6	1	S.N.A	
..2		BN63-05259A	COVER-MAIN;EO,ABS+PMMA,HB,BK23,H/GLOSSY	1	S.N.A	
...3		BN81-00204P	RESIN-HIGH GLOSS;HAM 8560,SF-0505,K21294	0.015	S.N.A	
..2	M0230	BN96-10076A	ASSY CABLE P-FPCB LVDS;LA46A650A1,FPCB L	1	S.A	
0.1	M0017	BN91-03505C	ASSY CHASSIS;LE40B653T5WXXC	1	S.N.A	
..2	M0014	BN94-02583C	ASSY PCB MAIN;LE40B653T5WXXC	1	S.A	
...3	T0245	0202-001608	SOLDER-WIRE FLUX;LFC7-107,D0.8,99.3Sn/0.	0.25	S.N.A	
...3	CN3010	3701-001388	CONNECTOR-HDMI;20P,Phosphor Bronze,ANGLE	1	S.A	
...3	CN3011	3701-001480	CONNECTOR-DSUB;15P,3R,FEMAIL,STAMPED PIN	1	S.A	
...3	CN906	3707-001081	CONNECTOR-OPTICAL;STRAIGHT,SPDIF	1	S.A	
...3	CN8001_EU	3709-001551	CONNECTOR-CARD SLOT;68P,1.27mm,DIP,AU50U	1	S.A	
...3	CN330	3711-003847	HEADER-BOARD TO CABLE;BOX,12P,1R,2mm,ANG	1	S.A	
...3	CN1001	3711-005884	HEADER-BOARD TO BOARD;BOX,30P,2R,2mm,ANG	1	S.A	
...3	CN330	3711-006715	HEADER-BOARD TO CABLE;BOX,4P,1R,2.5mm,AN	1	S.N.A	
...3	JA330	3722-001061	JACK-PHONE;1P,3.6PI,AG,BLK,N	1	S.A	
...3	JA330	3722-001061	JACK-PHONE;1P,3.6PI,AG,BLK,N	1	S.A	
...3	JA330	3722-001061	JACK-PHONE;1P,3.6PI,AG,BLK,N	1	S.A	
...3	JA330	3722-001061	JACK-PHONE;1P,3.6PI,AG,BLK,N	1	S.A	
...3	CN9001_650	3722-002426	JACK-MODULAR;8P/8C,-,N,STRAIGHT,GRN/YEL,	1	S.A	
...3	CN7002_650	3722-002546	JACK-USB;4P/1C,AU,BLK,ANGLE,A type	1	S.N.A	
...3	CN7006	3722-002546	JACK-USB;4P/1C,AU,BLK,ANGLE,A type	1	S.N.A	
...3	JA333	3722-002635	JACK-PIN;3P,Sn,YEL/WHT/RED,ANGLE	1	S.A	
...3	CN3002_EU	3722-002681	JACK-SCART;42P,SN,BLK	1	S.A	
...3	JA333	3722-002691	JACK-PIN;2P,Ni,WHT/RED,STRAIGHT	1	S.A	
...3	JA333	3722-002691	JACK-PIN;2P,Ni,WHT/RED,STRAIGHT	1	S.A	
...3	JA333	3722-002703	JACK-PIN;3P,Ni,GRN/BLU/RED,STRAIGHT	1	S.A	
...3	CIS3	BN40-00145A	TUNER;TDHG6-K12A,TDHG6-K12A,DVB-TC,164CH	1	S.A	
...3	T0174	BN97-03100C	ASSY SMD;LE40B653T5WXXC	1	S.N.A	
...4	SUB05	0202-001477	SOLDER-CREAM;LST309-M,-,D20~45um,96.5Sn/	1	S.N.A	
...4	D4003	0401-000133	DIODE-SWITCHING;RLS4148,75V,150mA,LL-34,	1	S.A	
...4	D4004	0401-000133	DIODE-SWITCHING;RLS4148,75V,150mA,LL-34,	1	S.A	
...4	D4100	0401-000133	DIODE-SWITCHING;RLS4148,75V,150mA,LL-34,	1	S.A	
...4	D4228	0401-000133	DIODE-SWITCHING;RLS4148,75V,150mA,LL-34,	1	S.A	
...4	D3001	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
...4	D3002	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
...4	D3051	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
...4	D3054	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
...4	D3061	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	D3062	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3063	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3076	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3077	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3079	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3080	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D4008	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D4010	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D9001_650	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D9002_650	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D9003_650	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D9004_650	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D9007_650	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D9008_650	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3811	0401-001099	DIODE-SWITCHING;1N4148WS,75V,150mA,SOD-3	1	S.N.A	
....4	D0254	0402-001207	DIODE-SCHOTTKY;UPS5819,40V,1000MA,DO-216	1	S.A	
....4	D4001	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D5100	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D3003_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3004_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3005_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3006_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3007_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3008_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3009_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3011	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3015	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3016_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3018	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3019	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3020	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3021	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3022_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3023	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3024	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3026_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3032	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3033	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3034	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3035	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3036	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3037	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3038	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3039	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3045	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3052	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3056	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3057	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3058	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3060	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3065	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	D3066	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3067	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3068	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3069	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3073	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3074	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3075	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3350	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3776	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3777_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3778_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3779_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D0254	0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	1	S.A	
....4	D0254	0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	1	S.A	
....4	D0254	0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	1	S.A	
....4	D0254	0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	1	S.A	
....4	D0254	0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	1	S.A	
....4	D0254	0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	1	S.A	
....4	D0254	0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	1	S.A	
....4	D0254	0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	1	S.A	
....4	D7001_650	0406-001200	DIODE-TVS;RCLAMP0504F,6/-V,150W,SC-70	1	S.A	
....4	D7002	0406-001200	DIODE-TVS;RCLAMP0504F,6/-V,150W,SC-70	1	S.A	
....4	D3751	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D3752	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D3753	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D3754	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D3755	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D3756	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D3757	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D3758	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D8001_CI	0407-000114	DIODE-ARRAY;-80V,100mA,CA2-3,SOT-23,TP	1	S.N.A	
....4	D8002_CI	0407-000114	DIODE-ARRAY;-80V,100mA,CA2-3,SOT-23,TP	1	S.N.A	
....4	D8003_CI	0407-000114	DIODE-ARRAY;-80V,100mA,CA2-3,SOT-23,TP	1	S.N.A	
....4	D8004_CI	0407-000114	DIODE-ARRAY;-80V,100mA,CA2-3,SOT-23,TP	1	S.N.A	
....4	D8005_CI	0407-000114	DIODE-ARRAY;-80V,100mA,CA2-3,SOT-23,TP	1	S.N.A	
....4	D8006_EU	0407-000114	DIODE-ARRAY;-80V,100mA,CA2-3,SOT-23,TP	1	S.N.A	
....4	Q4003	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150MW,SOT-23	1	S.A	
....4	Q4005	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150MW,SOT-23	1	S.A	
....4	Q4020	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150MW,SOT-23	1	S.A	
....4	Q1002_LCD	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3007	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3008	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3009	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3010	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3810	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3811	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q4004	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q4009	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q4011	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q9001_650	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3001_EU	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	
....4	Q3002_EU	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	Q7601_LCD	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	
....4	Q7602_LCD	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-001916	FET-SILICON;Si4800BDY,N,30V,9A,0.03ohm,2	1	S.A	
....4	IC104	0801-002095	IC-CMOS LOGIC;74LCX245,TRANSCEIVER,TSSOP	1	S.A	
....4	IC104	0801-002172	IC-CMOS LOGIC;74LCX16244,BUFFER/LINE DRI	1	S.A	
....4	IC104	0801-002172	IC-CMOS LOGIC;74LCX16244,BUFFER/LINE DRI	1	S.A	
....4	IC104	0801-002630	IC-CMOS LOGIC;74AHCT1G08,2-INPUT AND GAT	1	S.A	
....4	IC104	0801-002780	IC-CMOS LOGIC;74LVC1G17,SCHMITT-TRIGGER	1	S.N.A	
....4	IC7009	0904-002119	IC-I/O SUPPORT CHIP;PCF8574TS,8Bit,SSOP,	1	S.A	
....4	IC7008	1001-000164	IC-ANALOG MULTIPLEX;74HC4052,CMOS,SOP,16	1	S.A	
....4	IC9003_650	1001-001109	IC-ANALOG SWITCH;FST3125M,BUS SWITCH & C	1	S.A	
....4	IC106	1001-001177	IC-VIDEO SWITCH;TEA6425D,VIDEO SWITCH ,S	1	S.A	
....4	IC106	1001-001573	IC-VIDEO SWITCH;Sil9287CNUTR,QFN,72P,10x	1	S.A	
....4	IC107	1002-001482	IC-D/A CONVERTER;WM8521H9GED/R,16bit,SOI	1	S.A	
....4	IC3001	1006-001266	IC-LINE TRANSCEIVER;SP3232EEY,TSSOP,16P,	1	S.A	
....4	IC112	1103-000129	IC-EEPROM;24C02,2Kbit,256x8Bit,SOP,8P,5x	1	S.A	
....4	IC112	1103-000129	IC-EEPROM;24C02,2Kbit,256x8Bit,SOP,8P,5x	1	S.A	
....4	IC112	1103-001310	IC-EEPROM;24LC02B,256X8BIT,SOIC,8P,3.91X	1	S.N.A	
....4	IC112	1103-001385	IC-EEPROM;AT24C256,256Kbit,32Kx8,SOP,8P,	1	S.A	
....4	IC112	1103-001415	IC-EEPROM;AT93C46D,1Kbit,128x8/64x16,SOP	1	S.N.A	
....4	IC7003	1105-001859	IC-DDR2 SDRAM;K4T1G164QD-ZCE7,DDR2,1Gbit	1	S.A	
....4	IC7004	1105-001859	IC-DDR2 SDRAM;K4T1G164QD-ZCE7,DDR2,1Gbit	1	S.A	
....4	IC7005	1105-001859	IC-DDR2 SDRAM;K4T1G164QD-ZCE7,DDR2,1Gbit	1	S.A	
....4	IC7006	1105-001859	IC-DDR2 SDRAM;K4T1G164QD-ZCE7,DDR2,1Gbit	1	S.A	
....4	T0124	1201-002796	IC-POWER AMP;STA339BWS,PSSO,36P,10.3x7.5	1	S.A	
....4	T0087	1203-001815	IC-POSI.FIXED REG.;78M09,TO-252,3P,-,PLA	1	S.A	
....4	T0087	1203-001816	IC-POSI.FIXED REG.;78M08,TO-252,3P,-,PLA	1	S.A	
....4	T0087	1203-002842	IC-POSI.FIXED REG.;AP1117D-33A,TO-252,3P	1	S.A	
....4	T0087	1203-002898	IC-POSI.FIXED REG.;G950T45R,TO-252,3P,6.	1	S.A	
....4	IC012	1203-002995	IC-POSI.ADJUST REG.;AP1117D-A,TO-252,3P,	1	S.A	
....4	IC012	1203-002995	IC-POSI.ADJUST REG.;AP1117D-A,TO-252,3P,	1	S.A	
....4	IC012	1203-002995	IC-POSI.ADJUST REG.;AP1117D-A,TO-252,3P,	1	S.A	
....4	IC4005	1203-004363	IC-VOL. DETECTOR;RT9818C-29PV,SOT-23,3P,	1	S.A	
....4	IC4004	1203-004364	IC-VOL. DETECTOR;RT9818C-42PV,SOT-23,3P,	1	S.A	
....4	IC1007	1203-004879	IC-DC/DC CONVERTER;MP8668DL,QFN,14P,3x4mm	1	S.A	
....4	T0087	1203-005134	IC-POSI.FIXED REG.;RT9167A-33PB,SOT-23-5	1	S.A	
....4	IC1006	1203-005538	IC-DC/DC CONVERTER;AOZ1021HAIL,SOP,8P,4.	1	S.A	
....4	IC5006	1203-005559	IC-BACKLIGHT DRIVER;MP3302DJ,TSOT23,5P,2	1	S.A	
....4	T0087	1203-005713	IC-POSI.FIXED REG.;S-1172B33-E6T1G,HSOP,	1	S.A	
....4	IC118	1204-003010	IC-VIDEO PROCESS;SDP84,PBGA,324P,23x23mm	1	S.A	
....4	IC7001	1204-003011	IC-DECODER;SDP83,PBGA,729P,34x34mm,PLAST	1	S.A	
....4	IC9002_650	1205-002941	IC-ETHERNET CONTROLLER;RTL8100CL-LF,LQFP	1	S.N.A	
....4	IC3011	1205-003201	IC-BUS SWITCH;TC7WB125FK,SSOP,8P,2x2.3mm	1	S.A	
....4	IC2001	1205-003352	IC-CODEC;WM8593SEFT/V,TQFP,64P,10x10mm,P	1	S.A	
....4	IC7010_650	1205-003479	IC-SWITCH;TPS2051BDBVR,SOT-23,5P,2.9x1.6	1	S.A	
....4	IC8006_EU	1205-003479	IC-SWITCH;TPS2051BDBVR,SOT-23,5P,2.9x1.6	1	S.A	
....4	IC7007	1205-003681	IC-SWITCH;TPS2069DGN,MSOP,8P,3.05x4.98mm	1	S.A	
....4	IC5010	1209-001830	IC-PLL;IDT6V10012PGG,TSSOP,20P,6.5x4.4mm	1	S.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	D4110	1405-001185	VARISTOR;24Vdc,1.6x0.8x0.36mm,TP	1	S.A	
....4	D3010	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3012_EU	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3013	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3014_EU	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3017	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3025	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3027	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3028	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3029	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3030	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3031	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3040	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3041	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3042	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3050	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3053	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3055	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3059	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3064	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3070	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3071	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3072	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3078	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3081	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3097	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3098	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3099	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4011	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4012	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4013	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4014	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4015	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4016	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4017	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4018	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D7003_650	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D7004	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	R7120	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7121	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7122	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7123	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7152	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7153	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7154	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7155	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7162	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7163	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7164	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7165	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7169	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R7170	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7171	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7172	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R5101	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R2058	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R2059	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R2060	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R2061	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R4155	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	1	S.A	
....4	R7050	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7053	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7056	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7058	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7062	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7066	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7069	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7070	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3007	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3034_EU	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3036_EU	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3062	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3070	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3071	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3078_EU	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3120	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3191	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3192	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3205	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3206	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3207	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3243	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3254	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3255	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3320	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3999	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4042	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4049	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4050	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4087	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5022	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7114	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7132	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7143	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7605_LCD	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8311_EU	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1031_LCD	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1072	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3010_EU	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3021_EU	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3022_EU	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3035	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R3037	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3072	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3073	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3081	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3082	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3138	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3139	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3189	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3190	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3227	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3228	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4081	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6028	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6066	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7045	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7072	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7195	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7196	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7602_LCD	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R9007_650	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R2054	2007-000141	R-CHIP;2.2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4085	2007-000141	R-CHIP;2.2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5030	2007-000141	R-CHIP;2.2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1030_LCD	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1060	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1070	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3520	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3522	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3524	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3526	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4016	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4018	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4020	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4066	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4071	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4074	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4077	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4551	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4552	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4553	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4554	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4755	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4756	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5017	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6015	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6021	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6023	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6038	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6048	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6053	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6100	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R6101	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6102	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7017	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7033	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7034	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7036	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7037	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7064	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7156	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7174	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7352	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7353_OP	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7356	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7357_OP	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3044_EU	2007-000146	R-CHIP;6.8Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3067_EU	2007-000146	R-CHIP;6.8Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1013	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1015	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1023_LCD	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R2023	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R2027	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3168	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3252	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3253	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3310	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3311	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4017	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4019	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4023	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4027	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4078	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4150	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4152	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5111	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7103	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7351	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7411_LCD	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7600_LCD	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7601_LCD	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7603_LCD	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7604_LCD	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8012	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8014_EU	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8015_EU	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8020_EU	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R9028_650	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3028_EU	2007-000149	R-CHIP;12Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R3032_EU	2007-000149	R-CHIP;12Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R3027_EU	2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3033_EU	2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4021	2007-000155	R-CHIP;27Kohm,5%,1/16W,TP,1005	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R1011	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R2019	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3040_EU	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3042_EU	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3058_EU	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3060_EU	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3126	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3136	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3201	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3204	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3521	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3523	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3525	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3527	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3820	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4151	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R9008_650	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R9029_650	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5110	2007-000159	R-CHIP;56Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3111	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3112	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3113	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3114	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5038	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3038_EU	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3049_EU	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3077_EU	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3103_OP	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3125	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3169	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3170	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3200	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3202	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3203	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3220	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3250	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3251	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3258	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3259	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3284	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3285	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3289	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3290	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3400	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3410_OP	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3450	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3451	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3452	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3453	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3500	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3751_EU	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R3752_EU	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3753_EU	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3811_OP	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3860	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4041	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4084	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4086	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4250	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5006	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5007	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5011	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5033	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5035	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6013	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6061	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6068	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7002	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7003	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7004	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7007	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7014	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7015	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7018	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7035	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7038	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7048	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7073	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7074	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7075	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7076	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7077	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7078	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7079	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7080	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7081	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7082	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7083	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7084	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7089	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7090	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7091	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7092	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7093	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7094	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7095	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7096	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7097	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7098	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7099	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7100	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7101	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R7102	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7104	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7118	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7119	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7128	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7129	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7130	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7133	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7134	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7135	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7141	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7142	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7144	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7150_650	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7151_650	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7161	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7167	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7168	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7177	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7201	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7202	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7204_120H	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7230_120H	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7234	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7236	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7237	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7238	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7244_120H	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7245_120H	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7246_120H	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7284_LCD	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7294_120H	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7295_120H	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8016_EU	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3288	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3300	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3301	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3302	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3303	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4038	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R2047	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3240	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3244	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4036	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4750	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4751	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4752	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4850	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4851	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5216	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5217	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R5218	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6031	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6125	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6126	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6211	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6212	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6213	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6214	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6215	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6216	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7115	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7159	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7175	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7650	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7651	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8021	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3008	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3083	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3256	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3257	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4039	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4040	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6184	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6810	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6811	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6812	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6813	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6814	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6815	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6816	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6817	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6818	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6819	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6820	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6821	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6822	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6823	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6824	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6825	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6826	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6827	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6828	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6829	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6830	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6831	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6832	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6833	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6834	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6835	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6836	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6837	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R6838	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6839	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6840	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6841	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6842	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6843	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6844	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6845	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7310	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1018	2007-000239	R-CHIP;1.5Kohm,1%,1/10W,TP,1608	1	S.N.A	
....4	R6089	2007-000259	R-CHIP;1.6Kohm,5%,1/10W,TP,1608	1	S.A	
....4	R5112	2007-000287	R-CHIP;100ohm,1%,1/10W,TP,1608	1	S.N.A	
....4	R7105	2007-000287	R-CHIP;100ohm,1%,1/10W,TP,1608	1	S.N.A	
....4	R7147	2007-000287	R-CHIP;100ohm,1%,1/10W,TP,1608	1	S.N.A	
....4	R1800	2007-000343	R-CHIP;120ohm,1%,1/10W,TP,1608	1	S.N.A	
....4	R2064	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R2065	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R2066	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R2067	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R2068	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R2069	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R2070	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R2071	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R5001	2007-000402	R-CHIP;150ohm,5%,1/10W,TP,1608	1	S.A	
....4	R3001_EU	2007-000458	R-CHIP;18Kohm,5%,1/10W,TP,1608	1	S.A	
....4	R3055_EU	2007-000458	R-CHIP;18Kohm,5%,1/10W,TP,1608	1	S.A	
....4	R1801	2007-000536	R-CHIP;200ohm,1%,1/10W,TP,1608	1	S.A	
....4	R5031	2007-000566	R-CHIP;220Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5026	2007-000591	R-CHIP;22ohm,1%,1/10W,TP,1608	1	S.A	
....4	R5041	2007-000591	R-CHIP;22ohm,1%,1/10W,TP,1608	1	S.A	
....4	R5052_STU	2007-000606	R-CHIP;240ohm,1%,1/10W,TP,1608	1	S.A	
....4	R5053_STU	2007-000606	R-CHIP;240ohm,1%,1/10W,TP,1608	1	S.A	
....4	R5045	2007-000669	R-CHIP;2Kohm,1%,1/10W,TP,1608	1	S.N.A	
....4	R7160	2007-000729	R-CHIP;300ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R7176	2007-000729	R-CHIP;300ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R5044	2007-000755	R-CHIP;330Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R5039	2007-000758	R-CHIP;330Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5037	2007-000763	R-CHIP;330ohm,1%,1/10W,TP,1608	1	S.N.A	
....4	R1012	2007-000828	R-CHIP;39Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R3004_EU	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3005_EU	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4015	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6067	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R9018_650	2007-000982	R-CHIP;5.6Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R9030_650	2007-000982	R-CHIP;5.6Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R1014	2007-001179	R-CHIP;8.2Kohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R3722	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8028_EU	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R9022_650	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3721	2007-001305	R-CHIP;120ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3723	2007-001305	R-CHIP;120ohm,5%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R7194	2007-001308	R-CHIP;200ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7410_LCD	2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7190	2007-001329	R-CHIP;7.5Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R7191	2007-001329	R-CHIP;7.5Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R3810	2007-001333	R-CHIP;18Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1004	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R1007	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R1008	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R1009	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R5056	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R5102	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R9001_650	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R1021	2007-002899	R-CHIP;10ohm,1%,1/10W,TP,1608	1	S.A	
....4	R1017	2007-002900	R-CHIP;11Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R5070	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5210	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5211	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5213	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5214	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5215	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R9023_650	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R9024_650	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R9025_650	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R9026_650	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1010	2007-007107	R-CHIP;100Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R5034	2007-007107	R-CHIP;100Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R2057	2007-007136	R-CHIP;4.7Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R8013_EU	2007-007136	R-CHIP;4.7Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R1019	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R4028	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R4030	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R4089	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R4156	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R4753	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R4754	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R2055	2007-007197	R-CHIP;3.3ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R2056	2007-007197	R-CHIP;3.3ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7193	2007-007222	R-CHIP;6.04Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R1016	2007-007312	R-CHIP;20Kohm,1%,1/16W,TP,1005	1	S.A	
....4	R1022	2007-007312	R-CHIP;20Kohm,1%,1/16W,TP,1005	1	S.A	
....4	R1020	2007-007318	R-CHIP;1Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R5036	2007-007469	R-CHIP;110ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R7116	2007-007797	R-CHIP;44.2ohm,1%,1/10W,TP,1608	1	S.A	
....4	R7117	2007-007797	R-CHIP;44.2ohm,1%,1/10W,TP,1608	1	S.A	
....4	R3002_EU	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3006_EU	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3009	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3011	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3012	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3029	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3030	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R3031	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3045	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3047_EU	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3050	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3057_EU	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3137	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3208	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3209	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3210	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3241	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3242	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R5032	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R6280	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R6281	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R6282	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R9014_650	2007-008298	R-CHIP;49.9ohm,1%,1/16W,TP,1005	1	S.A	
....4	R9015_650	2007-008298	R-CHIP;49.9ohm,1%,1/16W,TP,1005	1	S.A	
....4	R9016_650	2007-008298	R-CHIP;49.9ohm,1%,1/16W,TP,1005	1	S.A	
....4	R9017_650	2007-008298	R-CHIP;49.9ohm,1%,1/16W,TP,1005	1	S.A	
....4	RA5005	2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA5006	2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA8006	2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA8007	2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA8008	2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA2001	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA2002	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA2003	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA2007	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA4001	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA4044	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA4045	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA4048	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA4051	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA5004	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA6013	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7002	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7003	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7004	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7005	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7006	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7007	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7008	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7009	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7010	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7011	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7012	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7039	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7041	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7042	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7043	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7044	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	RA7045	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7046	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7047	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7048	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7049	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7050	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7051	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7052	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7062	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7500	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7501	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA8017_CI	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA8018_CI	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA8019_CI	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA9001_650	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA5003	2011-001344	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA7056	2011-001344	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA7057	2011-001344	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA2004	2011-001345	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA2005	2011-001345	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA2006	2011-001345	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA8010_EU	2011-001345	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA6018	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7013	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7014	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7015	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7020	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7038	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7040	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7053	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7054	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7061	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7502	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7503	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA3011	2011-001397	R-NETWORK;47Kohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA3012	2011-001397	R-NETWORK;47Kohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA3035	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3650_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3651_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3652_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3653_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3654_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3655_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3666_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3667_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3668_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3669_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3670_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3671_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3672_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3673_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	RA3674_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3675_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA5013	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3006	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,-,4P,TP,1010	1	S.N.A	
....4	RA3007	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,-,4P,TP,1010	1	S.N.A	
....4	RA3008	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,-,4P,TP,1010	1	S.N.A	
....4	RA3009	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,-,4P,TP,1010	1	S.N.A	
....4	RA3016	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,-,4P,TP,1010	1	S.N.A	
....4	RA4010	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,-,4P,TP,1010	1	S.N.A	
....4	RA4046	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,-,4P,TP,1010	1	S.N.A	
....4	RA6020	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,-,4P,TP,1010	1	S.N.A	
....4	RA2008	2011-001497	R-NETWORK;470ohm,5%,1/16W,L,CHIP,4P,TP,1	1	S.N.A	
....4	RA3018	2011-001497	R-NETWORK;470ohm,5%,1/16W,L,CHIP,4P,TP,1	1	S.N.A	
....4	RA9003_650	2011-001497	R-NETWORK;470ohm,5%,1/16W,L,CHIP,4P,TP,1	1	S.N.A	
....4	RA6019	2011-001506	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,4P,TP,1	1	S.N.A	
....4	RA6119	2011-001506	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,4P,TP,1	1	S.N.A	
....4	RA8011_EU	2011-001506	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,4P,TP,1	1	S.N.A	
....4	RA3015	2011-001519	R-NETWORK;33OHM,5%,1/16W,L,CHIP,4P,TP,1.	1	S.N.A	
....4	RA4018	2011-001519	R-NETWORK;33OHM,5%,1/16W,L,CHIP,4P,TP,1.	1	S.N.A	
....4	RA5012	2011-001519	R-NETWORK;33OHM,5%,1/16W,L,CHIP,4P,TP,1.	1	S.N.A	
....4	RA3017	2011-001527	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,4P,TP,	1	S.N.A	
....4	RA6021	2011-001527	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,4P,TP,	1	S.N.A	
....4	RA7034	2011-001527	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,4P,TP,	1	S.N.A	
....4	RA7065	2011-001527	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,4P,TP,	1	S.N.A	
....4	RA7066_650	2011-001527	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,4P,TP,	1	S.N.A	
....4	RA3014	2011-001586	R-NETWORK;1Kohm,5%,1/16W,L,CHIP-V,4P,TP,	1	S.A	
....4	RA3031	2011-001586	R-NETWORK;1Kohm,5%,1/16W,L,CHIP-V,4P,TP,	1	S.A	
....4	RA3036	2011-001586	R-NETWORK;1Kohm,5%,1/16W,L,CHIP-V,4P,TP,	1	S.A	
....4	RA6022	2011-001586	R-NETWORK;1Kohm,5%,1/16W,L,CHIP-V,4P,TP,	1	S.A	
....4	RA3010	2011-001587	R-NETWORK;100ohm,5%,1/16W,L,CHIP-V,4P,TP	1	S.A	
....4	RA3013	2011-001587	R-NETWORK;100ohm,5%,1/16W,L,CHIP-V,4P,TP	1	S.A	
....4	RA4016	2011-001587	R-NETWORK;100ohm,5%,1/16W,L,CHIP-V,4P,TP	1	S.A	
....4	RA4017	2011-001587	R-NETWORK;100ohm,5%,1/16W,L,CHIP-V,4P,TP	1	S.A	
....4	RA3030_EU	2011-001588	R-NETWORK;75ohm,5%,1/16W,L,CHIP-V,4P,TP,	1	S.A	
....4	RA6009	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA6010	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA6011	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA6012	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA7060	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA7079	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA7600	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA7601	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA7900	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA3032	2011-001590	R-NETWORK;47Kohm,5%,1/16W,L,CHIP-V,4P,TP	1	S.A	
....4	RA3072	2011-001590	R-NETWORK;47Kohm,5%,1/16W,L,CHIP-V,4P,TP	1	S.A	
....4	C2080	2203-000125	C-CER,CHIP;1.2nF,10%,50V,X7R,TP,1608,-	1	S.A	
....4	C2081	2203-000125	C-CER,CHIP;1.2nF,10%,50V,X7R,TP,1608,-	1	S.A	
....4	C2082	2203-000125	C-CER,CHIP;1.2nF,10%,50V,X7R,TP,1608,-	1	S.A	
....4	C2083	2203-000125	C-CER,CHIP;1.2nF,10%,50V,X7R,TP,1608,-	1	S.A	
....4	C2040	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3001	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C3002_EU	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3013	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3015	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3021	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3022	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3029	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3033_EU	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3045	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3066	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3250	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3251	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C2036	2203-000280	C-CER,CHIP;0.01nF,0.5pF,50V,C0G,1608	1	S.A	
....4	C7137	2203-000384	C-CER,CHIP;0.015nF,5%,50V,C0G,1608	1	S.N.A	
....4	C9017_650	2203-000384	C-CER,CHIP;0.015nF,5%,50V,C0G,1608	1	S.N.A	
....4	C9019_650	2203-000384	C-CER,CHIP;0.015nF,5%,50V,C0G,1608	1	S.N.A	
....4	C1001	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C1029	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C1041_LCD	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C1768	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C2033	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C2034	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C4003	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C4012	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C4025	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C6090	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C1027	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C3014_EU	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C3016_EU	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C3024	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C3025	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C5001	2203-000550	C-CER,CHIP;0.02nF,5%,50V,C0G,1005	1	S.N.A	
....4	C5002	2203-000550	C-CER,CHIP;0.02nF,5%,50V,C0G,1005	1	S.N.A	
....4	C2070	2203-000575	C-CER,CHIP;220nF,10%,25V,X7R,TP,2012	1	S.N.A	
....4	C2071	2203-000575	C-CER,CHIP;220nF,10%,25V,X7R,TP,2012	1	S.N.A	
....4	C2072	2203-000575	C-CER,CHIP;220nF,10%,25V,X7R,TP,2012	1	S.N.A	
....4	C2073	2203-000575	C-CER,CHIP;220nF,10%,25V,X7R,TP,2012	1	S.N.A	
....4	C2074	2203-000575	C-CER,CHIP;220nF,10%,25V,X7R,TP,2012	1	S.N.A	
....4	C2075	2203-000575	C-CER,CHIP;220nF,10%,25V,X7R,TP,2012	1	S.N.A	
....4	C5100	2203-000585	C-CER,CHIP;0.22nF,10%,50V,X7R,1005	1	S.A	
....4	C4009	2203-000679	C-CER,CHIP;0.027nF,5%,50V,C0G,1005	1	S.A	
....4	C4010	2203-000679	C-CER,CHIP;0.027nF,5%,50V,C0G,1005	1	S.A	
....4	C5003	2203-000697	C-CER,CHIP;0.002NF,0.25PF,50V,C0G,TP,160	1	S.A	
....4	C5004	2203-000697	C-CER,CHIP;0.002NF,0.25PF,50V,C0G,TP,160	1	S.A	
....4	C7048	2203-000761	C-CER,CHIP;330nF,10%,16V,X7R,TP,2012,-	1	S.N.A	
....4	C3006	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C3007	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C3008	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C3011_EU	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C3012_EU	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C3018	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C3019	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C3020	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C1120	2203-000995	C-CER,CHIP;0.047nF,5%,50V,C0G,1005	1	S.A	
....4	C3017	2203-000995	C-CER,CHIP;0.047nF,5%,50V,C0G,1005	1	S.A	
....4	C3023_EU	2203-000995	C-CER,CHIP;0.047nF,5%,50V,C0G,1005	1	S.A	
....4	C4018	2203-000995	C-CER,CHIP;0.047nF,5%,50V,C0G,1005	1	S.A	
....4	C4020	2203-000995	C-CER,CHIP;0.047nF,5%,50V,C0G,1005	1	S.A	
....4	C2038	2203-001126	C-CER,CHIP;0.68nF,10%,50V,X7R,1608	1	S.N.A	
....4	C5031	2203-001412	C-CER,CHIP;0.03nF,5%,50V,NP0,TP,1005	1	S.N.A	
....4	C5035	2203-001412	C-CER,CHIP;0.03nF,5%,50V,NP0,TP,1005	1	S.N.A	
....4	C5036	2203-001412	C-CER,CHIP;0.03nF,5%,50V,NP0,TP,1005	1	S.N.A	
....4	C5037	2203-001412	C-CER,CHIP;0.03nF,5%,50V,NP0,TP,1005	1	S.N.A	
....4	C5038	2203-001412	C-CER,CHIP;0.03nF,5%,50V,NP0,TP,1005	1	S.N.A	
....4	C5039_OP	2203-001596	C-CER,CHIP;2200nF,+80-20%,50V,Y5V,2012	1	S.A	
....4	C5060_OP	2203-001596	C-CER,CHIP;2200nF,+80-20%,50V,Y5V,2012	1	S.A	
....4	C1005	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C1007	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C1008	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C2006	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C2007	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C4008	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C4011	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C4019	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C4021	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C4022	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C4024	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C4100	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C5023	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C6061	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C6077	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C6099	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C6113	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C6114	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C7018	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C7136	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C7139_LCD	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C5010	2203-002494	C-CER,CHIP;470nF,10%,16V,X7R,2012	1	S.N.A	
....4	C7050	2203-005138	C-CER,CHIP;1.8nF,10%,50V,X7R,1005	1	S.A	
....4	C7051	2203-005138	C-CER,CHIP;1.8nF,10%,50V,X7R,1005	1	S.A	
....4	C7052	2203-005138	C-CER,CHIP;1.8nF,10%,50V,X7R,1005	1	S.A	
....4	C1004	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C1022	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C1024	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C1048_LCD	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C1148_LCD	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C1149_LCD	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C1150_LCD	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2047	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2048	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2049	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2050	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2051	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C2052	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2060	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2061	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2062	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2063	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2066	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2067	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2068	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2069	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2076	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2077	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2078	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2079	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C5021	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6056	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6057	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6058	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6059	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6062	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6063	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6073	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6074	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6075	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6078	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6094	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6095	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6096	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6100	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7011	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7017	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7049	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7109_650	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7114	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7115	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7121	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7122	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7009	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7016	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7025	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7029	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7059	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7063	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7065	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7073	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7096	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7105	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7106	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7148	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7157	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7173	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7205	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C7210	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C3063	2203-005393	C-CER,CHIP;0.005nF,0.1pF,50V,NP0,TP,1005	1	S.N.A	
....4	C3811	2203-005493	C-CER,CHIP;220nF,+80-20%,16V,Y5V,1005	1	S.A	
....4	C6044	2203-005493	C-CER,CHIP;220nF,+80-20%,16V,Y5V,1005	1	S.A	
....4	C6045	2203-005493	C-CER,CHIP;220nF,+80-20%,16V,Y5V,1005	1	S.A	
....4	C7053	2203-005659	C-CER,CHIP;0.18nF,5%,50V,NP0,1005	1	S.N.A	
....4	C1032	2203-005834	C-CER,CHIP;22000nF,+80-20%,10V,Y5V,3216	1	S.A	
....4	C1035	2203-005834	C-CER,CHIP;22000nF,+80-20%,10V,Y5V,3216	1	S.A	
....4	C1036	2203-005834	C-CER,CHIP;22000nF,+80-20%,10V,Y5V,3216	1	S.A	
....4	C5025	2203-005834	C-CER,CHIP;22000nF,+80-20%,10V,Y5V,3216	1	S.A	
....4	C5034	2203-005834	C-CER,CHIP;22000nF,+80-20%,10V,Y5V,3216	1	S.A	
....4	C2041	2203-005968	C-CER,CHIP;4.7NF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C6091	2203-005968	C-CER,CHIP;4.7NF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C9020_650	2203-006039	C-CER,CHIP;1nF,10%,2000V,X7R,3216	1	S.A	
....4	C9021_650	2203-006039	C-CER,CHIP;1nF,10%,2000V,X7R,3216	1	S.A	
....4	C5337	2203-006104	C-CER,CHIP;1000nF,10%,50V,X7R,3225	1	S.A	
....4	C3997	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C3998	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C6098	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C1019	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.N.A	
....4	C1025	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.N.A	
....4	C1028	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.N.A	
....4	C1060	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.N.A	
....4	C7084	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.N.A	
....4	C7310	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.N.A	
....4	C7601_LCD	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.N.A	
....4	C1002	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1003	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1006	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1012	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1014	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1030	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1034	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1070	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1071	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1080	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1091	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1092	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1801	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C2037	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C2039	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C2042	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C2043	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C2044	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C2045	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3046	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3051	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3054	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3055	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3056	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3057	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C3065	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3070	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3071	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3072	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3100	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3101	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3102	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4002	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4006	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4013	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4014	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4016	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4023	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4026	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4050	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4103	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5011	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5020	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5024	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5027	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5070	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5071	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5072	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5073	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5112	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6027	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6028	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6033	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6042	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6043	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6048	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6052	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6053	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6064	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6065	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6066	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6067	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6068	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6069	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6070	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6079	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6080	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6081	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6082	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6083	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6084	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6085	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6086	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6087	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6088	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6089	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C6101	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6105	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6109	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6110	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6111	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6112	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6115	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6116	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6153	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7012	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7013	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7019	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7020	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7034	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7038	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7043	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7054	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7055	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7056	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7062	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7064	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7068	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7069	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7074	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7075	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7078	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7081	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7083	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7086	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7087	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7088	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7094	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7095	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7098	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7099	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7100_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7107	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7112	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7113	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7116	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7117	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7134	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7140	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7142	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7143	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7146	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7147	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7149	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7152	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7160	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7161	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C7164	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7165	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7168	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7169	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7172	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7176	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7177	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7180	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7181	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7185	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7200	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7201	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7202	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7203	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7206	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7211	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7220	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7221	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7222	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7223	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7224	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7225	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7226	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7227	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7228	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7301	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7302	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7400	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7402	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7403	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7404	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7405	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7406	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7407	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7408	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7409	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7410	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7411	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7412	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7413	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7414	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7416	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7417	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7418	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7419	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7420	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7423	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7750	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7751	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7752	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7753	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C7754	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7755	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7756	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7757	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7758	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7759	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7760	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7761	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7770	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7771	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7772	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7773	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7880	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7881	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7900	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7901	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8001	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8002	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8003	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8004	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8007_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8011_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8012	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8013_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8014_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8015_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8016_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8017_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8018_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8019_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9001_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9003_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9004_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9005_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9006_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9007_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9009_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9010_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9011_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9012_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9013_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9014_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9015_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9016_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9018_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9023_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9024_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9101_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9103_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9105_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9107_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C5012	2203-006336	C-CER,CHIP;10000nF,10%,25V,X5R,3216	1	S.A	
....4	C1017	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C1020	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C1021	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C1023	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C1031	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C1033	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C1050	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2001	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2003	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2005	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2011	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2014	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2031	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2032	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2035	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2046	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2055	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2064	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2065	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3009_EU	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3010_EU	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3037	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3043	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3053	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3067	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3068	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3069	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3073	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3810	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C4001	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C4015	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C5005	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C5018	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C5028	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C5032	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C5111	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C5336	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6001	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6011	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6022	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6029	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6030	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6031	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6032	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6046	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6049	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6050	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6054	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6055	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6071	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C6072	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6092	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6093	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7001	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7004	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7005	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7006	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7007	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7008	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7021	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7085_650	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7108	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7110	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7130	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7132	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7133	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C8010_EU	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C9002_650	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C9008_650	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C9022_650	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C9100_650	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C9102_650	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C9104_650	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C9106_650	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C9900_650	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2084	2203-006382	C-CER,CHIP;10000nF,10%,25V,X7R,TP,3225	1	S.N.A	
....4	C2085	2203-006382	C-CER,CHIP;10000nF,10%,25V,X7R,TP,3225	1	S.N.A	
....4	C2086	2203-006382	C-CER,CHIP;10000nF,10%,25V,X7R,TP,3225	1	S.N.A	
....4	C2087	2203-006382	C-CER,CHIP;10000nF,10%,25V,X7R,TP,3225	1	S.N.A	
....4	C1040_LCD	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C1042_LCD	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2019	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2020	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2021	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2022	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2023	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2024	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2025	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2026	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2027	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2028	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2029	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2030	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C3103	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C3104	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C3105	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C3106	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C3320	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C3321	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C4004	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6005	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C6014	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6040	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6041	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6060	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6076	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6097	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6851	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6852	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6853	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6854	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7003	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7028	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7030	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7037	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7039	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7040	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7072	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7089	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7097	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7141	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7156	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7204	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7209	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C1013	2203-006618	C-CER,CHIP;2200nF,+80-20%,16V,Y5V,-,1608	1	S.N.A	
....4	C1016	2203-006618	C-CER,CHIP;2200nF,+80-20%,16V,Y5V,-,1608	1	S.N.A	
....4	C2004	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C2008	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C2009	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C2010	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C2056	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C2057	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C2059	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C3077	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C4005	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C5016	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C2053	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C2054	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C3038	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C3039	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C3047	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C3048	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C3058	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C3062	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C3999	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C1015	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (1	S.N.A	
....4	C1018	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (1	S.N.A	
....4	C2002	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (1	S.N.A	
....4	C2058	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (1	S.N.A	
....4	C5022	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (1	S.N.A	
....4	C6047	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (1	S.N.A	
....4	C2012	2402-001128	C-AL,SMD;100##F,20%,16V,-,TP,6.3X5.7mm	1	S.A	

5. Exploded View & Part List

[illegible]

5. Exploded View & Part List

[illegible]

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	M0018	BN97-03213A	ASSY MICOM;WT61P8-RG480WT,N68A,2008.11.2	1	S.N.A	
....5	IC520	0903-001552	IC-MICROCONTROLLER;WT61P8-RG480WT,LQFP,4	1	S.N.A	
....4	T0010	BP27-00002A	COIL CHOKE;SLF6028T-220MR77,22uF,20%,,,,	1	S.A	
...3	T0066	BP62-00016B	HEAT SINK-ES;SUNRAY,A6063,T2.0,36.2,36.2	1	S.N.A	
...3	T0066	BP62-00017A	HEAT SINK-ES;SP-50L2HX,A6063S,T2.0,26.2,	1	S.N.A	
0.1		BN91-03829E	ASSY LCD-AUO;LE40B653T5WXXC	1	S.N.A	
..2	M0215	BN07-00646A	LCD-PANEL;T400HW02 V5	1	S.A	
...3		BN81-02372A	A/S-T CON T400HW02_V5;T400HW02_V5	1	S.N.A	
0.1	M0045	BN92-04322C	ASSY ACCESSORY;LE40B653T5WXXC	1	S.N.A	
..2	M0045	BN96-09731A	ASSY ACCESSORY-MANUAL;LE32B653T5WXXC	1	S.A	
...3	T0524	6902-000110	BAG PE;LDPE,T0.05,W250,L400,TRP,28,2,-,9	1	S.N.A	
...3	T0210	AA68-03242Q	MANUAL FLYER-01,SAFETY GUIDE;comm,Samsun	1	S.N.A	
...3	T0175	BN68-00514E	MANUAL FLYER-01,WARRANTY CARD;comm,Samsu	1	S.N.A	
...3		BN68-00907D	MANUAL FLYER-WEEE BATTERY;COMM,SAMSUNG,2	1	S.N.A	
...3	T0511	BN68-01900B	MANUAL USERS;COMM,SAMSUNG,Tur,W.EUROPE,W	1	S.N.A	
...3		BN68-01902A	MANUAL FLYER-QSG;COMM,SAMSUNG,9Langs,W.E	1	S.N.A	
...3		BN96-10241A	ASSY MANUAL P-USB;B650,USB,SAMSUNG,W.EUR	1	S.N.A	
....4	T0511	BN68-01900A	MANUAL USERS;COMM,SAMSUNG,9Langs,W.EUROP	1	S.N.A	
..2	M0045	BN96-09731D	ASSY ACCESSORY-CABEL;LE40B653T5WXXC	1	S.A	
...3	T0268	3903-000145	CBF-POWER CORD;DT,EU,FP3/YES,U(IEC C13-R	1	S.A	
...3	T0524	6902-000110	BAG PE;LDPE,T0.05,W250,L400,TRP,28,2,-,9	1	S.N.A	
...3	M9889	BN63-01798B	CLOTH-CLEAN;cloth,180,200,sea blue,ToC	1	S.N.A	
...3	T0531	BN63-05286B	COVER-BOTTOM;B650 40,HIPS,HB,BK500	1	S.A	
....4		BN81-00199H	RESIN;HIPS HB,BK500,HF-1690H,K2901	0.06	S.N.A	
...3	M0560	BN96-01800A	ASSY ACCESSORY-SCREW ZIPPER;ROME32,-,-,-	1	S.N.A	
....4	T0081	6002-001294	SCREW-TAPPING;BH,+,,M4,L16,ZPC(BLK)	4	S.N.A	
....4	ACCESSORY	6902-000683	BAG ZIPPER;LDPE,T0.05,W60,L60,TRP,-,-,4-	1	S.N.A	
...3	T0074	BN59-00861A	REMOCON;LCD650,TM960,EUROPE,49	1	S.A	
0.1	M0113	BN92-04610A	ASSY P/MATERIAL;40,LB650	1	S.N.A	
..2	T0003	6902-000604	BAG WRAPPING;LDPE,T0.02,W500,L10000,TRP,	7	S.N.A	
..2	T0524	6902-001043	BAG PE;HDPE/NITRON,T0.015/T0.5,W1200,L80	1	S.N.A	
..2	T0214	AA61-20285C	HOLDER-BOX;CORAL,PP,BLACK,HB	4	S.N.A	
..2	T0214	BN74-00008A	TAPE-OPP MASKING;OPP-2,T0.05,W100,L800M,	1.39	S.N.A	
0.1	M0003	BN92-04616B	ASSY BOX;40BT5,EO,LB650	1	S.N.A	
..2	M0521	BN69-03475A	BOX-SET,IN;40LB450,CB,C-01,DW2,YEL,W1525	1	S.N.A	
..2		BN69-03509B	BOX-SET,OUT;40LB650,CB,C-03,DW2,YEL,W123	1	S.N.A	
0.1	M0019	BN92-04323B	ASSY LABEL;LE37B653T5WXXC	1	S.N.A	
0.1	M0216	BN90-02174A	ASSY STAND;37,40,LB650,ROSE BLACK	1	S.N.A	
..2	M0027	BN96-10691A	ASSY STAND P-BASE;37,40,LB650,TEMPERED G	1	S.N.A	
...3	M0081	6003-001003	SCREW-TAPTITE;BH,+,B,M4,L12,ZPC(BLK),SWR	3	S.N.A	
...3	M0081	6003-001003	SCREW-TAPTITE;BH,+,B,M4,L12,ZPC(BLK),SWR	4	S.N.A	
...3		BN61-04692A	BOSS-PRIMER;#94,clear,35cps	0.1	S.N.A	
...3		BN61-04731B	BOSS-TAPE;AMBER,ACRYL,T1.1,W12.0mm,WHITE	0.95	S.N.A	
...3	T0920	BN61-04813A	GUIDE-STAND;37,PC+G/F 20%,BK500	1	S.N.A	
....4		BN81-00204H	RESIN;Trirex,3025G20 BK,ABS+PC G/F 20%,4	0.38	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
...3		BN61-05240A	HOLDER-SWIVEL RING TOP;LB700 46,POM HB,A	1	S.N.A	
...3		BN61-05244A	BRACKET-SWIVEL BOTTOM;LB700 46,HGI,T3.0	1	S.N.A	
...3		BN61-05251A	GUIDE-STAND NECK;LB700 46,PC,CLEAR(TP27)	1	S.N.A	
...3		BN61-05492A	BRACKET-STAND BOTTOM;B650 40,SECC,T2.0	1	S.N.A	
...3		BN61-05493A	HOLDER-SWIVEL RING BOTTOM;LB650 40,Aceta	1	S.N.A	
...3	T0056	BN63-05538A	COVER-DECORATION;UB7000 46inch,ABS,PMMA,	1	S.N.A	
....4		BN81-00204P	RESIN-HIGH GLOSS;HAM 8560,SF-0505,K21294	0.013	S.N.A	
...3		BN63-05781B	COVER-STAND GLASS;37,40,LB650,GLASS,T8.0	1	S.A	
...4	CCM1	BN63-04755A	COVER-SHEET;AMBER,PE,T0.05,W150mm,200M,6	0.57	S.N.A	
...3	M0126	BN73-00203A	RUBBER-FOOT;LB7000 46inch,CR RUBBER,T7.0	4	S.N.A	

5-20. LE46B65*A Parts List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
		LE46B653T5WXXC	LE46B653T5W,N68A/46BT5-G6T,46,LCD-TV,SPA			
0.1	M0001	BN90-01898B	ASSY COVER FRONT;46,LB650,EO,ROSE BLACK,	1	S.N.A	
..2	T0175	BN96-09463D	ASSY SPEAKER P;8ohm,4pin,10W,R:250/ L:70	1	S.A	
..2	T0003	BN96-09490B	ASSY COVER P-FRONT;46,LB650,EO,PC(CLR)+P	1	S.A	
...3	M0081	6003-001188	SCREW-TAPTITE;BH,+,-,B,M4,L10,ZPC(WHT),S	2	S.N.A	
...3	T0069	BN60-00027H	SPACER-FELT;L650-46,FELT,1020,0.5,20	2	S.N.A	
...3	T0069	BN60-00027Q	SPACER-FELT;L650 46,FELT,570,0.5,20	2	S.N.A	
...3		BN61-04661A	BRACKET-STOPPER;L650,SK-5,T0.4,Plating,H	7	S.N.A	
...3	CCM1	BN63-02183F	COVER-SHEET;Rhcm,PE Vinyl,T0.05,900mm,20	0.9	S.N.A	
...3	CCM1	BN63-05199B	COVER-SHEET;AMBER,PE,T0.08,W65mm,200M,CL	3.1	S.N.A	
...3	CCM1	BN63-05199H	COVER-SHEET;AMBER,PE,T0.08,W130mm,200M,C	1.3	S.N.A	
...3	M0112	BN63-05275B	COVER-FRONT;46,LB650,EO,PC(CLR)+PC(ROSE	1	S.N.A	
....4		BN81-00116D	RESIN-TOC;PC V0,TTP01,CLR,TN-1030(NP),TH	0.957	S.N.A	
....4		BN81-00116U	RESIN-TOC;PC V1, TRD03,Light Rose Black,	1.018	S.N.A	
...3		BN96-09511C	ASSY HOLDER P-BOSS SIDE RIGHT;46,LB650,A	1	S.N.A	
....4		BN61-04692A	BOSS-PRIMER;#94,clear,35cps	0.1	S.N.A	
....4		BN61-04731D	BOSS-TAPE;AMBER,ACRYL,T1.1,W20.0mm,WHITE	0.3	S.N.A	
....4		BN61-04731F	BOSS-TAPE;AMBER,ACRYL,T1.1,W6.0mm,WHITE,	0.43	S.N.A	
....4		BN61-04760C	HOLDER-BOSS SIDE R;46,LB650,ABS+PMMA,HB,	1	S.N.A	
.....5		BN81-00204P	RESIN-HIGH GLOSS;HAM 8560,SF-0505,K21294	0.09	S.N.A	
...3		BN96-09511D	ASSY HOLDER P-BOSS SIDE LEFT;46,LB650,AB	1	S.N.A	
....4		BN61-04692A	BOSS-PRIMER;#94,clear,35cps	0.1	S.N.A	
....4		BN61-04731D	BOSS-TAPE;AMBER,ACRYL,T1.1,W20.0mm,WHITE	0.3	S.N.A	
....4		BN61-04731F	BOSS-TAPE;AMBER,ACRYL,T1.1,W6.0mm,WHITE,	0.43	S.N.A	
....4		BN61-04760D	HOLDER-BOSS SIDE L;46,LB650,ABS+PMMA,HB,	1	S.N.A	
.....5		BN81-00204P	RESIN-HIGH GLOSS;HAM 8560,SF-0505,K21294	0.09	S.N.A	
...3		BN96-09521B	ASSY HOLDER P-BOSS BOTTOM;46,LB650,ABS,H	1	S.N.A	
....4		BN61-04692A	BOSS-PRIMER;#94,clear,35cps	0.5	S.N.A	
....4		BN61-04731B	BOSS-TAPE;AMBER,ACRYL,T1.1,W12.0mm,WHITE	0.82	S.N.A	
....4		BN61-04731D	BOSS-TAPE;AMBER,ACRYL,T1.1,W20.0mm,WHITE	0.07	S.N.A	
....4		BN61-04828B	HOLDER-BOSS BOTTOM;46,LB650,ABS,HB,WH12,	1	S.N.A	
.....5		BN81-00116F	RESIN;ABS HB,WHT,HF-0680U,W91902,-,-,-	357.5	S.N.A	
...3	M0175	BN96-10210B	ASSY BOARD P-TOUCH FUNCTION&IR;LN40B650T	1	S.A	
0.1	M0002	BN90-01911A	ASSY COVER REAR;46,LB650,EO	1	S.N.A	
..2	T0081	6002-001294	SCREW-TAPPING;BH,+,,M4,L16,ZPC(BLK)	12	S.N.A	
..2	T0081	6002-001294	SCREW-TAPPING;BH,+,,M4,L16,ZPC(BLK)	1	S.N.A	
..2	T0081	6002-001294	SCREW-TAPPING;BH,+,,M4,L16,ZPC(BLK)	1	S.N.A	
..2	M0013	BN96-09508A	ASSY COVER P-REAR;46,LB650,EO,ABS+PMMA,H	1	S.A	
...3		BN63-01151A	FELT-NON WOVEN;MM17NS,-,T0.5,393,10,BLK,	2	S.N.A	
...3	CCM1	BN63-02183F	COVER-SHEET;Rhcm,PE Vinyl,T0.05,900mm,20	0.9	S.N.A	
...3		BN63-02224A	FELT-VIBRATION;63P5,FELT,T0.5,850,10	1	S.N.A	
...3	M0006	BN63-05280A	COVER-REAR;46,LB650,EO,PMMA+ABS,HB,BK23,	1	S.N.A	
....4		BN81-00204P	RESIN-HIGH GLOSS;HAM 8560,SF-0505,K21294	3.883	S.N.A	
...3	T0071	BN64-01028A	INLAY-TERMINAL;B530 (PAL-Chelsea),PS SHE	1	S.N.A	
...3	T0064	BN65-00002A	CLAMPER CORE;BORDEAUX,LDPE,-,-,BLK,-	1	S.N.A	
0.1	M0112	BN91-03504A	ASSY SHIELD;LE46B653T5WXXC	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
..2	M0081	6003-000337	SCREW-TAPTITE;BH,+,S,M4,L10,ZPC(BLK),SWR	4	S.N.A	
..2	M0081	6003-000337	SCREW-TAPTITE;BH,+,S,M4,L10,ZPC(BLK),SWR	4	S.N.A	
..2	M0081	6003-000337	SCREW-TAPTITE;BH,+,S,M4,L10,ZPC(BLK),SWR	4	S.N.A	
..2	M0081	6003-000337	SCREW-TAPTITE;BH,+,S,M4,L10,ZPC(BLK),SWR	6	S.N.A	
..2	M0081	6003-001188	SCREW-TAPTITE;BH,+,B,M4,L10,ZPC(WHT),S	4	S.N.A	
..2	M0081	6003-001188	SCREW-TAPTITE;BH,+,B,M4,L10,ZPC(WHT),S	2	S.N.A	
..2	M0081	6003-001439	SCREW-TAPTITE;BH,+,S,M4,L8,ZPC(WHT),SW	1	S.N.A	
..2	M2893	BN39-00830B	LEAD CONNECTOR;LNT4642HX/XAA,UL1061#28,7	1	S.A	
..2	M2893	BN39-01021C	LEAD CONNECTOR;LH40MG,UL1617#22,2P,1100m	1	S.A	
..2	M2893	BN39-01024A	LEAD CONNECTOR;LN46A550P1FXZA,UL1007#26,	1	S.A	
..2	M2893	BN39-01099K	LEAD CONNECTOR;LB5P,LB5K,UL1007#26,30P,7	1	S.A	
..2	M0174	BN44-00265A	IP BOARD;PSIV281609A,I46F1_9SS,0.1mA,10.	1	S.A	
..2	M0115	BN61-04788A	BRACKET-STAND LINK;46, B610,SECC,T2.0	1	S.N.A	
..2	M0254	BN61-04800A	HOLDER-SIDE AV;EO,ABS+PMMA,HB,BK23,H/GLO	1	S.N.A	
...3		BN81-00204P	RESIN-HIGH GLOSS;HAM 8560,SF-0505,K21294	17.3	S.N.A	
..2	T0101	BN61-04817A	BRACKET-WALL;46, B610,SECC,T1.6	4	S.N.A	
..2	M0146	BN61-04818A	BRACKET-PANEL TOP;B650-32,SECC,T1.2	2	S.N.A	
..2		BN63-05259A	COVER-MAIN;EO,ABS+PMMA,HB,BK23,H/GLOSSY	1	S.N.A	
...3		BN81-00204P	RESIN-HIGH GLOSS;HAM 8560,SF-0505,K21294	0.015	S.N.A	
..2	M0230	BN96-10075A	ASSY CABLE P-FPCB LVDS;LA46A650A1,FPCB L	1	S.A	
0.1	M0017	BN91-03505D	ASSY CHASSIS;LE46B653T5WXXC	1	S.N.A	
..2	M0014	BN94-02583D	ASSY PCB MAIN;LE46B653T5WXXC	1	S.A	
...3	T0245	0202-001608	SOLDER-WIRE FLUX;LFC7-107,D0.8,99.3Sn/0.	0.25	S.N.A	
...3	CN3010	3701-001388	CONNECTOR-HDMI;20P,Phosphor Bronze,ANGLE	1	S.A	
...3	CN3011	3701-001480	CONNECTOR-DSUB;15P,3R,FEMAIL,STAMPED PIN	1	S.A	
...3	CN906	3707-001081	CONNECTOR-OPTICAL;STRAIGHT,SPDIF	1	S.A	
...3	CN8001_EU	3709-001551	CONNECTOR-CARD SLOT;68P,1.27mm,DIP,AU50U	1	S.A	
...3	CN330	3711-003847	HEADER-BOARD TO CABLE;BOX,12P,1R,2mm,ANG	1	S.A	
...3	CN1001	3711-005884	HEADER-BOARD TO BOARD;BOX,30P,2R,2mm,ANG	1	S.A	
...3	CN330	3711-006715	HEADER-BOARD TO CABLE;BOX,4P,1R,2.5mm,AN	1	S.N.A	
...3	JA330	3722-001061	JACK-PHONE;1P,3.6PI,AG,BLK,N	1	S.A	
...3	JA330	3722-001061	JACK-PHONE;1P,3.6PI,AG,BLK,N	1	S.A	
...3	JA330	3722-001061	JACK-PHONE;1P,3.6PI,AG,BLK,N	1	S.A	
...3	JA330	3722-001061	JACK-PHONE;1P,3.6PI,AG,BLK,N	1	S.A	
...3	CN9001_650	3722-002426	JACK-MODULAR;8P/8C,-,N,STRAIGHT,GRN/YEL,	1	S.A	
...3	CN7002_650	3722-002546	JACK-USB;4P/1C,AU,BLK,ANGLE,A type	1	S.N.A	
...3	CN7006	3722-002546	JACK-USB;4P/1C,AU,BLK,ANGLE,A type	1	S.N.A	
...3	JA333	3722-002635	JACK-PIN;3P,Sn,YEL/WHT/RED,ANGLE	1	S.A	
...3	CN3002_EU	3722-002681	JACK-SCART;42P,SN,BLK	1	S.A	
...3	JA333	3722-002691	JACK-PIN;2P,Ni,WHT/RED,STRAIGHT	1	S.A	
...3	JA333	3722-002691	JACK-PIN;2P,Ni,WHT/RED,STRAIGHT	1	S.A	
...3	JA333	3722-002703	JACK-PIN;3P,Ni,GRN/BLU/RED,STRAIGHT	1	S.A	
...3	CIS3	BN40-00145A	TUNER;TDHG6-K12A,TDHG6-K12A,DVB-TC,164CH	1	S.A	
...3	T0174	BN97-03100D	ASSY SMD;LE46B653T5WXXC	1	S.N.A	
....4	SUB05	0202-001477	SOLDER-CREAM;LST309-M,-,D20~45um,96.5Sn/	1	S.N.A	
....4	D4003	0401-000133	DIODE-SWITCHING;RLS4148,75V,150mA,LL-34,	1	S.A	
....4	D4004	0401-000133	DIODE-SWITCHING;RLS4148,75V,150mA,LL-34,	1	S.A	
....4	D4100	0401-000133	DIODE-SWITCHING;RLS4148,75V,150mA,LL-34,	1	S.A	
....4	D4228	0401-000133	DIODE-SWITCHING;RLS4148,75V,150mA,LL-34,	1	S.A	
....4	D3001	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	D3002	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3051	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3054	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3061	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3062	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3063	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3076	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3077	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3079	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3080	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D4008	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D4010	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D9001_650	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D9002_650	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D9003_650	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D9004_650	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D9007_650	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D9008_650	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3811	0401-001099	DIODE-SWITCHING;1N4148WS,75V,150mA,SOD-3	1	S.N.A	
....4	D0254	0402-001207	DIODE-SCHOTTKY;UPS5819,40V,1000MA,DO-216	1	S.A	
....4	D4001	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D5100	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D3003_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3004_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3005_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3006_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3007_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3008_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3009_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3011	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3015	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3016_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3018	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3019	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3020	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3021	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3022_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3023	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3024	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3026_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3032	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3033	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3034	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3035	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3036	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3037	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3038	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3039	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3045	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3052	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3056	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	D3057	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3058	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3060	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3065	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3066	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3067	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3068	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3069	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3073	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3074	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3075	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3350	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3776	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3777_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3778_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3779_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D0254	0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	1	S.A	
....4	D0254	0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	1	S.A	
....4	D0254	0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	1	S.A	
....4	D0254	0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	1	S.A	
....4	D0254	0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	1	S.A	
....4	D0254	0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	1	S.A	
....4	D0254	0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	1	S.A	
....4	D0254	0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	1	S.A	
....4	D7001_650	0406-001200	DIODE-TVS;RCLAMP0504F,6/-V,150W,SC-70	1	S.A	
....4	D7002	0406-001200	DIODE-TVS;RCLAMP0504F,6/-V,150W,SC-70	1	S.A	
....4	D3751	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D3752	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D3753	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D3754	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D3755	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D3756	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D3757	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D3758	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D8001_CI	0407-000114	DIODE-ARRAY;-80V,100mA,CA2-3,SOT-23,TP	1	S.N.A	
....4	D8002_CI	0407-000114	DIODE-ARRAY;-80V,100mA,CA2-3,SOT-23,TP	1	S.N.A	
....4	D8003_CI	0407-000114	DIODE-ARRAY;-80V,100mA,CA2-3,SOT-23,TP	1	S.N.A	
....4	D8004_CI	0407-000114	DIODE-ARRAY;-80V,100mA,CA2-3,SOT-23,TP	1	S.N.A	
....4	D8005_CI	0407-000114	DIODE-ARRAY;-80V,100mA,CA2-3,SOT-23,TP	1	S.N.A	
....4	D8006_EU	0407-000114	DIODE-ARRAY;-80V,100mA,CA2-3,SOT-23,TP	1	S.N.A	
....4	Q4003	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150MW,SOT-23	1	S.A	
....4	Q4005	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150MW,SOT-23	1	S.A	
....4	Q4020	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150MW,SOT-23	1	S.A	
....4	Q1002_LCD	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3007	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3008	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3009	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3010	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3810	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3811	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q4004	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q4009	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	Q4011	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q9001_650	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3001_EU	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	
....4	Q3002_EU	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	
....4	Q7601_LCD	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	
....4	Q7602_LCD	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-001916	FET-SILICON;Si4800BDY,N,30V,9A,0.03ohm,2	1	S.A	
....4	IC104	0801-002095	IC-CMOS LOGIC;74LCX245,TRANSCEIVER,TSSOP	1	S.A	
....4	IC104	0801-002172	IC-CMOS LOGIC;74LCX16244,BUFFER/LINE DRI	1	S.A	
....4	IC104	0801-002172	IC-CMOS LOGIC;74LCX16244,BUFFER/LINE DRI	1	S.A	
....4	IC104	0801-002630	IC-CMOS LOGIC;74AHCT1G08,2-INPUT AND GAT	1	S.A	
....4	IC104	0801-002780	IC-CMOS LOGIC;74LVC1G17,SCHMITT-TRIGGER	1	S.N.A	
....4	IC7009	0904-002119	IC-I/O SUPPORT CHIP;PCF8574TS,8Bit,SSOP,	1	S.A	
....4	IC7008	1001-000164	IC-ANALOG MULTIPLEX;74HC4052,CMOS,SOP,16	1	S.A	
....4	IC9003_650	1001-001109	IC-ANALOG SWITCH;FST3125M,BUS SWITCH & C	1	S.A	
....4	IC106	1001-001177	IC-VIDEO SWITCH;TEA6425D,VIDEO SWITCH ,S	1	S.A	
....4	IC106	1001-001573	IC-VIDEO SWITCH;Si19287CNUTR,QFN,72P,10x	1	S.A	
....4	IC107	1002-001482	IC-D/A CONVERTER;WM8521H9GED/R,16bit,SOI	1	S.A	
....4	IC3001	1006-001266	IC-LINE TRANSCEIVER;SP3232EEY,TSSOP,16P,	1	S.A	
....4	IC112	1103-000129	IC-EEPROM;24C02,2Kbit,256x8Bit,SOP,8P,5x	1	S.A	
....4	IC112	1103-000129	IC-EEPROM;24C02,2Kbit,256x8Bit,SOP,8P,5x	1	S.A	
....4	IC112	1103-001310	IC-EEPROM;24LC02B,256X8BIT,SOIC,8P,3.91X	1	S.N.A	
....4	IC112	1103-001385	IC-EEPROM;AT24C256,256Kbit,32Kx8,SOP,8P,	1	S.A	
....4	IC112	1103-001415	IC-EEPROM;AT93C46D,1Kbit,128x8/64x16,SOP	1	S.N.A	
....4	IC7003	1105-001859	IC-DDR2 SDRAM;K4T1G164QD-ZCE7,DDR2,1Gbit	1	S.A	
....4	IC7004	1105-001859	IC-DDR2 SDRAM;K4T1G164QD-ZCE7,DDR2,1Gbit	1	S.A	
....4	IC7005	1105-001859	IC-DDR2 SDRAM;K4T1G164QD-ZCE7,DDR2,1Gbit	1	S.A	
....4	IC7006	1105-001859	IC-DDR2 SDRAM;K4T1G164QD-ZCE7,DDR2,1Gbit	1	S.A	
....4	T0124	1201-002796	IC-POWER AMP;STA339BWS,PSSO,36P,10.3x7.5	1	S.A	
....4	T0087	1203-001815	IC-POSI.FIXED REG.;78M09,TO-252,3P,-,PLA	1	S.A	
....4	T0087	1203-001816	IC-POSI.FIXED REG.;78M08,TO-252,3P,-,PLA	1	S.A	
....4	T0087	1203-002842	IC-POSI.FIXED REG.;AP1117D-33A,TO-252,3P	1	S.A	
....4	T0087	1203-002898	IC-POSI.FIXED REG.;G950T45R,TO-252,3P,6.	1	S.A	
....4	IC012	1203-002995	IC-POSI.ADJUST REG.;AP1117D-A,TO-252,3P,	1	S.A	
....4	IC012	1203-002995	IC-POSI.ADJUST REG.;AP1117D-A,TO-252,3P,	1	S.A	
....4	IC012	1203-002995	IC-POSI.ADJUST REG.;AP1117D-A,TO-252,3P,	1	S.A	
....4	IC4005	1203-004363	IC-VOL. DETECTOR;RT9818C-29PV,SOT-23,3P,	1	S.A	
....4	IC4004	1203-004364	IC-VOL. DETECTOR;RT9818C-42PV,SOT-23,3P,	1	S.A	
....4	IC1007	1203-004879	IC-DC/DC CONVERTER;MP8668DL,QFN,14P,3x4mm	1	S.A	
....4	T0087	1203-005134	IC-POSI.FIXED REG.;RT9167A-33PB,SOT-23-5	1	S.A	
....4	IC1006	1203-005538	IC-DC/DC CONVERTER;AOZ1021HAIL,SOP,8P,4.	1	S.A	
....4	IC5006	1203-005559	IC-BACKLIGHT DRIVER;MP3302DJ,TSOT23,5P,2	1	S.A	
....4	T0087	1203-005713	IC-POSI.FIXED REG.;S-1172B33-E6T1G,HSOP,	1	S.A	
....4	IC118	1204-003010	IC-VIDEO PROCESS;SDP84,PBGA,324P,23x23mm	1	S.A	
....4	IC7001	1204-003011	IC-DECODER;SDP83,PBGA,729P,34x34mm,PLAST	1	S.A	
....4	IC9002_650	1205-002941	IC-ETHERNET CONTROLLER;RTL8100CL-LF,LQFP	1	S.N.A	
....4	IC3011	1205-003201	IC-BUS SWITCH;TC7WB125FK,SSOP,8P,2x2.3mm	1	S.A	
....4	IC2001	1205-003352	IC-CODEC;WM8593SEFT/V,TQFP,64P,10x10mm,P	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	IC7010_650	1205-003479	IC-SWITCH;TPS2051BDBVR,SOT-23,5P,2.9x1.6	1	S.A	
....4	IC8006_EU	1205-003479	IC-SWITCH;TPS2051BDBVR,SOT-23,5P,2.9x1.6	1	S.A	
....4	IC7007	1205-003681	IC-SWITCH;TPS2069DGN,MSOP,8P,3.05x4.98mm	1	S.A	
....4	IC5010	1209-001830	IC-PLL;IDT6V10012PGG,TSSOP,20P,6.5x4.4mm	1	S.A	
....4	D4110	1405-001185	VARISTOR;24Vdc,1.6x0.8x0.36mm,TP	1	S.A	
....4	D3010	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3012_EU	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3013	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3014_EU	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3017	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3025	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3027	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3028	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3029	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3030	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3031	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3040	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3041	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3042	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3050	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3053	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3055	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3059	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3064	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3070	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3071	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3072	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3078	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3081	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3097	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3098	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3099	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4011	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4012	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4013	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4014	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4015	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4016	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4017	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4018	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D7003_650	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D7004	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	R7120	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7121	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7122	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7123	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7152	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7153	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7154	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7155	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7162	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R7163	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7164	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7165	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7169	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7170	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7171	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7172	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R5101	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R2058	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R2059	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R2060	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R2061	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R4155	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	1	S.A	
....4	R7050	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7053	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7056	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7058	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7062	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7066	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7069	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7070	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3007	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3034_EU	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3036_EU	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3062	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3070	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3071	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3078_EU	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3120	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3191	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3192	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3205	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3206	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3207	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3243	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3254	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3255	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3320	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3999	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4042	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4049	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4050	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4087	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5022	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7114	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7132	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7143	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7605_LCD	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8311_EU	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1031_LCD	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1072	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R3010_EU	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3021_EU	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3022_EU	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3035	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3037	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3072	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3073	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3081	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3082	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3138	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3139	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3189	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3190	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3227	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3228	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4081	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6028	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6066	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7045	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7072	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7195	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7196	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7602_LCD	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R9007_650	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R2054	2007-000141	R-CHIP;2.2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4085	2007-000141	R-CHIP;2.2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5030	2007-000141	R-CHIP;2.2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1030_LCD	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1060	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1070	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3520	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3522	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3524	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3526	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4016	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4018	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4020	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4066	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4071	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4074	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4077	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4551	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4552	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4553	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4554	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4755	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4756	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5017	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6015	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6021	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6023	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R6038	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6048	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6053	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6100	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6101	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6102	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7017	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7033	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7034	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7036	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7037	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7064	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7156	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7174	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7352	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7353_OP	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7356	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7357_OP	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3044_EU	2007-000146	R-CHIP;6.8Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3067_EU	2007-000146	R-CHIP;6.8Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1013	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1015	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1023_LCD	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R2023	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R2027	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3168	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3252	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3253	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3310	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3311	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4017	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4019	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4023	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4027	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4078	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4150	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4152	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5111	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7103	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7351	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7411_LCD	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7600_LCD	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7601_LCD	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7603_LCD	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7604_LCD	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8012	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8014_EU	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8015_EU	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8020_EU	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R9028_650	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3028_EU	2007-000149	R-CHIP;12Kohm,5%,1/16W,TP,1005	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R3032_EU	2007-000149	R-CHIP;12Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R3027_EU	2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3033_EU	2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4021	2007-000155	R-CHIP;27Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1011	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R2019	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3040_EU	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3042_EU	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3058_EU	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3060_EU	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3126	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3136	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3201	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3204	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3521	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3523	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3525	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3527	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3820	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4151	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R9008_650	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R9029_650	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5110	2007-000159	R-CHIP;56Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3111	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3112	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3113	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3114	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5038	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3038_EU	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3049_EU	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3077_EU	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3103_OP	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3125	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3169	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3170	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3200	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3202	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3203	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3220	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3250	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3251	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3258	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3259	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3284	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3285	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3289	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3290	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3400	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3410_OP	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3450	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3451	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R3452	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3453	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3500	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3751_EU	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3752_EU	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3753_EU	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3811_OP	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3860	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4041	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4084	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4086	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4250	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5006	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5007	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5011	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5033	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5035	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6013	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6061	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6068	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7002	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7003	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7004	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7007	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7014	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7015	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7018	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7035	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7038	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7048	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7073	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7074	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7075	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7076	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7077	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7078	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7079	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7080	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7081	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7082	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7083	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7084	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7089	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7090	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7091	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7092	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7093	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7094	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7095	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7096	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7097	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R7098	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7099	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7100	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7101	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7102	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7104	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7118	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7119	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7128	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7129	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7130	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7133	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7134	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7135	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7141	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7142	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7144	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7150_650	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7151_650	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7161	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7167	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7168	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7177	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7201	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7202	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7204_120H	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7230_120H	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7234	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7236	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7237	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7238	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7244_120H	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7245_120H	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7246_120H	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7284_LCD	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7294_120H	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7295_120H	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8016_EU	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3288	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3300	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3301	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3302	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3303	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4038	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R2047	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3240	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3244	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4036	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4750	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4751	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4752	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R4850	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4851	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5216	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5217	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5218	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6031	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6125	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6126	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6211	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6212	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6213	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6214	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6215	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6216	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7115	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7159	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7175	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7650	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7651	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8021	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3008	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3083	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3256	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3257	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4039	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4040	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6184	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6810	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6811	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6812	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6813	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6814	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6815	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6816	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6817	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6818	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6819	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6820	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6821	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6822	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6823	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6824	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6825	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6826	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6827	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6828	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6829	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6830	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6831	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6832	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6833	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R6834	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6835	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6836	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6837	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6838	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6839	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6840	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6841	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6842	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6843	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6844	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6845	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7310	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1018	2007-000239	R-CHIP;1.5Kohm,1%,1/10W,TP,1608	1	S.N.A	
....4	R6089	2007-000259	R-CHIP;1.6Kohm,5%,1/10W,TP,1608	1	S.A	
....4	R5112	2007-000287	R-CHIP;100ohm,1%,1/10W,TP,1608	1	S.N.A	
....4	R7105	2007-000287	R-CHIP;100ohm,1%,1/10W,TP,1608	1	S.N.A	
....4	R7147	2007-000287	R-CHIP;100ohm,1%,1/10W,TP,1608	1	S.N.A	
....4	R1800	2007-000343	R-CHIP;120ohm,1%,1/10W,TP,1608	1	S.N.A	
....4	R2064	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R2065	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R2066	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R2067	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R2068	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R2069	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R2070	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R2071	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R5001	2007-000402	R-CHIP;150ohm,5%,1/10W,TP,1608	1	S.A	
....4	R3001_EU	2007-000458	R-CHIP;18Kohm,5%,1/10W,TP,1608	1	S.A	
....4	R3055_EU	2007-000458	R-CHIP;18Kohm,5%,1/10W,TP,1608	1	S.A	
....4	R1801	2007-000536	R-CHIP;200ohm,1%,1/10W,TP,1608	1	S.A	
....4	R5031	2007-000566	R-CHIP;220Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5026	2007-000591	R-CHIP;22ohm,1%,1/10W,TP,1608	1	S.A	
....4	R5041	2007-000591	R-CHIP;22ohm,1%,1/10W,TP,1608	1	S.A	
....4	R5052_STU	2007-000606	R-CHIP;240ohm,1%,1/10W,TP,1608	1	S.A	
....4	R5053_STU	2007-000606	R-CHIP;240ohm,1%,1/10W,TP,1608	1	S.A	
....4	R5045	2007-000669	R-CHIP;2Kohm,1%,1/10W,TP,1608	1	S.N.A	
....4	R7160	2007-000729	R-CHIP;300ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R7176	2007-000729	R-CHIP;300ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R5044	2007-000755	R-CHIP;330Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R5039	2007-000758	R-CHIP;330Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5037	2007-000763	R-CHIP;330ohm,1%,1/10W,TP,1608	1	S.N.A	
....4	R1012	2007-000828	R-CHIP;39Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R3004_EU	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3005_EU	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4015	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6067	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R9018_650	2007-000982	R-CHIP;5.6Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R9030_650	2007-000982	R-CHIP;5.6Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R1014	2007-001179	R-CHIP;8.2Kohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R3722	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R8028_EU	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R9022_650	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3721	2007-001305	R-CHIP;120ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3723	2007-001305	R-CHIP;120ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7194	2007-001308	R-CHIP;200ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7410_LCD	2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7190	2007-001329	R-CHIP;7.5Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R7191	2007-001329	R-CHIP;7.5Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R3810	2007-001333	R-CHIP;18Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1004	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R1007	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R1008	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R1009	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R5056	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R5102	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R9001_650	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R1021	2007-002899	R-CHIP;10ohm,1%,1/10W,TP,1608	1	S.A	
....4	R1017	2007-002900	R-CHIP;11Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R5070	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5210	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5211	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5213	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5214	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5215	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R9023_650	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R9024_650	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R9025_650	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R9026_650	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1010	2007-007107	R-CHIP;100Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R5034	2007-007107	R-CHIP;100Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R2057	2007-007136	R-CHIP;4.7Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R8013_EU	2007-007136	R-CHIP;4.7Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R1019	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R4028	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R4030	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R4089	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R4156	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R4753	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R4754	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R2055	2007-007197	R-CHIP;3.3ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R2056	2007-007197	R-CHIP;3.3ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7193	2007-007222	R-CHIP;6.04Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R1016	2007-007312	R-CHIP;20Kohm,1%,1/16W,TP,1005	1	S.A	
....4	R1022	2007-007312	R-CHIP;20Kohm,1%,1/16W,TP,1005	1	S.A	
....4	R1020	2007-007318	R-CHIP;1Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R5036	2007-007469	R-CHIP;110ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R7116	2007-007797	R-CHIP;44.2ohm,1%,1/10W,TP,1608	1	S.A	
....4	R7117	2007-007797	R-CHIP;44.2ohm,1%,1/10W,TP,1608	1	S.A	
....4	R3002_EU	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3006_EU	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3009	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R3011	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3012	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3029	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3030	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3031	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3045	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3047_EU	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3050	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3057_EU	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3137	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3208	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3209	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3210	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3241	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3242	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R5032	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R6280	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R6281	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R6282	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R9014_650	2007-008298	R-CHIP;49.9ohm,1%,1/16W,TP,1005	1	S.A	
....4	R9015_650	2007-008298	R-CHIP;49.9ohm,1%,1/16W,TP,1005	1	S.A	
....4	R9016_650	2007-008298	R-CHIP;49.9ohm,1%,1/16W,TP,1005	1	S.A	
....4	R9017_650	2007-008298	R-CHIP;49.9ohm,1%,1/16W,TP,1005	1	S.A	
....4	RA5005	2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA5006	2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA8006	2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA8007	2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA8008	2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA2001	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA2002	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA2003	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA2007	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA4001	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA4044	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA4045	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA4048	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA4051	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA5004	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA6013	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7002	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7003	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7004	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7005	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7006	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7007	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7008	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7009	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7010	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7011	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7012	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7039	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	RA7041	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7042	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7043	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7044	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7045	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7046	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7047	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7048	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7049	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7050	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7051	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7052	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7062	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7500	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7501	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA8017_CI	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA8018_CI	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA8019_CI	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA9001_650	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA5003	2011-001344	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA7056	2011-001344	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA7057	2011-001344	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA2004	2011-001345	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA2005	2011-001345	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA2006	2011-001345	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA8010_EU	2011-001345	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA6018	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7013	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7014	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7015	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7020	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7038	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7040	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7053	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7054	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7061	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7502	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7503	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA3011	2011-001397	R-NETWORK;47Kohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA3012	2011-001397	R-NETWORK;47Kohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA3035	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3650_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3651_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3652_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3653_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3654_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3655_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3666_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3667_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3668_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3669_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	RA3670_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3671_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3672_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3673_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3674_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3675_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA5013	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3006	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,-,4P,TP,1010	1	S.N.A	
....4	RA3007	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,-,4P,TP,1010	1	S.N.A	
....4	RA3008	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,-,4P,TP,1010	1	S.N.A	
....4	RA3009	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,-,4P,TP,1010	1	S.N.A	
....4	RA3016	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,-,4P,TP,1010	1	S.N.A	
....4	RA4010	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,-,4P,TP,1010	1	S.N.A	
....4	RA4046	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,-,4P,TP,1010	1	S.N.A	
....4	RA6020	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,-,4P,TP,1010	1	S.N.A	
....4	RA2008	2011-001497	R-NETWORK;470ohm,5%,1/16W,L,CHIP,4P,TP,1	1	S.N.A	
....4	RA3018	2011-001497	R-NETWORK;470ohm,5%,1/16W,L,CHIP,4P,TP,1	1	S.N.A	
....4	RA9003_650	2011-001497	R-NETWORK;470ohm,5%,1/16W,L,CHIP,4P,TP,1	1	S.N.A	
....4	RA6019	2011-001506	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,4P,TP,1	1	S.N.A	
....4	RA6119	2011-001506	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,4P,TP,1	1	S.N.A	
....4	RA8011_EU	2011-001506	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,4P,TP,1	1	S.N.A	
....4	RA3015	2011-001519	R-NETWORK;33OHM,5%,1/16W,L,CHIP,4P,TP,1.	1	S.N.A	
....4	RA4018	2011-001519	R-NETWORK;33OHM,5%,1/16W,L,CHIP,4P,TP,1.	1	S.N.A	
....4	RA5012	2011-001519	R-NETWORK;33OHM,5%,1/16W,L,CHIP,4P,TP,1.	1	S.N.A	
....4	RA3017	2011-001527	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,4P,TP,	1	S.N.A	
....4	RA6021	2011-001527	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,4P,TP,	1	S.N.A	
....4	RA7034	2011-001527	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,4P,TP,	1	S.N.A	
....4	RA7065	2011-001527	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,4P,TP,	1	S.N.A	
....4	RA7066_650	2011-001527	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,4P,TP,	1	S.N.A	
....4	RA3014	2011-001586	R-NETWORK;1Kohm,5%,1/16W,L,CHIP-V,4P,TP,	1	S.A	
....4	RA3031	2011-001586	R-NETWORK;1Kohm,5%,1/16W,L,CHIP-V,4P,TP,	1	S.A	
....4	RA3036	2011-001586	R-NETWORK;1Kohm,5%,1/16W,L,CHIP-V,4P,TP,	1	S.A	
....4	RA6022	2011-001586	R-NETWORK;1Kohm,5%,1/16W,L,CHIP-V,4P,TP,	1	S.A	
....4	RA3010	2011-001587	R-NETWORK;100ohm,5%,1/16W,L,CHIP-V,4P,TP	1	S.A	
....4	RA3013	2011-001587	R-NETWORK;100ohm,5%,1/16W,L,CHIP-V,4P,TP	1	S.A	
....4	RA4016	2011-001587	R-NETWORK;100ohm,5%,1/16W,L,CHIP-V,4P,TP	1	S.A	
....4	RA4017	2011-001587	R-NETWORK;100ohm,5%,1/16W,L,CHIP-V,4P,TP	1	S.A	
....4	RA3030_EU	2011-001588	R-NETWORK;75ohm,5%,1/16W,L,CHIP-V,4P,TP,	1	S.A	
....4	RA6009	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA6010	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA6011	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA6012	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA7060	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA7079	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA7600	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA7601	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA7900	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA3032	2011-001590	R-NETWORK;47Kohm,5%,1/16W,L,CHIP-V,4P,TP	1	S.A	
....4	RA3072	2011-001590	R-NETWORK;47Kohm,5%,1/16W,L,CHIP-V,4P,TP	1	S.A	
....4	C2080	2203-000125	C-CER,CHIP;1.2nF,10%,50V,X7R,TP,1608,-	1	S.A	
....4	C2081	2203-000125	C-CER,CHIP;1.2nF,10%,50V,X7R,TP,1608,-	1	S.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C2082	2203-000125	C-CER,CHIP;1.2nF,10%,50V,X7R,TP,1608,-	1	S.A	
....4	C2083	2203-000125	C-CER,CHIP;1.2nF,10%,50V,X7R,TP,1608,-	1	S.A	
....4	C2040	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3001	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3002_EU	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3013	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3015	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3021	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3022	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3029	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3033_EU	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3045	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3066	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3250	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3251	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C2036	2203-000280	C-CER,CHIP;0.01nF,0.5pF,50V,C0G,1608	1	S.A	
....4	C7137	2203-000384	C-CER,CHIP;0.015nF,5%,50V,C0G,1608	1	S.N.A	
....4	C9017_650	2203-000384	C-CER,CHIP;0.015nF,5%,50V,C0G,1608	1	S.N.A	
....4	C9019_650	2203-000384	C-CER,CHIP;0.015nF,5%,50V,C0G,1608	1	S.N.A	
....4	C1001	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C1029	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C1041_LCD	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C1768	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C2033	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C2034	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C4003	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C4012	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C4025	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C6090	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C1027	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C3014_EU	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C3016_EU	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C3024	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C3025	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C5001	2203-000550	C-CER,CHIP;0.02nF,5%,50V,C0G,1005	1	S.N.A	
....4	C5002	2203-000550	C-CER,CHIP;0.02nF,5%,50V,C0G,1005	1	S.N.A	
....4	C2070	2203-000575	C-CER,CHIP;220nF,10%,25V,X7R,TP,2012	1	S.N.A	
....4	C2071	2203-000575	C-CER,CHIP;220nF,10%,25V,X7R,TP,2012	1	S.N.A	
....4	C2072	2203-000575	C-CER,CHIP;220nF,10%,25V,X7R,TP,2012	1	S.N.A	
....4	C2073	2203-000575	C-CER,CHIP;220nF,10%,25V,X7R,TP,2012	1	S.N.A	
....4	C2074	2203-000575	C-CER,CHIP;220nF,10%,25V,X7R,TP,2012	1	S.N.A	
....4	C2075	2203-000575	C-CER,CHIP;220nF,10%,25V,X7R,TP,2012	1	S.N.A	
....4	C5100	2203-000585	C-CER,CHIP;0.22nF,10%,50V,X7R,1005	1	S.A	
....4	C4009	2203-000679	C-CER,CHIP;0.027nF,5%,50V,C0G,1005	1	S.A	
....4	C4010	2203-000679	C-CER,CHIP;0.027nF,5%,50V,C0G,1005	1	S.A	
....4	C5003	2203-000697	C-CER,CHIP;0.002nF,0.25PF,50V,C0G,TP,160	1	S.A	
....4	C5004	2203-000697	C-CER,CHIP;0.002nF,0.25PF,50V,C0G,TP,160	1	S.A	
....4	C7048	2203-000761	C-CER,CHIP;330nF,10%,16V,X7R,TP,2012,-	1	S.N.A	
....4	C3006	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C3007	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C3008	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C3011_EU	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C3012_EU	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C3018	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C3019	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C3020	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C1120	2203-000995	C-CER,CHIP;0.047nF,5%,50V,C0G,1005	1	S.A	
....4	C3017	2203-000995	C-CER,CHIP;0.047nF,5%,50V,C0G,1005	1	S.A	
....4	C3023_EU	2203-000995	C-CER,CHIP;0.047nF,5%,50V,C0G,1005	1	S.A	
....4	C4018	2203-000995	C-CER,CHIP;0.047nF,5%,50V,C0G,1005	1	S.A	
....4	C4020	2203-000995	C-CER,CHIP;0.047nF,5%,50V,C0G,1005	1	S.A	
....4	C2038	2203-001126	C-CER,CHIP;0.68nF,10%,50V,X7R,1608	1	S.N.A	
....4	C5031	2203-001412	C-CER,CHIP;0.03nF,5%,50V,NP0,TP,1005	1	S.N.A	
....4	C5035	2203-001412	C-CER,CHIP;0.03nF,5%,50V,NP0,TP,1005	1	S.N.A	
....4	C5036	2203-001412	C-CER,CHIP;0.03nF,5%,50V,NP0,TP,1005	1	S.N.A	
....4	C5037	2203-001412	C-CER,CHIP;0.03nF,5%,50V,NP0,TP,1005	1	S.N.A	
....4	C5038	2203-001412	C-CER,CHIP;0.03nF,5%,50V,NP0,TP,1005	1	S.N.A	
....4	C5039_OP	2203-001596	C-CER,CHIP;2200nF,+80-20%,50V,Y5V,2012	1	S.A	
....4	C5060_OP	2203-001596	C-CER,CHIP;2200nF,+80-20%,50V,Y5V,2012	1	S.A	
....4	C1005	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C1007	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C1008	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C2006	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C2007	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C4008	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C4011	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C4019	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C4021	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C4022	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C4024	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C4100	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C5023	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C6061	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C6077	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C6099	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C6113	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C6114	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C7018	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C7136	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C7139_LCD	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C5010	2203-002494	C-CER,CHIP;470nF,10%,16V,X7R,2012	1	S.N.A	
....4	C7050	2203-005138	C-CER,CHIP;1.8nF,10%,50V,X7R,1005	1	S.A	
....4	C7051	2203-005138	C-CER,CHIP;1.8nF,10%,50V,X7R,1005	1	S.A	
....4	C7052	2203-005138	C-CER,CHIP;1.8nF,10%,50V,X7R,1005	1	S.A	
....4	C1004	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C1022	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C1024	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C1048_LCD	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C1148_LCD	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C1149_LCD	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C1150_LCD	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2047	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C2048	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2049	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2050	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2051	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2052	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2060	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2061	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2062	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2063	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2066	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2067	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2068	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2069	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2076	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2077	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2078	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2079	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C5021	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6056	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6057	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6058	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6059	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6062	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6063	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6073	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6074	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6075	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6078	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6094	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6095	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6096	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6100	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7011	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7017	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7049	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7109_650	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7114	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7115	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7121	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7122	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7009	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7016	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7025	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7029	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7059	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7063	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7065	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7073	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7096	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7105	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7106	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C7148	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7157	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7173	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7205	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7210	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C3063	2203-005393	C-CER,CHIP;0.005nF,0.1pF,50V,NP0,TP,1005	1	S.N.A	
....4	C3811	2203-005493	C-CER,CHIP;220nF,+80-20%,16V,Y5V,1005	1	S.A	
....4	C6044	2203-005493	C-CER,CHIP;220nF,+80-20%,16V,Y5V,1005	1	S.A	
....4	C6045	2203-005493	C-CER,CHIP;220nF,+80-20%,16V,Y5V,1005	1	S.A	
....4	C7053	2203-005659	C-CER,CHIP;0.18nF,5%,50V,NP0,1005	1	S.N.A	
....4	C1032	2203-005834	C-CER,CHIP;22000nF,+80-20%,10V,Y5V,3216	1	S.A	
....4	C1035	2203-005834	C-CER,CHIP;22000nF,+80-20%,10V,Y5V,3216	1	S.A	
....4	C1036	2203-005834	C-CER,CHIP;22000nF,+80-20%,10V,Y5V,3216	1	S.A	
....4	C5025	2203-005834	C-CER,CHIP;22000nF,+80-20%,10V,Y5V,3216	1	S.A	
....4	C5034	2203-005834	C-CER,CHIP;22000nF,+80-20%,10V,Y5V,3216	1	S.A	
....4	C2041	2203-005968	C-CER,CHIP;4.7NF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C6091	2203-005968	C-CER,CHIP;4.7NF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C9020_650	2203-006039	C-CER,CHIP;1nF,10%,2000V,X7R,3216	1	S.A	
....4	C9021_650	2203-006039	C-CER,CHIP;1nF,10%,2000V,X7R,3216	1	S.A	
....4	C5337	2203-006104	C-CER,CHIP;1000nF,10%,50V,X7R,3225	1	S.A	
....4	C3997	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C3998	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C6098	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C1019	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.N.A	
....4	C1025	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.N.A	
....4	C1028	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.N.A	
....4	C1060	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.N.A	
....4	C7084	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.N.A	
....4	C7310	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.N.A	
....4	C7601_LCD	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.N.A	
....4	C1002	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1003	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1006	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1012	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1014	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1030	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1034	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1070	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1071	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1080	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1091	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1092	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1801	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C2037	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C2039	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C2042	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C2043	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C2044	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C2045	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3046	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3051	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C3054	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3055	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3056	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3057	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3065	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3070	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3071	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3072	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3100	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3101	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3102	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4002	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4006	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4013	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4014	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4016	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4023	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4026	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4050	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4103	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5011	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5020	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5024	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5027	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5070	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5071	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5072	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5073	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5112	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6027	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6028	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6033	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6042	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6043	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6048	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6052	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6053	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6064	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6065	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6066	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6067	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6068	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6069	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6070	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6079	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6080	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6081	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6082	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6083	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6084	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6085	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C6086	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6087	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6088	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6089	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6101	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6105	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6109	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6110	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6111	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6112	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6115	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6116	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6153	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7012	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7013	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7019	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7020	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7034	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7038	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7043	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7054	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7055	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7056	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7062	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7064	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7068	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7069	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7074	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7075	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7078	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7081	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7083	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7086	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7087	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7088	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7094	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7095	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7098	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7099	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7100_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7107	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7112	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7113	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7116	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7117	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7134	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7140	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7142	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7143	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7146	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7147	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C7149	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7152	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7160	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7161	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7164	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7165	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7168	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7169	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7172	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7176	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7177	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7180	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7181	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7185	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7200	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7201	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7202	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7203	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7206	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7211	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7220	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7221	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7222	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7223	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7224	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7225	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7226	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7227	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7228	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7301	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7302	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7400	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7402	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7403	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7404	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7405	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7406	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7407	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7408	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7409	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7410	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7411	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7412	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7413	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7414	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7416	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7417	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7418	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7419	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7420	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7423	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C7750	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7751	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7752	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7753	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7754	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7755	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7756	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7757	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7758	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7759	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7760	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7761	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7770	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7771	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7772	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7773	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7880	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7881	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7900	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7901	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8001	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8002	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8003	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8004	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8007_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8011_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8012	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8013_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8014_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8015_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8016_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8017_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8018_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8019_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9001_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9003_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9004_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9005_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9006_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9007_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9009_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9010_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9011_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9012_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9013_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9014_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9015_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9016_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9018_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9023_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9024_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C9101_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9103_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9105_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9107_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5012	2203-006336	C-CER,CHIP;10000nF,10%,25V,X5R,3216	1	S.A	
....4	C1017	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C1020	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C1021	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C1023	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C1031	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C1033	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C1050	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2001	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2003	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2005	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2011	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2014	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2031	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2032	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2035	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2046	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2055	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2064	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2065	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3009_EU	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3010_EU	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3037	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3043	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3053	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3067	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3068	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3069	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3073	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3810	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C4001	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C4015	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C5005	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C5018	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C5028	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C5032	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C5111	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C5336	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6001	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6011	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6022	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6029	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6030	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6031	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6032	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6046	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6049	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C6050	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6054	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6055	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6071	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6072	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6092	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6093	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7001	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7004	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7005	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7006	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7007	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7008	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7021	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7085_650	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7108	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7110	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7130	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7132	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7133	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C8010_EU	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C9002_650	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C9008_650	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C9022_650	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C9100_650	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C9102_650	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C9104_650	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C9106_650	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C9900_650	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2084	2203-006382	C-CER,CHIP;10000nF,10%,25V,X7R,TP,3225	1	S.N.A	
....4	C2085	2203-006382	C-CER,CHIP;10000nF,10%,25V,X7R,TP,3225	1	S.N.A	
....4	C2086	2203-006382	C-CER,CHIP;10000nF,10%,25V,X7R,TP,3225	1	S.N.A	
....4	C2087	2203-006382	C-CER,CHIP;10000nF,10%,25V,X7R,TP,3225	1	S.N.A	
....4	C1040_LCD	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C1042_LCD	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2019	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2020	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2021	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2022	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2023	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2024	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2025	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2026	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2027	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2028	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2029	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2030	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C3103	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C3104	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C3105	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C3106	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C3320	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C3321	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C4004	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6005	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6014	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6040	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6041	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6060	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6076	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6097	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6851	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6852	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6853	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6854	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7003	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7028	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7030	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7037	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7039	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7040	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7072	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7089	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7097	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7141	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7156	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7204	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7209	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C1013	2203-006618	C-CER,CHIP;2200nF,+80-20%,16V,Y5V,-,1608	1	S.N.A	
....4	C1016	2203-006618	C-CER,CHIP;2200nF,+80-20%,16V,Y5V,-,1608	1	S.N.A	
....4	C2004	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C2008	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C2009	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C2010	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C2056	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C2057	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C2059	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C3077	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C4005	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C5016	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C2053	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C2054	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C3038	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C3039	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C3047	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C3048	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C3058	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C3062	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C3999	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C1015	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (1	S.N.A	
....4	C1018	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (1	S.N.A	
....4	C2002	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C2058	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (1	S.N.A	
....4	C5022	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (1	S.N.A	
....4	C6047	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (1	S.N.A	
....4	C2012	2402-001128	C-AL,SMD;100##F,20%,16V,-,TP,6.3X5.7mm	1	S.A	
....4	C2013	2402-001128	C-AL,SMD;100##F,20%,16V,-,TP,6.3X5.7mm	1	S.A	
....4	C5030	2402-001210	C-POLYMER AL CHIP;100uF,20%,10V,WT,TP,7.	1	S.A	
....4	CA2001	2503-001051	C-NETWORK;100NFX4,20%,16V,-,2012, 4ARRAY	1	S.A	
....4	T9001_650	2601-001056	TRANS-SMD,PULSE;350UH,-,1:1,1:1,12.7X6.7	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-001239	INDUCTOR-SMD;3.3uH,10%,1608	1	S.A	
....4	T0052	2703-003559	INDUCTOR-SMD;4.7uH,20%,8080	1	S.A	
....4	T0052	2703-003628	INDUCTOR-SMD;1.5uH,20%,2020	1	S.A	
....4	L2001	2704-000018	INDUCTOR-SMD-ARRAY;15uH,2000mA,2,0.124oh	1	S.N.A	
....4	L2002	2704-000018	INDUCTOR-SMD-ARRAY;15uH,2000mA,2,0.124oh	1	S.N.A	
....4	X202	2801-003326	CRYSTAL-SMD;24MHZ,30PPM,28-ABX,20PF,50OH	1	S.A	
....4	X202	2801-003773	CRYSTAL-SMD;12MHz,30ppm,28-AAN,20pF,50oh	1	S.A	
....4	X202	2801-004629	CRYSTAL-SMD;27MHz,20ppm,12pF,50ohm,TP	1	S.A	
....4	X202	2801-004734	CRYSTAL-SMD;25.000000MHz,20ppm,28-AAN,12	1	S.A	
....4	F103	2901-001506	FILTER-EMI SMD;5V,0.13A,0pF,2x1x0.5mm,TP	1	S.A	
....4	F103	2901-001506	FILTER-EMI SMD;5V,0.13A,0pF,2x1x0.5mm,TP	1	S.A	
....4	T0568	3301-000314	BEAD-SMD;120ohm,1.6x0.8x0.8mm,-,-,-	1	S.N.A	
....4	T0568	3301-000314	BEAD-SMD;120ohm,1.6x0.8x0.8mm,-,-,-	1	S.N.A	
....4	T0568	3301-001145	BEAD-SMD;60ohm,4516,TP,70ohm/45MHz,82ohm	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	330				

5. Exploded View & Part List

[illegible]

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	CN330	3711-005939	HEADER-BOARD TO CABLE;BOX,3P,1R,2mm,SMD-	1	S.N.A	
....4	T0077	BN41-01167A	PCB MAIN;Chelsea-Arsnal,FR-4,4,1.2T,192x	1	S.N.A	
....4	M0018	BN97-03211A	ASSY MICOM;KFH8GH6U4M-DIB6,N68A,2008.11.	1	S.N.A	
....5	IC7002	1107-001740	IC-NAND FLASH;KFH8GH6U4M-DIB6,8Gbit,512M	1	S.A	
....4	M0018	BN97-03213A	ASSY MICOM;WT61P8-RG480WT,N68A,2008.11.2	1	S.N.A	
....5	IC520	0903-001552	IC-MICROCONTROLLER;WT61P8-RG480WT,LQFP,4	1	S.N.A	
....4	T0010	BP27-00002A	COIL CHOKE;SLF6028T-220MR77,22uF,20%,,,,	1	S.A	
...3	T0066	BP62-00016B	HEAT SINK-ES;SUNRAY,A6063,T2.0,36.2,36.2	1	S.N.A	
...3	T0066	BP62-00017A	HEAT SINK-ES;SP-50L2HX,A6063S,T2.0,26.2,	1	S.N.A	
0.1	T0852	BN91-03829D	ASSY LCD-CMO;LE46B653T5WXXC	1	S.N.A	
..2	M0215	BN07-00666A	LCD-PANEL;V460H1-LH5	1	S.A	
...3		BN81-02393A	A/S-T CON V460H1-LH5;V460H1-LH5	1	S.N.A	
...3		BN81-02396A	A/S-BB-L V460H1-LH5;V460H1-LH5	1	S.N.A	
0.1	M0045	BN92-04322D	ASSY ACCESSORY;LE46B653T5WXXC	1	S.N.A	
..2	M0045	BN96-09731A	ASSY ACCESSORY-MANUAL;LE32B653T5WXXC	1	S.A	
...3	T0524	6902-000110	BAG PE;LDPE,T0.05,W250,L400,TRP,28,2,-,9	1	S.N.A	
...3	T0210	AA68-03242Q	MANUAL FLYER-01,SAFETY GUIDE;comm,Samsun	1	S.N.A	
...3	T0175	BN68-00514E	MANUAL FLYER-01,WARRANTY CARD;comm,Samsu	1	S.N.A	
...3		BN68-00907D	MANUAL FLYER-WEEE BATTERY;COMM,SAMSUNG,2	1	S.N.A	
...3	T0511	BN68-01900B	MANUAL USERS;COMM,SAMSUNG,Tur,W.EUROPE,W	1	S.N.A	
...3		BN68-01902A	MANUAL FLYER-QSG;COMM,SAMSUNG,9Langs,W.E	1	S.N.A	
...3		BN96-10241A	ASSY MANUAL P-USB;B650,USB,SAMSUNG,W.EUR	1	S.N.A	
....4	T0511	BN68-01900A	MANUAL USERS;COMM,SAMSUNG,9Langs,W.EUROP	1	S.N.A	
..2	M0045	BN96-09731E	ASSY ACCESSORY-CABEL;LE46B653T5WXXC	1	S.A	
...3	T0268	3903-000145	CBF-POWER CORD;DT,EU,FP3/YES,U(IEC C13-R	1	S.A	
...3	T0524	6902-000110	BAG PE;LDPE,T0.05,W250,L400,TRP,28,2,-,9	1	S.N.A	
...3	T0074	BN59-00861A	REMOCON;LCD650,TM960,EUROPE,49	1	S.A	
...3	M9889	BN63-01798B	CLOTH-CLEAN;cloth,180,200,sea blue,ToC	1	S.N.A	
...3	T0531	BN63-05287B	COVER-BOTTOM;B650 46,HIPS,HB,BK500	1	S.A	
....4		BN81-00199H	RESIN;HIPS HB,BK500,HF-1690H,K2901	48.4	S.N.A	
...3	M0560	BN96-01800A	ASSY ACCESSORY-SCREW ZIPPER;ROME32,-,-,-	1	S.N.A	
....4	T0081	6002-001294	SCREW-TAPPING;BH,+,M4,L16,ZPC(BLK)	4	S.N.A	
....4	ACCESSORY	6902-000683	BAG ZIPPER;LDPE,T0.05,W60,L60,TRP,-,-,4-	1	S.N.A	
0.1	M0019	BN92-04323B	ASSY LABEL;LE37B653T5WXXC	1	S.N.A	
0.1	M0113	BN92-04611A	ASSY P/MATERIAL;46,LB650	1	S.N.A	
..2	T0003	6902-000604	BAG WRAPPING;LDPE,T0.02,W500,L10000,TRP,	7.5	S.N.A	
..2	T0524	6902-000959	BAG PE;NITRON,T0.015/T0.5,W1400,L900,TRP	1	S.N.A	
..2	T0214	AA61-20285C	HOLDER-BOX;CORAL,PP,BLACK,HB	4	S.N.A	
..2	T0214	BN74-00008A	TAPE-OPP MASKING;OPP-2,T0.05,W100,L800M,	1.61	S.N.A	
0.1	M0003	BN92-04617B	ASSY BOX;46BT5,EO,LB650	1	S.N.A	
..2	M0521	BN69-03467A	BOX-SET,IN;46LB610,CB,C-01,DW1,ECT50,YEL	1	S.N.A	
..2		BN69-03523B	BOX-SET,OUT;46LB650 V1,V2,CB,C-03,DW3,YE	1	S.N.A	
0.1	M0216	BN90-01906A	ASSY STAND;46,LB650,ROSE BLACK	1	S.N.A	
..2	M0027	BN96-09501A	ASSY STAND P-BASE;46,LB650,TEMPERED GLAS	1	S.A	
...3	M0081	6003-001003	SCREW-TAPTITE;BH,+,B,M4,L12,ZPC(BLK),SWR	6	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
...3	M0081	6003-001003	SCREW-TAPTITE;BH,+,B,M4,L12,ZPC(BLK),SWR	4	S.N.A	
...3		BN61-04692A	BOSS-PRIMER;#94,clear,35cps	0.001	S.N.A	
...3		BN61-04731B	BOSS-TAPE;AMBER,ACRYL,T1.1,W12.0mm,WHITE	1	S.N.A	
...3	T0920	BN61-04814A	GUIDE-STAND;46,PC+G/F 20%,BK500	1	S.N.A	
...4		BN81-00204H	RESIN;Tirrex,3025G20 BK,ABS+PC G/F 20%,4	463.1	S.N.A	
...3		BN61-05240A	HOLDER-SWIVEL RING TOP;LB700 46,POM HB,A	1	S.N.A	
...3		BN61-05243A	BRACKET-STAND BOTTOM;LB700 46,HGI,T3.0	1	S.N.A	
...3		BN61-05244A	BRACKET-SWIVEL BOTTOM;LB700 46,HGI,T3.0	1	S.N.A	
...3		BN61-05251A	GUIDE-STAND NECK;LB700 46,PC,CLEAR(TP27)	1	S.N.A	
...3		BN61-05255A	HOLDER-SWIVEL RING BOTTOM;LB700 46,POM H	1	S.N.A	
...3		BN63-05227B	COVER-STAND GLASS;46,LB650,GLASS,T8.0,RO	1	S.N.A	
...4	CCM1	BN63-04755A	COVER-SHEET;AMBER,PE,T0.05,W150mm,200M,6	0.62	S.N.A	
...3	T0056	BN63-05538A	COVER-DECORATION;UB7000 46inch,ABS,PMMA,	1	S.N.A	
...4		BN81-00204P	RESIN-HIGH GLOSS;HAM 8560,SF-0505,K21294	0.013	S.N.A	
...3	M0126	BN73-00203A	RUBBER-FOOT;LB7000 46inch,CR RUBBER,T7.0	4	S.N.A	
...3	M0126	BN73-00204A	RUBBER-FOOT;42LB650,RUBBER,16*33,60,2.0	4	S.N.A	

5-21. LE55B65*A Parts List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
		LE55B653T5WXXC	LE55B653T5W,N68A/55BT5-G6T,55,LCD-TV,SPA			
0.1	M0001	BN90-01901B	ASSY COVER FRONT;55,LB650,EO,ROSE BLACK,	1	S.N.A	
..2	T0175	BN96-09466A	ASSY SPEAKER P;8ohm,4pin,15W,R:800 / L:8	1	S.A	
..2	T0003	BN96-09491B	ASSY COVER P-FRONT;55,LB650,EO,PC(CLR)+P	1	S.A	
...3	M0081	6003-001188	SCREW-TAPTITE;BH,+, -,B,M4,L10,ZPC(WHT),S	1	S.N.A	
...3		BN61-04661A	BRACKET-STOPPER;L650,SK-5,T0.4,Plating,H	8	S.N.A	
...3	CCM1	BN63-02183F	COVER-SHEET;Rhcm,PE Vinyl,T0.05,900mm,20	0.992	S.N.A	
...3	CCM1	BN63-05199B	COVER-SHEET;AMBER,PE,T0.08,W65mm,200M,CL	3.5	S.N.A	
...3	CCM1	BN63-05199H	COVER-SHEET;AMBER,PE,T0.08,W130mm,200M,C	1.5	S.N.A	
...3	M0112	BN63-05474B	COVER-FRONT;55,LB650,EO,PC(CLR)+PC(ROSE	1	S.N.A	
....4		BN81-00116D	RESIN-TOC;PC V0,TTP01,CLR,TN-1030(NP),TH	1.16	S.N.A	
....4		BN81-00116U	RESIN-TOC;PC V1, TRD03,Light Rose Black,	1.4	S.N.A	
...3		BN96-09515C	ASSY HOLDER P-BOSS SIDE RIGHT;55,LB650,P	1	S.N.A	
....4		BN61-04692A	BOSS-PRIMER;#94,clear,35cps	0.1	S.N.A	
....4		BN61-04731D	BOSS-TAPE;AMBER,ACRYL,T1.1,W20.0mm,WHITE	0.03	S.N.A	
....4		BN61-04731F	BOSS-TAPE;AMBER,ACRYL,T1.1,W6.0mm,WHITE,	0.56	S.N.A	
....4		BN61-05150C	HOLDER-BOSS SIDE R;55,LB650,PMMA+ABS,HB,	1	S.N.A	
....5		BN81-00204P	RESIN-HIGH GLOSS;HAM 8560,SF-0505,K21294	0.13	S.N.A	
...3		BN96-09515D	ASSY HOLDER P-BOSS SIDE LEFT;55,LB650,PM	1	S.N.A	
....4		BN61-04692A	BOSS-PRIMER;#94,clear,35cps	0.1	S.N.A	
....4		BN61-04731D	BOSS-TAPE;AMBER,ACRYL,T1.1,W20.0mm,WHITE	0.03	S.N.A	
....4		BN61-04731F	BOSS-TAPE;AMBER,ACRYL,T1.1,W6.0mm,WHITE,	0.56	S.N.A	
....4		BN61-05150D	HOLDER-BOSS SIDE L;55,LB650,ABS+PMMA,HB,	1	S.N.A	
....5		BN81-00204P	RESIN-HIGH GLOSS;HAM 8560,SF-0505,K21294	0.13	S.N.A	
...3		BN96-09523B	ASSY HOLDER P-BOSS BOTTOM;55,LB650,ABS,H	1	S.N.A	
....4		BN61-04692A	BOSS-PRIMER;#94,clear,35cps	0.5	S.N.A	
....4		BN61-04731B	BOSS-TAPE;AMBER,ACRYL,T1.1,W12.0mm,WHITE	0.98	S.N.A	
....4		BN61-04731D	BOSS-TAPE;AMBER,ACRYL,T1.1,W20.0mm,WHITE	0.06	S.N.A	
....4		BN61-05147B	HOLDER-BOSS BOTTOM;55,LB650,ABS,HB,WH12,	1	S.N.A	
....5		BN81-00116F	RESIN;ABS HB,WHT,HF-0680U,W91902,-,-,-	0.43	S.N.A	
...3	M0175	BN96-10210B	ASSY BOARD P-TOUCH FUNCTION&IR;LN40B650T	1	S.A	
...3	T0069	BP60-00015K	SPACER-FELT;61K7,FELT,L670,BLK,T0.5,W20	2	S.N.A	
...3	T0069	BP60-00015P	SPACER-FELT;67K3,FELT,L1485,BLK,T0.5,W5	4	S.N.A	
0.1	M0002	BN90-01913A	ASSY COVER REAR;55,LB650,EO	1	S.N.A	
..2	T0081	6002-001294	SCREW-TAPPING;BH,+,M4,L16,ZPC(BLK)	14	S.N.A	
..2	T0081	6002-001294	SCREW-TAPPING;BH,+,M4,L16,ZPC(BLK)	1	S.N.A	
..2	T0081	6002-001294	SCREW-TAPPING;BH,+,M4,L16,ZPC(BLK)	1	S.N.A	
..2	M0013	BN96-09510A	ASSY COVER P-REAR;55,LB650,EO,ABS+PMMA,H	1	S.A	
...3	T0069	AA60-00091P	SPACER-FELT;FELT,500X10,BLK,T0.5	2	S.N.A	
...3	CCM1	BN63-02183F	COVER-SHEET;Rhcm,PE Vinyl,T0.05,900mm,20	1.5	S.N.A	
...3		BN63-02224A	FELT-VIBRATION;63P5,FELT,T0.5,850,10	1	S.N.A	
...3	M0006	BN63-05477A	COVER-REAR;55,LB650,EO,PMMA+ABS,HB,BK23,	1	S.N.A	
....4		BN81-00204P	RESIN-HIGH GLOSS;HAM 8560,SF-0505,K21294	5.5	S.N.A	
...3	T0071	BN64-01028A	INLAY-TERMINAL;B530 (PAL-Chelsea),PS SHE	1	S.N.A	
...3	T0064	BN65-00002A	CLAMPER CORE;BORDEAUX,LDPE,-,-,BLK,-	1	S.N.A	
0.1	T0852	BN91-03433C	ASSY LCD-CMO;LN55B650T1FXZA	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
..2	M0215	BN07-00695A	LCD-PANEL;V546H1-L01	1	S.A	
...3	M0215	BN81-02395A	A/S-T CON V546H1-LH1;V546H1-LH1	1	S.A	
...3		BN81-02398A	A/S-BB-L V546H1-LH1;V546H1-LH1	1	S.N.A	
0.1	M0017	BN91-03505E	ASSY CHASSIS;LE55B653T5WXXC	1	S.N.A	
..2	M0014	BN94-02583E	ASSY PCB MAIN;LE55B653T5WXXC	1	S.N.A	
...3	T0245	0202-001608	SOLDER-WIRE FLUX;LFC7-107,D0.8,99.3Sn/0.	0.25	S.N.A	
...3	CN3010	3701-001388	CONNECTOR-HDMI;20P,Phosphor Bronze,ANGLE	1	S.A	
...3	CN3011	3701-001480	CONNECTOR-DSUB;15P,3R,FEMAIL,STAMPED PIN	1	S.A	
...3	CN906	3707-001081	CONNECTOR-OPTICAL;STRAIGHT,SPDIF	1	S.A	
...3	CN8001_EU	3709-001551	CONNECTOR-CARD SLOT;68P,1.27mm,DIP,AU50U	1	S.A	
...3	CN330	3711-003847	HEADER-BOARD TO CABLE;BOX,12P,1R,2mm,ANG	1	S.A	
...3	CN1001	3711-005884	HEADER-BOARD TO BOARD;BOX,30P,2R,2mm,ANG	1	S.A	
...3	CN330	3711-006715	HEADER-BOARD TO CABLE;BOX,4P,1R,2.5mm,AN	1	S.N.A	
...3	JA330	3722-001061	JACK-PHONE;1P,3.6PI,AG,BLK,N	1	S.A	
...3	JA330	3722-001061	JACK-PHONE;1P,3.6PI,AG,BLK,N	1	S.A	
...3	JA330	3722-001061	JACK-PHONE;1P,3.6PI,AG,BLK,N	1	S.A	
...3	JA330	3722-001061	JACK-PHONE;1P,3.6PI,AG,BLK,N	1	S.A	
...3	CN9001_650	3722-002426	JACK-MODULAR;8P/8C,-,N,STRAIGHT,GRN/YEL,	1	S.A	
...3	CN7002_650	3722-002546	JACK-USB;4P/1C,AU,BLK,ANGLE,A type	1	S.N.A	
...3	CN7006	3722-002546	JACK-USB;4P/1C,AU,BLK,ANGLE,A type	1	S.N.A	
...3	JA333	3722-002635	JACK-PIN;3P,Sn,YEL/WHT/RED,ANGLE	1	S.A	
...3	CN3002_EU	3722-002681	JACK-SCART;42P,SN,BLK	1	S.A	
...3	JA333	3722-002691	JACK-PIN;2P,Ni,WHT/RED,STRAIGHT	1	S.A	
...3	JA333	3722-002691	JACK-PIN;2P,Ni,WHT/RED,STRAIGHT	1	S.A	
...3	JA333	3722-002703	JACK-PIN;3P,Ni,GRN/BLU/RED,STRAIGHT	1	S.A	
...3	CIS3	BN40-00145A	TUNER;TDHG6-K12A,TDHG6-K12A,DVB-TC,164CH	1	S.A	
...3	T0174	BN97-03100E	ASSY SMD;LE55B653T5WXXC	1	S.N.A	
....4	SUB05	0202-001477	SOLDER-CREAM;LST309-M,-,D20~45um,96.5Sn/	1	S.N.A	
....4	D4003	0401-000133	DIODE-SWITCHING;RLS4148,75V,150mA,LL-34,	1	S.A	
....4	D4004	0401-000133	DIODE-SWITCHING;RLS4148,75V,150mA,LL-34,	1	S.A	
....4	D4100	0401-000133	DIODE-SWITCHING;RLS4148,75V,150mA,LL-34,	1	S.A	
....4	D4228	0401-000133	DIODE-SWITCHING;RLS4148,75V,150mA,LL-34,	1	S.A	
....4	D3001	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3002	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3051	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3054	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3061	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3062	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3063	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3076	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3077	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3079	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3080	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D4008	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D4010	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D9001_650	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D9002_650	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D9003_650	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D9004_650	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D9007_650	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	D9008_650	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3811	0401-001099	DIODE-SWITCHING;1N4148WS,75V,150mA,SOD-3	1	S.N.A	
....4	D0254	0402-001207	DIODE-SCHOTTKY;UPS5819,40V,1000MA,DO-216	1	S.A	
....4	D4001	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D5100	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D3003_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3004_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3005_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3006_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3007_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3008_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3009_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3011	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3015	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3016_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3018	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3019	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3020	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3021	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3022_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3023	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3024	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3026_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3032	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3033	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3034	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3035	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3036	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3037	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3038	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3039	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3045	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3052	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3056	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3057	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3058	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3060	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3065	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3066	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3067	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3068	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3069	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3073	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3074	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3075	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3350	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3776	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3777_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3778_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3779_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D0254	0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	1	S.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	D0254	0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	1	S.A	
....4	D0254	0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	1	S.A	
....4	D0254	0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	1	S.A	
....4	D0254	0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	1	S.A	
....4	D0254	0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	1	S.A	
....4	D0254	0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	1	S.A	
....4	D7001_650	0406-001200	DIODE-TVS;RCLAMP0504F,6/-V,150W,SC-70	1	S.A	
....4	D7002	0406-001200	DIODE-TVS;RCLAMP0504F,6/-V,150W,SC-70	1	S.A	
....4	D3751	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D3752	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D3753	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D3754	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D3755	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D3756	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D3757	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D3758	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D8001_CI	0407-000114	DIODE-ARRAY;-80V,100mA,CA2-3,SOT-23,TP	1	S.N.A	
....4	D8002_CI	0407-000114	DIODE-ARRAY;-80V,100mA,CA2-3,SOT-23,TP	1	S.N.A	
....4	D8003_CI	0407-000114	DIODE-ARRAY;-80V,100mA,CA2-3,SOT-23,TP	1	S.N.A	
....4	D8004_CI	0407-000114	DIODE-ARRAY;-80V,100mA,CA2-3,SOT-23,TP	1	S.N.A	
....4	D8005_CI	0407-000114	DIODE-ARRAY;-80V,100mA,CA2-3,SOT-23,TP	1	S.N.A	
....4	D8006_EU	0407-000114	DIODE-ARRAY;-80V,100mA,CA2-3,SOT-23,TP	1	S.N.A	
....4	Q4003	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150MW,SOT-23	1	S.A	
....4	Q4005	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150MW,SOT-23	1	S.A	
....4	Q4020	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150MW,SOT-23	1	S.A	
....4	Q1002_LCD	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3007	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3008	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3009	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3010	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3810	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3811	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q4004	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q4009	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q4011	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q9001_650	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3001_EU	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	
....4	Q3002_EU	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	
....4	Q7601_LCD	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	
....4	Q7602_LCD	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-001916	FET-SILICON;Si4800BDY,N,30V,9A,0.03ohm,2	1	S.A	
....4	IC104	0801-002095	IC-CMOS LOGIC;74LCX245,TRANSCEIVER,TSSOP	1	S.A	
....4	IC104	0801-002172	IC-CMOS LOGIC;74LCX16244,BUFFER/LINE DRI	1	S.A	
....4	IC104	0801-002172	IC-CMOS LOGIC;74LCX16244,BUFFER/LINE DRI	1	S.A	
....4	IC104	0801-002630	IC-CMOS LOGIC;74AHCT1G08,2-INPUT AND GAT	1	S.A	
....4	IC104	0801-002780	IC-CMOS LOGIC;74LVC1G17,SCHMITT-TRIGGER	1	S.N.A	
....4	IC7009	0904-002119	IC-I/O SUPPORT CHIP;PCF8574TS,8Bit,SSOP,	1	S.A	
....4	IC7008	1001-000164	IC-ANALOG MULTIPLEX;74HC4052,CMOS,SOP,16	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	IC9003_650	1001-001109	IC-ANALOG SWITCH;FST3125M,BUS SWITCH & C	1	S.A	
....4	IC106	1001-001177	IC-VIDEO SWITCH;TEA6425D,VIDEO SWITCH ,S	1	S.A	
....4	IC106	1001-001573	IC-VIDEO SWITCH;Sil9287CNUTR,QFN,72P,10x	1	S.A	
....4	IC107	1002-001482	IC-D/A CONVERTER;WM8521H9GED/R,16bit,SOI	1	S.A	
....4	IC3001	1006-001266	IC-LINE TRANSCEIVER;SP3232EEY,TSSOP,16P,	1	S.A	
....4	IC112	1103-000129	IC-EEPROM;24C02,2Kbit,256x8Bit,SOP,8P,5x	1	S.A	
....4	IC112	1103-000129	IC-EEPROM;24C02,2Kbit,256x8Bit,SOP,8P,5x	1	S.A	
....4	IC112	1103-001310	IC-EEPROM;24LC02B,256X8BIT,SOIC,8P,3.91X	1	S.N.A	
....4	IC112	1103-001385	IC-EEPROM;AT24C256,256Kbit,32Kx8,SOP,8P,	1	S.A	
....4	IC112	1103-001415	IC-EEPROM;AT93C46D,1Kbit,128x8/64x16,SOP	1	S.N.A	
....4	IC7003	1105-001859	IC-DDR2 SDRAM;K4T1G164QD-ZCE7,DDR2,1Gbit	1	S.A	
....4	IC7004	1105-001859	IC-DDR2 SDRAM;K4T1G164QD-ZCE7,DDR2,1Gbit	1	S.A	
....4	IC7005	1105-001859	IC-DDR2 SDRAM;K4T1G164QD-ZCE7,DDR2,1Gbit	1	S.A	
....4	IC7006	1105-001859	IC-DDR2 SDRAM;K4T1G164QD-ZCE7,DDR2,1Gbit	1	S.A	
....4	T0124	1201-002796	IC-POWER AMP;STA339BWS,PSSO,36P,10.3x7.5	1	S.A	
....4	T0087	1203-001815	IC-POSI.FIXED REG.;78M09,TO-252,3P,-,PLA	1	S.A	
....4	T0087	1203-001816	IC-POSI.FIXED REG.;78M08,TO-252,3P,-,PLA	1	S.A	
....4	T0087	1203-002842	IC-POSI.FIXED REG.;AP1117D-33A,TO-252,3P	1	S.A	
....4	T0087	1203-002898	IC-POSI.FIXED REG.;G950T45R,TO-252,3P,6.	1	S.A	
....4	IC012	1203-002995	IC-POSI.ADJUST REG.;AP1117D-A,TO-252,3P,	1	S.A	
....4	IC012	1203-002995	IC-POSI.ADJUST REG.;AP1117D-A,TO-252,3P,	1	S.A	
....4	IC012	1203-002995	IC-POSI.ADJUST REG.;AP1117D-A,TO-252,3P,	1	S.A	
....4	IC4005	1203-004363	IC-VOL. DETECTOR;RT9818C-29PV,SOT-23,3P,	1	S.A	
....4	IC4004	1203-004364	IC-VOL. DETECTOR;RT9818C-42PV,SOT-23,3P,	1	S.A	
....4	IC1007	1203-004879	IC-DC/DC CONVERTER;MP8668DL,QFN,14P,3x4mm	1	S.A	
....4	T0087	1203-005134	IC-POSI.FIXED REG.;RT9167A-33PB,SOT-23-5	1	S.A	
....4	IC1006	1203-005538	IC-DC/DC CONVERTER;AOZ1021HAIL,SOP,8P,4.	1	S.A	
....4	IC5006	1203-005559	IC-BACKLIGHT DRIVER;MP3302DJ,TSOT23,5P,2	1	S.A	
....4	T0087	1203-005713	IC-POSI.FIXED REG.;S-1172B33-E6T1G,HSOP,	1	S.A	
....4	IC118	1204-003010	IC-VIDEO PROCESS;SDP84,PBGA,324P,23x23mm	1	S.A	
....4	IC7001	1204-003011	IC-DECODER;SDP83,PBGA,729P,34x34mm,PLAST	1	S.A	
....4	IC9002_650	1205-002941	IC-ETHERNET CONTROLLER;RTL8100CL-LF,LQFP	1	S.N.A	
....4	IC3011	1205-003201	IC-BUS SWITCH;TC7WB125FK,SSOP,8P,2x2.3mm	1	S.A	
....4	IC2001	1205-003352	IC-CODEC;WM8593SEFT/V,TQFP,64P,10x10mm,P	1	S.A	
....4	IC7010_650	1205-003479	IC-SWITCH;TPS2051BDBVR,SOT-23,5P,2.9x1.6	1	S.A	
....4	IC8006_EU	1205-003479	IC-SWITCH;TPS2051BDBVR,SOT-23,5P,2.9x1.6	1	S.A	
....4	IC7007	1205-003681	IC-SWITCH;TPS2069DGN,MSOP,8P,3.05x4.98mm	1	S.A	
....4	IC5010	1209-001830	IC-PLL;IDT6V10012PGG,TSSOP,20P,6.5x4.4mm	1	S.A	
....4	D4110	1405-001185	VARISTOR;24Vdc,1.6x0.8x0.36mm,TP	1	S.A	
....4	D3010	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3012_EU	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3013	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3014_EU	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3017	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3025	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3027	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3028	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3029	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3030	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3031	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3040	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	D3041	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3042	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3050	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3053	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3055	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3059	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3064	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3070	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3071	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3072	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3078	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3081	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3097	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3098	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3099	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4011	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4012	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4013	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4014	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4015	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4016	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4017	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4018	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D7003_650	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D7004	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	R7120	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7121	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7122	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7123	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7152	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7153	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7154	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7155	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7162	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7163	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7164	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7165	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7169	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7170	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7171	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7172	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R5101	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R2058	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R2059	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R2060	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R2061	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R4155	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	1	S.A	
....4	R7050	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7053	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7056	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7058	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R7062	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7066	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7069	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7070	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3007	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3034_EU	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3036_EU	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3062	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3070	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3071	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3078_EU	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3120	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3191	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3192	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3205	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3206	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3207	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3243	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3254	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3255	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3320	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3999	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4042	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4049	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4050	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4087	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5022	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7114	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7132	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7143	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7605_LCD	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8311_EU	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1031_LCD	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1072	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3010_EU	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3021_EU	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3022_EU	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3035	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3037	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3072	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3073	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3081	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3082	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3138	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3139	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3189	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3190	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3227	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3228	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4081	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6028	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R6066	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7045	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7072	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7195	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7196	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7602_LCD	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R9007_650	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R2054	2007-000141	R-CHIP;2.2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4085	2007-000141	R-CHIP;2.2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5030	2007-000141	R-CHIP;2.2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1030_LCD	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1060	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1070	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3520	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3522	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3524	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3526	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4016	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4018	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4020	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4066	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4071	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4074	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4077	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4551	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4552	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4553	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4554	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4755	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4756	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5017	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6015	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6021	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6023	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6038	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6048	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6053	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6100	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6101	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6102	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7017	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7033	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7034	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7036	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7037	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7064	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7156	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7174	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7352	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7353_OP	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7356	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R7357_OP	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3044_EU	2007-000146	R-CHIP;6.8Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3067_EU	2007-000146	R-CHIP;6.8Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1013	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1015	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1023_LCD	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R2023	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R2027	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3168	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3252	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3253	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3310	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3311	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4017	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4019	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4023	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4027	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4078	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4150	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4152	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5111	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7103	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7351	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7411_LCD	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7600_LCD	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7601_LCD	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7603_LCD	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7604_LCD	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8012	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8014_EU	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8015_EU	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8020_EU	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R9028_650	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3028_EU	2007-000149	R-CHIP;12Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R3032_EU	2007-000149	R-CHIP;12Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R3027_EU	2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3033_EU	2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4021	2007-000155	R-CHIP;27Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1011	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R2019	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3040_EU	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3042_EU	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3058_EU	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3060_EU	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3126	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3136	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3201	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3204	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3521	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3523	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3525	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R3527	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3820	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4151	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R9008_650	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R9029_650	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5110	2007-000159	R-CHIP;56Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3111	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3112	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3113	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3114	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5038	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3038_EU	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3049_EU	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3077_EU	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3103_OP	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3125	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3169	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3170	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3200	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3202	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3203	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3220	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3250	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3251	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3258	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3259	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3284	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3285	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3289	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3290	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3400	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3410_OP	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3450	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3451	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3452	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3453	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3500	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3751_EU	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3752_EU	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3753_EU	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3811_OP	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3860	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4041	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4084	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4086	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4250	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5006	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5007	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5011	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5033	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5035	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R6013	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6061	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6068	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7002	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7003	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7004	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7007	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7014	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7015	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7018	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7035	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7038	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7048	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7073	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7074	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7075	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7076	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7077	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7078	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7079	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7080	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7081	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7082	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7083	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7084	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7089	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7090	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7091	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7092	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7093	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7094	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7095	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7096	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7097	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7098	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7099	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7100	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7101	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7102	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7104	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7118	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7119	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7128	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7129	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7130	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7133	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7134	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7135	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7141	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7142	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7144	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R7150_650	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7151_650	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7161	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7167	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7168	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7177	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7201	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7202	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7204_120H	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7230_120H	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7234	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7236	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7237	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7238	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7244_120H	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7245_120H	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7246_120H	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7284_LCD	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7294_120H	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7295_120H	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8016_EU	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3288	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3300	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3301	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3302	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3303	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4038	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R2047	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3240	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3244	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4036	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4750	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4751	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4752	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4850	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4851	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5216	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5217	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5218	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6031	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6125	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6126	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6211	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6212	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6213	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6214	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6215	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6216	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7115	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7159	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7175	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R7650	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7651	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8021	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3008	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3083	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3256	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3257	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4039	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4040	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6184	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6810	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6811	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6812	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6813	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6814	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6815	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6816	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6817	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6818	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6819	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6820	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6821	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6822	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6823	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6824	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6825	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6826	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6827	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6828	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6829	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6830	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6831	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6832	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6833	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6834	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6835	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6836	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6837	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6838	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6839	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6840	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6841	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6842	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6843	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6844	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6845	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7310	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1018	2007-000239	R-CHIP;1.5Kohm,1%,1/10W,TP,1608	1	S.N.A	
....4	R6089	2007-000259	R-CHIP;1.6Kohm,5%,1/10W,TP,1608	1	S.A	
....4	R5112	2007-000287	R-CHIP;100ohm,1%,1/10W,TP,1608	1	S.N.A	
....4	R7105	2007-000287	R-CHIP;100ohm,1%,1/10W,TP,1608	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R7147	2007-000287	R-CHIP;100ohm,1%,1/10W,TP,1608	1	S.N.A	
....4	R1800	2007-000343	R-CHIP;120ohm,1%,1/10W,TP,1608	1	S.N.A	
....4	R2064	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R2065	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R2066	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R2067	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R2068	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R2069	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R2070	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R2071	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R5001	2007-000402	R-CHIP;150ohm,5%,1/10W,TP,1608	1	S.A	
....4	R3001_EU	2007-000458	R-CHIP;18Kohm,5%,1/10W,TP,1608	1	S.A	
....4	R3055_EU	2007-000458	R-CHIP;18Kohm,5%,1/10W,TP,1608	1	S.A	
....4	R1801	2007-000536	R-CHIP;200ohm,1%,1/10W,TP,1608	1	S.A	
....4	R5031	2007-000566	R-CHIP;220Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5026	2007-000591	R-CHIP;22ohm,1%,1/10W,TP,1608	1	S.A	
....4	R5041	2007-000591	R-CHIP;22ohm,1%,1/10W,TP,1608	1	S.A	
....4	R5052_STU	2007-000606	R-CHIP;240ohm,1%,1/10W,TP,1608	1	S.A	
....4	R5053_STU	2007-000606	R-CHIP;240ohm,1%,1/10W,TP,1608	1	S.A	
....4	R5045	2007-000669	R-CHIP;2Kohm,1%,1/10W,TP,1608	1	S.N.A	
....4	R7160	2007-000729	R-CHIP;300ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R7176	2007-000729	R-CHIP;300ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R5044	2007-000755	R-CHIP;330Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R5039	2007-000758	R-CHIP;330Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5037	2007-000763	R-CHIP;330ohm,1%,1/10W,TP,1608	1	S.N.A	
....4	R1012	2007-000828	R-CHIP;39Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R3004_EU	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3005_EU	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4015	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6067	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R9018_650	2007-000982	R-CHIP;5.6Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R9030_650	2007-000982	R-CHIP;5.6Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R1014	2007-001179	R-CHIP;8.2Kohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R3722	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8028_EU	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R9022_650	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3721	2007-001305	R-CHIP;120ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3723	2007-001305	R-CHIP;120ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7194	2007-001308	R-CHIP;200ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7410_LCD	2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7190	2007-001329	R-CHIP;7.5Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R7191	2007-001329	R-CHIP;7.5Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R3810	2007-001333	R-CHIP;18Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1004	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R1007	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R1008	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R1009	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R5056	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R5102	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R9001_650	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R1021	2007-002899	R-CHIP;10ohm,1%,1/10W,TP,1608	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R1017	2007-002900	R-CHIP;11Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R5070	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5210	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5211	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5213	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5214	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5215	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R9023_650	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R9024_650	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R9025_650	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R9026_650	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1010	2007-007107	R-CHIP;100Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R5034	2007-007107	R-CHIP;100Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R2057	2007-007136	R-CHIP;4.7Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R8013_EU	2007-007136	R-CHIP;4.7Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R1019	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R4028	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R4030	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R4089	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R4156	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R4753	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R4754	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R2055	2007-007197	R-CHIP;3.3ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R2056	2007-007197	R-CHIP;3.3ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7193	2007-007222	R-CHIP;6.04Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R1016	2007-007312	R-CHIP;20Kohm,1%,1/16W,TP,1005	1	S.A	
....4	R1022	2007-007312	R-CHIP;20Kohm,1%,1/16W,TP,1005	1	S.A	
....4	R1020	2007-007318	R-CHIP;1Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R5036	2007-007469	R-CHIP;110ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R7116	2007-007797	R-CHIP;44.2ohm,1%,1/10W,TP,1608	1	S.A	
....4	R7117	2007-007797	R-CHIP;44.2ohm,1%,1/10W,TP,1608	1	S.A	
....4	R3002_EU	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3006_EU	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3009	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3011	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3012	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3029	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3030	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3031	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3045	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3047_EU	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3050	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3057_EU	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3137	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3208	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3209	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3210	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3241	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3242	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R5032	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R6280	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R6281	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R6282	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R9014_650	2007-008298	R-CHIP;49.9ohm,1%,1/16W,TP,1005	1	S.A	
....4	R9015_650	2007-008298	R-CHIP;49.9ohm,1%,1/16W,TP,1005	1	S.A	
....4	R9016_650	2007-008298	R-CHIP;49.9ohm,1%,1/16W,TP,1005	1	S.A	
....4	R9017_650	2007-008298	R-CHIP;49.9ohm,1%,1/16W,TP,1005	1	S.A	
....4	RA5005	2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA5006	2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA8006	2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA8007	2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA8008	2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA2001	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA2002	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA2003	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA2007	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA4001	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA4044	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA4045	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA4048	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA4051	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA5004	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA6013	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7002	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7003	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7004	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7005	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7006	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7007	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7008	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7009	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7010	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7011	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7012	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7039	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7041	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7042	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7043	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7044	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7045	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7046	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7047	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7048	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7049	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7050	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7051	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7052	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7062	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7500	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7501	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA8017_CI	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA8018_CI	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	RA8019_CI	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA9001_650	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA5003	2011-001344	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA7056	2011-001344	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA7057	2011-001344	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA2004	2011-001345	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA2005	2011-001345	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA2006	2011-001345	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA8010_EU	2011-001345	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA6018	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7013	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7014	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7015	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7020	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7038	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7040	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7053	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7054	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7061	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7502	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7503	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA3011	2011-001397	R-NETWORK;47Kohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA3012	2011-001397	R-NETWORK;47Kohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA3035	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3650_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3651_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3652_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3653_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3654_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3655_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3666_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3667_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3668_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3669_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3670_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3671_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3672_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3673_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3674_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3675_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA5013	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,-,4P,T,1010	1	S.N.A	
....4	RA3006	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,-,4P,TP,1010	1	S.N.A	
....4	RA3007	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,-,4P,TP,1010	1	S.N.A	
....4	RA3008	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,-,4P,TP,1010	1	S.N.A	
....4	RA3009	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,-,4P,TP,1010	1	S.N.A	
....4	RA3016	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,-,4P,TP,1010	1	S.N.A	
....4	RA4010	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,-,4P,TP,1010	1	S.N.A	
....4	RA4046	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,-,4P,TP,1010	1	S.N.A	
....4	RA6020	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,-,4P,TP,1010	1	S.N.A	
....4	RA2008	2011-001497	R-NETWORK;470ohm,5%,1/16W,L,CHIP,4P,TP,1	1	S.N.A	
....4	RA3018	2011-001497	R-NETWORK;470ohm,5%,1/16W,L,CHIP,4P,TP,1	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	RA9003_650	2011-001497	R-NETWORK;470ohm,5%,1/16W,L,CHIP,4P,TP,1	1	S.N.A	
....4	RA6019	2011-001506	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,4P,TP,1	1	S.N.A	
....4	RA6119	2011-001506	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,4P,TP,1	1	S.N.A	
....4	RA8011_EU	2011-001506	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,4P,TP,1	1	S.N.A	
....4	RA3015	2011-001519	R-NETWORK;33OHM,5%,1/16W,L,CHIP,4P,TP,1.	1	S.N.A	
....4	RA4018	2011-001519	R-NETWORK;33OHM,5%,1/16W,L,CHIP,4P,TP,1.	1	S.N.A	
....4	RA5012	2011-001519	R-NETWORK;33OHM,5%,1/16W,L,CHIP,4P,TP,1.	1	S.N.A	
....4	RA3017	2011-001527	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,4P,TP,	1	S.N.A	
....4	RA6021	2011-001527	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,4P,TP,	1	S.N.A	
....4	RA7034	2011-001527	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,4P,TP,	1	S.N.A	
....4	RA7065	2011-001527	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,4P,TP,	1	S.N.A	
....4	RA7066_650	2011-001527	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,4P,TP,	1	S.N.A	
....4	RA3014	2011-001586	R-NETWORK;1Kohm,5%,1/16W,L,CHIP-V,4P,TP,	1	S.A	
....4	RA3031	2011-001586	R-NETWORK;1Kohm,5%,1/16W,L,CHIP-V,4P,TP,	1	S.A	
....4	RA3036	2011-001586	R-NETWORK;1Kohm,5%,1/16W,L,CHIP-V,4P,TP,	1	S.A	
....4	RA6022	2011-001586	R-NETWORK;1Kohm,5%,1/16W,L,CHIP-V,4P,TP,	1	S.A	
....4	RA3010	2011-001587	R-NETWORK;100ohm,5%,1/16W,L,CHIP-V,4P,TP	1	S.A	
....4	RA3013	2011-001587	R-NETWORK;100ohm,5%,1/16W,L,CHIP-V,4P,TP	1	S.A	
....4	RA4016	2011-001587	R-NETWORK;100ohm,5%,1/16W,L,CHIP-V,4P,TP	1	S.A	
....4	RA4017	2011-001587	R-NETWORK;100ohm,5%,1/16W,L,CHIP-V,4P,TP	1	S.A	
....4	RA3030_EU	2011-001588	R-NETWORK;75ohm,5%,1/16W,L,CHIP-V,4P,TP,	1	S.A	
....4	RA6009	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA6010	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA6011	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA6012	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA7060	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA7079	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA7600	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA7601	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA7900	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA3032	2011-001590	R-NETWORK;47Kohm,5%,1/16W,L,CHIP-V,4P,TP	1	S.A	
....4	RA3072	2011-001590	R-NETWORK;47Kohm,5%,1/16W,L,CHIP-V,4P,TP	1	S.A	
....4	C2080	2203-000125	C-CER,CHIP;1.2nF,10%,50V,X7R,TP,1608,-	1	S.A	
....4	C2081	2203-000125	C-CER,CHIP;1.2nF,10%,50V,X7R,TP,1608,-	1	S.A	
....4	C2082	2203-000125	C-CER,CHIP;1.2nF,10%,50V,X7R,TP,1608,-	1	S.A	
....4	C2083	2203-000125	C-CER,CHIP;1.2nF,10%,50V,X7R,TP,1608,-	1	S.A	
....4	C2040	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3001	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3002_EU	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3013	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3015	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3021	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3022	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3029	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3033_EU	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3045	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3066	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3250	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3251	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C2036	2203-000280	C-CER,CHIP;0.01nF,0.5pF,50V,C0G,1608	1	S.A	
....4	C7137	2203-000384	C-CER,CHIP;0.015nF,5%,50V,C0G,1608	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C9017_650	2203-000384	C-CER,CHIP;0.015nF,5%,50V,C0G,1608	1	S.N.A	
....4	C9019_650	2203-000384	C-CER,CHIP;0.015nF,5%,50V,C0G,1608	1	S.N.A	
....4	C1001	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C1029	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C1041_LCD	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C1768	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C2033	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C2034	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C4003	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C4012	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C4025	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C6090	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C1027	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C3014_EU	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C3016_EU	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C3024	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C3025	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C5001	2203-000550	C-CER,CHIP;0.02nF,5%,50V,C0G,1005	1	S.N.A	
....4	C5002	2203-000550	C-CER,CHIP;0.02nF,5%,50V,C0G,1005	1	S.N.A	
....4	C2070	2203-000575	C-CER,CHIP;220nF,10%,25V,X7R,TP,2012	1	S.N.A	
....4	C2071	2203-000575	C-CER,CHIP;220nF,10%,25V,X7R,TP,2012	1	S.N.A	
....4	C2072	2203-000575	C-CER,CHIP;220nF,10%,25V,X7R,TP,2012	1	S.N.A	
....4	C2073	2203-000575	C-CER,CHIP;220nF,10%,25V,X7R,TP,2012	1	S.N.A	
....4	C2074	2203-000575	C-CER,CHIP;220nF,10%,25V,X7R,TP,2012	1	S.N.A	
....4	C2075	2203-000575	C-CER,CHIP;220nF,10%,25V,X7R,TP,2012	1	S.N.A	
....4	C5100	2203-000585	C-CER,CHIP;0.22nF,10%,50V,X7R,1005	1	S.A	
....4	C4009	2203-000679	C-CER,CHIP;0.027nF,5%,50V,C0G,1005	1	S.A	
....4	C4010	2203-000679	C-CER,CHIP;0.027nF,5%,50V,C0G,1005	1	S.A	
....4	C5003	2203-000697	C-CER,CHIP;0.002NF,0.25PF,50V,C0G,TP,160	1	S.A	
....4	C5004	2203-000697	C-CER,CHIP;0.002NF,0.25PF,50V,C0G,TP,160	1	S.A	
....4	C7048	2203-000761	C-CER,CHIP;330nF,10%,16V,X7R,TP,2012,-	1	S.N.A	
....4	C3006	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C3007	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C3008	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C3011_EU	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C3012_EU	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C3018	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C3019	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C3020	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C1120	2203-000995	C-CER,CHIP;0.047nF,5%,50V,C0G,1005	1	S.A	
....4	C3017	2203-000995	C-CER,CHIP;0.047nF,5%,50V,C0G,1005	1	S.A	
....4	C3023_EU	2203-000995	C-CER,CHIP;0.047nF,5%,50V,C0G,1005	1	S.A	
....4	C4018	2203-000995	C-CER,CHIP;0.047nF,5%,50V,C0G,1005	1	S.A	
....4	C4020	2203-000995	C-CER,CHIP;0.047nF,5%,50V,C0G,1005	1	S.A	
....4	C2038	2203-001126	C-CER,CHIP;0.68nF,10%,50V,X7R,1608	1	S.N.A	
....4	C5031	2203-001412	C-CER,CHIP;0.03nF,5%,50V,NP0,TP,1005	1	S.N.A	
....4	C5035	2203-001412	C-CER,CHIP;0.03nF,5%,50V,NP0,TP,1005	1	S.N.A	
....4	C5036	2203-001412	C-CER,CHIP;0.03nF,5%,50V,NP0,TP,1005	1	S.N.A	
....4	C5037	2203-001412	C-CER,CHIP;0.03nF,5%,50V,NP0,TP,1005	1	S.N.A	
....4	C5038	2203-001412	C-CER,CHIP;0.03nF,5%,50V,NP0,TP,1005	1	S.N.A	
....4	C5039_OP	2203-001596	C-CER,CHIP;2200nF,+80-20%,50V,Y5V,2012	1	S.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C5060_OP	2203-001596	C-CER,CHIP;2200nF,+80-20%,50V,Y5V,2012	1	S.A	
....4	C1005	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C1007	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C1008	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C2006	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C2007	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C4008	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C4011	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C4019	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C4021	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C4022	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C4024	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C4100	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C5023	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C6061	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C6077	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C6099	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C6113	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C6114	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C7018	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C7136	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C7139_LCD	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C5010	2203-002494	C-CER,CHIP;470nF,10%,16V,X7R,2012	1	S.N.A	
....4	C7050	2203-005138	C-CER,CHIP;1.8nF,10%,50V,X7R,1005	1	S.A	
....4	C7051	2203-005138	C-CER,CHIP;1.8nF,10%,50V,X7R,1005	1	S.A	
....4	C7052	2203-005138	C-CER,CHIP;1.8nF,10%,50V,X7R,1005	1	S.A	
....4	C1004	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C1022	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C1024	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C1048_LCD	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C1148_LCD	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C1149_LCD	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C1150_LCD	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2047	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2048	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2049	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2050	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2051	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2052	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2060	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2061	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2062	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2063	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2066	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2067	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2068	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2069	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2076	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2077	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2078	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2079	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C5021	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6056	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6057	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6058	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6059	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6062	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6063	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6073	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6074	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6075	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6078	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6094	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6095	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6096	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6100	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7011	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7017	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7049	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7109_650	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7114	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7115	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7121	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7122	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7009	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7016	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7025	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7029	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7059	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7063	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7065	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7073	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7096	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7105	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7106	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7148	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7157	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7173	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7205	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7210	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C3063	2203-005393	C-CER,CHIP;0.005nF,0.1pF,50V,NP0,TP,1005	1	S.N.A	
....4	C3811	2203-005493	C-CER,CHIP;220nF,+80-20%,16V,Y5V,1005	1	S.A	
....4	C6044	2203-005493	C-CER,CHIP;220nF,+80-20%,16V,Y5V,1005	1	S.A	
....4	C6045	2203-005493	C-CER,CHIP;220nF,+80-20%,16V,Y5V,1005	1	S.A	
....4	C7053	2203-005659	C-CER,CHIP;0.18nF,5%,50V,NP0,1005	1	S.N.A	
....4	C1032	2203-005834	C-CER,CHIP;22000nF,+80-20%,10V,Y5V,3216	1	S.A	
....4	C1035	2203-005834	C-CER,CHIP;22000nF,+80-20%,10V,Y5V,3216	1	S.A	
....4	C1036	2203-005834	C-CER,CHIP;22000nF,+80-20%,10V,Y5V,3216	1	S.A	
....4	C5025	2203-005834	C-CER,CHIP;22000nF,+80-20%,10V,Y5V,3216	1	S.A	
....4	C5034	2203-005834	C-CER,CHIP;22000nF,+80-20%,10V,Y5V,3216	1	S.A	
....4	C2041	2203-005968	C-CER,CHIP;4.7NF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C6091	2203-005968	C-CER,CHIP;4.7NF,10%,50V,X7R,TP,1005	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C9020_650	2203-006039	C-CER,CHIP;1nF,10%,2000V,X7R,3216	1	S.A	
....4	C9021_650	2203-006039	C-CER,CHIP;1nF,10%,2000V,X7R,3216	1	S.A	
....4	C5337	2203-006104	C-CER,CHIP;1000nF,10%,50V,X7R,3225	1	S.A	
....4	C3997	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C3998	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C6098	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C1019	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.N.A	
....4	C1025	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.N.A	
....4	C1028	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.N.A	
....4	C1060	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.N.A	
....4	C7084	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.N.A	
....4	C7310	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.N.A	
....4	C7601_LCD	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.N.A	
....4	C1002	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1003	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1006	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1012	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1014	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1030	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1034	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1070	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1071	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1080	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1091	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1092	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1801	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C2037	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C2039	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C2042	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C2043	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C2044	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C2045	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3046	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3051	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3054	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3055	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3056	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3057	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3065	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3070	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3071	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3072	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3100	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3101	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3102	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4002	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4006	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4013	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4014	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4016	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4023	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C4026	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4050	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4103	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5011	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5020	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5024	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5027	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5070	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5071	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5072	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5073	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5112	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6027	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6028	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6033	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6042	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6043	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6048	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6052	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6053	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6064	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6065	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6066	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6067	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6068	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6069	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6070	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6079	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6080	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6081	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6082	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6083	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6084	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6085	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6086	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6087	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6088	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6089	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6101	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6105	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6109	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6110	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6111	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6112	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6115	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6116	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6153	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7012	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7013	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7019	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7020	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C7034	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7038	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7043	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7054	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7055	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7056	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7062	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7064	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7068	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7069	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7074	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7075	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7078	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7081	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7083	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7086	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7087	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7088	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7094	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7095	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7098	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7099	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7100_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7107	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7112	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7113	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7116	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7117	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7134	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7140	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7142	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7143	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7146	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7147	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7149	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7152	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7160	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7161	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7164	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7165	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7168	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7169	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7172	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7176	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7177	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7180	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7181	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7185	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7200	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7201	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7202	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C7203	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7206	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7211	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7220	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7221	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7222	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7223	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7224	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7225	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7226	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7227	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7228	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7301	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7302	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7400	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7402	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7403	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7404	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7405	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7406	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7407	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7408	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7409	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7410	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7411	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7412	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7413	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7414	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7416	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7417	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7418	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7419	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7420	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7423	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7750	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7751	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7752	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7753	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7754	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7755	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7756	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7757	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7758	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7759	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7760	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7761	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7770	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7771	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7772	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7773	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7880	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C7881	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7900	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7901	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8001	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8002	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8003	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8004	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8007_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8011_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8012	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8013_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8014_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8015_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8016_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8017_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8018_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8019_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9001_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9003_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9004_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9005_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9006_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9007_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9009_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9010_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9011_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9012_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9013_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9014_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9015_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9016_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9018_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9023_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9024_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9101_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9103_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9105_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9107_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5012	2203-006336	C-CER,CHIP;10000nF,10%,25V,X5R,3216	1	S.A	
....4	C1017	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C1020	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C1021	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C1023	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C1031	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C1033	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C1050	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2001	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2003	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2005	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2011	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2014	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C2031	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2032	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2035	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2046	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2055	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2064	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2065	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3009_EU	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3010_EU	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3037	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3043	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3053	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3067	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3068	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3069	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3073	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3810	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C4001	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C4015	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C5005	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C5018	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C5028	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C5032	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C5111	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C5336	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6001	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6011	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6022	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6029	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6030	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6031	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6032	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6046	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6049	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6050	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6054	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6055	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6071	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6072	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6092	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6093	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7001	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7004	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7005	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7006	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7007	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7008	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7021	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7085_650	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7108	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7110	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C7130	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7132	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7133	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C8010_EU	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C9002_650	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C9008_650	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C9022_650	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C9100_650	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C9102_650	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C9104_650	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C9106_650	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C9900_650	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2084	2203-006382	C-CER,CHIP;10000nF,10%,25V,X7R,TP,3225	1	S.N.A	
....4	C2085	2203-006382	C-CER,CHIP;10000nF,10%,25V,X7R,TP,3225	1	S.N.A	
....4	C2086	2203-006382	C-CER,CHIP;10000nF,10%,25V,X7R,TP,3225	1	S.N.A	
....4	C2087	2203-006382	C-CER,CHIP;10000nF,10%,25V,X7R,TP,3225	1	S.N.A	
....4	C1040_LCD	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C1042_LCD	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2019	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2020	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2021	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2022	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2023	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2024	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2025	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2026	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2027	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2028	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2029	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2030	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C3103	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C3104	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C3105	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C3106	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C3320	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C3321	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C4004	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6005	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6014	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6040	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6041	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6060	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6076	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6097	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6851	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6852	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6853	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6854	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7003	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7028	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7030	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C7037	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7039	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7040	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7072	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7089	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7097	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7141	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7156	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7204	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7209	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C1013	2203-006618	C-CER,CHIP;2200nF,+80-20%,16V,Y5V,-,1608	1	S.N.A	
....4	C1016	2203-006618	C-CER,CHIP;2200nF,+80-20%,16V,Y5V,-,1608	1	S.N.A	
....4	C2004	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C2008	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C2009	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C2010	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C2056	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C2057	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C2059	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C3077	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C4005	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C5016	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C2053	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C2054	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C3038	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C3039	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C3047	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C3048	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C3058	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C3062	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C3999	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C1015	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (1	S.N.A	
....4	C1018	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (1	S.N.A	
....4	C2002	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (1	S.N.A	
....4	C2058	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (1	S.N.A	
....4	C5022	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (1	S.N.A	
....4	C6047	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (1	S.N.A	
....4	C2012	2402-001128	C-AL,SMD;100##F,20%,16V,-,TP,6.3X5.7mm	1	S.A	
....4	C2013	2402-001128	C-AL,SMD;100##F,20%,16V,-,TP,6.3X5.7mm	1	S.A	
....4	C5030	2402-001210	C-POLYMER AL CHIP;100uF,20%,10V,WT,TP,7.	1	S.A	
....4	CA2001	2503-001051	C-NETWORK;100NFX4,20%,16V,-,2012, 4ARRAY	1	S.A	
....4	T9001_650	2601-001056	TRANS-SMD,PULSE;350UH,-,1:1,1:1,12.7X6.7	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	

5. Exploded View & Part List

[illegible]

5. Exploded View & Part List

[illegible]

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
..2	M0081	6003-001188	SCREW-TAPTITE;BH,+,-,B,M4,L10,ZPC(WHT),S	2	S.N.A	
..2	M0081	6003-001439	SCREW-TAPTITE;BH,+,-,S,M4,L8,ZPC(WHT),SW	1	S.N.A	
..2	M2893	BN39-00830B	LEAD CONNECTOR;LNT4642HX/XAA,UL1061#28,7	1	S.A	
..2	M2893	BN39-01021A	LEAD CONNECTOR;LN46A550P,UL1007#26,2pin,	1	S.A	
..2	M2893	BN39-01021D	LEAD CONNECTOR;LB6T,UL1617#22,2P,1200mm,	1	S.A	
..2	M2893	BN39-01099B	LEAD CONNECTOR;LN55A950D1FXZA,UL1007#26,	1	S.A	
..2	M0174	BN44-00268A	IP BOARD-IP;I55F2_9HS,I55F2_9HS,5.5mA,6.	1	S.A	
..2	M0115	BN61-04788A	BRACKET-STAND LINK;46, B610,SECC,T2.0	1	S.N.A	
..2	M0254	BN61-04800A	HOLDER-SIDE AV;EO,ABS+PMMA,HB,BK23,H/GLO	1	S.N.A	
...3		BN81-00204P	RESIN-HIGH GLOSS;HAM 8560,SF-0505,K21294	17.3	S.N.A	
..2	T0101	BN61-04817A	BRACKET-WALL;46, B610,SECC,T1.6	4	S.N.A	
..2	M0146	BN61-04819A	BRACKET-PANEL TOP;B650-46,SECC,T1.2	5	S.N.A	
..2		BN63-05259A	COVER-MAIN;EO,ABS+PMMA,HB,BK23,H/GLOSSY	1	S.N.A	
...3		BN81-00204P	RESIN-HIGH GLOSS;HAM 8560,SF-0505,K21294	0.015	S.N.A	
..2	M0230	BN96-10074A	ASSY CABLE P-FPCB LVDS;LA46A650A1,FPCB L	1	S.A	
0.1	M0045	BN92-04322E	ASSY ACCESSORY;LE55B653T5WXXC	1	S.N.A	
..2	M0045	BN96-09731A	ASSY ACCESSORY-MANUAL;LE32B653T5WXXC	1	S.A	
...3	T0524	6902-000110	BAG PE;LDPE,T0.05,W250,L400,TRP,28,2,-,9	1	S.N.A	
...3	T0210	AA68-03242Q	MANUAL FLYER-01,SAFETY GUIDE;comm,Samsun	1	S.N.A	
...3	T0175	BN68-00514E	MANUAL FLYER-01,WARRANTY CARD;comm,Samsu	1	S.N.A	
...3		BN68-00907D	MANUAL FLYER-WEEE BATTERY;COMM,SAMSUNG,2	1	S.N.A	
...3	T0511	BN68-01900B	MANUAL USERS;COMM,SAMSUNG,Tur,W.EUROPE,W	1	S.N.A	
...3		BN68-01902A	MANUAL FLYER-QSG;COMM,SAMSUNG,9Langs,W.E	1	S.N.A	
...3		BN96-10241A	ASSY MANUAL P-USB;B650,USB,SAMSUNG,W.EUR	1	S.N.A	
...4	T0511	BN68-01900A	MANUAL USERS;COMM,SAMSUNG,9Langs,W.EUROP	1	S.N.A	
..2	M0045	BN96-09731L	ASSY ACCESSORY-CABEL;LE55B653T5WXXC	1	S.A	
...3	T0268	3903-000145	CBF-POWER CORD;DT,EU,FP3/YES,U(IEC C13-R	1	S.A	
...3	T0524	6902-000110	BAG PE;LDPE,T0.05,W250,L400,TRP,28,2,-,9	1	S.N.A	
...3	T0074	BN59-00861A	REMOCON;LCD650,TM960,EUROPE,49	1	S.A	
...3	M9889	BN63-01798B	CLOTH-CLEAN;cloth,180,200,sea blue,ToC	1	S.N.A	
...3	T0531	BN63-05478B	COVER-BOTTOM;B650 52,55,HIPS,HB,BK500	1	S.N.A	
...4		BN81-00199H	RESIN;HIPS HB,BK500,HF-1690H,K2901	0.08	S.N.A	
0.1	M0019	BN92-04323C	ASSY LABEL;LE40B653T5WXXC	1	S.N.A	
0.1	M0113	BN92-04613A	ASSY P/MATERIAL;55,LB650	1	S.N.A	
..2	T0524	6902-000426	BAG PE;HDPE/NITRON,T0.015/T0.5,W1600,L14	1	S.N.A	
..2	T0003	6902-000604	BAG WRAPPING;LDPE,T0.02,W500,L10000,TRP,	5.5	S.N.A	
..2	T0214	AA61-20285C	HOLDER-BOX;CORAL,PP,BLACK,HB	4	S.N.A	
..2	T0214	BN74-00008A	TAPE-OPP MASKING;OPP-2,T0.05,W100,L800M,	1.63	S.N.A	
0.1	M0003	BN92-04619B	ASSY BOX;55BT5,EO,LB650	1	S.N.A	
..2	M0521	BN69-03569A	BOX-SET,IN;55LB650-V1/V2,CB,C-01,DW1,ECT	1	S.N.A	
..2		BN69-03570B	BOX-SET,OUT;55LB650-V1,CB,C-01,DW3,ECT60	1	S.N.A	
0.1	M0216	BN90-02173A	ASSY STAND;55,LB650,ROSE BLACK	1	S.N.A	
..2	T0081	6002-001294	SCREW-TAPPING;BH,+,,M4,L16,ZPC(BLK)	4	S.N.A	
..2	M0027	BN96-10606A	ASSY STAND P-BASE;55,LB650,TEMPERED GLAS	1	S.N.A	
...3	M0081	6003-001003	SCREW-TAPTITE;BH,+,,B,M4,L12,ZPC(BLK),SWR	6	S.N.A	
...3	M0081	6003-001003	SCREW-TAPTITE;BH,+,,B,M4,L12,ZPC(BLK),SWR	4	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
...3		BN61-04692A	BOSS-PRIMER;#94,clear,35cps	0.001	S.N.A	
...3		BN61-04731B	BOSS-TAPE;AMBER,ACRYL,T1.1,W12.0mm,WHITE	1	S.N.A	
...3	T0920	BN61-04814A	GUIDE-STAND;46,PC+G/F 20%,BK500	1	S.N.A	
...4		BN81-00204H	RESIN;Tirrex,3025G20 BK,ABS+PC G/F 20%,4	463.1	S.N.A	
...3		BN61-05240A	HOLDER-SWIVEL RING TOP;LB700 46,POM HB,A	1	S.N.A	
...3		BN61-05243A	BRACKET-STAND BOTTOM;LB700 46,HGI,T3.0	1	S.N.A	
...3		BN61-05244A	BRACKET-SWIVEL BOTTOM;LB700 46,HGI,T3.0	1	S.N.A	
...3		BN61-05251A	GUIDE-STAND NECK;LB700 46,PC,CLEAR(TP27)	1	S.N.A	
...3		BN61-05255A	HOLDER-SWIVEL RING BOTTOM;LB700 46,POM H	1	S.N.A	
...3	T0056	BN63-05538A	COVER-DECORATION;UB7000 46inch,ABS,PMMA,	1	S.N.A	
...4		BN81-00204P	RESIN-HIGH GLOSS;HAM 8560,SF-0505,K21294	0.013	S.N.A	
...3		BN63-05766B	COVER-STAND GLASS;55,LB650,GLASS,T8.0,RO	1	S.A	
...4	CCM1	BN63-04755A	COVER-SHEET;AMBER,PE,T0.05,W150mm,200M,6	0.68	S.N.A	
...3	M0126	BN73-00203A	RUBBER-FOOT;LB7000 46inch,CR RUBBER,T7.0	4	S.N.A	
...3	M0126	BN73-00204A	RUBBER-FOOT;42LB650,RUBBER,16*33,60,2.0	4	S.N.A	

5-22. LE40B75* Parts List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
		LE40B750U1WXXC	LE40B750U1W,N68A/40BU1-G7U,40,LCD-TV,SPA			
0.1	M0001	BN90-01962B	ASSY COVER FRONT;40,LB750,EO,CHARCOAL GR	1	S.N.A	
..2	T0175	BN96-09463C	ASSY SPEAKER P;8ohm,4pin,10W,R:250/ L:60	1	S.A	
..2	T0003	BN96-09632B	ASSY COVER P-FRONT;40,LB750,EO,PC(CLR)+P	1	S.N.A	
...3	T0069	BN60-00027G	SPACER-FELT;L650-40,FELT,890,0.5,20	2	S.N.A	
...3	T0069	BN60-00027P	SPACER-FELT;L650 40,FELT,502,0.5,20	2	S.N.A	
...3		BN61-04661A	BRACKET-STOPPER;L650,SK-5,T0.4,Plating,H	6	S.N.A	
...3	M0279	BN63-00866A	FELT;AS17UO,FELT,0.5,10,140	2	S.N.A	
...3	CCM1	BN63-02183E	COVER-SHEET;Rhcm,PE Vinyl,T0.05,750mm,20	0.7	S.N.A	
...3	CCM1	BN63-05199B	COVER-SHEET;AMBER,PE,T0.08,W65mm,200M,CL	2.3	S.N.A	
...3	CCM1	BN63-05199F	COVER-SHEET;AMBER,PE,T0.08,W95mm,200M,CL	1	S.N.A	
...3	M0112	BN63-05262B	COVER-FRONT;40,LB750,EO,PC(CLR)+PC(C/GRA	1	S.A	
....4		BN81-00116D	RESIN-TOC;PC V0,TTP01,CLR,TN-1030(NP),TH	0.666	S.N.A	
....4		BN81-00265E	RESIN;ToC PC, TGR02,TN-1030S, LD046,TH30	0.955	S.N.A	
...3		BN64-01022A	DECORATION-BOTTOM;UB7000,PC,clear	1	S.N.A	
....4		BN81-00116J	RESIN;PC CLEAR,SC-1220R/70918,HF-1130R,	0.13	S.N.A	
...3		BN96-09509C	ASSY HOLDER P-BOSS SIDE RIGHT;40,LB650,A	1	S.N.A	
....4		BN61-04692A	BOSS-PRIMER;#94,clear,35cps	0.1	S.N.A	
....4		BN61-04731D	BOSS-TAPE;AMBER,ACRYL,T1.1,W20.0mm,WHITE	0.03	S.N.A	
....4		BN61-04731F	BOSS-TAPE;AMBER,ACRYL,T1.1,W6.0mm,WHITE,	0.27	S.N.A	
....4		BN61-04805C	HOLDER-BOSS SIDE R;40,LB650,ABS+PMMA,HB,	1	S.N.A	
....5		BN81-00204P	RESIN-HIGH GLOSS;HAM 8560,SF-0505,K21294	0.05	S.N.A	
...3		BN96-09509D	ASSY HOLDER P-BOSS SIDE LEFT;40,LB650,AB	1	S.N.A	
....4		BN61-04692A	BOSS-PRIMER;#94,clear,35cps	0.1	S.N.A	
....4		BN61-04731D	BOSS-TAPE;AMBER,ACRYL,T1.1,W20.0mm,WHITE	0.03	S.N.A	
....4		BN61-04731F	BOSS-TAPE;AMBER,ACRYL,T1.1,W6.0mm,WHITE,	0.27	S.N.A	
....4		BN61-04805D	HOLDER-BOSS SIDE L;40,LB650,ABS+PMMA,HB,	1	S.N.A	
....5		BN81-00204P	RESIN-HIGH GLOSS;HAM 8560,SF-0505,K21294	0.05	S.N.A	
...3		BN96-09640B	ASSY HOLDER P-BOSS BOTTOM;40,LB750,HIPS,	1	S.N.A	
....4		BN61-04692A	BOSS-PRIMER;#94,clear,35cps	0.4	S.N.A	
....4		BN61-04731A	BOSS-TAPE;AMBER,ACRYL,T1.1,W8.0mm,WHITE	0.19	S.N.A	
....4		BN61-04731E	BOSS-TAPE;AMBER,ACRYL,T1.1,W24.0mm,WHITE	0.77	S.N.A	
....4		BN61-04809B	HOLDER-BOSS BOTTOM;40,LB750,HIPS,HB,BK50	1	S.N.A	
....5		BN81-00199H	RESIN;HIPS HB,BK500,HF-1690H,K2901	0.195	S.N.A	
...3	M0175	BN96-10210D	ASSY BOARD P-TOUCH FUNCTION&IR;LN40B750U	1	S.N.A	
...3	H/B/SIDE+C	6003-001188	SCREW-TAPTYPE;BH,+,-,B,M4,L10,ZPC(WHT),S	2	S.N.A	
0.1	M0216	BN90-01987A	ASSY STAND;40,LB750,BLACK,CLEAR NECK	1	S.N.A	
..2	M0027	BN96-09475A	ASSY STAND P-BASE;40,LB750,BLACK,CLEAR N	1	S.N.A	
...3	B/S/STAND+	6003-001003	SCREW-TAPTYPE;BH,+,-,B,M4,L12,ZPC(BLK),SWR	3	S.N.A	
...3	G/STAND+G/	6003-001003	SCREW-TAPTYPE;BH,+,-,B,M4,L12,ZPC(BLK),SWR	4	S.N.A	
...3		BN61-04692A	BOSS-PRIMER;#94,clear,35cps	0.1	S.N.A	
...3		BN61-04731B	BOSS-TAPE;AMBER,ACRYL,T1.1,W12.0mm,WHITE	0.95	S.N.A	
...3	T0920	BN61-04996A	GUIDE-STAND;LB640 40,PC+GF 20%,BLK	1	S.N.A	
....4		BN81-00204H	RESIN;Trirex,3025G20 BK,ABS+PC G/F 20%,4	0.175	S.N.A	
...3		BN61-05240A	HOLDER-SWIVEL RING TOP;LB700 46,POM HB,A	1	S.N.A	
...3		BN61-05244A	BRACKET-SWIVEL BOTTOM;LB700 46,HGI,T3.0	1	S.N.A	
...3		BN61-05252A	GUIDE-STAND NECK;LB700 46,PC CLEAR,Pi 60	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
...4		BN61-05267A	HOLDER-INSERT;40 LB7000,PC, extrusion,CL	1	S.N.A	
...4		BN81-00116J	RESIN;PC CLEAR,SC-1220R/70918,HF-1130R,	0.15	S.N.A	
...3		BN61-05492A	BRACKET-STAND BOTTOM;B650 40,SECC,T2.0	1	S.N.A	
...3		BN61-05493A	HOLDER-SWIVEL RING BOTTOM;LB650 40,Aceta	1	S.N.A	
...3	CCM1	BN63-04755A	COVER-SHEET;AMBER,PE,T0.05,W150mm,200M,6	1.14	S.N.A	
...3	T0056	BN63-05538A	COVER-DECORATION;UB7000 46inch,ABS,PMMA,	1	S.N.A	
...4		BN81-00204P	RESIN-HIGH GLOSS;HAM 8560,SF-0505,K21294	0.013	S.N.A	
...3		BN63-05781A	COVER-STAND GLASS;37,40,LB650,GLASS,8.0,	1	S.A	
...3	M0126	BN73-00203A	RUBBER-FOOT;LB7000 46inch,CR RUBBER,T7.0	4	S.N.A	
0.1	M0002	BN90-01990A	ASSY COVER REAR;40,LB750,EO	1	S.N.A	
..2	T0081	6002-001294	SCREW-TAPPING;BH,+,,M4,L16,ZPC(BLK)	9	S.N.A	
..2	T0081	6002-001294	SCREW-TAPPING;BH,+,,M4,L16,ZPC(BLK)	1	S.N.A	
..2	T0081	6002-001294	SCREW-TAPPING;BH,+,,M4,L16,ZPC(BLK)	1	S.N.A	
..2	M0013	BN96-09652A	ASSY COVER P-REAR;40,LB750,EO,PC/ABS+REC	1	S.N.A	
...3	T0069	AA60-00091J	SPACER-FELT;- ,FELT,330X10,-,-,BLK,T0.5,-	4	S.N.A	
...3	T0101	BN61-04816A	BRACKET-WALL;40, B610,SECC,T1.2	4	S.N.A	
...3	CCM1	BN63-02183E	COVER-SHEET;Rhcm,PE Vinyl,T0.05,750mm,20	0.7	S.N.A	
...3	M0006	BN63-05269A	COVER-REAR;40,LB750,EO,PC/ABS+RECYCLE PC	1	S.A	
...4		BN81-00204P	RESIN-HIGH GLOSS;HAM 8560,SF-0505,K21294	2.736	S.N.A	
...3	T0071	BN64-01028A	INLAY-TERMINAL;B650/750,EO,PS SHEET,T0.5	1	S.N.A	
...3	T0064	BN65-00002A	CLAMPER CORE;BORDEAUX,LDPE,-,-,BLK,-	1	S.N.A	
...3	T0069	AA63-60001D	SPACER-FELT;- ,FELT,-,-,BLK,T0.3,-,30X2	2	S.N.A	
0.1		BN91-03555F	ASSY LCD-AMLCD;LN40B750U1FXZA	1	S.N.A	
..2	M0215	BN07-00694B	LCD-PANEL;LTF400HG03	1	S.A	
...3		BN81-02355A	A/S-T CON LTF400HG01;LTF400HG01	1	S.N.A	
0.1	M0017	BN91-03740A	ASSY CHASSIS;LE40B750U1WXXC	1	S.N.A	
..2	M0014	BN94-02663D	ASSY PCB MAIN;LE40B750U1WXXC	1	S.N.A	
...3	T0245	0202-001608	SOLDER-WIRE FLUX;LFC7-107,D0.8,99.3Sn/0.	0.25	S.N.A	
...3	CN3010	3701-001388	CONNECTOR-HDMI;20P,Phosphor Bronze,ANGLE	1	S.A	
...3	CN3011	3701-001480	CONNECTOR-DSUB;15P,3R,FEMAIL,STAMPED PIN	1	S.A	
...3	CN906	3707-001081	CONNECTOR-OPTICAL;STRAIGHT,SPDIF	1	S.A	
...3	CN8001_EU	3709-001551	CONNECTOR-CARD SLOT;68P,1.27mm,DIP,AU50U	1	S.A	
...3	CN330	3711-003847	HEADER-BOARD TO CABLE;BOX,12P,1R,2mm,ANG	1	S.A	
...3	CN1001	3711-005884	HEADER-BOARD TO BOARD;BOX,30P,2R,2mm,ANG	1	S.A	
...3	CN330	3711-006715	HEADER-BOARD TO CABLE;BOX,4P,1R,2.5mm,AN	1	S.N.A	
...3	JA330	3722-001061	JACK-PHONE;1P,3.6PI,AG,BLK,N	1	S.A	
...3	JA330	3722-001061	JACK-PHONE;1P,3.6PI,AG,BLK,N	1	S.A	
...3	JA330	3722-001061	JACK-PHONE;1P,3.6PI,AG,BLK,N	1	S.A	
...3	JA330	3722-001061	JACK-PHONE;1P,3.6PI,AG,BLK,N	1	S.A	
...3	CN9001_650	3722-002426	JACK-MODULAR;8P/8C,N,STRAIGHT,GRN/YEL,AU	1	S.A	
...3	CN7002_650	3722-002546	JACK-USB;4P/1C,AU,BLK,ANGLE,A type	1	S.N.A	
...3	CN7006	3722-002546	JACK-USB;4P/1C,AU,BLK,ANGLE,A type	1	S.N.A	
...3	JA333	3722-002635	JACK-PIN;3P,Sn,YEL/WHT/RED,ANGLE	1	S.A	
...3	CN3002_EU	3722-002681	JACK-SCART;42P,SN,BLK	1	S.A	
...3	JA333	3722-002691	JACK-PIN;2P,Ni,WHT/RED,STRAIGHT	1	S.A	
...3	JA333	3722-002691	JACK-PIN;2P,Ni,WHT/RED,STRAIGHT	1	S.A	
...3	JA333	3722-002703	JACK-PIN;3P,Ni,GRN/BLU/RED,STRAIGHT	1	S.A	
...3	CIS3	BN40-00145A	TUNER;TDHG6-K12A,TDHG6-K12A,DVB-TC,164CH	1	S.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
...3	T0066	BN62-00042A	HEAT SINK-ES;30*30*5,Ceramic,T1.5,TAPE	1	S.A	
...3	T0066	BN62-00043A	HEAT SINK-ES;40*40*5,Ceramic,T1.5,TAPE	1	S.A	
...3	T0174	BN97-03208D	ASSY SMD;LE40B750U1WXXC,BN94-02663D	1	S.N.A	
....4	SUB05	0202-001477	SOLDER-CREAM;LST309-M,D20~45um,96.5Sn/3A	1	S.N.A	
....4	D4003	0401-001049	DIODE-SWITCHING;LS4148,75V,150mA,SOD-80,	1	S.A	
....4	D4004	0401-001049	DIODE-SWITCHING;LS4148,75V,150mA,SOD-80,	1	S.A	
....4	D4100	0401-001049	DIODE-SWITCHING;LS4148,75V,150mA,SOD-80,	1	S.A	
....4	D4228	0401-001049	DIODE-SWITCHING;LS4148,75V,150mA,SOD-80,	1	S.A	
....4	D3001	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3002	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3051	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3054	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3061	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3062	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3063	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3076	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3077	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3079	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3080	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D4008	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D4010	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D9001_650	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D9002_650	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D9003_650	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D9004_650	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D9007_650	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D9008_650	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D7400	0401-001099	DIODE-SWITCHING;1N4148WS,75V,150mA,SOD-3	1	S.N.A	
....4	D0254	0402-001207	DIODE-SCHOTTKY;UPS5819,40V,1000MA,DO-216	1	S.A	
....4	D4001	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D5100	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D1180	0403-000584	DIODE-ZENER;VLZ3V6B,3.6/3.845V,500mW,SOD	1	S.N.A	
....4	D3003_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3004_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3005_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3006_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3007_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3008_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3009_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3011	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3015	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3016_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3018	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3019	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3020	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3021	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3022_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3023	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3024	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3026_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3032	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	D3033	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3034	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3035	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3036	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3037	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3038	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3039	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3045	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3052	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3056	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3057	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3058	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3060	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3065	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3066	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3067	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3068	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3069	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3073	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3074	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3075	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3350	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3776	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3777_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3778_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3779_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D0254	0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	1	S.A	
....4	D0254	0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	1	S.A	
....4	D0254	0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	1	S.A	
....4	D0254	0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	1	S.A	
....4	D0254	0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	1	S.A	
....4	D7001_650	0406-001200	DIODE-TVS;RCLAMP0504F,6/-V,150W,SC-70	1	S.A	
....4	D7002	0406-001200	DIODE-TVS;RCLAMP0504F,6/-V,150W,SC-70	1	S.A	
....4	D3751	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D3752	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D3753	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D3754	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D3755	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D3756	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D3757	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D3758	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D8001_CI	0407-000114	DIODE-ARRAY;-80V,100mA,CA2-3,SOT-23,TP	1	S.N.A	
....4	D8002_CI	0407-000114	DIODE-ARRAY;-80V,100mA,CA2-3,SOT-23,TP	1	S.N.A	
....4	D8003_CI	0407-000114	DIODE-ARRAY;-80V,100mA,CA2-3,SOT-23,TP	1	S.N.A	
....4	D8004_CI	0407-000114	DIODE-ARRAY;-80V,100mA,CA2-3,SOT-23,TP	1	S.N.A	
....4	D8005_CI	0407-000114	DIODE-ARRAY;-80V,100mA,CA2-3,SOT-23,TP	1	S.N.A	
....4	D8006_EU	0407-000114	DIODE-ARRAY;-80V,100mA,CA2-3,SOT-23,TP	1	S.N.A	
....4	D7900	0407-000123	DIODE-ARRAY;DAN202K,80V,100mA,CA2-3,SOT-	1	S.N.A	
....4	Q4003	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150MW,SOT-23	1	S.A	
....4	Q4005	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150MW,SOT-23	1	S.A	
....4	Q4020	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150MW,SOT-23	1	S.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	Q1002_LCD	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3007	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3008	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3009	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3010	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q4004	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q4009	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q4011	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q9001_650	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3001_EU	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	
....4	Q3002_EU	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	
....4	Q7601_LCD	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	
....4	Q7602_LCD	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-001916	FET-SILICON;Si4800BDY,N,30V,9A,0.03ohm,2	1	S.A	
....4	IC104	0801-002095	IC-CMOS LOGIC;74LCX245,TRANSCEIVER,TSSOP	1	S.A	
....4	IC104	0801-002172	IC-CMOS LOGIC;74LCX16244,BUFFER/LINE DRI	1	S.A	
....4	IC104	0801-002172	IC-CMOS LOGIC;74LCX16244,BUFFER/LINE DRI	1	S.A	
....4	IC104	0801-002630	IC-CMOS LOGIC;74AHCT1G08,2-INPUT AND GAT	1	S.A	
....4	IC104	0801-002780	IC-CMOS LOGIC;74LVC1G17,SCHMITT-TRIGGER	1	S.N.A	
....4	IC7008	1001-000164	IC-ANALOG MULTIPLEX;74HC4052,CMOS,SOP,16	1	S.A	
....4	IC9003_650	1001-001109	IC-ANALOG SWITCH;FST3125M,BUS SWITCH & C	1	S.A	
....4	IC106	1001-001177	IC-VIDEO SWITCH;TEA6425D,VIDEO SWITCH,SO	1	S.A	
....4	IC106	1001-001573	IC-VIDEO SWITCH;SiI9287ACNUTR,QFN,72P,10	1	S.A	
....4	IC107	1002-001482	IC-D/A CONVERTER;WM8521H9GED/R,16bit,SOI	1	S.A	
....4	IC3001	1006-001266	IC-LINE TRANSCEIVER;SP3232EEY,TSSOP,16P,	1	S.A	
....4	IC112	1103-000129	IC-EEPROM;24C02,2Kbit,256x8,SOP,8P,5x4mm	1	S.A	
....4	IC112	1103-000129	IC-EEPROM;24C02,2Kbit,256x8,SOP,8P,5x4mm	1	S.A	
....4	IC112	1103-001310	IC-EEPROM;24LC02B,256X8BIT,SOIC,8P,3.91X	1	S.N.A	
....4	IC112	1103-001385	IC-EEPROM;AT24C256,256Kbit,32Kx8,SOP,8P,	1	S.A	
....4	IC112	1103-001415	IC-EEPROM;AT93C46D,1Kbit,128x8/64x16,SOP	1	S.N.A	
....4	IC7003	1105-001859	IC-DDR2 SDRAM;K4T1G164QD-ZCE7,DDR2,1Gbit	1	S.A	
....4	IC7004	1105-001859	IC-DDR2 SDRAM;K4T1G164QD-ZCE7,DDR2,1Gbit	1	S.A	
....4	IC7005	1105-001859	IC-DDR2 SDRAM;K4T1G164QD-ZCE7,DDR2,1Gbit	1	S.A	
....4	IC7006	1105-001859	IC-DDR2 SDRAM;K4T1G164QD-ZCE7,DDR2,1Gbit	1	S.A	
....4	T0124	1201-002796	IC-POWER AMP;STA339BWS,PSSO,36P,10.3x7.5	1	S.A	
....4	T0087	1203-001815	IC-POSI.FIXED REG.;78M09,TO-252,3P,PLAST	1	S.A	
....4	T0087	1203-001816	IC-POSI.FIXED REG.;78M08,TO-252,3P,-,PLA	1	S.A	
....4	T0087	1203-002842	IC-POSI.FIXED REG.;AP1117D-33A,TO-252,3P	1	S.A	
....4	T0087	1203-002842	IC-POSI.FIXED REG.;AP1117D-33A,TO-252,3P	1	S.A	
....4	T0087	1203-002898	IC-POSI.FIXED REG.;G950T45R,TO-252,3P,6.	1	S.A	
....4	IC012	1203-002995	IC-POSI.ADJUST REG.;AP1117D-A,TO-252,3P,	1	S.A	
....4	IC012	1203-002995	IC-POSI.ADJUST REG.;AP1117D-A,TO-252,3P,	1	S.A	
....4	IC4005	1203-004363	IC-VOL. DETECTOR;RT9818C-29PV,SOT-23,3P,	1	S.A	
....4	IC4004	1203-004364	IC-VOL. DETECTOR;RT9818C-42PV,SOT-23,3P,	1	S.A	
....4	IC1007	1203-004879	IC-DC/DC CONVERTER;MP8668DL,QFN,14P,3x4m	1	S.A	
....4	T0087	1203-005134	IC-POSI.FIXED REG.;RT9167A-33PB,SOT-23-5	1	S.A	
....4	IC1006	1203-005538	IC-DC/DC CONVERTER;AOZ1021HAIL,SOP,8P,4.	1	S.A	
....4	IC5006	1203-005559	IC-BACKLIGHT DRIVER;MP3302DJ,TSOT23,5P,2	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	IC012	1203-005756	IC-POSI.ADJUST REG.;AP7173-SP,SOP-8L-EP,	1	S.A	
....4	IC118	1204-003010	IC-VIDEO PROCESS;SDP84,PBGA,324P,23x23mm	1	S.A	
....4	IC7001	1204-003011	IC-DECODER;SDP83,PBGA,729P,34x34mm,PLAST	1	S.A	
....4	IC9002_650	1205-002941	IC-ETHERNET CONTROLLER;RTL8100CSL-LF,LQF	1	S.N.A	
....4	IC3011	1205-003201	IC-BUS SWITCH;TC7WB125FK,SSOP,8P,2x2.3mm	1	S.A	
....4	IC2001	1205-003352	IC-CODEC;WM8593SEFT/V,TQFP,64P,10x10mm,P	1	S.A	
....4	IC8006_EU	1205-003479	IC-SWITCH;TPS2051BDBVR,SOT-23,5P,2.9x1.6	1	S.A	
....4	IC7007	1205-003733	IC-SWITCH;AP2191MPG-13,MSOP-8L-EP,8P,2.9	1	S.A	
....4	IC7010_650	1205-003735	IC-SWITCH;AP2151WG-7,SOT25,5P,2.9x1.6mm,	1	S.A	
....4	IC5010	1209-001830	IC-PLL;IDT6V10012PGG,TSSOP,20P,6.5x4.4mm	1	S.A	
....4	D4110	1405-001185	VARISTOR;24Vdc,1.6x0.8x0.36mm,TP	1	S.A	
....4	D3010	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3012_EU	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3013	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3014_EU	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3017	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3025	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3027	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3028	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3029	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3030	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3031	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3040	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3041	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3042	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3050	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3053	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3055	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3059	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3064	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3070	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3071	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3072	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3078	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3081	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3097	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3098	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3099	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4011	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4012	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4013	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4014	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4015	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4016	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4017	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4018	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D7003_650	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D7004	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	R7120	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7121	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7122	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R7123	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7152	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7153	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7154	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7155	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7162	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7163	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7164	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7165	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7169	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7170	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7171	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7172	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R1005	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R1801	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R5101	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R2058	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R2059	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R2060	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R2061	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R4155	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	1	S.A	
....4	R7050	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7053	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7056	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7058	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7062	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7066	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7069	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7070	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3007	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3034_EU	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3036_EU	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3062	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3070	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3071	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3078_EU	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3120	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3191	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3192	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3205	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3206	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3207	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3243	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3254	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3255	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3320	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3999	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4042	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4049	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4050	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4087	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R5022	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7114	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7132	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7143	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7605_LCD	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8311_EU	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1031_LCD	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1072	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3010_EU	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3021_EU	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3022_EU	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3035	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3037	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3072	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3073	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3081	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3082	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3138	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3139	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3189	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3190	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3227	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3228	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4081	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6028	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6066	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7045	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7072	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7195	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7196	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7602_LCD	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R9007_650	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R2054	2007-000141	R-CHIP;2.2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4085	2007-000141	R-CHIP;2.2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5030	2007-000141	R-CHIP;2.2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1030_LCD	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1060	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3520	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3522	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3524	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3526	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4016	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4018	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4020	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4066	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4071	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4074	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4077	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4551	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4552	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4553	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R4554	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4755	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4756	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5017	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6015	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6021	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6023	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6038	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6048	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6053	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6100	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6101	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6102	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7017	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7033	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7034	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7036	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7037	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7064	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7156	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7174	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7352	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7353_OP	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7356	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7357_OP	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7800	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3044_EU	2007-000146	R-CHIP;6.8Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3067_EU	2007-000146	R-CHIP;6.8Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1013	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1015	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1023_LCD	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1073	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1180	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1181	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R2023	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R2027	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3168	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3252	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3253	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3310	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3311	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4017	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4019	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4023	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4027	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4078	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4150	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4152	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5111	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6847	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7103	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R7351	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7411_LCD	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7600_LCD	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7601_LCD	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7603_LCD	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7604_LCD	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8012	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8014_EU	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8015_EU	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8020_EU	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R9028_650	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3028_EU	2007-000149	R-CHIP;12Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R3032_EU	2007-000149	R-CHIP;12Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R3027_EU	2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3033_EU	2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4021	2007-000155	R-CHIP;27Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1011	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R2019	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3040_EU	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3042_EU	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3058_EU	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3060_EU	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3126	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3136	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3201	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3204	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3521	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3523	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3525	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3527	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3820	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4151	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R9008_650	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R9029_650	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5110	2007-000159	R-CHIP;56Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5038	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3038_EU	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3049_EU	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3077_EU	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3103_OP	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3125	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3169	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3170	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3200	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3202	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3203	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3220	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3250	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3251	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3258	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3259	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R3284	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3285	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3289	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3290	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3400	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3500	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3751_EU	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3752_EU	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3753_EU	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3860	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4041	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4084	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4086	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4250	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5006	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5007	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5011	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5033	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5035	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6013	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6061	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6068	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6848	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7002	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7003	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7004	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7007	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7014	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7015	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7018	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7035	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7038	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7048	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7079	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7080	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7081	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7082	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7083	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7084	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7104	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7118	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7119	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7133	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7134	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7135	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7141	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7142	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7144	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7150_650	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7151_650	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7161	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R7167	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7168	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7177	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7201	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7202	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7204_120H	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7230_120H	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7234	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7244_120H	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7245_120H	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7246_120H	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7284_LCD	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7294_120H	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7295_120H	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8016_EU	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3288	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3300	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3301	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3302	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3303	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3722	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4038	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R2047	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3240	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3244	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4036	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4750	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4751	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4752	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4850	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4851	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5216	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5217	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5218	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6031	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6125	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6126	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6211	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6212	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6213	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6214	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6215	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6216	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7115	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7159	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7175	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7650	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7651	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8021	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3008	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3083	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R3256	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3257	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4039	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4040	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6184	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6810	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6811	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6812	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6813	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6814	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6815	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6816	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6817	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6818	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6819	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6820	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6821	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6822	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6823	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6824	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6825	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6826	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6827	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6828	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6829	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6830	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6831	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6832	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6833	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6834	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6835	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6836	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6837	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6838	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6839	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6840	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6841	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6842	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6843	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6844	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6845	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7310	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1018	2007-000239	R-CHIP;1.5Kohm,1%,1/10W,TP,1608	1	S.N.A	
....4	R6089	2007-000259	R-CHIP;1.6Kohm,5%,1/10W,TP,1608	1	S.A	
....4	R5112	2007-000287	R-CHIP;100ohm,1%,1/10W,TP,1608	1	S.N.A	
....4	R7105	2007-000287	R-CHIP;100ohm,1%,1/10W,TP,1608	1	S.N.A	
....4	R7147	2007-000287	R-CHIP;100ohm,1%,1/10W,TP,1608	1	S.N.A	
....4	R2064	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R2065	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R2066	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R2067	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R2068	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R2069	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R2070	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R2071	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R5001	2007-000402	R-CHIP;150ohm,5%,1/10W,TP,1608	1	S.A	
....4	R3001_EU	2007-000458	R-CHIP;18Kohm,5%,1/10W,TP,1608	1	S.A	
....4	R3055_EU	2007-000458	R-CHIP;18Kohm,5%,1/10W,TP,1608	1	S.A	
....4	R5031	2007-000566	R-CHIP;220Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5026	2007-000591	R-CHIP;22ohm,1%,1/10W,TP,1608	1	S.A	
....4	R5041	2007-000591	R-CHIP;22ohm,1%,1/10W,TP,1608	1	S.A	
....4	R5052_STU	2007-000606	R-CHIP;240ohm,1%,1/10W,TP,1608	1	S.A	
....4	R5053_STU	2007-000606	R-CHIP;240ohm,1%,1/10W,TP,1608	1	S.A	
....4	R1800	2007-000608	R-CHIP;240ohm,5%,1/10W,TP,1608	1	S.A	
....4	R5045	2007-000669	R-CHIP;2Kohm,1%,1/10W,TP,1608	1	S.N.A	
....4	R7160	2007-000729	R-CHIP;300ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R7176	2007-000729	R-CHIP;300ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R5044	2007-000755	R-CHIP;330Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R5039	2007-000758	R-CHIP;330Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5037	2007-000763	R-CHIP;330ohm,1%,1/10W,TP,1608	1	S.N.A	
....4	R1012	2007-000803	R-CHIP;36Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R3004_EU	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3005_EU	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4015	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6067	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R9018_650	2007-000982	R-CHIP;5.6Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R9030_650	2007-000982	R-CHIP;5.6Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R1014	2007-001179	R-CHIP;8.2Kohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R8028_EU	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R9022_650	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5211_650	2007-001301	R-CHIP;68ohm,5%,1/16W,TP,1005	1	S.A	
....4	R7194	2007-001308	R-CHIP;200ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3111	2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3112	2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3113	2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3114	2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7410_LCD	2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1004	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R1007	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R1008	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R1009	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R5056	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R5102	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R9001_650	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R1021	2007-002899	R-CHIP;10ohm,1%,1/10W,TP,1608	1	S.A	
....4	R1017	2007-002900	R-CHIP;11Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R3721	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3723	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5070	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5210	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5213	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5214	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R5215	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R9023_650	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R9024_650	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R9025_650	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R9026_650	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6846	2007-007095	R-CHIP;390ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1010	2007-007107	R-CHIP;100Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R5034	2007-007107	R-CHIP;100Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R2057	2007-007136	R-CHIP;4.7Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R8013_EU	2007-007136	R-CHIP;4.7Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R1019	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R4028	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R4030	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R4089	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R4156	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R4753	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R4754	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R2055	2007-007197	R-CHIP;3.3ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R2056	2007-007197	R-CHIP;3.3ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7193	2007-007222	R-CHIP;6.04Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R1016	2007-007312	R-CHIP;20Kohm,1%,1/16W,TP,1005	1	S.A	
....4	R1022	2007-007312	R-CHIP;20Kohm,1%,1/16W,TP,1005	1	S.A	
....4	R1071	2007-007316	R-CHIP;3.3Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R5036	2007-007469	R-CHIP;110ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R1070	2007-007671	R-CHIP;11Kohm,1%,1/16W,TP,1005	1	S.A	
....4	R7190	2007-007698	R-CHIP;5.1Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R7191	2007-007698	R-CHIP;5.1Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R7116	2007-007797	R-CHIP;44.2ohm,1%,1/10W,TP,1608	1	S.A	
....4	R7117	2007-007797	R-CHIP;44.2ohm,1%,1/10W,TP,1608	1	S.A	
....4	R3002_EU	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3006_EU	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3009	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3011	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3012	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3029	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3030	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3031	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3045	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3047_EU	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3050	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3057_EU	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3137	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3208	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3209	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3210	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3241	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3242	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R5032	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R6280	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R6281	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R6282	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R9014_650	2007-008298	R-CHIP;49.9ohm,1%,1/16W,TP,1005	1	S.A	
....4	R9015_650	2007-008298	R-CHIP;49.9ohm,1%,1/16W,TP,1005	1	S.A	
....4	R9016_650	2007-008298	R-CHIP;49.9ohm,1%,1/16W,TP,1005	1	S.A	
....4	R9017_650	2007-008298	R-CHIP;49.9ohm,1%,1/16W,TP,1005	1	S.A	
....4	R1020	2007-008593	R-CHIP;750ohm,1%,1/16W,TP,1005	1	S.A	
....4	RA5005	2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA5006	2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA8006	2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA8007	2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA8008	2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA2001	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA2002	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA2003	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA2007	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA4001	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA4044	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA4045	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA4048	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA4051	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA5004	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA6013	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7002	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7003	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7004	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7005	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7006	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7007	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7008	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7009	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7010	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7011	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7012	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7039	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7041	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7042	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7043	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7044	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7045	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7046	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7047	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7048	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7049	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7050	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7051	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7052	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7062	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7500	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7501	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA8017_CI	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA8018_CI	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA8019_CI	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	RA9001_650	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA5003	2011-001344	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA7056	2011-001344	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA7057	2011-001344	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA2004	2011-001345	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA2005	2011-001345	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA2006	2011-001345	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA8010_EU	2011-001345	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA6018	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7013	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7014	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7015	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7020	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7038	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7040	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7053	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7054	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7061	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7502	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7503	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA3011	2011-001397	R-NETWORK;47Kohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA3012	2011-001397	R-NETWORK;47Kohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA3035	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,4P,T,1010	1	S.N.A	
....4	RA3650_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,4P,T,1010	1	S.N.A	
....4	RA3651_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,4P,T,1010	1	S.N.A	
....4	RA3652_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,4P,T,1010	1	S.N.A	
....4	RA3653_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,4P,T,1010	1	S.N.A	
....4	RA3654_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,4P,T,1010	1	S.N.A	
....4	RA3655_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,4P,T,1010	1	S.N.A	
....4	RA3666_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,4P,T,1010	1	S.N.A	
....4	RA3667_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,4P,T,1010	1	S.N.A	
....4	RA3668_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,4P,T,1010	1	S.N.A	
....4	RA3669_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,4P,T,1010	1	S.N.A	
....4	RA3670_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,4P,T,1010	1	S.N.A	
....4	RA3671_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,4P,T,1010	1	S.N.A	
....4	RA3672_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,4P,T,1010	1	S.N.A	
....4	RA3673_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,4P,T,1010	1	S.N.A	
....4	RA3674_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,4P,T,1010	1	S.N.A	
....4	RA3675_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,4P,T,1010	1	S.N.A	
....4	RA5013	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,4P,T,1010	1	S.N.A	
....4	RA3006	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,4P,TP,1010	1	S.N.A	
....4	RA3007	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,4P,TP,1010	1	S.N.A	
....4	RA3008	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,4P,TP,1010	1	S.N.A	
....4	RA3009	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,4P,TP,1010	1	S.N.A	
....4	RA3016	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,4P,TP,1010	1	S.N.A	
....4	RA4010	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,4P,TP,1010	1	S.N.A	
....4	RA4046	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,4P,TP,1010	1	S.N.A	
....4	RA6020	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,4P,TP,1010	1	S.N.A	
....4	RA2008	2011-001497	R-NETWORK;470ohm,5%,1/16W,L,CHIP,4P,TP,1	1	S.N.A	
....4	RA3018	2011-001497	R-NETWORK;470ohm,5%,1/16W,L,CHIP,4P,TP,1	1	S.N.A	
....4	RA9003_650	2011-001497	R-NETWORK;470ohm,5%,1/16W,L,CHIP,4P,TP,1	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	RA6019	2011-001506	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,4P,TP,1	1	S.N.A	
....4	RA6119	2011-001506	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,4P,TP,1	1	S.N.A	
....4	RA8011_EU	2011-001506	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,4P,TP,1	1	S.N.A	
....4	RA3015	2011-001519	R-NETWORK;33OHM,5%,1/16W,L,CHIP,4P,TP,1.	1	S.N.A	
....4	RA4018	2011-001519	R-NETWORK;33OHM,5%,1/16W,L,CHIP,4P,TP,1.	1	S.N.A	
....4	RA5012	2011-001519	R-NETWORK;33OHM,5%,1/16W,L,CHIP,4P,TP,1.	1	S.N.A	
....4	RA3017	2011-001527	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,4P,TP,	1	S.N.A	
....4	RA6021	2011-001527	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,4P,TP,	1	S.N.A	
....4	RA7034	2011-001527	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,4P,TP,	1	S.N.A	
....4	RA7065	2011-001527	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,4P,TP,	1	S.N.A	
....4	RA7066_650	2011-001527	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,4P,TP,	1	S.N.A	
....4	RA3014	2011-001586	R-NETWORK;1Kohm,5%,1/16W,L,CHIP-V,4P,TP,	1	S.A	
....4	RA3031	2011-001586	R-NETWORK;1Kohm,5%,1/16W,L,CHIP-V,4P,TP,	1	S.A	
....4	RA3036	2011-001586	R-NETWORK;1Kohm,5%,1/16W,L,CHIP-V,4P,TP,	1	S.A	
....4	RA6022	2011-001586	R-NETWORK;1Kohm,5%,1/16W,L,CHIP-V,4P,TP,	1	S.A	
....4	RA3010	2011-001587	R-NETWORK;100ohm,5%,1/16W,L,CHIP-V,4P,TP	1	S.A	
....4	RA3013	2011-001587	R-NETWORK;100ohm,5%,1/16W,L,CHIP-V,4P,TP	1	S.A	
....4	RA4016	2011-001587	R-NETWORK;100ohm,5%,1/16W,L,CHIP-V,4P,TP	1	S.A	
....4	RA4017	2011-001587	R-NETWORK;100ohm,5%,1/16W,L,CHIP-V,4P,TP	1	S.A	
....4	RA3030_EU	2011-001588	R-NETWORK;75ohm,5%,1/16W,L,CHIP-V,4P,TP,	1	S.A	
....4	RA6009	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA6010	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA6011	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA6012	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA7060	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA7079	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA7600	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA7601	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA7900	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA3032	2011-001590	R-NETWORK;47Kohm,5%,1/16W,L,CHIP-V,4P,TP	1	S.A	
....4	RA3072	2011-001590	R-NETWORK;47Kohm,5%,1/16W,L,CHIP-V,4P,TP	1	S.A	
....4	C2080	2203-000125	C-CER,CHIP;1.2nF,10%,50V,X7R,TP,1608,-	1	S.A	
....4	C2081	2203-000125	C-CER,CHIP;1.2nF,10%,50V,X7R,TP,1608,-	1	S.A	
....4	C2082	2203-000125	C-CER,CHIP;1.2nF,10%,50V,X7R,TP,1608,-	1	S.A	
....4	C2083	2203-000125	C-CER,CHIP;1.2nF,10%,50V,X7R,TP,1608,-	1	S.A	
....4	C2040	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3001	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3002_EU	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3013	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3015	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3021	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3022	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3029	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3033_EU	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3045	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3066	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3250	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3251	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C2036	2203-000280	C-CER,CHIP;0.01nF,0.5pF,50V,C0G,1608	1	S.A	
....4	C6857	2203-000357	C-CER,CHIP;0.15nF,5%,50V,C0G,1608	1	S.N.A	
....4	C7137	2203-000384	C-CER,CHIP;0.015nF,5%,50V,C0G,1608	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C9017_650	2203-000384	C-CER,CHIP;0.015nF,5%,50V,C0G,1608	1	S.N.A	
....4	C9019_650	2203-000384	C-CER,CHIP;0.015nF,5%,50V,C0G,1608	1	S.N.A	
....4	C1001	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C1029	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C1041_LCD	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C1768	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C2033	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C2034	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C4003	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C4012	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C4025	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C6090	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C1027	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C3014_EU	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C3016_EU	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C3024	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C3025	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C5001	2203-000550	C-CER,CHIP;0.02nF,5%,50V,C0G,1005	1	S.N.A	
....4	C5002	2203-000550	C-CER,CHIP;0.02nF,5%,50V,C0G,1005	1	S.N.A	
....4	C2070	2203-000575	C-CER,CHIP;220nF,10%,25V,X7R,TP,2012	1	S.N.A	
....4	C2071	2203-000575	C-CER,CHIP;220nF,10%,25V,X7R,TP,2012	1	S.N.A	
....4	C2072	2203-000575	C-CER,CHIP;220nF,10%,25V,X7R,TP,2012	1	S.N.A	
....4	C2073	2203-000575	C-CER,CHIP;220nF,10%,25V,X7R,TP,2012	1	S.N.A	
....4	C2074	2203-000575	C-CER,CHIP;220nF,10%,25V,X7R,TP,2012	1	S.N.A	
....4	C2075	2203-000575	C-CER,CHIP;220nF,10%,25V,X7R,TP,2012	1	S.N.A	
....4	C5100	2203-000585	C-CER,CHIP;0.22nF,10%,50V,X7R,1005	1	S.A	
....4	C4009	2203-000679	C-CER,CHIP;0.027nF,5%,50V,C0G,1005	1	S.A	
....4	C4010	2203-000679	C-CER,CHIP;0.027nF,5%,50V,C0G,1005	1	S.A	
....4	C5003	2203-000697	C-CER,CHIP;0.002NF,0.25PF,50V,C0G,TP,160	1	S.A	
....4	C5004	2203-000697	C-CER,CHIP;0.002NF,0.25PF,50V,C0G,TP,160	1	S.A	
....4	C7048	2203-000761	C-CER,CHIP;330nF,10%,16V,X7R,TP,2012,-	1	S.N.A	
....4	C3006	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C3007	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C3008	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C3011_EU	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C3012_EU	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C3018	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C3019	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C3020	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C1120	2203-000995	C-CER,CHIP;0.047nF,5%,50V,C0G,1005	1	S.A	
....4	C3017	2203-000995	C-CER,CHIP;0.047nF,5%,50V,C0G,1005	1	S.A	
....4	C3023_EU	2203-000995	C-CER,CHIP;0.047nF,5%,50V,C0G,1005	1	S.A	
....4	C4018	2203-000995	C-CER,CHIP;0.047nF,5%,50V,C0G,1005	1	S.A	
....4	C4020	2203-000995	C-CER,CHIP;0.047nF,5%,50V,C0G,1005	1	S.A	
....4	C5031_650	2203-001072	C-CER,CHIP;0.056nF,5%,50V,NP0,1005	1	S.A	
....4	C2038	2203-001126	C-CER,CHIP;0.68nF,10%,50V,X7R,1608	1	S.N.A	
....4	C5035	2203-001412	C-CER,CHIP;0.03nF,5%,50V,NP0,TP,1005	1	S.N.A	
....4	C5036	2203-001412	C-CER,CHIP;0.03nF,5%,50V,NP0,TP,1005	1	S.N.A	
....4	C5037	2203-001412	C-CER,CHIP;0.03nF,5%,50V,NP0,TP,1005	1	S.N.A	
....4	C5038	2203-001412	C-CER,CHIP;0.03nF,5%,50V,NP0,TP,1005	1	S.N.A	
....4	C5039_OP	2203-001596	C-CER,CHIP;2200nF,+80-20%,50V,Y5V,2012	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C5060_OP	2203-001596	C-CER,CHIP;2200nF,+80-20%,50V,Y5V,2012	1	S.A	
....4	C1005	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C1007	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C1008	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C2006	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C2007	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C4008	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C4011	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C4019	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C4021	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C4022	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C4024	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C4100	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C5023	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C6061	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C6077	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C6099	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C6113	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C6114	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C7018	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C7136	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C7139_LCD	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C5010	2203-002494	C-CER,CHIP;470nF,10%,16V,X7R,2012	1	S.N.A	
....4	C7050	2203-005138	C-CER,CHIP;1.8nF,10%,50V,X7R,1005	1	S.A	
....4	C7051	2203-005138	C-CER,CHIP;1.8nF,10%,50V,X7R,1005	1	S.A	
....4	C7052	2203-005138	C-CER,CHIP;1.8nF,10%,50V,X7R,1005	1	S.A	
....4	C1004	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C1022	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C1024	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C1048_LCD	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C1148_LCD	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C1149_LCD	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C1150_LCD	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2047	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2048	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2049	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2050	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2051	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2052	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2060	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2061	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2062	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2063	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2066	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2067	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2068	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2069	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2076	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2077	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2078	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2079	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C5021	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6056	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6057	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6058	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6059	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6062	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6063	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6073	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6074	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6075	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6078	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6094	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6095	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6096	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6100	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7011	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7017	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7049	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7109_650	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7114	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7115	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7121	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7122	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7009	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7016	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7025	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7029	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7059	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7063	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7065	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7073	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7096	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7105	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7106	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7148	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7157	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7173	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7205	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7210	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C3063	2203-005393	C-CER,CHIP;0.005nF,0.1pF,50V,NP0,TP,1005	1	S.N.A	
....4	C6044	2203-005493	C-CER,CHIP;220nF,+80-20%,16V,Y5V,1005	1	S.A	
....4	C6045	2203-005493	C-CER,CHIP;220nF,+80-20%,16V,Y5V,1005	1	S.A	
....4	C7053	2203-005659	C-CER,CHIP;0.18nF,5%,50V,NP0,1005	1	S.N.A	
....4	C1032	2203-005834	C-CER,CHIP;22000nF,+80-20%,10V,Y5V,3216	1	S.A	
....4	C1035	2203-005834	C-CER,CHIP;22000nF,+80-20%,10V,Y5V,3216	1	S.A	
....4	C1036	2203-005834	C-CER,CHIP;22000nF,+80-20%,10V,Y5V,3216	1	S.A	
....4	C5025_OP	2203-005834	C-CER,CHIP;22000nF,+80-20%,10V,Y5V,3216	1	S.A	
....4	C5034	2203-005834	C-CER,CHIP;22000nF,+80-20%,10V,Y5V,3216	1	S.A	
....4	C2041	2203-005968	C-CER,CHIP;4.7NF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C6091	2203-005968	C-CER,CHIP;4.7NF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C9020_650	2203-006039	C-CER,CHIP;1nF,10%,2000V,X7R,3216	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C9021_650	2203-006039	C-CER,CHIP;1nF,10%,2000V,X7R,3216	1	S.A	
....4	C5337	2203-006104	C-CER,CHIP;1000nF,10%,50V,X7R,3225	1	S.A	
....4	C3997	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C3998	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C6098	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C1013	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.N.A	
....4	C1019	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.N.A	
....4	C1025	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.N.A	
....4	C1028	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.N.A	
....4	C1060	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.N.A	
....4	C7084	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.N.A	
....4	C7310	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.N.A	
....4	C7601_LCD	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.N.A	
....4	C1002	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1003	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1006	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1012	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1014	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1030	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1034	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1070	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1071	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1080	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1090	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1091	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1092	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1801	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C2037	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C2039	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C2042	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C2043	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C2044	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C2045	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3046	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3051	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3054	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3055	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3056	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3057	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3065	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3070	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3071	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3072	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3100	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3101	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3102	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4002	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4006	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4013	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4014	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4016	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C4023	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4026	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4050	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4103	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5011	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5020	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5024	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5027	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5070	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5071	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5072	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5073	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5112	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6027	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6028	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6033	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6042	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6043	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6048	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6052	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6053	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6064	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6065	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6066	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6067	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6068	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6069	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6070	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6079	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6080	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6081	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6082	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6083	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6084	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6085	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6086	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6087	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6088	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6089	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6101	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6105	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6109	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6110	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6111	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6112	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6115	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6116	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6153	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7012	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7013	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7019	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C7020	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7034	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7038	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7043	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7054	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7055	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7056	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7062	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7064	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7068	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7069	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7074	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7075	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7078	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7081	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7083	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7086	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7087	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7088	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7094	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7095	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7098	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7099	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7100_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7107	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7112	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7113	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7116	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7117	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7134	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7140	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7142	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7143	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7146	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7147	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7149	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7152	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7160	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7161	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7164	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7165	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7168	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7169	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7172	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7176	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7177	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7180	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7181	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7185	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7200	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7201	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C7202	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7203	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7206	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7211	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7220	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7221	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7222	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7223	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7224	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7225	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7226	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7227	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7228	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7301	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7302	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7400	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7402	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7403	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7404	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7405	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7406	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7407	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7408	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7409	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7410	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7411	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7412	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7413	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7414	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7416	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7417	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7418	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7419	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7420	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7423	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7750	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7751	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7752	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7753	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7754	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7755	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7756	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7757	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7758	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7759	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7760	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7761	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7770	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7771	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7772	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7773	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C7880	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7881	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7900	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7901	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8001	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8002	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8003	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8004	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8007_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8011_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8012	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8013_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8014_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8015_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8016_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8017_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8018_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8019_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9001_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9003_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9004_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9005_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9006_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9007_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9009_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9010_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9011_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9012_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9013_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9014_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9015_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9016_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9018_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9023_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9024_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9101_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9103_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9105_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9107_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5012	2203-006336	C-CER,CHIP;10000nF,10%,25V,X5R,3216	1	S.A	
....4	C1016	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C1017	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C1020	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C1021	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C1023	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C1031	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C1033	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C1050	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2001	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2003	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2005	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C2011	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2014	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2031	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2032	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2035	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2046	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2055	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2064	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2065	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3009_EU	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3010_EU	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3037	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3043	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3053	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3067	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3068	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3069	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3073	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3810	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C4001	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C4015	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C5005	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C5018	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C5028	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C5032	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C5111	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C5336	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6001	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6011	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6022	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6029	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6030	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6031	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6032	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6046	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6049	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6050	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6054	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6055	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6071	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6072	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6092	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6093	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7001	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7004	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7005	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7006	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7007	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7008	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7021	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7085_650	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C7108	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7110	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7130	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7132	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7133	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C8010_EU	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C9002_650	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C9008_650	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C9022_650	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C9100_650	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C9102_650	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C9104_650	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C9106_650	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C9900_650	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2084	2203-006382	C-CER,CHIP;10000nF,10%,25V,X7R,TP,3225	1	S.N.A	
....4	C2085	2203-006382	C-CER,CHIP;10000nF,10%,25V,X7R,TP,3225	1	S.N.A	
....4	C2086	2203-006382	C-CER,CHIP;10000nF,10%,25V,X7R,TP,3225	1	S.N.A	
....4	C2087	2203-006382	C-CER,CHIP;10000nF,10%,25V,X7R,TP,3225	1	S.N.A	
....4	C1040_LCD	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C1042_LCD	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2019	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2020	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2021	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2022	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2023	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2024	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2025	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2026	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2027	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2028	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2029	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2030	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C3103	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C3104	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C3105	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C3106	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C3320	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C4004	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6005	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6014	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6040	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6041	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6060	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6076	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6097	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6851	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6852	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6853	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6854	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7003	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7028	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C7030	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7037	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7039	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7040	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7072	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7089	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7097	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7141	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7156	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7204	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7209	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2004	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C2008	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C2009	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C2010	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C2056	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C2057	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C2059	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C3077	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C4005	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C5016	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C2053	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C2054	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C3038	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C3039	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C3047	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C3048	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C3058	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C3062	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C3999	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C1015	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (1	S.N.A	
....4	C1018	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (1	S.N.A	
....4	C2002	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (1	S.N.A	
....4	C2058	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (1	S.N.A	
....4	C5022	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (1	S.N.A	
....4	C6047	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (1	S.N.A	
....4	C2012	2402-001128	C-AL,SMD;100##F,20%,16V,-,TP,6.3X5.7mm	1	S.A	
....4	C2013	2402-001128	C-AL,SMD;100##F,20%,16V,-,TP,6.3X5.7mm	1	S.A	
....4	C5030	2402-001210	C-POLYMER AL CHIP;100uF,20%,10V,WT,TP,7.	1	S.A	
....4	CA2001	2503-001051	C-NETWORK;100NFX4,20%,16V,-,2012, 4ARRAY	1	S.A	
....4	T9001_650	2601-001056	TRANS-SMD,PULSE;350UH,-,1:1,1:1,12.7X6.7	1	S.A	
....4	T0052	2703-000380	INDUCTOR-SMD;18uH,5%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	

5. Exploded View & Part List

[illegible]

5. Exploded View & Part List

[illegible]

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
...3		BN81-00204P	RESIN-HIGH GLOSS;HAM 8560,SF-0505,K21294	17.3	S.N.A	
..2	M0115	BN61-04918A	BRACKET-STAND LINK;40, B610,SECC,T1.6	1	S.N.A	
..2		BN63-05259A	COVER-MAIN;EO,ABS+PMMA,HB,BK23,H/GLOSSY	1	S.N.A	
...3		BN81-00204P	RESIN-HIGH GLOSS;HAM 8560,SF-0505,K21294	0.015	S.N.A	
..2	M0230	BN96-10075A	ASSY CABLE P-FPCB LVDS;LA46A650A1,FPCB L	1	S.A	
..2	T0081	6001-002284	SCREW-MACHINE;BH,+,M4,L8,ZPC(WHT),SWRCH1	6	S.A	
..2	T0081	6001-002284	SCREW-MACHINE;BH,+,M4,L8,ZPC(WHT),SWRCH1	5	S.A	
0.1	M0019	BN92-04476A	ASSY LABEL;LE40B750U1WXXC	1	S.N.A	
0.1	M0045	BN92-04477A	ASSY ACCESSORY;LE40B750U1WXXC	1	S.N.A	
..2	M0045	BN96-10041A	ASSY ACCESSORY-MANUAL;LE40B750U1WXXC	1	S.A	
...3	T0524	6902-000110	BAG PE;LDPE,T0.05,W250,L400,TRP,28,2,-,9	1	S.N.A	
...3		AA68-03242Q	MANUAL FLYER-02,SAFETY GUIDE;comm,Samsun	1	S.N.A	
...3	T0076	BN68-00514E	MANUAL FLYER-02,WARRANTY CARD;comm,Samsu	1	S.N.A	
...3		BN68-00907D	MANUAL FLYER-WEEE BATTERY;COMM,SAMSUNG,2	1	S.N.A	
...3		BN68-02004A	MANUAL FLYER-QSG;B750,SAMSUNG,9Langs,W.E	1	S.N.A	
...3		BN96-10411A	ASSY MANUAL P-USB;B750,USB,SAMSUNG,W.EUR	1	S.N.A	
...4		BN59-00893A	S/W DRIVER-USB;HANIL 512,E-manual,HANIL,	1	S.N.A	
...3		BN59-00726D	S/W DRIVER-CD;LN40B650T1F,DLNA,WorldWide	1	S.N.A	
..2	M0045	BN96-10041B	ASSY ACCESSORY-CABEL;LE40B750U1WXXC	1	S.A	
...3	T0268	3903-000145	CBF-POWER CORD;DT,EU,FP3/YES,U(IEC C13-R	1	S.A	
...3	T0524	6902-000110	BAG PE;LDPE,T0.05,W250,L400,TRP,28,2,-,9	1	S.N.A	
...3	T0074	BN59-00860A	REMOCON;LCD850,750,TM970,EUROPE,49	1	S.A	
...3	M9889	BN63-01798B	CLOTH-CLEAN;cloth,180,200,sea blue,ToC	1	S.N.A	
...3	T0531	BN63-05385B	COVER-BOTTOM;40,LB620,HIPS,HB,BK500	1	S.A	
...4		BN81-00199H	RESIN;HIPS HB,BK500,HF-1690H,K2901	58.3	S.N.A	
...3	M0560	BN96-01800A	ASSY ACCESSORY-SCREW ZIPPER;ROME32,-,-,-	1	S.N.A	
...4	T0081	6002-001294	SCREW-TAPPING;BH,+,M4,L16,ZPC(BLK)	4	S.N.A	
...4	ACCESSORY	6902-000683	BAG ZIPPER;LDPE,T0.05,W60,L60,TRP,-,-,4-	1	S.N.A	
...3		BN61-05596A	HOLDER-WIRE CABLE;LED TV,LDPE,T1.1,L150,	1	S.N.A	
0.1	M0113	BN92-04782A	ASSY P/MATERIAL;40,LB750	1	S.N.A	
..2	T0003	6902-000604	BAG WRAPPING;LDPE,T0.02,W500,L10000,TRP,	7.5	S.N.A	
..2	T0524	6902-001043	BAG PE;HDPE/NITRON,T0.015/T0.5,W1200,L80	1	S.N.A	
..2	T0214	AA61-20285C	HOLDER-BOX;CORAL,PP,BLACK,HB,17.5g	4	S.N.A	
..2	T0214	BN74-00008A	TAPE-OPP MASKING;OPP-2,T0.05,W100,L800M,	1.39	S.N.A	
0.1	M0003	BN92-04785B	ASSY BOX;40,LB750,EO	1	S.N.A	
..2	M0521	BN69-03475A	BOX-SET,IN;40LB450,CB,C-01,DW2,YEL,W1525	1	S.N.A	
..2		BN69-03603B	BOX-SET,OUT;40LB750,CB,C-03,DW2,YEL,W123	1	S.N.A	
0.1	M0003	BN92-04619B	ASSY BOX;55BT5,EO,LB650	1	S.N.A	

5-23. LE46B75* Parts List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
		LE46B750U1WXXC	LE46B750U1W,N68A/46BU1-G7U,46,LCD-TV,SPA			
0.1	M0001	BN90-01963B	ASSY COVER FRONT;46,LB750,EO,CHARCOAL GR	1	S.N.A	
..2	T0003	BN96-09633B	ASSY COVER P-FRONT;46,LB750,EO,PC(CLR)+P	1	S.N.A	
...3	T0069	BN60-00027H	SPACER-FELT;L650-46,FELT,1020,0.5,20	2	S.N.A	
...3	T0069	BN60-00027Q	SPACER-FELT;L650 46,FELT,570,0.5,20	2	S.N.A	
...3		BN61-04661A	BRACKET-STOPPER;L650,SK-5,T0.4,Plating,H	8	S.N.A	
...3	M0279	BN63-00866A	FELT;AS17UO,FELT,0.5,10,140	2	S.N.A	
...3	CCM1	BN63-02183F	COVER-SHEET;Rhcm,PE Vinyl,T0.05,900mm,20	1.05	S.N.A	
...3	CCM1	BN63-05199B	COVER-SHEET;AMBER,PE,T0.08,W65mm,200M,CL	3.2	S.N.A	
...3	CCM1	BN63-05199F	COVER-SHEET;AMBER,PE,T0.08,W95mm,200M,CL	1.4	S.N.A	
...3	M0112	BN63-05224B	COVER-FRONT;46,LB750,EO,PC(CLR)+PC(C/GRA	1	S.A	
....4		BN81-00116D	RESIN-TOC;PC V0,TTP01,CLR,TN-1030(NP),TH	0.756	S.N.A	
....4		BN81-00265E	RESIN;ToC PC, TGR02,TN-1030S, LD046,TH30	0.975	S.N.A	
...3		BN64-01022A	DECORATION-BOTTOM;UB7000,PC,clear	1	S.N.A	
....4		BN81-00116J	RESIN;PC CLEAR,SC-1220R/70918,HF-1130R,	0.13	S.N.A	
...3		BN96-09511C	ASSY HOLDER P-BOSS SIDE RIGHT;46,LB650,A	1	S.N.A	
....4		BN61-04692A	BOSS-PRIMER;#94,clear,35cps	0.1	S.N.A	
....4		BN61-04731D	BOSS-TAPE;AMBER,ACRYL,T1.1,W20.0mm,WHITE	0.03	S.N.A	
....4		BN61-04731F	BOSS-TAPE;AMBER,ACRYL,T1.1,W6.0mm,WHITE,	0.43	S.N.A	
....4		BN61-04760C	HOLDER-BOSS SIDE R;46,LB650,ABS+PMMA,HB,	1	S.N.A	
....5		BN81-00204P	RESIN-HIGH GLOSS;HAM 8560,SF-0505,K21294	0.09	S.N.A	
...3		BN96-09511D	ASSY HOLDER P-BOSS SIDE LEFT;46,LB650,AB	1	S.N.A	
....4		BN61-04692A	BOSS-PRIMER;#94,clear,35cps	0.1	S.N.A	
....4		BN61-04731D	BOSS-TAPE;AMBER,ACRYL,T1.1,W20.0mm,WHITE	0.03	S.N.A	
....4		BN61-04731F	BOSS-TAPE;AMBER,ACRYL,T1.1,W6.0mm,WHITE,	0.43	S.N.A	
....4		BN61-04760D	HOLDER-BOSS SIDE L;46,LB650,ABS+PMMA,HB,	1	S.N.A	
....5		BN81-00204P	RESIN-HIGH GLOSS;HAM 8560,SF-0505,K21294	0.09	S.N.A	
...3		BN96-09642B	ASSY HOLDER P-BOSS BOTTOM;46,LB750,HIPS,	1	S.N.A	
....4		BN61-04692A	BOSS-PRIMER;#94,clear,35cps	0.4	S.N.A	
....4		BN61-04731D	BOSS-TAPE;AMBER,ACRYL,T1.1,W20.0mm,WHITE	0.84	S.N.A	
....4		BN61-04731F	BOSS-TAPE;AMBER,ACRYL,T1.1,W6.0mm,WHITE,	0.22	S.N.A	
....4		BN61-04761B	HOLDER-BOSS BOTTOM;46,LB750,HIPS,HB,BK50	1	S.N.A	
....5		BN81-00199H	RESIN;HIPS HB,BK500,HF-1690H,K2901	0.207	S.N.A	
...3	M0175	BN96-10210D	ASSY BOARD P-TOUCH FUNCTION&IR;LN40B750U	1	S.N.A	
...3	H/B/SIDE+C	6003-001188	SCREW-TAPTYPE;BH,+,-,B,M4,L10,ZPC(WHT),S	2	S.N.A	
..2	T0175	BN96-09463C	ASSY SPEAKER P;8ohm,4pin,10W,R:250/ L:60	1	S.A	
0.1	M0216	BN90-01988A	ASSY STAND;46,LB750,BLACK,CLEAR NECK	1	S.N.A	
..2	M0027	BN96-09478A	ASSY STAND P-BASE;46,LB750,BLACK,CLEAR N	1	S.N.A	
...3	B/S+G/NECK	6003-001003	SCREW-TAPTYPE;BH,+,-,B,M4,L12,ZPC(BLK),SWR	6	S.N.A	
...3	G/S+G/NECK	6003-001003	SCREW-TAPTYPE;BH,+,-,B,M4,L12,ZPC(BLK),SWR	4	S.N.A	
...3		BN61-04692A	BOSS-PRIMER;#94,clear,35cps	0.001	S.N.A	
...3		BN61-04731B	BOSS-TAPE;AMBER,ACRYL,T1.1,W12.0mm,WHITE	1	S.N.A	
...3	T0920	BN61-04767A	GUIDE-STAND;LB750 46,PC+GF 20%	1	S.N.A	
....4		BN81-00204H	RESIN;Trirex,3025G20 BK,ABS+PC G/F 20%,4	278.5	S.N.A	
...3		BN61-05240A	HOLDER-SWIVEL RING TOP;LB700 46,POM HB,A	1	S.N.A	
...3		BN61-05243A	BRACKET-STAND BOTTOM;LB700 46,HGI,T3.0	1	S.N.A	
...3		BN61-05244A	BRACKET-SWIVEL BOTTOM;LB700 46,HGI,T3.0	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
...3		BN61-05252A	GUIDE-STAND NECK;LB700 46,PC CLEAR,Pi 60	1	S.N.A	
...4		BN61-05267A	HOLDER-INSERT;40 LB7000,PC, extrusion,CL	1	S.N.A	
...4		BN81-00116J	RESIN;PC CLEAR,SC-1220R/70918,HF-1130R,	0.15	S.N.A	
...3		BN61-05255A	HOLDER-SWIVEL RING BOTTOM;LB700 46,POM H	1	S.N.A	
...3	CCM1	BN63-04755A	COVER-SHEET;AMBER,PE,T0.05,W150mm,200M,6	1.22	S.N.A	
...3		BN63-05227A	COVER-STAND/GLASS;46,LB650,GLASS,T8.0,CH	1	S.N.A	
...3	T0056	BN63-05538A	COVER-DECORATION;UB7000 46inch,ABS,PMMA,	1	S.N.A	
...4		BN81-00204P	RESIN-HIGH GLOSS;HAM 8560,SF-0505,K21294	0.013	S.N.A	
...3	M0126	BN73-00203A	RUBBER-FOOT;LB7000 46inch,CR RUBBER,T7.0	4	S.N.A	
...3	M0126	BN73-00204A	RUBBER-FOOT;42LB650,RUBBER,16*33,60,2.0	4	S.N.A	
0.1	M0002	BN90-01991A	ASSY COVER REAR;46,LB750,EO	1	S.N.A	
..2	T0081	6002-001294	SCREW-TAPPING;BH,+,,M4,L16,ZPC(BLK)	12	S.N.A	
..2	T0081	6002-001294	SCREW-TAPPING;BH,+,,M4,L16,ZPC(BLK)	1	S.N.A	
..2	T0081	6002-001294	SCREW-TAPPING;BH,+,,M4,L16,ZPC(BLK)	1	S.N.A	
..2	M0013	BN96-09653A	ASSY COVER P-REAR;46,LB750,EO,PC/ABS+REC	1	S.N.A	
...3	T0069	AA60-00091J	SPACER-FELT;-FELT,330X10,-,-,BLK,T0.5,-	4	S.N.A	
...3	CCM1	BN63-02183F	COVER-SHEET;Rhcm,PE Vinyl,T0.05,900mm,20	0.9	S.N.A	
...3	M0006	BN63-05229A	COVER-REAR;46,LB750,EO,PC/ABS+RECYCLE PC	1	S.A	
...4		BN81-00204P	RESIN-HIGH GLOSS;HAM 8560,SF-0505,K21294	3.224	S.N.A	
...3	T0071	BN64-01028A	INLAY-TERMINAL;B650/750,EO,PS SHEET,T0.5	1	S.N.A	
...3	T0064	BN65-00002A	CLAMPER CORE;BORDEAUX,LDPE,-,-,BLK,-	1	S.N.A	
0.1		BN91-03555C	ASSY LCD-AMLCD;LN40B750U1FXZA	1	S.N.A	
..2	M0215	BN07-00637A	LCD-PANEL;LTF460HG01	1	S.A	
...3		BN81-02354A	A/S-T CON LTF460HG01;LTF460HG01	1	S.N.A	
0.1	M0017	BN91-03740B	ASSY CHASSIS;LE46B750U1WXXC	1	S.N.A	
..2	M0014	BN94-02663E	ASSY PCB MAIN;LE46B750U1WXXC	1	S.N.A	
...3	T0245	0202-001608	SOLDER-WIRE FLUX;LFC7-107,D0.8,99.3Sn/0.	0.25	S.N.A	
...3	CN3010	3701-001388	CONNECTOR-HDMI;20P,Phosphor Bronze,ANGLE	1	S.A	
...3	CN3011	3701-001480	CONNECTOR-DSUB;15P,3R,FEMAIL,STAMPED PIN	1	S.A	
...3	CN906	3707-001081	CONNECTOR-OPTICAL;STRAIGHT,SPDIF	1	S.A	
...3	CN8001_EU	3709-001551	CONNECTOR-CARD SLOT;68P,1.27mm,DIP,AU50U	1	S.A	
...3	CN330	3711-003847	HEADER-BOARD TO CABLE;BOX,12P,1R,2mm,ANG	1	S.A	
...3	CN1001	3711-005884	HEADER-BOARD TO BOARD;BOX,30P,2R,2mm,ANG	1	S.A	
...3	CN330	3711-006715	HEADER-BOARD TO CABLE;BOX,4P,1R,2.5mm,AN	1	S.N.A	
...3	JA330	3722-001061	JACK-PHONE;1P,3.6PI,AG,BLK,N	1	S.A	
...3	JA330	3722-001061	JACK-PHONE;1P,3.6PI,AG,BLK,N	1	S.A	
...3	JA330	3722-001061	JACK-PHONE;1P,3.6PI,AG,BLK,N	1	S.A	
...3	JA330	3722-001061	JACK-PHONE;1P,3.6PI,AG,BLK,N	1	S.A	
...3	CN9001_650	3722-002426	JACK-MODULAR;8P/8C,N,STRAIGHT,GRN/YEL,AU	1	S.A	
...3	CN7002_650	3722-002546	JACK-USB;4P/1C,AU,BLK,ANGLE,A type	1	S.N.A	
...3	CN7006	3722-002546	JACK-USB;4P/1C,AU,BLK,ANGLE,A type	1	S.N.A	
...3	JA333	3722-002635	JACK-PIN;3P,Sn,YEL/WHT/RED,ANGLE	1	S.A	
...3	CN3002_EU	3722-002681	JACK-SCART;42P,SN,BLK	1	S.A	
...3	JA333	3722-002691	JACK-PIN;2P,Ni,WHT/RED,STRAIGHT	1	S.A	
...3	JA333	3722-002691	JACK-PIN;2P,Ni,WHT/RED,STRAIGHT	1	S.A	
...3	JA333	3722-002703	JACK-PIN;3P,Ni,GRN/BLU/RED,STRAIGHT	1	S.A	
...3	CIS3	BN40-00145A	TUNER;TDHG6-K12A,TDHG6-K12A,DVB-TC,164CH	1	S.A	
...3	T0066	BN62-00042A	HEAT SINK-ES;30*30*5,Ceramic,T1.5,TAPE	1	S.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
...3	T0066	BN62-00043A	HEAT SINK-ES;40*40*5,Ceramic,T1.5,TAPE	1	S.A	
...3	T0174	BN97-03208E	ASSY SMD;LE46B750U1WXXC,BN94-02663E	1	S.N.A	
....4	SUB05	0202-001477	SOLDER-CREAM;LST309-M,D20~45um,96.5Sn/3A	1	S.N.A	
....4	D4003	0401-001049	DIODE-SWITCHING;LS4148,75V,150mA,SOD-80,	1	S.A	
....4	D4004	0401-001049	DIODE-SWITCHING;LS4148,75V,150mA,SOD-80,	1	S.A	
....4	D4100	0401-001049	DIODE-SWITCHING;LS4148,75V,150mA,SOD-80,	1	S.A	
....4	D4228	0401-001049	DIODE-SWITCHING;LS4148,75V,150mA,SOD-80,	1	S.A	
....4	D3001	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3002	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3051	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3054	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3061	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3062	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3063	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3076	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3077	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3079	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3080	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D4008	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D4010	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D9001_650	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D9002_650	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D9003_650	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D9004_650	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D9007_650	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D9008_650	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D7400	0401-001099	DIODE-SWITCHING;1N4148WS,75V,150mA,SOD-3	1	S.N.A	
....4	D0254	0402-001207	DIODE-SCHOTTKY;UPS5819,40V,1000MA,DO-216	1	S.A	
....4	D4001	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D5100	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D1180	0403-000584	DIODE-ZENER;VLZ3V6B,3.6/3.845V,500mW,SOD	1	S.N.A	
....4	D3003_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3004_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3005_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3006_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3007_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3008_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3009_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3011	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3015	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3016_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3018	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3019	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3020	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3021	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3022_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3023	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3024	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3026_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3032	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3033	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	D3034	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3035	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3036	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3037	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3038	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3039	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3045	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3052	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3056	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3057	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3058	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3060	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3065	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3066	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3067	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3068	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3069	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3073	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3074	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3075	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3350	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3776	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3777_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3778_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3779_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D0254	0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	1	S.A	
....4	D0254	0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	1	S.A	
....4	D0254	0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	1	S.A	
....4	D0254	0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	1	S.A	
....4	D0254	0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	1	S.A	
....4	D7001_650	0406-001200	DIODE-TVS;RCLAMP0504F,6/-V,150W,SC-70	1	S.A	
....4	D7002	0406-001200	DIODE-TVS;RCLAMP0504F,6/-V,150W,SC-70	1	S.A	
....4	D3751	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D3752	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D3753	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D3754	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D3755	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D3756	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D3757	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D3758	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D8001_CI	0407-000114	DIODE-ARRAY;-80V,100mA,CA2-3,SOT-23,TP	1	S.N.A	
....4	D8002_CI	0407-000114	DIODE-ARRAY;-80V,100mA,CA2-3,SOT-23,TP	1	S.N.A	
....4	D8003_CI	0407-000114	DIODE-ARRAY;-80V,100mA,CA2-3,SOT-23,TP	1	S.N.A	
....4	D8004_CI	0407-000114	DIODE-ARRAY;-80V,100mA,CA2-3,SOT-23,TP	1	S.N.A	
....4	D8005_CI	0407-000114	DIODE-ARRAY;-80V,100mA,CA2-3,SOT-23,TP	1	S.N.A	
....4	D8006_EU	0407-000114	DIODE-ARRAY;-80V,100mA,CA2-3,SOT-23,TP	1	S.N.A	
....4	D7900	0407-000123	DIODE-ARRAY;DAN202K,80V,100mA,CA2-3,SOT-	1	S.N.A	
....4	Q4003	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150MW,SOT-23	1	S.A	
....4	Q4005	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150MW,SOT-23	1	S.A	
....4	Q4020	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150MW,SOT-23	1	S.A	
....4	Q1002_LCD	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	Q3007	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3008	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3009	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3010	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q4004	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q4009	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q4011	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q9001_650	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3001_EU	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	
....4	Q3002_EU	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	
....4	Q7601_LCD	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	
....4	Q7602_LCD	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-001916	FET-SILICON;Si4800BDY,N,30V,9A,0.03ohm,2	1	S.A	
....4	IC104	0801-002095	IC-CMOS LOGIC;74LCX245,TRANSCEIVER,TSSOP	1	S.A	
....4	IC104	0801-002172	IC-CMOS LOGIC;74LCX16244,BUFFER/LINE DRI	1	S.A	
....4	IC104	0801-002172	IC-CMOS LOGIC;74LCX16244,BUFFER/LINE DRI	1	S.A	
....4	IC104	0801-002630	IC-CMOS LOGIC;74AHCT1G08,2-INPUT AND GAT	1	S.A	
....4	IC104	0801-002780	IC-CMOS LOGIC;74LVC1G17,SCHMITT-TRIGGER	1	S.N.A	
....4	IC7008	1001-000164	IC-ANALOG MULTIPLEX;74HC4052,CMOS,SOP,16	1	S.A	
....4	IC9003_650	1001-001109	IC-ANALOG SWITCH;FST3125M,BUS SWITCH & C	1	S.A	
....4	IC106	1001-001177	IC-VIDEO SWITCH;TEA6425D,VIDEO SWITCH,SO	1	S.A	
....4	IC106	1001-001573	IC-VIDEO SWITCH;SiI9287ACNUTR,QFN,72P,10	1	S.A	
....4	IC107	1002-001482	IC-D/A CONVERTER;WM8521H9GED/R,16bit,SOI	1	S.A	
....4	IC3001	1006-001266	IC-LINE TRANSCEIVER;SP3232EEY,TSSOP,16P,	1	S.A	
....4	IC112	1103-000129	IC-EEPROM;24C02,2Kbit,256x8,SOP,8P,5x4mm	1	S.A	
....4	IC112	1103-000129	IC-EEPROM;24C02,2Kbit,256x8,SOP,8P,5x4mm	1	S.A	
....4	IC112	1103-001310	IC-EEPROM;24LC02B,256X8BIT,SOIC,8P,3.91X	1	S.N.A	
....4	IC112	1103-001385	IC-EEPROM;AT24C256,256Kbit,32Kx8,SOP,8P,	1	S.A	
....4	IC112	1103-001415	IC-EEPROM;AT93C46D,1Kbit,128x8/64x16,SOP	1	S.N.A	
....4	IC7003	1105-001859	IC-DDR2 SDRAM;K4T1G164QD-ZCE7,DDR2,1Gbit	1	S.A	
....4	IC7004	1105-001859	IC-DDR2 SDRAM;K4T1G164QD-ZCE7,DDR2,1Gbit	1	S.A	
....4	IC7005	1105-001859	IC-DDR2 SDRAM;K4T1G164QD-ZCE7,DDR2,1Gbit	1	S.A	
....4	IC7006	1105-001859	IC-DDR2 SDRAM;K4T1G164QD-ZCE7,DDR2,1Gbit	1	S.A	
....4	T0124	1201-002796	IC-POWER AMP;STA339BWS,PSSO,36P,10.3x7.5	1	S.A	
....4	T0087	1203-001815	IC-POSI.FIXED REG.;78M09,TO-252,3P,PLAST	1	S.A	
....4	T0087	1203-001816	IC-POSI.FIXED REG.;78M08,TO-252,3P,-,PLA	1	S.A	
....4	T0087	1203-002842	IC-POSI.FIXED REG.;AP1117D-33A,TO-252,3P	1	S.A	
....4	T0087	1203-002842	IC-POSI.FIXED REG.;AP1117D-33A,TO-252,3P	1	S.A	
....4	T0087	1203-002898	IC-POSI.FIXED REG.;G950T45R,TO-252,3P,6.	1	S.A	
....4	IC012	1203-002995	IC-POSI.ADJUST REG.;AP1117D-A,TO-252,3P,	1	S.A	
....4	IC012	1203-002995	IC-POSI.ADJUST REG.;AP1117D-A,TO-252,3P,	1	S.A	
....4	IC4005	1203-004363	IC-VOL. DETECTOR;RT9818C-29PV,SOT-23,3P,	1	S.A	
....4	IC4004	1203-004364	IC-VOL. DETECTOR;RT9818C-42PV,SOT-23,3P,	1	S.A	
....4	IC1007	1203-004879	IC-DC/DC CONVERTER;MP8668DL,QFN,14P,3x4m	1	S.A	
....4	T0087	1203-005134	IC-POSI.FIXED REG.;RT9167A-33PB,SOT-23-5	1	S.A	
....4	IC1006	1203-005538	IC-DC/DC CONVERTER;AOZ1021HAIL,SOP,8P,4.	1	S.A	
....4	IC5006	1203-005559	IC-BACKLIGHT DRIVER;MP3302DJ,TSOT23,5P,2	1	S.A	
....4	IC012	1203-005756	IC-POSI.ADJUST REG.;AP7173-SP,SOP-8L-EP,	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	IC118	1204-003010	IC-VIDEO PROCESS;SDP84,PBGA,324P,23x23mm	1	S.A	
....4	IC7001	1204-003011	IC-DECODER;SDP83,PBGA,729P,34x34mm,PLAST	1	S.A	
....4	IC9002_650	1205-002941	IC-ETHERNET CONTROLLER;RTL8100CSL-LF,LQF	1	S.N.A	
....4	IC3011	1205-003201	IC-BUS SWITCH;TC7WB125FK,SSOP,8P,2x2.3mm	1	S.A	
....4	IC2001	1205-003352	IC-CODEC;WM8593SEFT/V,TQFP,64P,10x10mm,P	1	S.A	
....4	IC8006_EU	1205-003479	IC-SWITCH;TPS2051BDBVR,SOT-23,5P,2.9x1.6	1	S.A	
....4	IC7007	1205-003733	IC-SWITCH;AP2191MPG-13,MSOP-8L-EP,8P,2.9	1	S.A	
....4	IC7010_650	1205-003735	IC-SWITCH;AP2151WG-7,SOT25,5P,2.9x1.6mm,	1	S.A	
....4	IC5010	1209-001830	IC-PLL;IDT6V10012PGG,TSSOP,20P,6.5x4.4mm	1	S.A	
....4	D4110	1405-001185	VARISTOR;24Vdc,1.6x0.8x0.36mm,TP	1	S.A	
....4	D3010	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3012_EU	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3013	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3014_EU	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3017	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3025	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3027	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3028	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3029	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3030	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3031	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3040	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3041	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3042	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3050	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3053	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3055	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3059	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3064	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3070	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3071	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3072	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3078	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3081	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3097	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3098	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3099	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4011	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4012	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4013	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4014	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4015	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4016	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4017	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4018	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D7003_650	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D7004	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	R7120	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7121	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7122	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7123	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R7152	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7153	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7154	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7155	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7162	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7163	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7164	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7165	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7169	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7170	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7171	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7172	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R1005	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R1801	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R5101	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R2058	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R2059	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R2060	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R2061	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R4155	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	1	S.A	
....4	R7050	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7053	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7056	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7058	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7062	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7066	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7069	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7070	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3007	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3034_EU	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3036_EU	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3062	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3070	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3071	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3078_EU	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3120	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3191	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3192	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3205	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3206	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3207	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3243	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3254	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3255	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3320	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3999	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4042	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4049	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4050	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4087	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5022	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R7114	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7132	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7143	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7605_LCD	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8311_EU	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1031_LCD	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1072	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3010_EU	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3021_EU	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3022_EU	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3035	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3037	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3072	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3073	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3081	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3082	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3138	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3139	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3189	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3190	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3227	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3228	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4081	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6028	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6066	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7045	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7072	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7195	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7196	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7602_LCD	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R9007_650	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R2054	2007-000141	R-CHIP;2.2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4085	2007-000141	R-CHIP;2.2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5030	2007-000141	R-CHIP;2.2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1030_LCD	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1060	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3520	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3522	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3524	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3526	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4016	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4018	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4020	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4066	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4071	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4074	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4077	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4551	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4552	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4553	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4554	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R4755	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4756	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5017	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6015	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6021	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6023	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6038	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6048	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6053	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6100	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6101	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6102	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7017	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7033	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7034	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7036	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7037	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7064	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7156	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7174	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7352	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7353_OP	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7356	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7357_OP	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7800	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3044_EU	2007-000146	R-CHIP;6.8Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3067_EU	2007-000146	R-CHIP;6.8Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1013	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1015	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1023_LCD	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1073	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1180	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1181	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R2023	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R2027	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3168	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3252	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3253	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3310	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3311	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4017	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4019	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4023	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4027	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4078	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4150	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4152	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5111	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6847	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7103	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7351	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R7411_LCD	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7600_LCD	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7601_LCD	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7603_LCD	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7604_LCD	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8012	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8014_EU	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8015_EU	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8020_EU	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R9028_650	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3028_EU	2007-000149	R-CHIP;12Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R3032_EU	2007-000149	R-CHIP;12Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R3027_EU	2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3033_EU	2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4021	2007-000155	R-CHIP;27Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1011	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R2019	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3040_EU	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3042_EU	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3058_EU	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3060_EU	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3126	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3136	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3201	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3204	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3521	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3523	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3525	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3527	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3820	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4151	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R9008_650	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R9029_650	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5110	2007-000159	R-CHIP;56Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5038	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3038_EU	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3049_EU	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3077_EU	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3103_OP	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3125	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3169	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3170	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3200	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3202	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3203	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3220	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3250	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3251	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3258	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3259	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3284	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R3285	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3289	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3290	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3400	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3500	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3751_EU	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3752_EU	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3753_EU	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3860	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4041	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4084	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4086	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4250	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5006	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5007	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5011	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5033	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5035	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6013	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6061	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6068	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6848	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7002	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7003	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7004	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7007	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7014	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7015	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7018	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7035	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7038	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7048	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7079	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7080	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7081	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7082	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7083	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7084	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7104	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7118	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7119	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7133	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7134	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7135	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7141	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7142	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7144	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7150_650	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7151_650	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7161	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7167	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R7168	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7177	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7201	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7202	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7204_120H	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7230_120H	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7234	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7244_120H	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7245_120H	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7246_120H	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7284_LCD	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7294_120H	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7295_120H	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8016_EU	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3288	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3300	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3301	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3302	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3303	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3722	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4038	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R2047	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3240	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3244	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4036	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4750	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4751	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4752	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4850	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4851	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5216	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5217	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5218	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6031	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6125	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6126	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6211	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6212	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6213	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6214	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6215	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6216	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7115	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7159	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7175	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7650	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7651	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8021	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3008	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3083	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3256	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R3257	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4039	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4040	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6184	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6810	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6811	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6812	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6813	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6814	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6815	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6816	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6817	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6818	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6819	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6820	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6821	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6822	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6823	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6824	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6825	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6826	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6827	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6828	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6829	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6830	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6831	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6832	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6833	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6834	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6835	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6836	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6837	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6838	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6839	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6840	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6841	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6842	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6843	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6844	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6845	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7310	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1018	2007-000239	R-CHIP;1.5Kohm,1%,1/10W,TP,1608	1	S.N.A	
....4	R6089	2007-000259	R-CHIP;1.6Kohm,5%,1/10W,TP,1608	1	S.A	
....4	R5112	2007-000287	R-CHIP;100ohm,1%,1/10W,TP,1608	1	S.N.A	
....4	R7105	2007-000287	R-CHIP;100ohm,1%,1/10W,TP,1608	1	S.N.A	
....4	R7147	2007-000287	R-CHIP;100ohm,1%,1/10W,TP,1608	1	S.N.A	
....4	R2064	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R2065	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R2066	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R2067	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R2068	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R2069	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R2070	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R2071	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R5001	2007-000402	R-CHIP;150ohm,5%,1/10W,TP,1608	1	S.A	
....4	R3001_EU	2007-000458	R-CHIP;18Kohm,5%,1/10W,TP,1608	1	S.A	
....4	R3055_EU	2007-000458	R-CHIP;18Kohm,5%,1/10W,TP,1608	1	S.A	
....4	R5031	2007-000566	R-CHIP;220Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5026	2007-000591	R-CHIP;22ohm,1%,1/10W,TP,1608	1	S.A	
....4	R5041	2007-000591	R-CHIP;22ohm,1%,1/10W,TP,1608	1	S.A	
....4	R5052_STU	2007-000606	R-CHIP;240ohm,1%,1/10W,TP,1608	1	S.A	
....4	R5053_STU	2007-000606	R-CHIP;240ohm,1%,1/10W,TP,1608	1	S.A	
....4	R1800	2007-000608	R-CHIP;240ohm,5%,1/10W,TP,1608	1	S.A	
....4	R5045	2007-000669	R-CHIP;2Kohm,1%,1/10W,TP,1608	1	S.N.A	
....4	R7160	2007-000729	R-CHIP;300ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R7176	2007-000729	R-CHIP;300ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R5044	2007-000755	R-CHIP;330Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R5039	2007-000758	R-CHIP;330Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5037	2007-000763	R-CHIP;330ohm,1%,1/10W,TP,1608	1	S.N.A	
....4	R1012	2007-000803	R-CHIP;36Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R3004_EU	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3005_EU	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4015	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6067	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R9018_650	2007-000982	R-CHIP;5.6Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R9030_650	2007-000982	R-CHIP;5.6Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R1014	2007-001179	R-CHIP;8.2Kohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R8028_EU	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R9022_650	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5211_650	2007-001301	R-CHIP;68ohm,5%,1/16W,TP,1005	1	S.A	
....4	R7194	2007-001308	R-CHIP;200ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3111	2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3112	2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3113	2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3114	2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7410_LCD	2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1004	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R1007	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R1008	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R1009	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R5056	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R5102	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R9001_650	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R1021	2007-002899	R-CHIP;10ohm,1%,1/10W,TP,1608	1	S.A	
....4	R1017	2007-002900	R-CHIP;11Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R3721	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3723	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5070	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5210	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5213	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5214	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5215	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R9023_650	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R9024_650	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R9025_650	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R9026_650	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6846	2007-007095	R-CHIP;390ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1010	2007-007107	R-CHIP;100Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R5034	2007-007107	R-CHIP;100Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R2057	2007-007136	R-CHIP;4.7Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R8013_EU	2007-007136	R-CHIP;4.7Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R1019	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R4028	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R4030	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R4089	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R4156	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R4753	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R4754	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R2055	2007-007197	R-CHIP;3.3ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R2056	2007-007197	R-CHIP;3.3ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7193	2007-007222	R-CHIP;6.04Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R1016	2007-007312	R-CHIP;20Kohm,1%,1/16W,TP,1005	1	S.A	
....4	R1022	2007-007312	R-CHIP;20Kohm,1%,1/16W,TP,1005	1	S.A	
....4	R1071	2007-007316	R-CHIP;3.3Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R5036	2007-007469	R-CHIP;110ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R1070	2007-007671	R-CHIP;11Kohm,1%,1/16W,TP,1005	1	S.A	
....4	R7190	2007-007698	R-CHIP;5.1Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R7191	2007-007698	R-CHIP;5.1Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R7116	2007-007797	R-CHIP;44.2ohm,1%,1/10W,TP,1608	1	S.A	
....4	R7117	2007-007797	R-CHIP;44.2ohm,1%,1/10W,TP,1608	1	S.A	
....4	R3002_EU	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3006_EU	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3009	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3011	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3012	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3029	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3030	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3031	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3045	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3047_EU	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3050	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3057_EU	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3137	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3208	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3209	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3210	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3241	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3242	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R5032	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R6280	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R6281	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R6282	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R9014_650	2007-008298	R-CHIP;49.9ohm,1%,1/16W,TP,1005	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R9015_650	2007-008298	R-CHIP;49.9ohm,1%,1/16W,TP,1005	1	S.A	
....4	R9016_650	2007-008298	R-CHIP;49.9ohm,1%,1/16W,TP,1005	1	S.A	
....4	R9017_650	2007-008298	R-CHIP;49.9ohm,1%,1/16W,TP,1005	1	S.A	
....4	R1020	2007-008593	R-CHIP;750ohm,1%,1/16W,TP,1005	1	S.A	
....4	RA5005	2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA5006	2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA8006	2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA8007	2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA8008	2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA2001	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA2002	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA2003	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA2007	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA4001	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA4044	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA4045	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA4048	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA4051	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA5004	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA6013	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7002	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7003	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7004	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7005	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7006	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7007	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7008	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7009	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7010	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7011	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7012	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7039	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7041	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7042	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7043	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7044	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7045	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7046	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7047	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7048	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7049	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7050	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7051	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7052	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7062	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7500	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7501	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA8017_CI	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA8018_CI	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA8019_CI	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA9001_650	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	RA5003	2011-001344	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA7056	2011-001344	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA7057	2011-001344	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA2004	2011-001345	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA2005	2011-001345	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA2006	2011-001345	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA8010_EU	2011-001345	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA6018	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7013	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7014	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7015	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7020	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7038	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7040	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7053	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7054	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7061	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7502	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7503	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA3011	2011-001397	R-NETWORK;47Kohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA3012	2011-001397	R-NETWORK;47Kohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA3035	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,4P,T,1010	1	S.N.A	
....4	RA3650_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,4P,T,1010	1	S.N.A	
....4	RA3651_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,4P,T,1010	1	S.N.A	
....4	RA3652_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,4P,T,1010	1	S.N.A	
....4	RA3653_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,4P,T,1010	1	S.N.A	
....4	RA3654_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,4P,T,1010	1	S.N.A	
....4	RA3655_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,4P,T,1010	1	S.N.A	
....4	RA3666_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,4P,T,1010	1	S.N.A	
....4	RA3667_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,4P,T,1010	1	S.N.A	
....4	RA3668_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,4P,T,1010	1	S.N.A	
....4	RA3669_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,4P,T,1010	1	S.N.A	
....4	RA3670_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,4P,T,1010	1	S.N.A	
....4	RA3671_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,4P,T,1010	1	S.N.A	
....4	RA3672_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,4P,T,1010	1	S.N.A	
....4	RA3673_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,4P,T,1010	1	S.N.A	
....4	RA3674_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,4P,T,1010	1	S.N.A	
....4	RA3675_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,4P,T,1010	1	S.N.A	
....4	RA5013	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,4P,T,1010	1	S.N.A	
....4	RA3006	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,4P,TP,1010	1	S.N.A	
....4	RA3007	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,4P,TP,1010	1	S.N.A	
....4	RA3008	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,4P,TP,1010	1	S.N.A	
....4	RA3009	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,4P,TP,1010	1	S.N.A	
....4	RA3016	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,4P,TP,1010	1	S.N.A	
....4	RA4010	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,4P,TP,1010	1	S.N.A	
....4	RA4046	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,4P,TP,1010	1	S.N.A	
....4	RA6020	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,4P,TP,1010	1	S.N.A	
....4	RA2008	2011-001497	R-NETWORK;470ohm,5%,1/16W,L,CHIP,4P,TP,1	1	S.N.A	
....4	RA3018	2011-001497	R-NETWORK;470ohm,5%,1/16W,L,CHIP,4P,TP,1	1	S.N.A	
....4	RA9003_650	2011-001497	R-NETWORK;470ohm,5%,1/16W,L,CHIP,4P,TP,1	1	S.N.A	
....4	RA6019	2011-001506	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,4P,TP,1	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	RA6119	2011-001506	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,4P,TP,1	1	S.N.A	
....4	RA8011_EU	2011-001506	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,4P,TP,1	1	S.N.A	
....4	RA3015	2011-001519	R-NETWORK;33OHM,5%,1/16W,L,CHIP,4P,TP,1.	1	S.N.A	
....4	RA4018	2011-001519	R-NETWORK;33OHM,5%,1/16W,L,CHIP,4P,TP,1.	1	S.N.A	
....4	RA5012	2011-001519	R-NETWORK;33OHM,5%,1/16W,L,CHIP,4P,TP,1.	1	S.N.A	
....4	RA3017	2011-001527	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,4P,TP,	1	S.N.A	
....4	RA6021	2011-001527	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,4P,TP,	1	S.N.A	
....4	RA7034	2011-001527	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,4P,TP,	1	S.N.A	
....4	RA7065	2011-001527	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,4P,TP,	1	S.N.A	
....4	RA7066_650	2011-001527	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,4P,TP,	1	S.N.A	
....4	RA3014	2011-001586	R-NETWORK;1Kohm,5%,1/16W,L,CHIP-V,4P,TP,	1	S.A	
....4	RA3031	2011-001586	R-NETWORK;1Kohm,5%,1/16W,L,CHIP-V,4P,TP,	1	S.A	
....4	RA3036	2011-001586	R-NETWORK;1Kohm,5%,1/16W,L,CHIP-V,4P,TP,	1	S.A	
....4	RA6022	2011-001586	R-NETWORK;1Kohm,5%,1/16W,L,CHIP-V,4P,TP,	1	S.A	
....4	RA3010	2011-001587	R-NETWORK;100ohm,5%,1/16W,L,CHIP-V,4P,TP	1	S.A	
....4	RA3013	2011-001587	R-NETWORK;100ohm,5%,1/16W,L,CHIP-V,4P,TP	1	S.A	
....4	RA4016	2011-001587	R-NETWORK;100ohm,5%,1/16W,L,CHIP-V,4P,TP	1	S.A	
....4	RA4017	2011-001587	R-NETWORK;100ohm,5%,1/16W,L,CHIP-V,4P,TP	1	S.A	
....4	RA3030_EU	2011-001588	R-NETWORK;75ohm,5%,1/16W,L,CHIP-V,4P,TP,	1	S.A	
....4	RA6009	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA6010	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA6011	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA6012	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA7060	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA7079	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA7600	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA7601	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA7900	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA3032	2011-001590	R-NETWORK;47Kohm,5%,1/16W,L,CHIP-V,4P,TP	1	S.A	
....4	RA3072	2011-001590	R-NETWORK;47Kohm,5%,1/16W,L,CHIP-V,4P,TP	1	S.A	
....4	C2080	2203-000125	C-CER,CHIP;1.2nF,10%,50V,X7R,TP,1608,-	1	S.A	
....4	C2081	2203-000125	C-CER,CHIP;1.2nF,10%,50V,X7R,TP,1608,-	1	S.A	
....4	C2082	2203-000125	C-CER,CHIP;1.2nF,10%,50V,X7R,TP,1608,-	1	S.A	
....4	C2083	2203-000125	C-CER,CHIP;1.2nF,10%,50V,X7R,TP,1608,-	1	S.A	
....4	C2040	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3001	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3002_EU	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3013	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3015	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3021	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3022	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3029	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3033_EU	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3045	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3066	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3250	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3251	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C2036	2203-000280	C-CER,CHIP;0.01nF,0.5pF,50V,C0G,1608	1	S.A	
....4	C6857	2203-000357	C-CER,CHIP;0.15nF,5%,50V,C0G,1608	1	S.N.A	
....4	C7137	2203-000384	C-CER,CHIP;0.015nF,5%,50V,C0G,1608	1	S.N.A	
....4	C9017_650	2203-000384	C-CER,CHIP;0.015nF,5%,50V,C0G,1608	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C9019_650	2203-000384	C-CER,CHIP;0.015nF,5%,50V,C0G,1608	1	S.N.A	
....4	C1001	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C1029	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C1041_LCD	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C1768	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C2033	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C2034	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C4003	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C4012	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C4025	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C6090	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C1027	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C3014_EU	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C3016_EU	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C3024	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C3025	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C5001	2203-000550	C-CER,CHIP;0.02nF,5%,50V,C0G,1005	1	S.N.A	
....4	C5002	2203-000550	C-CER,CHIP;0.02nF,5%,50V,C0G,1005	1	S.N.A	
....4	C2070	2203-000575	C-CER,CHIP;220nF,10%,25V,X7R,TP,2012	1	S.N.A	
....4	C2071	2203-000575	C-CER,CHIP;220nF,10%,25V,X7R,TP,2012	1	S.N.A	
....4	C2072	2203-000575	C-CER,CHIP;220nF,10%,25V,X7R,TP,2012	1	S.N.A	
....4	C2073	2203-000575	C-CER,CHIP;220nF,10%,25V,X7R,TP,2012	1	S.N.A	
....4	C2074	2203-000575	C-CER,CHIP;220nF,10%,25V,X7R,TP,2012	1	S.N.A	
....4	C2075	2203-000575	C-CER,CHIP;220nF,10%,25V,X7R,TP,2012	1	S.N.A	
....4	C5100	2203-000585	C-CER,CHIP;0.22nF,10%,50V,X7R,1005	1	S.A	
....4	C4009	2203-000679	C-CER,CHIP;0.027nF,5%,50V,C0G,1005	1	S.A	
....4	C4010	2203-000679	C-CER,CHIP;0.027nF,5%,50V,C0G,1005	1	S.A	
....4	C5003	2203-000697	C-CER,CHIP;0.002NF,0.25PF,50V,C0G,TP,160	1	S.A	
....4	C5004	2203-000697	C-CER,CHIP;0.002NF,0.25PF,50V,C0G,TP,160	1	S.A	
....4	C7048	2203-000761	C-CER,CHIP;330nF,10%,16V,X7R,TP,2012,-	1	S.N.A	
....4	C3006	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C3007	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C3008	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C3011_EU	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C3012_EU	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C3018	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C3019	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C3020	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C1120	2203-000995	C-CER,CHIP;0.047nF,5%,50V,C0G,1005	1	S.A	
....4	C3017	2203-000995	C-CER,CHIP;0.047nF,5%,50V,C0G,1005	1	S.A	
....4	C3023_EU	2203-000995	C-CER,CHIP;0.047nF,5%,50V,C0G,1005	1	S.A	
....4	C4018	2203-000995	C-CER,CHIP;0.047nF,5%,50V,C0G,1005	1	S.A	
....4	C4020	2203-000995	C-CER,CHIP;0.047nF,5%,50V,C0G,1005	1	S.A	
....4	C5031_650	2203-001072	C-CER,CHIP;0.056nF,5%,50V,NP0,1005	1	S.A	
....4	C2038	2203-001126	C-CER,CHIP;0.68nF,10%,50V,X7R,1608	1	S.N.A	
....4	C5035	2203-001412	C-CER,CHIP;0.03nF,5%,50V,NP0,TP,1005	1	S.N.A	
....4	C5036	2203-001412	C-CER,CHIP;0.03nF,5%,50V,NP0,TP,1005	1	S.N.A	
....4	C5037	2203-001412	C-CER,CHIP;0.03nF,5%,50V,NP0,TP,1005	1	S.N.A	
....4	C5038	2203-001412	C-CER,CHIP;0.03nF,5%,50V,NP0,TP,1005	1	S.N.A	
....4	C5039_OP	2203-001596	C-CER,CHIP;2200nF,+80-20%,50V,Y5V,2012	1	S.A	
....4	C5060_OP	2203-001596	C-CER,CHIP;2200nF,+80-20%,50V,Y5V,2012	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C1005	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C1007	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C1008	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C2006	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C2007	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C4008	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C4011	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C4019	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C4021	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C4022	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C4024	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C4100	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C5023	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C6061	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C6077	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C6099	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C6113	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C6114	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C7018	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C7136	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C7139_LCD	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C5010	2203-002494	C-CER,CHIP;470nF,10%,16V,X7R,2012	1	S.N.A	
....4	C7050	2203-005138	C-CER,CHIP;1.8nF,10%,50V,X7R,1005	1	S.A	
....4	C7051	2203-005138	C-CER,CHIP;1.8nF,10%,50V,X7R,1005	1	S.A	
....4	C7052	2203-005138	C-CER,CHIP;1.8nF,10%,50V,X7R,1005	1	S.A	
....4	C1004	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C1022	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C1024	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C1048_LCD	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C1148_LCD	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C1149_LCD	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C1150_LCD	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2047	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2048	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2049	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2050	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2051	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2052	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2060	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2061	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2062	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2063	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2066	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2067	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2068	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2069	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2076	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2077	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2078	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2079	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C5021	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C6056	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6057	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6058	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6059	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6062	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6063	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6073	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6074	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6075	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6078	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6094	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6095	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6096	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6100	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7011	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7017	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7049	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7109_650	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7114	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7115	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7121	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7122	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7009	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7016	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7025	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7029	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7059	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7063	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7065	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7073	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7096	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7105	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7106	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7148	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7157	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7173	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7205	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7210	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C3063	2203-005393	C-CER,CHIP;0.005nF,0.1pF,50V,NP0,TP,1005	1	S.N.A	
....4	C6044	2203-005493	C-CER,CHIP;220nF,+80-20%,16V,Y5V,1005	1	S.A	
....4	C6045	2203-005493	C-CER,CHIP;220nF,+80-20%,16V,Y5V,1005	1	S.A	
....4	C7053	2203-005659	C-CER,CHIP;0.18nF,5%,50V,NP0,1005	1	S.N.A	
....4	C1032	2203-005834	C-CER,CHIP;22000nF,+80-20%,10V,Y5V,3216	1	S.A	
....4	C1035	2203-005834	C-CER,CHIP;22000nF,+80-20%,10V,Y5V,3216	1	S.A	
....4	C1036	2203-005834	C-CER,CHIP;22000nF,+80-20%,10V,Y5V,3216	1	S.A	
....4	C5025_OP	2203-005834	C-CER,CHIP;22000nF,+80-20%,10V,Y5V,3216	1	S.A	
....4	C5034	2203-005834	C-CER,CHIP;22000nF,+80-20%,10V,Y5V,3216	1	S.A	
....4	C2041	2203-005968	C-CER,CHIP;4.7NF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C6091	2203-005968	C-CER,CHIP;4.7NF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C9020_650	2203-006039	C-CER,CHIP;1nF,10%,2000V,X7R,3216	1	S.A	
....4	C9021_650	2203-006039	C-CER,CHIP;1nF,10%,2000V,X7R,3216	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C5337	2203-006104	C-CER,CHIP;1000nF,10%,50V,X7R,3225	1	S.A	
....4	C3997	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C3998	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C6098	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C1013	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.N.A	
....4	C1019	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.N.A	
....4	C1025	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.N.A	
....4	C1028	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.N.A	
....4	C1060	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.N.A	
....4	C7084	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.N.A	
....4	C7310	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.N.A	
....4	C7601_LCD	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.N.A	
....4	C1002	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1003	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1006	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1012	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1014	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1030	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1034	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1070	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1071	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1080	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1090	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1091	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1092	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1801	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C2037	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C2039	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C2042	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C2043	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C2044	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C2045	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3046	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3051	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3054	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3055	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3056	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3057	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3065	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3070	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3071	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3072	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3100	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3101	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3102	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4002	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4006	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4013	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4014	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4016	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4023	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C4026	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4050	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4103	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5011	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5020	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5024	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5027	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5070	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5071	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5072	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5073	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5112	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6027	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6028	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6033	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6042	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6043	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6048	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6052	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6053	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6064	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6065	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6066	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6067	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6068	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6069	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6070	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6079	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6080	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6081	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6082	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6083	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6084	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6085	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6086	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6087	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6088	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6089	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6101	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6105	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6109	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6110	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6111	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6112	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6115	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6116	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6153	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7012	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7013	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7019	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7020	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C7034	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7038	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7043	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7054	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7055	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7056	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7062	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7064	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7068	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7069	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7074	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7075	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7078	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7081	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7083	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7086	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7087	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7088	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7094	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7095	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7098	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7099	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7100_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7107	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7112	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7113	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7116	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7117	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7134	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7140	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7142	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7143	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7146	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7147	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7149	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7152	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7160	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7161	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7164	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7165	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7168	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7169	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7172	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7176	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7177	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7180	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7181	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7185	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7200	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7201	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7202	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C7203	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7206	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7211	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7220	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7221	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7222	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7223	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7224	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7225	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7226	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7227	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7228	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7301	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7302	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7400	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7402	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7403	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7404	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7405	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7406	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7407	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7408	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7409	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7410	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7411	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7412	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7413	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7414	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7416	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7417	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7418	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7419	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7420	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7423	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7750	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7751	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7752	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7753	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7754	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7755	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7756	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7757	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7758	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7759	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7760	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7761	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7770	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7771	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7772	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7773	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7880	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C7881	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7900	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7901	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8001	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8002	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8003	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8004	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8007_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8011_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8012	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8013_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8014_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8015_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8016_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8017_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8018_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8019_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9001_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9003_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9004_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9005_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9006_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9007_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9009_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9010_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9011_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9012_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9013_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9014_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9015_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9016_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9018_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9023_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9024_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9101_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9103_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9105_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9107_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5012	2203-006336	C-CER,CHIP;10000nF,10%,25V,X5R,3216	1	S.A	
....4	C1016	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C1017	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C1020	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C1021	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C1023	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C1031	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C1033	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C1050	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2001	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2003	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2005	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2011	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C2014	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2031	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2032	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2035	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2046	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2055	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2064	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2065	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3009_EU	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3010_EU	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3037	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3043	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3053	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3067	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3068	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3069	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3073	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3810	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C4001	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C4015	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C5005	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C5018	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C5028	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C5032	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C5111	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C5336	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6001	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6011	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6022	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6029	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6030	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6031	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6032	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6046	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6049	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6050	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6054	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6055	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6071	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6072	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6092	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6093	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7001	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7004	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7005	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7006	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7007	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7008	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7021	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7085_650	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7108	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C7110	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7130	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7132	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7133	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C8010_EU	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C9002_650	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C9008_650	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C9022_650	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C9100_650	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C9102_650	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C9104_650	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C9106_650	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C9900_650	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2084	2203-006382	C-CER,CHIP;10000nF,10%,25V,X7R,TP,3225	1	S.N.A	
....4	C2085	2203-006382	C-CER,CHIP;10000nF,10%,25V,X7R,TP,3225	1	S.N.A	
....4	C2086	2203-006382	C-CER,CHIP;10000nF,10%,25V,X7R,TP,3225	1	S.N.A	
....4	C2087	2203-006382	C-CER,CHIP;10000nF,10%,25V,X7R,TP,3225	1	S.N.A	
....4	C1040_LCD	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C1042_LCD	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2019	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2020	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2021	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2022	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2023	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2024	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2025	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2026	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2027	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2028	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2029	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2030	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C3103	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C3104	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C3105	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C3106	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C3320	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C4004	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6005	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6014	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6040	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6041	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6060	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6076	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6097	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6851	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6852	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6853	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6854	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7003	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7028	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7030	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	

5. Exploded View & Part List

[illegible]

5. Exploded View & Part List

[illegible]

5. Exploded View & Part List

[illegible]

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
..2	M0115	BN61-04788A	BRACKET-STAND LINK;46, B610,SECC,T2.0	1	S.N.A	
..2	M0254	BN61-04800A	HOLDER-SIDE AV;EO,ABS+PMMA,HB,BK23,H/GLO	1	S.N.A	
...3		BN81-00204P	RESIN-HIGH GLOSS;HAM 8560,SF-0505,K21294	17.3	S.N.A	
..2	T0101	BN61-04817A	BRACKET-WALL;46, B610,SECC,T1.6	4	S.N.A	
..2	M0146	BN61-04818A	BRACKET-PANEL TOP;B650-32,SECC,T1.2	2	S.N.A	
..2		BN63-05259A	COVER-MAIN;EO,ABS+PMMA,HB,BK23,H/GLOSSY	1	S.N.A	
...3		BN81-00204P	RESIN-HIGH GLOSS;HAM 8560,SF-0505,K21294	0.015	S.N.A	
..2	M0230	BN96-10074A	ASSY CABLE P-FPCB LVDS;LA46A650A1,FPCB L	1	S.A	
..2	T0081	6001-002284	SCREW-MACHINE;BH,+,M4,L8,ZPC(WHT),SWRCH1	6	S.A	
..2	T0081	6001-002284	SCREW-MACHINE;BH,+,M4,L8,ZPC(WHT),SWRCH1	6	S.A	
..2	M2893	BN39-00830G	LEAD CONNECTOR;LNB750U1FXZA,UL1061#28,7p	1	S.A	
0.1	M0019	BN92-04476A	ASSY LABEL;LE40B750U1WXXC	1	S.N.A	
0.1	M0045	BN92-04477B	ASSY ACCESSORY;LE46B750U1WXXC	1	S.N.A	
..2	M0045	BN96-10041A	ASSY ACCESSORY-MANUAL;LE40B750U1WXXC	1	S.A	
...3	T0524	6902-000110	BAG PE;LDPE,T0.05,W250,L400,TRP,28,2,-,9	1	S.N.A	
...3		AA68-03242Q	MANUAL FLYER-02,SAFETY GUIDE;comm,Samsun	1	S.N.A	
...3	T0076	BN68-00514E	MANUAL FLYER-02,WARRANTY CARD;comm,Samsu	1	S.N.A	
...3		BN68-00907D	MANUAL FLYER-WEEE BATTERY;COMM,SAMSUNG,2	1	S.N.A	
...3		BN68-02004A	MANUAL FLYER-QSG;B750,SAMSUNG,9Langs,W.E	1	S.N.A	
...3		BN96-10411A	ASSY MANUAL P-USB;B750,USB,SAMSUNG,W.EUR	1	S.N.A	
...4		BN59-00893A	S/W DRIVER-USB;HANIL 512,E-manual,HANIL,	1	S.N.A	
...3		BN59-00726D	S/W DRIVER-CD;LN40B650T1F,DLNA,WorldWide	1	S.N.A	
..2	M0045	BN96-10041C	ASSY ACCESSORY-CABEL;LE46B750U1WXXC	1	S.A	
...3	T0268	3903-000145	CBF-POWER CORD;DT,EU,FP3/YES,U(IEC C13-R	1	S.A	
...3	T0524	6902-000110	BAG PE;LDPE,T0.05,W250,L400,TRP,28,2,-,9	1	S.N.A	
...3	T0074	BN59-00860A	REMOCON;LCD850,750,TM970,EUROPE,49	1	S.A	
...3	M9889	BN63-01798B	CLOTH-CLEAN;cloth,180,200,sea blue,ToC	1	S.N.A	
...3	T0531	BN63-05254B	COVER-BOTTOM;46,LB750,HIPS,HB,BK500	1	S.A	
...4		BN81-00199H	RESIN;HIPS HB,BK500,HF-1690H,K2901	70.4	S.N.A	
...3	M0560	BN96-01800A	ASSY ACCESSORY-SCREW ZIPPER;ROME32,-,-,-	1	S.N.A	
...4	T0081	6002-001294	SCREW-TAPPING;BH,+,M4,L16,ZPC(BLK)	4	S.N.A	
...4	ACCESSORY	6902-000683	BAG ZIPPER;LDPE,T0.05,W60,L60,TRP,-,-,4-	1	S.N.A	
...3		BN61-05596A	HOLDER-WIRE CABLE;LED TV,LDPE,T1.1,L150,	1	S.N.A	
0.1	M0113	BN92-04783A	ASSY P/MATERIAL;46,LB750	1	S.N.A	
..2	T0003	6902-000604	BAG WRAPPING;LDPE,T0.02,W500,L10000,TRP,	7.5	S.N.A	
..2	T0524	6902-000959	BAG PE;NITRON,T0.015/T0.5,W1400,L900,TRP	1	S.N.A	
..2	T0214	AA61-20285C	HOLDER-BOX;CORAL,PP,BLACK,HB,17.5g	4	S.N.A	
..2	T0214	BN74-00008A	TAPE-OPP MASKING;OPP-2,T0.05,W100,L800M,	1.55	S.N.A	
0.1	M0003	BN92-04786B	ASSY BOX;46,LB750,EO	1	S.N.A	
..2	M0521	BN69-03467A	BOX-SET,IN;46LB610,CB,C-01,DW1,ECT50,YEL	1	S.N.A	
..2		BN69-03592B	BOX-SET,OUT;46LB750-S,CB,C-03, DW3, AB,Y	1	S.N.A	

5-24. LE52B75* Parts List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
		LE52B750U1WXXC	LE52B750U1W,N68A/52BU1-G7U,52,LCD-TV,SPA			
0.1	M0001	BN90-01964B	ASSY COVER FRONT;52,LB750,EO,CHARCOAL GR	1	S.N.A	
..2	T0175	BN96-09463D	ASSY SPEAKER P;8ohm,4pin,10W,R:250/ L:70	1	S.A	
..2	T0003	BN96-09635B	ASSY COVER P-FRONT;52,LB750,EO,PC(CLR)+P	1	S.N.A	
...3	H/B/SIDE+C	6003-001188	SCREW-TAPTYPE;BH,+,-,B,M4,L10,ZPC(WHT),S	2	S.N.A	
...3	T0069	AA63-60122T	SPACER-FELT;52L650,FELT,1150,T0.5,25	2	S.N.A	
...3	T0069	BN60-00027S	SPACER-FELT;L650 52,FELT,650,0.35,25	2	S.N.A	
...3		BN61-04661A	BRACKET-STOPPER;L650,SK-5,T0.4,Plating,H	6	S.N.A	
...3	M0279	BN63-00866A	FELT;AS17UO,FELT,0.5,10,140	2	S.N.A	
...3	CCM1	BN63-02183F	COVER-SHEET;Rhcm,PE Vinyl,T0.05,900mm,20	0.75	S.N.A	
...3	CCM1	BN63-05199B	COVER-SHEET;AMBER,PE,T0.08,W65mm,200M,CL	3.7	S.N.A	
...3	CCM1	BN63-05199F	COVER-SHEET;AMBER,PE,T0.08,W95mm,200M,CL	1.5	S.N.A	
...3	M0112	BN63-05263B	COVER-FRONT;52,LB750,EO,PC(CLR)+PC(C/GRA	1	S.A	
....4		BN81-00116D	RESIN-TOC;PC V0,TTP01,CLR,TN-1030(NP),TH	0.952	S.N.A	
....4		BN81-00265E	RESIN;ToC PC, TGR02,TN-1030S, LD046,TH30	1.227	S.N.A	
...3		BN64-01022A	DECORATION-BOTTOM;UB7000,PC,clear	1	S.N.A	
....4		BN81-00116J	RESIN;PC CLEAR,SC-1220R/70918,HF-1130R,	0.13	S.N.A	
...3		BN96-09513C	ASSY HOLDER P-BOSS SIDE RIGHT;52,LB650,P	1	S.N.A	
....4		BN61-04692A	BOSS-PRIMER;#94,clear,35cps	0.1	S.N.A	
....4		BN61-04731D	BOSS-TAPE;AMBER,ACRYL,T1.1,W20.0mm,WHITE	0.03	S.N.A	
....4		BN61-04731F	BOSS-TAPE;AMBER,ACRYL,T1.1,W6.0mm,WHITE,	0.54	S.N.A	
....4		BN61-04806C	HOLDER-BOSS SIDE R;52,LB650,ABS+PMMA,HB,	1	S.N.A	
.....5		BN81-00204P	RESIN-HIGH GLOSS;HAM 8560,SF-0505,K21294	0.213	S.N.A	
...3		BN96-09513D	ASSY HOLDER P-BOSS SIDE LEFT;52,LB650,PM	1	S.N.A	
....4		BN61-04692A	BOSS-PRIMER;#94,clear,35cps	0.1	S.N.A	
....4		BN61-04731D	BOSS-TAPE;AMBER,ACRYL,T1.1,W20.0mm,WHITE	0.03	S.N.A	
....4		BN61-04731F	BOSS-TAPE;AMBER,ACRYL,T1.1,W6.0mm,WHITE,	0.54	S.N.A	
....4		BN61-04806D	HOLDER-BOSS SIDE L;52,LB650,ABS+PMMA,HB,	1	S.N.A	
.....5		BN81-00204P	RESIN-HIGH GLOSS;HAM 8560,SF-0505,K21294	0.213	S.N.A	
...3		BN96-09651B	ASSY HOLDER P-BOSS BOTTOM;52,LB750,HIPS,	1	S.N.A	
....4		BN61-04692A	BOSS-PRIMER;#94,clear,35cps	0.5	S.N.A	
....4		BN61-04731D	BOSS-TAPE;AMBER,ACRYL,T1.1,W20.0mm,WHITE	0.99	S.N.A	
....4		BN61-04731F	BOSS-TAPE;AMBER,ACRYL,T1.1,W6.0mm,WHITE,	0.19	S.N.A	
....4		BN61-04810B	HOLDER-BOSS BOTTOM;52,LB750,HIPS,HB,BK50	1	S.N.A	
.....5		BN81-00199H	RESIN;HIPS HB,BK500,HF-1690H,K2901	0.267	S.N.A	
...3	M0175	BN96-10210E	ASSY BOARD P-TOUCH FUNCTION&IR;LN40B750U	1	S.N.A	
0.1	M0216	BN90-01989A	ASSY STAND;52,LB750,BLACK,CLEAR NECK	1	S.N.A	
..2	M0027	BN96-09481A	ASSY STAND P-BASE;52,LB750,TEMPERED GLAS	1	S.N.A	
...3	B/S/STAND+	6003-001003	SCREW-TAPTYPE;BH,+,-,B,M4,L12,ZPC(BLK),SWR	6	S.N.A	
...3	G/STAND+G/	6003-001003	SCREW-TAPTYPE;BH,+,-,B,M4,L12,ZPC(BLK),SWR	4	S.N.A	
...3		BN61-04692A	BOSS-PRIMER;#94,clear,35cps	0.001	S.N.A	
...3		BN61-04731B	BOSS-TAPE;AMBER,ACRYL,T1.1,W12.0mm,WHITE	1	S.N.A	
...3	T0920	BN61-04997A	GUIDE-STAND;LB750 52,PC+GF 20%,BLK	1	S.N.A	
....4		BN81-00204H	RESIN;Trirex,3025G20 BK,ABS+PC G/F 20%,4	493.9	S.N.A	
...3		BN61-05240A	HOLDER-SWIVEL RING TOP;LB700 46,POM HB,A	1	S.N.A	
...3		BN61-05243A	BRACKET-STAND BOTTOM;LB700 46,HGI,T3.0	1	S.N.A	
...3		BN61-05244A	BRACKET-SWIVEL BOTTOM;LB700 46,HGI,T3.0	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
...3		BN61-05252A	GUIDE-STAND NECK;LB700 46,PC CLEAR,Pi 60	1	S.N.A	
...4		BN61-05267A	HOLDER-INSERT;40 LB7000,PC, extrusion,CL	1	S.N.A	
...4		BN81-00116J	RESIN;PC CLEAR,SC-1220R/70918,HF-1130R,	0.15	S.N.A	
...3		BN61-05255A	HOLDER-SWIVEL RING BOTTOM;LB700 46,POM H	1	S.N.A	
...3	CCM1	BN63-04755A	COVER-SHEET;AMBER,PE,T0.05,W150mm,200M,6	1.36	S.N.A	
...3		BN63-05311A	COVER-STAND GLASS;52,LB650,GLASS,T8.0,CH	1	S.N.A	
...3	T0056	BN63-05538A	COVER-DECORATION;UB7000 46inch,ABS,PMMA,	1	S.N.A	
...4		BN81-00204P	RESIN-HIGH GLOSS;HAM 8560,SF-0505,K21294	0.013	S.N.A	
...3	M0126	BN73-00203A	RUBBER-FOOT;LB7000 46inch,CR RUBBER,T7.0	4	S.N.A	
...3	M0126	BN73-00204A	RUBBER-FOOT;42LB650,RUBBER,16*33,60,2.0	4	S.N.A	
0.1	M0002	BN90-01992A	ASSY COVER REAR;52,LB750,EO	1	S.N.A	
..2	T0081	6002-001294	SCREW-TAPPING;BH,+,M4,L16,ZPC(BLK)	12	S.N.A	
..2	T0081	6002-001294	SCREW-TAPPING;BH,+,M4,L16,ZPC(BLK)	1	S.N.A	
..2	T0081	6002-001294	SCREW-TAPPING;BH,+,M4,L16,ZPC(BLK)	1	S.N.A	
..2	M0013	BN96-09654A	ASSY COVER P-REAR;52,LB750,EO,PC/ABS+REC	1	S.N.A	
...3	CCM1	BN63-02183G	COVER-SHEET;Rhcm,PE Vinyl,T0.05,1100mm,2	1.2	S.N.A	
...3	M0006	BN63-05271A	COVER-REAR;52,LB750,EO,PC/ABS+RECYCLE PC	1	S.A	
...4		BN81-00204P	RESIN-HIGH GLOSS;HAM 8560,SF-0505,K21294	4.166	S.N.A	
...3	T0071	BN64-01028A	INLAY-TERMINAL;B650/750,EO,PS SHEET,T0.5	1	S.N.A	
...3	T0064	BN65-00002A	CLAMPER CORE;BORDEAUX,LDPE,-,-,BLK,-	1	S.N.A	
...3	T0069	AA60-00171L	SPACER-FELT;46L3,FELT,460,T0.5,10	2	S.N.A	
0.1		BN91-03555B	ASSY LCD-AMLCD;LN52B750U1FXZA	1	S.N.A	
..2	M0215	BN07-00696A	LCD-PANEL;LTF520HH01	1	S.A	
...3	M0215	BN81-02356A	A/S-T CON LTF520HH01;LTF520HH01	1	S.A	
0.1	M0017	BN91-03740C	ASSY CHASSIS;LE52B750U1WXXC	1	S.N.A	
..2	M0014	BN94-02663F	ASSY PCB MAIN;LE52B750U1WXXC	1	S.N.A	
...3	T0245	0202-001608	SOLDER-WIRE FLUX;LFC7-107,D0.8,99.3Sn/0.	0.25	S.N.A	
...3	CN3010	3701-001388	CONNECTOR-HDMI;20P,Phosphor Bronze,ANGLE	1	S.A	
...3	CN3011	3701-001480	CONNECTOR-DSUB;15P,3R,FEMAIL,STAMPED PIN	1	S.A	
...3	CN906	3707-001081	CONNECTOR-OPTICAL;STRAIGHT,SPDIF	1	S.A	
...3	CN8001_EU	3709-001551	CONNECTOR-CARD SLOT;68P,1.27mm,DIP,AU50U	1	S.A	
...3	CN330	3711-003847	HEADER-BOARD TO CABLE;BOX,12P,1R,2mm,ANG	1	S.A	
...3	CN1001	3711-005884	HEADER-BOARD TO BOARD;BOX,30P,2R,2mm,ANG	1	S.A	
...3	CN330	3711-006715	HEADER-BOARD TO CABLE;BOX,4P,1R,2.5mm,AN	1	S.N.A	
...3	JA330	3722-001061	JACK-PHONE;1P,3.6PI,AG,BLK,N	1	S.A	
...3	JA330	3722-001061	JACK-PHONE;1P,3.6PI,AG,BLK,N	1	S.A	
...3	JA330	3722-001061	JACK-PHONE;1P,3.6PI,AG,BLK,N	1	S.A	
...3	JA330	3722-001061	JACK-PHONE;1P,3.6PI,AG,BLK,N	1	S.A	
...3	CN9001_650	3722-002426	JACK-MODULAR;8P/8C,N,STRAIGHT,GRN/YEL,AU	1	S.A	
...3	CN7002_650	3722-002546	JACK-USB;4P/1C,AU,BLK,ANGLE,A type	1	S.N.A	
...3	CN7006	3722-002546	JACK-USB;4P/1C,AU,BLK,ANGLE,A type	1	S.N.A	
...3	JA333	3722-002635	JACK-PIN;3P,Sn,YEL/WHT/RED,ANGLE	1	S.A	
...3	CN3002_EU	3722-002681	JACK-SCART;42P,SN,BLK	1	S.A	
...3	JA333	3722-002691	JACK-PIN;2P,Ni,WHT/RED,STRAIGHT	1	S.A	
...3	JA333	3722-002691	JACK-PIN;2P,Ni,WHT/RED,STRAIGHT	1	S.A	
...3	JA333	3722-002703	JACK-PIN;3P,Ni,GRN/BLU/RED,STRAIGHT	1	S.A	
...3	CIS3	BN40-00145A	TUNER;TDHG6-K12A,TDHG6-K12A,DVB-TC,164CH	1	S.A	
...3	T0066	BN62-00042A	HEAT SINK-ES;30*30*5,Ceramic,T1.5,TAPE	1	S.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
...3	T0066	BN62-00043A	HEAT SINK-ES;40*40*5,Ceramic,T1.5,TAPE	1	S.A	
...3	T0174	BN97-03208F	ASSY SMD;LE52B750U1WXXC,BN94-02663F	1	S.N.A	
....4	SUB05	0202-001477	SOLDER-CREAM;LST309-M,D20~45um,96.5Sn/3A	1	S.N.A	
....4	D4003	0401-001049	DIODE-SWITCHING;LS4148,75V,150mA,SOD-80,	1	S.A	
....4	D4004	0401-001049	DIODE-SWITCHING;LS4148,75V,150mA,SOD-80,	1	S.A	
....4	D4100	0401-001049	DIODE-SWITCHING;LS4148,75V,150mA,SOD-80,	1	S.A	
....4	D4228	0401-001049	DIODE-SWITCHING;LS4148,75V,150mA,SOD-80,	1	S.A	
....4	D3001	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3002	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3051	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3054	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3061	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3062	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3063	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3076	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3077	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3079	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3080	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D4008	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D4010	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D9001_650	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D9002_650	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D9003_650	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D9004_650	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D9007_650	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D9008_650	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D7400	0401-001099	DIODE-SWITCHING;1N4148WS,75V,150mA,SOD-3	1	S.N.A	
....4	D0254	0402-001207	DIODE-SCHOTTKY;UPS5819,40V,1000MA,DO-216	1	S.A	
....4	D4001	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D5100	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D1180	0403-000584	DIODE-ZENER;VLZ3V6B,3.6/3.845V,500mW,SOD	1	S.N.A	
....4	D3003_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3004_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3005_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3006_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3007_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3008_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3009_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3011	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3015	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3016_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3018	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3019	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3020	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3021	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3022_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3023	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3024	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3026_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3032	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3033	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	D3034	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3035	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3036	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3037	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3038	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3039	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3045	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3052	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3056	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3057	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3058	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3060	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3065	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3066	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3067	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3068	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3069	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3073	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3074	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3075	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3350	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3776	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3777_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3778_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D3779_EU	0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	S.A	
....4	D0254	0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	1	S.A	
....4	D0254	0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	1	S.A	
....4	D0254	0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	1	S.A	
....4	D0254	0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	1	S.A	
....4	D0254	0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	1	S.A	
....4	D7001_650	0406-001200	DIODE-TVS;RCLAMP0504F,6/-V,150W,SC-70	1	S.A	
....4	D7002	0406-001200	DIODE-TVS;RCLAMP0504F,6/-V,150W,SC-70	1	S.A	
....4	D3751	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D3752	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D3753	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D3754	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D3755	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D3756	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D3757	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D3758	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	S.A	
....4	D8001_CI	0407-000114	DIODE-ARRAY;-80V,100mA,CA2-3,SOT-23,TP	1	S.N.A	
....4	D8002_CI	0407-000114	DIODE-ARRAY;-80V,100mA,CA2-3,SOT-23,TP	1	S.N.A	
....4	D8003_CI	0407-000114	DIODE-ARRAY;-80V,100mA,CA2-3,SOT-23,TP	1	S.N.A	
....4	D8004_CI	0407-000114	DIODE-ARRAY;-80V,100mA,CA2-3,SOT-23,TP	1	S.N.A	
....4	D8005_CI	0407-000114	DIODE-ARRAY;-80V,100mA,CA2-3,SOT-23,TP	1	S.N.A	
....4	D8006_EU	0407-000114	DIODE-ARRAY;-80V,100mA,CA2-3,SOT-23,TP	1	S.N.A	
....4	D7900	0407-000123	DIODE-ARRAY;DAN202K,80V,100mA,CA2-3,SOT-	1	S.N.A	
....4	Q4003	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150MW,SOT-23	1	S.A	
....4	Q4005	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150MW,SOT-23	1	S.A	
....4	Q4020	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150MW,SOT-23	1	S.A	
....4	Q1002_LCD	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	Q3007	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3008	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3009	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3010	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q4004	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q4009	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q4011	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q9001_650	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3001_EU	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	
....4	Q3002_EU	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	
....4	Q7601_LCD	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	
....4	Q7602_LCD	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-001916	FET-SILICON;Si4800BDY,N,30V,9A,0.03ohm,2	1	S.A	
....4	IC104	0801-002095	IC-CMOS LOGIC;74LCX245,TRANSCEIVER,TSSOP	1	S.A	
....4	IC104	0801-002172	IC-CMOS LOGIC;74LCX16244,BUFFER/LINE DRI	1	S.A	
....4	IC104	0801-002172	IC-CMOS LOGIC;74LCX16244,BUFFER/LINE DRI	1	S.A	
....4	IC104	0801-002630	IC-CMOS LOGIC;74AHCT1G08,2-INPUT AND GAT	1	S.A	
....4	IC104	0801-002780	IC-CMOS LOGIC;74LVC1G17,SCHMITT-TRIGGER	1	S.N.A	
....4	IC7008	1001-000164	IC-ANALOG MULTIPLEX;74HC4052,CMOS,SOP,16	1	S.A	
....4	IC9003_650	1001-001109	IC-ANALOG SWITCH;FST3125M,BUS SWITCH & C	1	S.A	
....4	IC106	1001-001177	IC-VIDEO SWITCH;TEA6425D,VIDEO SWITCH,SO	1	S.A	
....4	IC106	1001-001573	IC-VIDEO SWITCH;SiI9287ACNUTR,QFN,72P,10	1	S.A	
....4	IC107	1002-001482	IC-D/A CONVERTER;WM8521H9GED/R,16bit,SOI	1	S.A	
....4	IC3001	1006-001266	IC-LINE TRANSCEIVER;SP3232EEY,TSSOP,16P,	1	S.A	
....4	IC112	1103-000129	IC-EEPROM;24C02,2Kbit,256x8,SOP,8P,5x4mm	1	S.A	
....4	IC112	1103-000129	IC-EEPROM;24C02,2Kbit,256x8,SOP,8P,5x4mm	1	S.A	
....4	IC112	1103-001310	IC-EEPROM;24LC02B,256X8BIT,SOIC,8P,3.91X	1	S.N.A	
....4	IC112	1103-001385	IC-EEPROM;AT24C256,256Kbit,32Kx8,SOP,8P,	1	S.A	
....4	IC112	1103-001415	IC-EEPROM;AT93C46D,1Kbit,128x8/64x16,SOP	1	S.N.A	
....4	IC7003	1105-001859	IC-DDR2 SDRAM;K4T1G164QD-ZCE7,DDR2,1Gbit	1	S.A	
....4	IC7004	1105-001859	IC-DDR2 SDRAM;K4T1G164QD-ZCE7,DDR2,1Gbit	1	S.A	
....4	IC7005	1105-001859	IC-DDR2 SDRAM;K4T1G164QD-ZCE7,DDR2,1Gbit	1	S.A	
....4	IC7006	1105-001859	IC-DDR2 SDRAM;K4T1G164QD-ZCE7,DDR2,1Gbit	1	S.A	
....4	T0124	1201-002796	IC-POWER AMP;STA339BWS,PSSO,36P,10.3x7.5	1	S.A	
....4	T0087	1203-001815	IC-POSI.FIXED REG.;78M09,TO-252,3P,PLAST	1	S.A	
....4	T0087	1203-001816	IC-POSI.FIXED REG.;78M08,TO-252,3P,-,PLA	1	S.A	
....4	T0087	1203-002842	IC-POSI.FIXED REG.;AP1117D-33A,TO-252,3P	1	S.A	
....4	T0087	1203-002842	IC-POSI.FIXED REG.;AP1117D-33A,TO-252,3P	1	S.A	
....4	T0087	1203-002898	IC-POSI.FIXED REG.;G950T45R,TO-252,3P,6.	1	S.A	
....4	IC012	1203-002995	IC-POSI.ADJUST REG.;AP1117D-A,TO-252,3P,	1	S.A	
....4	IC012	1203-002995	IC-POSI.ADJUST REG.;AP1117D-A,TO-252,3P,	1	S.A	
....4	IC4005	1203-004363	IC-VOL. DETECTOR;RT9818C-29PV,SOT-23,3P,	1	S.A	
....4	IC4004	1203-004364	IC-VOL. DETECTOR;RT9818C-42PV,SOT-23,3P,	1	S.A	
....4	IC1007	1203-004879	IC-DC/DC CONVERTER;MP8668DL,QFN,14P,3x4m	1	S.A	
....4	T0087	1203-005134	IC-POSI.FIXED REG.;RT9167A-33PB,SOT-23-5	1	S.A	
....4	IC1006	1203-005538	IC-DC/DC CONVERTER;AOZ1021HAIL,SOP,8P,4.	1	S.A	
....4	IC5006	1203-005559	IC-BACKLIGHT DRIVER;MP3302DJ,TSOT23,5P,2	1	S.A	
....4	IC012	1203-005756	IC-POSI.ADJUST REG.;AP7173-SP,SOP-8L-EP,	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	IC118	1204-003010	IC-VIDEO PROCESS;SDP84,PBGA,324P,23x23mm	1	S.A	
....4	IC7001	1204-003011	IC-DECODER;SDP83,PBGA,729P,34x34mm,PLAST	1	S.A	
....4	IC9002_650	1205-002941	IC-ETHERNET CONTROLLER;RTL8100CSL-LF,LQF	1	S.N.A	
....4	IC3011	1205-003201	IC-BUS SWITCH;TC7WB125FK,SSOP,8P,2x2.3mm	1	S.A	
....4	IC2001	1205-003352	IC-CODEC;WM8593SEFT/V,TQFP,64P,10x10mm,P	1	S.A	
....4	IC8006_EU	1205-003479	IC-SWITCH;TPS2051BDBVR,SOT-23,5P,2.9x1.6	1	S.A	
....4	IC7007	1205-003733	IC-SWITCH;AP2191MPG-13,MSOP-8L-EP,8P,2.9	1	S.A	
....4	IC7010_650	1205-003735	IC-SWITCH;AP2151WG-7,SOT25,5P,2.9x1.6mm,	1	S.A	
....4	IC5010	1209-001830	IC-PLL;IDT6V10012PGG,TSSOP,20P,6.5x4.4mm	1	S.A	
....4	D4110	1405-001185	VARISTOR;24Vdc,1.6x0.8x0.36mm,TP	1	S.A	
....4	D3010	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3012_EU	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3013	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3014_EU	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3017	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3025	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3027	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3028	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3029	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3030	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3031	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3040	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3041	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3042	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3050	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3053	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3055	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3059	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3064	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3070	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3071	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3072	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3078	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3081	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3097	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3098	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D3099	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4011	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4012	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4013	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4014	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4015	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4016	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4017	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D4018	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D7003_650	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	D7004	1405-001233	VARISTOR;30Vdc,5A,1.6x0.8x0.8mm,TP	1	S.A	
....4	R7120	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7121	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7122	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7123	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R7152	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7153	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7154	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7155	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7162	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7163	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7164	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7165	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7169	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7170	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7171	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R7172	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R1005	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R1801	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R5101	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R2058	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R2059	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R2060	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R2061	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R4155	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	1	S.A	
....4	R7050	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7053	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7056	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7058	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7062	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7066	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7069	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7070	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3007	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3034_EU	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3036_EU	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3062	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3070	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3071	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3078_EU	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3120	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3191	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3192	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3205	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3206	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3207	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3243	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3254	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3255	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3320	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3999	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4042	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4049	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4050	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4087	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5022	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R7114	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7132	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7143	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7605_LCD	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8311_EU	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1031_LCD	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1072	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3010_EU	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3021_EU	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3022_EU	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3035	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3037	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3072	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3073	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3081	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3082	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3138	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3139	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3189	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3190	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3227	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3228	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4081	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6028	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6066	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7045	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7072	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7195	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7196	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7602_LCD	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R9007_650	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R2054	2007-000141	R-CHIP;2.2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4085	2007-000141	R-CHIP;2.2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5030	2007-000141	R-CHIP;2.2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1030_LCD	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1060	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3520	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3522	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3524	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3526	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4016	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4018	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4020	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4066	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4071	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4074	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4077	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4551	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4552	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4553	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4554	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R4755	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4756	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5017	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6015	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6021	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6023	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6038	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6048	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6053	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6100	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6101	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6102	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7017	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7033	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7034	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7036	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7037	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7064	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7156	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7174	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7352	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7353_OP	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7356	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7357_OP	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7800	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3044_EU	2007-000146	R-CHIP;6.8Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3067_EU	2007-000146	R-CHIP;6.8Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1013	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1015	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1023_LCD	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1073	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1180	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1181	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R2023	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R2027	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3168	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3252	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3253	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3310	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3311	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4017	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4019	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4023	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4027	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4078	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4150	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4152	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5111	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6847	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7103	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7351	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R7411_LCD	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7600_LCD	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7601_LCD	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7603_LCD	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7604_LCD	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8012	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8014_EU	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8015_EU	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8020_EU	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R9028_650	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3028_EU	2007-000149	R-CHIP;12Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R3032_EU	2007-000149	R-CHIP;12Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R3027_EU	2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3033_EU	2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4021	2007-000155	R-CHIP;27Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1011	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R2019	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3040_EU	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3042_EU	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3058_EU	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3060_EU	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3126	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3136	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3201	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3204	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3521	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3523	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3525	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3527	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3820	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4151	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R9008_650	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R9029_650	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5110	2007-000159	R-CHIP;56Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5038	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3038_EU	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3049_EU	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3077_EU	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3103_OP	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3125	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3169	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3170	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3200	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3202	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3203	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3220	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3250	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3251	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3258	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3259	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3284	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R3285	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3289	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3290	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3400	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3500	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3751_EU	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3752_EU	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3753_EU	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3860	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4041	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4084	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4086	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4250	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5006	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5007	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5011	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5033	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5035	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6013	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6061	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6068	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6848	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7002	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7003	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7004	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7007	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7014	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7015	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7018	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7035	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7038	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7048	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7079	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7080	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7081	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7082	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7083	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7084	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7104	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7118	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7119	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7133	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7134	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7135	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7141	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7142	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7144	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7150_650	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7151_650	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7161	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7167	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R7168	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7177	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7201	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7202	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7204_120H	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7230_120H	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7234	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7244_120H	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7245_120H	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7246_120H	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7284_LCD	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7294_120H	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7295_120H	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8016_EU	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3288	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3300	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3301	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3302	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3303	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3722	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4038	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R2047	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3240	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3244	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4036	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4750	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4751	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4752	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4850	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4851	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5216	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5217	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5218	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6031	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6125	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6126	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6211	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6212	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6213	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6214	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6215	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6216	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7115	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7159	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7175	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7650	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7651	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R8021	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3008	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3083	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3256	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R3257	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4039	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4040	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6184	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6810	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6811	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6812	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6813	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6814	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6815	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6816	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6817	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6818	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6819	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6820	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6821	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6822	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6823	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6824	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6825	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6826	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6827	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6828	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6829	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6830	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6831	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6832	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6833	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6834	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6835	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6836	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6837	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6838	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6839	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6840	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6841	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6842	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6843	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6844	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6845	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7310	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1018	2007-000239	R-CHIP;1.5Kohm,1%,1/10W,TP,1608	1	S.N.A	
....4	R6089	2007-000259	R-CHIP;1.6Kohm,5%,1/10W,TP,1608	1	S.A	
....4	R5112	2007-000287	R-CHIP;100ohm,1%,1/10W,TP,1608	1	S.N.A	
....4	R7105	2007-000287	R-CHIP;100ohm,1%,1/10W,TP,1608	1	S.N.A	
....4	R7147	2007-000287	R-CHIP;100ohm,1%,1/10W,TP,1608	1	S.N.A	
....4	R2064	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R2065	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R2066	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R2067	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R2068	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R2069	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R2070	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R2071	2007-000362	R-CHIP;12ohm,5%,1/10W,TP,1608	1	S.A	
....4	R5001	2007-000402	R-CHIP;150ohm,5%,1/10W,TP,1608	1	S.A	
....4	R3001_EU	2007-000458	R-CHIP;18Kohm,5%,1/10W,TP,1608	1	S.A	
....4	R3055_EU	2007-000458	R-CHIP;18Kohm,5%,1/10W,TP,1608	1	S.A	
....4	R5031	2007-000566	R-CHIP;220Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5026	2007-000591	R-CHIP;22ohm,1%,1/10W,TP,1608	1	S.A	
....4	R5041	2007-000591	R-CHIP;22ohm,1%,1/10W,TP,1608	1	S.A	
....4	R5052_STU	2007-000606	R-CHIP;240ohm,1%,1/10W,TP,1608	1	S.A	
....4	R5053_STU	2007-000606	R-CHIP;240ohm,1%,1/10W,TP,1608	1	S.A	
....4	R1800	2007-000608	R-CHIP;240ohm,5%,1/10W,TP,1608	1	S.A	
....4	R5045	2007-000669	R-CHIP;2Kohm,1%,1/10W,TP,1608	1	S.N.A	
....4	R7160	2007-000729	R-CHIP;300ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R7176	2007-000729	R-CHIP;300ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R5044	2007-000755	R-CHIP;330Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R5039	2007-000758	R-CHIP;330Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5037	2007-000763	R-CHIP;330ohm,1%,1/10W,TP,1608	1	S.N.A	
....4	R1012	2007-000803	R-CHIP;36Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R3004_EU	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3005_EU	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R4015	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6067	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R9018_650	2007-000982	R-CHIP;5.6Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R9030_650	2007-000982	R-CHIP;5.6Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R1014	2007-001179	R-CHIP;8.2Kohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R8028_EU	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R9022_650	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5211_650	2007-001301	R-CHIP;68ohm,5%,1/16W,TP,1005	1	S.A	
....4	R7194	2007-001308	R-CHIP;200ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3111	2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3112	2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3113	2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3114	2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7410_LCD	2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1004	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R1007	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R1008	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R1009	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R5056	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R5102	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R9001_650	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.N.A	
....4	R1021	2007-002899	R-CHIP;10ohm,1%,1/10W,TP,1608	1	S.A	
....4	R1017	2007-002900	R-CHIP;11Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R3721	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R3723	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5070	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5210	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5213	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5214	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R5215	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R9023_650	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R9024_650	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R9025_650	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R9026_650	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R6846	2007-007095	R-CHIP;390ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R1010	2007-007107	R-CHIP;100Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R5034	2007-007107	R-CHIP;100Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R2057	2007-007136	R-CHIP;4.7Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R8013_EU	2007-007136	R-CHIP;4.7Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R1019	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R4028	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R4030	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R4089	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R4156	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R4753	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R4754	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R2055	2007-007197	R-CHIP;3.3ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R2056	2007-007197	R-CHIP;3.3ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R7193	2007-007222	R-CHIP;6.04Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R1016	2007-007312	R-CHIP;20Kohm,1%,1/16W,TP,1005	1	S.A	
....4	R1022	2007-007312	R-CHIP;20Kohm,1%,1/16W,TP,1005	1	S.A	
....4	R1071	2007-007316	R-CHIP;3.3Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R5036	2007-007469	R-CHIP;110ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R1070	2007-007671	R-CHIP;11Kohm,1%,1/16W,TP,1005	1	S.A	
....4	R7190	2007-007698	R-CHIP;5.1Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R7191	2007-007698	R-CHIP;5.1Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R7116	2007-007797	R-CHIP;44.2ohm,1%,1/10W,TP,1608	1	S.A	
....4	R7117	2007-007797	R-CHIP;44.2ohm,1%,1/10W,TP,1608	1	S.A	
....4	R3002_EU	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3006_EU	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3009	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3011	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3012	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3029	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3030	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3031	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3045	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3047_EU	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3050	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3057_EU	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3137	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3208	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3209	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3210	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3241	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R3242	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R5032	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R6280	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R6281	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R6282	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R9014_650	2007-008298	R-CHIP;49.9ohm,1%,1/16W,TP,1005	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R9015_650	2007-008298	R-CHIP;49.9ohm,1%,1/16W,TP,1005	1	S.A	
....4	R9016_650	2007-008298	R-CHIP;49.9ohm,1%,1/16W,TP,1005	1	S.A	
....4	R9017_650	2007-008298	R-CHIP;49.9ohm,1%,1/16W,TP,1005	1	S.A	
....4	R1020	2007-008593	R-CHIP;750ohm,1%,1/16W,TP,1005	1	S.A	
....4	RA5005	2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA5006	2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA8006	2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA8007	2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA8008	2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA2001	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA2002	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA2003	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA2007	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA4001	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA4044	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA4045	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA4048	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA4051	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA5004	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA6013	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7002	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7003	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7004	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7005	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7006	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7007	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7008	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7009	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7010	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7011	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7012	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7039	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7041	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7042	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7043	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7044	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7045	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7046	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7047	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7048	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7049	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7050	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7051	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7052	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7062	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7500	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA7501	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA8017_CI	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA8018_CI	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA8019_CI	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	
....4	RA9001_650	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	S.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	RA5003	2011-001344	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA7056	2011-001344	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA7057	2011-001344	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA2004	2011-001345	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA2005	2011-001345	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA2006	2011-001345	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA8010_EU	2011-001345	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA6018	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7013	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7014	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7015	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7020	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7038	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7040	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7053	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7054	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7061	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7502	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA7503	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	S.N.A	
....4	RA3011	2011-001397	R-NETWORK;47Kohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA3012	2011-001397	R-NETWORK;47Kohm,5%,1/16W,L,CHIP,8P,TP,2	1	S.N.A	
....4	RA3035	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,4P,T,1010	1	S.N.A	
....4	RA3650_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,4P,T,1010	1	S.N.A	
....4	RA3651_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,4P,T,1010	1	S.N.A	
....4	RA3652_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,4P,T,1010	1	S.N.A	
....4	RA3653_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,4P,T,1010	1	S.N.A	
....4	RA3654_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,4P,T,1010	1	S.N.A	
....4	RA3655_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,4P,T,1010	1	S.N.A	
....4	RA3666_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,4P,T,1010	1	S.N.A	
....4	RA3667_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,4P,T,1010	1	S.N.A	
....4	RA3668_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,4P,T,1010	1	S.N.A	
....4	RA3669_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,4P,T,1010	1	S.N.A	
....4	RA3670_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,4P,T,1010	1	S.N.A	
....4	RA3671_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,4P,T,1010	1	S.N.A	
....4	RA3672_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,4P,T,1010	1	S.N.A	
....4	RA3673_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,4P,T,1010	1	S.N.A	
....4	RA3674_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,4P,T,1010	1	S.N.A	
....4	RA3675_OP	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,4P,T,1010	1	S.N.A	
....4	RA5013	2011-001448	R-NETWORK;10ohm,5%,1/16W,L,4P,T,1010	1	S.N.A	
....4	RA3006	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,4P,TP,1010	1	S.N.A	
....4	RA3007	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,4P,TP,1010	1	S.N.A	
....4	RA3008	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,4P,TP,1010	1	S.N.A	
....4	RA3009	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,4P,TP,1010	1	S.N.A	
....4	RA3016	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,4P,TP,1010	1	S.N.A	
....4	RA4010	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,4P,TP,1010	1	S.N.A	
....4	RA4046	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,4P,TP,1010	1	S.N.A	
....4	RA6020	2011-001449	R-NETWORK;22ohm,5%,1/16W,L,4P,TP,1010	1	S.N.A	
....4	RA2008	2011-001497	R-NETWORK;470ohm,5%,1/16W,L,CHIP,4P,TP,1	1	S.N.A	
....4	RA3018	2011-001497	R-NETWORK;470ohm,5%,1/16W,L,CHIP,4P,TP,1	1	S.N.A	
....4	RA9003_650	2011-001497	R-NETWORK;470ohm,5%,1/16W,L,CHIP,4P,TP,1	1	S.N.A	
....4	RA6019	2011-001506	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,4P,TP,1	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	RA6119	2011-001506	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,4P,TP,1	1	S.N.A	
....4	RA8011_EU	2011-001506	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,4P,TP,1	1	S.N.A	
....4	RA3015	2011-001519	R-NETWORK;33OHM,5%,1/16W,L,CHIP,4P,TP,1.	1	S.N.A	
....4	RA4018	2011-001519	R-NETWORK;33OHM,5%,1/16W,L,CHIP,4P,TP,1.	1	S.N.A	
....4	RA5012	2011-001519	R-NETWORK;33OHM,5%,1/16W,L,CHIP,4P,TP,1.	1	S.N.A	
....4	RA3017	2011-001527	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,4P,TP,	1	S.N.A	
....4	RA6021	2011-001527	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,4P,TP,	1	S.N.A	
....4	RA7034	2011-001527	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,4P,TP,	1	S.N.A	
....4	RA7065	2011-001527	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,4P,TP,	1	S.N.A	
....4	RA7066_650	2011-001527	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,4P,TP,	1	S.N.A	
....4	RA3014	2011-001586	R-NETWORK;1Kohm,5%,1/16W,L,CHIP-V,4P,TP,	1	S.A	
....4	RA3031	2011-001586	R-NETWORK;1Kohm,5%,1/16W,L,CHIP-V,4P,TP,	1	S.A	
....4	RA3036	2011-001586	R-NETWORK;1Kohm,5%,1/16W,L,CHIP-V,4P,TP,	1	S.A	
....4	RA6022	2011-001586	R-NETWORK;1Kohm,5%,1/16W,L,CHIP-V,4P,TP,	1	S.A	
....4	RA3010	2011-001587	R-NETWORK;100ohm,5%,1/16W,L,CHIP-V,4P,TP	1	S.A	
....4	RA3013	2011-001587	R-NETWORK;100ohm,5%,1/16W,L,CHIP-V,4P,TP	1	S.A	
....4	RA4016	2011-001587	R-NETWORK;100ohm,5%,1/16W,L,CHIP-V,4P,TP	1	S.A	
....4	RA4017	2011-001587	R-NETWORK;100ohm,5%,1/16W,L,CHIP-V,4P,TP	1	S.A	
....4	RA3030_EU	2011-001588	R-NETWORK;75ohm,5%,1/16W,L,CHIP-V,4P,TP,	1	S.A	
....4	RA6009	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA6010	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA6011	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA6012	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA7060	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA7079	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA7600	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA7601	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA7900	2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	S.A	
....4	RA3032	2011-001590	R-NETWORK;47Kohm,5%,1/16W,L,CHIP-V,4P,TP	1	S.A	
....4	RA3072	2011-001590	R-NETWORK;47Kohm,5%,1/16W,L,CHIP-V,4P,TP	1	S.A	
....4	C2080	2203-000125	C-CER,CHIP;1.2nF,10%,50V,X7R,TP,1608,-	1	S.A	
....4	C2081	2203-000125	C-CER,CHIP;1.2nF,10%,50V,X7R,TP,1608,-	1	S.A	
....4	C2082	2203-000125	C-CER,CHIP;1.2nF,10%,50V,X7R,TP,1608,-	1	S.A	
....4	C2083	2203-000125	C-CER,CHIP;1.2nF,10%,50V,X7R,TP,1608,-	1	S.A	
....4	C2040	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3001	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3002_EU	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3013	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3015	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3021	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3022	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3029	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3033_EU	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3045	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3066	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3250	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C3251	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C2036	2203-000280	C-CER,CHIP;0.01nF,0.5pF,50V,C0G,1608	1	S.A	
....4	C6857	2203-000357	C-CER,CHIP;0.15nF,5%,50V,C0G,1608	1	S.N.A	
....4	C7137	2203-000384	C-CER,CHIP;0.015nF,5%,50V,C0G,1608	1	S.N.A	
....4	C9017_650	2203-000384	C-CER,CHIP;0.015nF,5%,50V,C0G,1608	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C9019_650	2203-000384	C-CER,CHIP;0.015nF,5%,50V,C0G,1608	1	S.N.A	
....4	C1001	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C1029	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C1041_LCD	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C1768	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C2033	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C2034	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C4003	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C4012	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C4025	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C6090	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C1027	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C3014_EU	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C3016_EU	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C3024	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C3025	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C5001	2203-000550	C-CER,CHIP;0.02nF,5%,50V,C0G,1005	1	S.N.A	
....4	C5002	2203-000550	C-CER,CHIP;0.02nF,5%,50V,C0G,1005	1	S.N.A	
....4	C2070	2203-000575	C-CER,CHIP;220nF,10%,25V,X7R,TP,2012	1	S.N.A	
....4	C2071	2203-000575	C-CER,CHIP;220nF,10%,25V,X7R,TP,2012	1	S.N.A	
....4	C2072	2203-000575	C-CER,CHIP;220nF,10%,25V,X7R,TP,2012	1	S.N.A	
....4	C2073	2203-000575	C-CER,CHIP;220nF,10%,25V,X7R,TP,2012	1	S.N.A	
....4	C2074	2203-000575	C-CER,CHIP;220nF,10%,25V,X7R,TP,2012	1	S.N.A	
....4	C2075	2203-000575	C-CER,CHIP;220nF,10%,25V,X7R,TP,2012	1	S.N.A	
....4	C5100	2203-000585	C-CER,CHIP;0.22nF,10%,50V,X7R,1005	1	S.A	
....4	C4009	2203-000679	C-CER,CHIP;0.027nF,5%,50V,C0G,1005	1	S.A	
....4	C4010	2203-000679	C-CER,CHIP;0.027nF,5%,50V,C0G,1005	1	S.A	
....4	C5003	2203-000697	C-CER,CHIP;0.002NF,0.25PF,50V,C0G,TP,160	1	S.A	
....4	C5004	2203-000697	C-CER,CHIP;0.002NF,0.25PF,50V,C0G,TP,160	1	S.A	
....4	C7048	2203-000761	C-CER,CHIP;330nF,10%,16V,X7R,TP,2012,-	1	S.N.A	
....4	C3006	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C3007	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C3008	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C3011_EU	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C3012_EU	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C3018	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C3019	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C3020	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,-,1005	1	S.A	
....4	C1120	2203-000995	C-CER,CHIP;0.047nF,5%,50V,C0G,1005	1	S.A	
....4	C3017	2203-000995	C-CER,CHIP;0.047nF,5%,50V,C0G,1005	1	S.A	
....4	C3023_EU	2203-000995	C-CER,CHIP;0.047nF,5%,50V,C0G,1005	1	S.A	
....4	C4018	2203-000995	C-CER,CHIP;0.047nF,5%,50V,C0G,1005	1	S.A	
....4	C4020	2203-000995	C-CER,CHIP;0.047nF,5%,50V,C0G,1005	1	S.A	
....4	C5031_650	2203-001072	C-CER,CHIP;0.056nF,5%,50V,NP0,1005	1	S.A	
....4	C2038	2203-001126	C-CER,CHIP;0.68nF,10%,50V,X7R,1608	1	S.N.A	
....4	C5035	2203-001412	C-CER,CHIP;0.03nF,5%,50V,NP0,TP,1005	1	S.N.A	
....4	C5036	2203-001412	C-CER,CHIP;0.03nF,5%,50V,NP0,TP,1005	1	S.N.A	
....4	C5037	2203-001412	C-CER,CHIP;0.03nF,5%,50V,NP0,TP,1005	1	S.N.A	
....4	C5038	2203-001412	C-CER,CHIP;0.03nF,5%,50V,NP0,TP,1005	1	S.N.A	
....4	C5039_OP	2203-001596	C-CER,CHIP;2200nF,+80-20%,50V,Y5V,2012	1	S.A	
....4	C5060_OP	2203-001596	C-CER,CHIP;2200nF,+80-20%,50V,Y5V,2012	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C1005	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C1007	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C1008	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C2006	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C2007	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C4008	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C4011	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C4019	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C4021	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C4022	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C4024	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C4100	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C5023	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C6061	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C6077	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C6099	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C6113	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C6114	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C7018	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C7136	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C7139_LCD	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C5010	2203-002494	C-CER,CHIP;470nF,10%,16V,X7R,2012	1	S.N.A	
....4	C7050	2203-005138	C-CER,CHIP;1.8nF,10%,50V,X7R,1005	1	S.A	
....4	C7051	2203-005138	C-CER,CHIP;1.8nF,10%,50V,X7R,1005	1	S.A	
....4	C7052	2203-005138	C-CER,CHIP;1.8nF,10%,50V,X7R,1005	1	S.A	
....4	C1004	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C1022	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C1024	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C1048_LCD	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C1148_LCD	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C1149_LCD	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C1150_LCD	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2047	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2048	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2049	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2050	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2051	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2052	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2060	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2061	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2062	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2063	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2066	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2067	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2068	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2069	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2076	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2077	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2078	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C2079	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C5021	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C6056	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6057	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6058	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6059	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6062	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6063	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6073	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6074	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6075	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6078	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6094	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6095	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6096	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C6100	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7011	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7017	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7049	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7109_650	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7114	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7115	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7121	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7122	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	S.N.A	
....4	C7009	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7016	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7025	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7029	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7059	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7063	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7065	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7073	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7096	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7105	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7106	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7148	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7157	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7173	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7205	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C7210	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	S.N.A	
....4	C3063	2203-005393	C-CER,CHIP;0.005nF,0.1pF,50V,NP0,TP,1005	1	S.N.A	
....4	C6044	2203-005493	C-CER,CHIP;220nF,+80-20%,16V,Y5V,1005	1	S.A	
....4	C6045	2203-005493	C-CER,CHIP;220nF,+80-20%,16V,Y5V,1005	1	S.A	
....4	C7053	2203-005659	C-CER,CHIP;0.18nF,5%,50V,NP0,1005	1	S.N.A	
....4	C1032	2203-005834	C-CER,CHIP;22000nF,+80-20%,10V,Y5V,3216	1	S.A	
....4	C1035	2203-005834	C-CER,CHIP;22000nF,+80-20%,10V,Y5V,3216	1	S.A	
....4	C1036	2203-005834	C-CER,CHIP;22000nF,+80-20%,10V,Y5V,3216	1	S.A	
....4	C5025_OP	2203-005834	C-CER,CHIP;22000nF,+80-20%,10V,Y5V,3216	1	S.A	
....4	C5034	2203-005834	C-CER,CHIP;22000nF,+80-20%,10V,Y5V,3216	1	S.A	
....4	C2041	2203-005968	C-CER,CHIP;4.7NF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C6091	2203-005968	C-CER,CHIP;4.7NF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C9020_650	2203-006039	C-CER,CHIP;1nF,10%,2000V,X7R,3216	1	S.A	
....4	C9021_650	2203-006039	C-CER,CHIP;1nF,10%,2000V,X7R,3216	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C5337	2203-006104	C-CER,CHIP;1000nF,10%,50V,X7R,3225	1	S.A	
....4	C3997	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C3998	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C6098	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C1013	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.N.A	
....4	C1019	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.N.A	
....4	C1025	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.N.A	
....4	C1028	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.N.A	
....4	C1060	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.N.A	
....4	C7084	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.N.A	
....4	C7310	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.N.A	
....4	C7601_LCD	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.N.A	
....4	C1002	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1003	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1006	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1012	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1014	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1030	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1034	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1070	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1071	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1080	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1090	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1091	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1092	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C1801	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C2037	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C2039	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C2042	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C2043	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C2044	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C2045	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3046	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3051	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3054	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3055	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3056	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3057	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3065	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3070	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3071	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3072	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3100	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3101	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C3102	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4002	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4006	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4013	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4014	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4016	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4023	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C4026	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4050	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C4103	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5011	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5020	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5024	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5027	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5070	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5071	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5072	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5073	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5112	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6027	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6028	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6033	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6042	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6043	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6048	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6052	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6053	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6064	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6065	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6066	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6067	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6068	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6069	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6070	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6079	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6080	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6081	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6082	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6083	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6084	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6085	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6086	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6087	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6088	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6089	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6101	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6105	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6109	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6110	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6111	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6112	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6115	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6116	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C6153	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7012	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7013	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7019	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7020	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C7034	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7038	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7043	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7054	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7055	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7056	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7062	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7064	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7068	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7069	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7074	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7075	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7078	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7081	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7083	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7086	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7087	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7088	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7094	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7095	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7098	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7099	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7100_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7107	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7112	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7113	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7116	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7117	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7134	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7140	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7142	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7143	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7146	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7147	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7149	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7152	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7160	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7161	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7164	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7165	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7168	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7169	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7172	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7176	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7177	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7180	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7181	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7185	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7200	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7201	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7202	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C7203	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7206	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7211	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7220	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7221	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7222	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7223	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7224	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7225	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7226	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7227	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7228	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7301	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7302	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7400	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7402	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7403	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7404	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7405	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7406	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7407	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7408	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7409	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7410	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7411	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7412	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7413	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7414	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7416	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7417	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7418	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7419	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7420	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7423	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7750	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7751	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7752	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7753	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7754	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7755	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7756	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7757	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7758	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7759	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7760	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7761	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7770	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7771	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7772	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7773	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7880	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C7881	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7900	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C7901	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8001	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8002	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8003	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8004	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8007_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8011_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8012	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8013_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8014_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8015_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8016_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8017_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8018_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C8019_EU	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9001_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9003_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9004_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9005_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9006_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9007_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9009_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9010_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9011_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9012_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9013_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9014_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9015_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9016_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9018_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9023_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9024_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9101_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9103_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9105_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C9107_650	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C5012	2203-006336	C-CER,CHIP;10000nF,10%,25V,X5R,3216	1	S.A	
....4	C1016	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C1017	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C1020	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C1021	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C1023	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C1031	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C1033	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C1050	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2001	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2003	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2005	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2011	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C2014	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2031	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2032	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2035	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2046	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2055	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2064	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2065	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3009_EU	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3010_EU	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3037	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3043	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3053	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3067	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3068	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3069	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3073	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C3810	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C4001	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C4015	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C5005	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C5018	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C5028	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C5032	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C5111	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C5336	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6001	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6011	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6022	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6029	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6030	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6031	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6032	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6046	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6049	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6050	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6054	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6055	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6071	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6072	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6092	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C6093	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7001	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7004	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7005	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7006	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7007	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7008	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7021	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7085_650	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7108	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C7110	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7130	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7132	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C7133	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C8010_EU	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C9002_650	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C9008_650	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C9022_650	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C9100_650	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C9102_650	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C9104_650	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C9106_650	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C9900_650	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	1	S.A	
....4	C2084	2203-006382	C-CER,CHIP;10000nF,10%,25V,X7R,TP,3225	1	S.N.A	
....4	C2085	2203-006382	C-CER,CHIP;10000nF,10%,25V,X7R,TP,3225	1	S.N.A	
....4	C2086	2203-006382	C-CER,CHIP;10000nF,10%,25V,X7R,TP,3225	1	S.N.A	
....4	C2087	2203-006382	C-CER,CHIP;10000nF,10%,25V,X7R,TP,3225	1	S.N.A	
....4	C1040_LCD	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C1042_LCD	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2019	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2020	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2021	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2022	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2023	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2024	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2025	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2026	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2027	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2028	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2029	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C2030	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C3103	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C3104	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C3105	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C3106	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C3320	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C4004	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6005	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6014	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6040	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6041	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6060	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6076	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6097	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6851	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6852	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6853	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C6854	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7003	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7028	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	
....4	C7030	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	S.N.A	

5. Exploded View & Part List

[illegible]

5. Exploded View & Part List

[illegible]


5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0313	3404-001207	SWITCH-TACT;12V,50mA,160gf,6.2X6.2,SPST	1	S.A	
....4	CN3013	3701-001367	CONNECTOR-HDMI;19P,2R,FEMALE,SMD,AU	1	S.A	
....4	CN3015	3701-001367	CONNECTOR-HDMI;19P,2R,FEMALE,SMD,AU	1	S.A	
....4	CN3016	3701-001367	CONNECTOR-HDMI;19P,2R,FEMALE,SMD,AU	1	S.A	
....4	CN330	3711-005477	HEADER-BOARD TO CABLE;BOX,4P,1R,2mm,SMD-	1	S.A	
....4	CN330	3711-005499	HEADER-BOARD TO CABLE;BOX,8P,1R,1.25mm,S	1	S.N.A	
....4	CN330	3711-005925	HEADER-BOARD TO CABLE;BOX,51P,1R,0.5mm,S	1	S.N.A	
....4	CN330	3711-005939	HEADER-BOARD TO CABLE;BOX,3P,1R,2mm,SMD-	1	S.N.A	
....4	T0077	BN41-01167B	PCB MAIN;Chelsea-Arsnal,FR-4,4,MP1.1,1.2	1	S.N.A	
....4	M0018	BN97-03211A	ASSY MICOM;KFH8GH6U4M-DIB6,N68A,2008.11.	1	S.N.A	
.....5	IC7002	1107-001740	IC-NAND FLASH;KFH8GH6U4M-DIB6,8Gbit,512M	1	S.A	
....4	M0018	BN97-03213A	ASSY MICOM;WT61P8-RG480WT,N68A,2008.11.2	1	S.N.A	
.....5	IC520	0903-001552	IC-MICROCONTROLLER;WT61P8-RG480WT,LQFP,4	1	S.N.A	
....4	T0010	BP27-00002A	COIL CHOKE;SLF6028T-220MR77,22uF,20%,,,,,	1	S.A	
0.1	M0112	BN91-03743A	ASSY SHIELD;LE52B750U1WXXC	1	S.N.A	
..2	BR/LINK+PA	6003-000337	SCREW-TAPTYPE;BH,+ ,S,M4,L10,ZPC(BLK),SWR	4	S.N.A	
..2	BR/WALL+PA	6003-000337	SCREW-TAPTYPE;BH,+ ,S,M4,L10,ZPC(BLK),SWR	4	S.N.A	
..2	BR/LINK+H/	6003-001188	SCREW-TAPTYPE;BH,+,- ,B,M4,L10,ZPC(WHT),S	4	S.N.A	
..2	BR/TOP+C/F	6003-001188	SCREW-TAPTYPE;BH,+,- ,B,M4,L10,ZPC(WHT),S	2	S.N.A	
..2	BR/TOP+H/B	6003-001188	SCREW-TAPTYPE;BH,+,- ,B,M4,L10,ZPC(WHT),S	2	S.N.A	
..2	GROUND	6003-001439	SCREW-TAPTYPE;BH,+,- ,S,M4,L8,ZPC(WHT),SW	1	S.N.A	
..2	M2893	BN39-00830B	LEAD CONNECTOR;LNT4642HX/XAA,UL1061#28,7	1	S.A	
..2	M2893	BN39-01021D	LEAD CONNECTOR;LB6T,UL3239#24,2P,1200mm,	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
..2	M2893	BN39-01099B	LEAD CONNECTOR;LN55A950D1FXZA,UL1007#26,	1	S.A	
..2	M0174	BN44-00287A	IP BOARD;IP-361609F,I52F2_9SS,146mA,166m	1	S.A	
..2	M0115	BN61-04788A	BRACKET-STAND LINK;46, B610,SECC,T2.0	1	S.N.A	
..2	M0254	BN61-04800A	HOLDER-SIDE AV;EO,ABS+PMMA,HB,BK23,H/GLO	1	S.N.A	
...3		BN81-00204P	RESIN-HIGH GLOSS;HAM 8560,SF-0505,K21294	17.3	S.N.A	
..2	T0101	BN61-04817A	BRACKET-WALL;46, B610,SECC,T1.6	4	S.N.A	
..2	M0146	BN61-04819A	BRACKET-PANEL TOP;B650-46,SECC,T1.2	4	S.N.A	
..2		BN63-05259A	COVER-MAIN;EO,ABS+PMMA,HB,BK23,H/GLOSSY	1	S.N.A	
...3		BN81-00204P	RESIN-HIGH GLOSS;HAM 8560,SF-0505,K21294	0.015	S.N.A	
..2	M0230	BN96-10074A	ASSY CABLE P-FPCB LVDS;LA46A650A1,FPCB L	1	S.A	
..2	T0081	6001-002284	SCREW-MACHINE;BH,+,M4,L8,ZPC(WHT),SWRCH1	6	S.A	
..2	T0081	6001-002284	SCREW-MACHINE;BH,+,M4,L8,ZPC(WHT),SWRCH1	6	S.A	
0.1	M0019	BN92-04476B	ASSY LABEL;LE46B750U1WXXC	1	S.N.A	
0.1	M0045	BN92-04477C	ASSY ACCESSORY;LE52B750U1WXXC	1	S.N.A	
..2	M0045	BN96-10041A	ASSY ACCESSORY-MANUAL;LE40B750U1WXXC	1	S.A	
...3	T0524	6902-000110	BAG PE;LDPE,T0.05,W250,L400,TRP,28,2,-,9	1	S.N.A	
...3		AA68-03242Q	MANUAL FLYER-02,SAFETY GUIDE;comm,Samsun	1	S.N.A	
...3	T0076	BN68-00514E	MANUAL FLYER-02,WARRANTY CARD;comm,Samsu	1	S.N.A	
...3		BN68-00907D	MANUAL FLYER-WEEE BATTERY;COMM,SAMSUNG,2	1	S.N.A	
...3		BN68-02004A	MANUAL FLYER-QSG;B750,SAMSUNG,9Langs,W.E	1	S.N.A	
...3		BN96-10411A	ASSY MANUAL P-USB;B750,USB,SAMSUNG,W.EUR	1	S.N.A	
....4		BN59-00893A	S/W DRIVER-USB;HANIL 512,E-manual,HANIL,	1	S.N.A	
...3		BN59-00726D	S/W DRIVER-CD;LN40B650T1F,DLNA,WorldWide	1	S.N.A	
..2	M0045	BN96-10041D	ASSY ACCESSORY-CABEL;LE52B750U1WXXC	1	S.A	
...3	T0268	3903-000145	CBF-POWER CORD;DT,EU,FP3/YES,U(IEC C13-R	1	S.A	
...3	T0524	6902-000110	BAG PE;LDPE,T0.05,W250,L400,TRP,28,2,-,9	1	S.N.A	
...3	T0074	BN59-00860A	REMOCON;LCD850,750,TM970,EUROPE,49	1	S.A	
...3	M9889	BN63-01798B	CLOTH-CLEAN;cloth,180,200,sea blue,ToC	1	S.N.A	
...3	T0531	BN63-05314B	COVER-BOTTOM;52,LB620,HIPS,HB,BK500	1	S.A	
....4		BN81-00199H	RESIN;HIPS HB,BK500,HF-1690H,K2901	81.4	S.N.A	
...3	M0560	BN96-01800A	ASSY ACCESSORY-SCREW ZIPPER;ROME32,-,-,-	1	S.N.A	
....4	T0081	6002-001294	SCREW-TAPPING;BH,+,M4,L16,ZPC(BLK)	4	S.N.A	
....4	ACCESSORY	6902-000683	BAG ZIPPER;LDPE,T0.05,W60,L60,TRP,-,-,4-	1	S.N.A	
...3		BN61-05596A	HOLDER-WIRE CABLE;LED TV,LDPE,T1.1,L150,	1	S.N.A	
0.1	M0113	BN92-04784A	ASSY P/MATERIAL;52,LB750	1	S.N.A	
..2	T0003	6902-000604	BAG WRAPPING;LDPE,T0.02,W500,L10000,TRP,	5	S.N.A	
..2	T0524	6902-001042	BAG PE;HDPE/NITRON,T0.015/T0.5,W1500,L10	1	S.N.A	
..2	T0214	AA61-20285C	HOLDER-BOX;CORAL,PP,BLACK,HB,17.5g	4	S.N.A	
..2	T0214	BN74-00008A	TAPE-OPP MASKING;OPP-2,T0.05,W100,L800M,	1.76	S.N.A	
0.1	M0003	BN92-04787B	ASSY BOX;52,LB750,EO	1	S.N.A	
..2	M0521	BN69-03481A	BOX-SET,IN;52LB610,CB,C-01,DW1(DY-01),YE	1	S.N.A	
..2		BN69-03611B	BOX-SET,OUT;52LB750-S,CB,DW3,YEL,W1547,D	1	S.N.A	

6. Wiring Diagram

6-1. Wiring Diagram

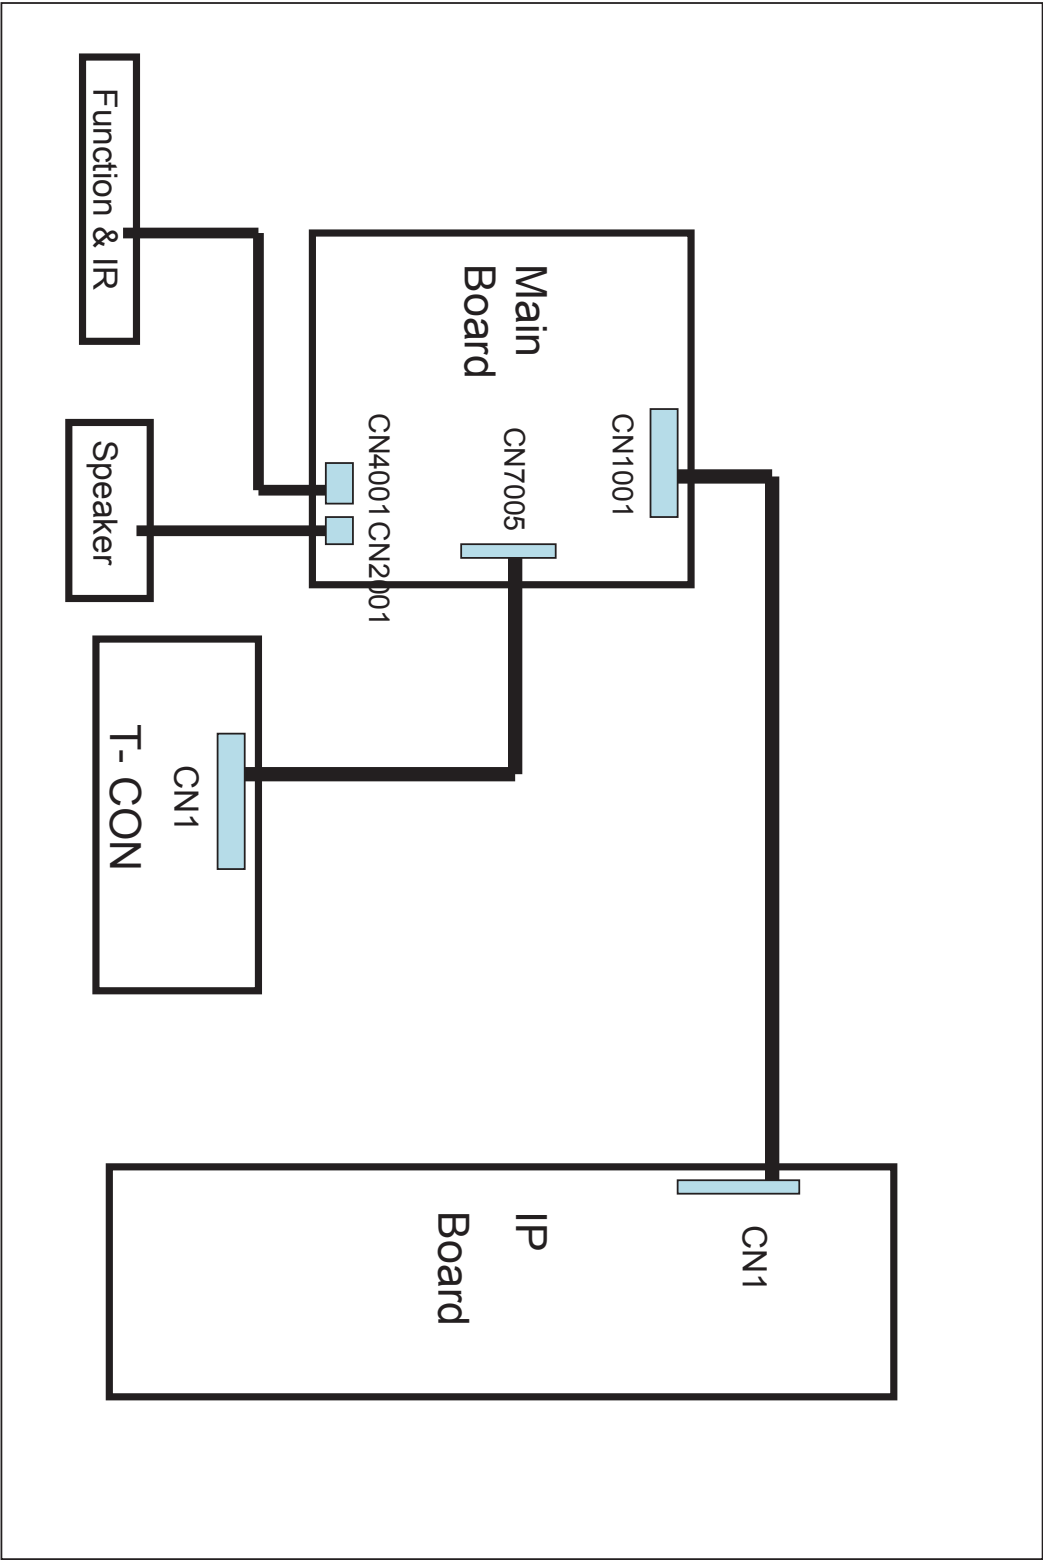

6. Wiring Diagram

CN7005 (to Panel)

1	PDP Start_Opt	26	EVEN TX0+
2	PDP Logic_TX	27	EVEN TX0-
3	SW_PVCC	28	GND
4	SDA4	29	ODD TX4+
5	GND	30	ODD TX4-
6	SCL4	31	ODD TX3+
7	GND	32	ODD TX3-
8	PDP Logic_RX	33	GND
9	NC	34	ODD TXCLK+
10	T-CON-Check	35	ODD TXCLK-
11	EVEN TX5+	36	GND
12	EVEN TX5-	37	ODD TX2+
13	GND	38	ODD TX2-
14	EVEN TX4+	39	ODD TX1+
15	EVEN TX4-	40	ODD TX1-
16	EVEN TX3+	41	ODD TX0+
17	EVEN TX3-	42	ODD TX0-
18	GND	43	GND
19	EVEN TXCLK+	44	ODD TX5+
20	EVEN TXCLK-	45	ODD TX5-
21	GND	46	NC
22	EVEN TX2+	47	12V
23	EVEN TX2-	48	12V
24	EVEN TX1+	49	12V
25	EVEN TX1-	50	12V
		51	12V

CN1001 (POWER)

1	GND	16	5V
2	GND	17	5V
3	DET_5V	18	5V
4	NC	19	GND
5	PWM_DIMMING	20	GND
6	GND	21	GND
7	SW_INVERTER	22	GND
8	ANA_DIMMING	23	12VS
9	13V	24	12VS
10	13V	25	GND
11	13V	26	GND
12	GND	27	A5V
13	GND	28	GND
14	GND	29	SW_POWER
15	5V	30	FRC_M_SYND

CN3004_EU(to Component)

1	GND
2	COMP_IDENT
3	COMP_Y
4	GND
5	COMP_PB
6	COMP_PB
7	GND
8	COMP_PR
9	COMP_PR

CN3005_EU(to Component)

1	GND
2	COMP_SR_IN
3	COMP_SL_IN
4	GND
5	COMP_SL_IN
6	COMP_SR_IN

CN3013(to HDMI)

1	HDMI1_RX2+	12	HDMI1_RXCLK-
2	GND	13	NC
3	HDMI1_RX2-	14	NC
4	HDMI1_RX1+	15	HDMI1_DDC_SCL
5	GND	16	HDMI1_DDC_SDA
6	HDMI1_RX1-	17	GND
7	HDMI1_RX0+	18	IDENT_HDMI1
8	GND	19	HDMI1_HOT_PLUG
9	HDMI1_RX0-	20	GND
10	HDMI1_RXCLK+	21	GND
11	GND		

CN3016(to HDMI2)

1	HDMI2_RX2+	12	HDMI2_RXCLK-
2	GND	13	NC
3	HDMI2_RX2-	14	NC
4	HDMI2_RX1+	15	HDMI2_DDC_SCL
5	GND	16	HDMI2_DDC_SDA
6	HDMI2_RX1-	17	GND
7	HDMI2_RX0+	18	IDENT_HDMI2
8	GND	19	HDMI2_HOT_PLUG
9	HDMI2_RX0-	20	GND
10	HDMI2_RXCLK+	21	GND
11	GND		

CN3010 (to HDMI4)

1	HDMI4_RX2+	12	HDMI4_RXCLK-
2	GND	13	NC
3	HDMI4_RX2-	14	NC
4	HDMI4_RX1+	15	HDMI4_DDC_SCL
5	GND	16	HDMI4_DDC_SDA
6	HDMI4_RX1-	17	GND
7	HDMI4_RX0+	18	IDENT_HDMI4
8	GND	19	HDMI4_HOT_PLUG
9	HDMI4_RX0-	20	GND
10	HDMI4_RXCLK+	21	GND
11	GND		

CN3015(to HDMI3)

1	HDMI3_RX2+	12	HDMI3_RXCLK-
2	GND	13	NC
3	HDMI3_RX2-	14	NC
4	HDMI3_RX1+	15	HDMI3_DDC_SCL
5	GND	16	HDMI3_DDC_SDA
6	HDMI3_RX1-	17	GND
7	HDMI3_RX0+	18	IDENT_HDMI3
8	GND	19	HDMI3_HOT_PLUG
9	HDMI3_RX0-	20	GND
10	HDMI3_RXCLK+	21	GND
11	GND		

CN3011(to PC)

1	PC_RED	9	5V
2	PC_GREEN	10	PC_IDENT
3	PC_BLUE	11	GND
4	GND	12	SDA
5	GND	13	PC_HS
6	GND	14	PC_VS
7	GND	15	SCL
8	GND		

CN3006(to Sound Output)

1	GND
2	MONITOR_SL_OUT
3	MONITOR_SL_OUT
4	GND
5	MONITOR_SR_OUT
6	MONITOR_SR_OUT

CN2001(Speaker Out)

1	R- OUT
2	R+ OUT
3	L- OUT
4	L+ OUT

OP3001(Optical Jack)

1	VIN
2	VCC
3	GND

CN3009(to Video)

1	GND
2	VIDEO_SL_IN
3	VIDEO_SR_IN
4	GND
5	VIDEO_SR_IN
6	VIDEO_SL_IN
7	GND
8	VIDEO_IDENT
9	VIDEO_CVBS

CN3014 (to Service Jack)

1	GND
2	RX
3	TX
4	RX
5	RX
6	TX
7	TX

CN7006(USB1)

1	VCC
2	DM
3	DP
4	GND

CN7002_650(USB2)

1	VCC
2	DM
3	DP
4	GND

CN4001 (to Function)

1	IR
2	GND
3	A3.3V
4	LED_STB
5	BUZZER
6	KEY_INPUT1
7	KEY_INPUT2
8	MSDA_5V
9	A5V
10	MSCL_5V
11	LED_CNTR
12	A5V

6-2. Wiring Picture



6-3. Connector Functions

Connector	Functions
Panel <-> CN7005	The LVDS signal transferred Panel to Main Board. * defective symptom : No picture but normal sound
IP, SMPS <-> CN1001	Supply dimming and main power from IP, SMPS to Main Board. * defective symptom : No picture, repeat power On/Off

6-4



GSPN (Global Service Partner Network)

Area	Web Site
North America	http://service.samsungportal.com
Latin America	http://latin.samsungportal.com
CIS	http://cis.samsungportal.com
Europe	http://europe.samsungportal.com
China	http://china.samsungportal.com
Asia	http://asia.samsungportal.com
Mideast & Africa	http://mea.samsungportal.com

This Service Manual is a property of Samsung Electronics Co.,Ltd.
Any unauthorized use of Manual can be punished under applicable
International and/or domestic law.

© 2009 Samsung Electronics Co.,Ltd.
All rights reserved.
Printed in Korea
P/N: BN82-00559A-00