



website: <http://biz.LGservice.com>  
e-mail: <http://www.LGservice.com/techsup.html>


# PLASMA MONITOR SERVICE MANUAL

**CHASSIS : RF-02KE**

**MODEL : MU-50PZ41V MU-50PZ41VB**

## **CAUTION**

BEFORE SERVICING THE CHASSIS,  
READ THE SAFETY PRECAUTIONS IN THIS MANUAL.

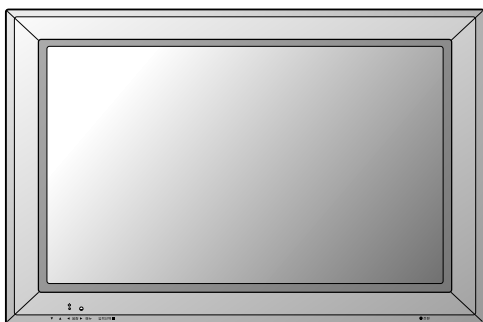

# CONTENTS

SAFETY PRECAUTIONS .....	3
DISCRIPTION OF CONTROLS .....	4
ADJUSTMENT INSTRUCTIONS .....	6
BLOCK DIAGRAM.....	9
EXPLODED VIEW .....	10
EXPLODED VIEW PARTS LIST .....	11
REPLACEMENT PARTS LIST .....	12
SCHEMATIC DIAGRAM .....	
PRINTED CIRCUIT BOARD .....	

# SAFETY PRECAUTIONS

## IMPORTANT SAFETY NOTICE

Many electrical and mechanical parts in this chassis have special safety-related characteristics. These parts are identified by  $\Delta$  in the Schematic Diagram and Replacement Parts List.

It is essential that these special safety parts should be replaced with the same components as recommended in this manual to prevent X-RADIATION, Shock, Fire, or other Hazards.

Do not modify the original design without permission of manufacturer.

### General Guidance

An **Isolation Transformer should always be used** during the servicing of a receiver whose chassis is not isolated from the AC power line. Use a transformer of adequate power rating as this protects the technician from accidents resulting in personal injury from electrical shocks.

It will also protect the receiver and its components from being damaged by accidental shorts of the circuitry that may be inadvertently introduced during the service operation.

If any fuse (or Fusible Resistor) in this monitor is blown, replace it with the specified.

When replacing a high wattage resistor (Oxide Metal Film Resistor, over 1W), keep the resistor 10mm away from PCB.

Keep wires away from high voltage or high temperature parts.

Due to high vacuum and large surface area of picture tube, extreme care should be used in **handling the Picture Tube**. Do not lift the Picture tube by its Neck.

### Leakage Current Cold Check(Antenna Cold Check)

With the instrument AC plug removed from AC source, connect an electrical jumper across the two AC plug prongs. Place the AC switch in the on position, connect one lead of ohm-meter to the AC plug prongs tied together and touch other ohm-meter lead in turn to each exposed metallic parts such as antenna terminals, phone jacks, etc.

If the exposed metallic part has a return path to the chassis, the measured resistance should be between  $1M\Omega$  and  $5.2M\Omega$ .

When the exposed metal has no return path to the chassis the reading must be infinite.

An other abnormality exists that must be corrected before the receiver is returned to the customer.

### Leakage Current Hot Check (See below Figure)

Plug the AC cord directly into the AC outlet.

**Do not use a line Isolation Transformer during this check.**


Connect 1.5K/10watt resistor in parallel with a 0.15uF capacitor between a known good earth ground (Water Pipe, Conduit, etc.) and the exposed metallic parts.

Measure the AC voltage across the resistor using AC voltmeter with 1000 ohms/volt or more sensitivity.

Reverse plug the AC cord into the AC outlet and repeat AC voltage measurements for each exposed metallic part. Any voltage measured must not exceed 0.75 volt RMS which is corresponds to 0.5mA.

In case any measurement is out of the limits specified, there is possibility of shock hazard and the set must be checked and repaired before it is returned to the customer.


### Leakage Current Hot Check circuit

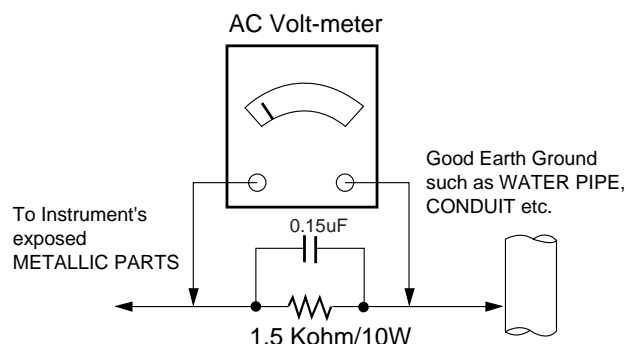

# CONTROLS DESCRIPTION


## Monitor Controls

Front Panel Controls

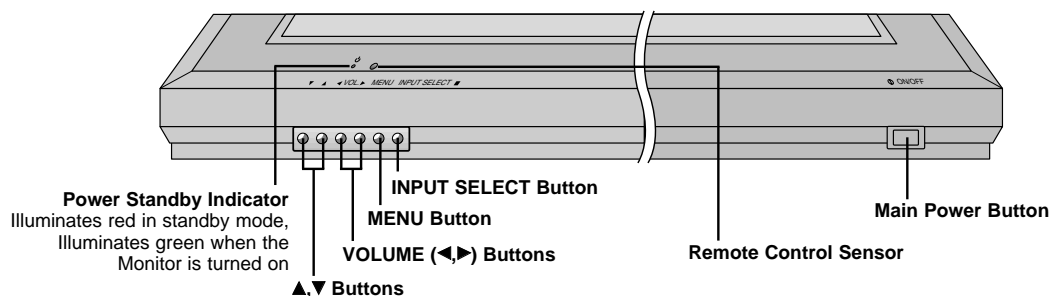

## Connection Options


Back Connection Panel

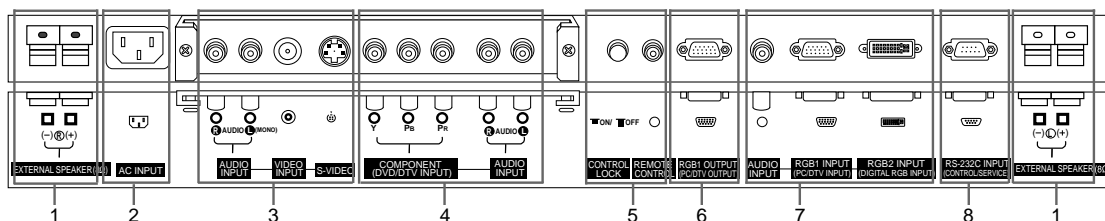

1. **EXTERNAL SPEAKER (8 ohm output)**  
Connect to optional external speaker(s).  
\*For further information, refer to 'Speaker & Speaker Stand' manual.
2. **POWER CORD SOCKET**  
This Monitor operates on an AC power. The voltage is indicated on the Specifications page. Never attempt to operate the Monitor on DC power.
3. **AUDIO/VIDEO INPUT JACKS**  
Connect audio/video out from external equipment to these jacks.  
**S-VIDEO INPUTS (S-VIDEO)**  
Connect video out from an S-VIDEO VCR to the S-VIDEO input.
4. **COMPONENT(DVD/DTV INPUT)/AUDIO INPUT JACKS**
5. **CONTROL LOCK Switch**  
**REMOTE CONTROL**  
When "CONTROL LOCK" is set "ON", Monitor is operated by the external control device.
6. **RGB1 OUTPUT(PC/DTV OUTPUT) JACKS**  
You can watch the RGB1 signal on another monitor, connect RGB1 OUTPUT (PC/DTV OUTPUT) to another monitor's PC input port.
7. **AUDIO INPUT/RGB1 INPUT(PC/DTV INPUT)/RGB2 INPUT(DIGITAL RGB INPUT) JACKS**  
Connect the monitor output socket of the PC to this socket.
8. **RS-232C INPUT(CONTROL/SERVICE) PORT**  
Connect to the RS-232C port on a PC.

# Remote Control Key Functions

- When using the remote control aim it at the remote control sensor of the Monitor.
- There's maybe a defect in consecutive operation of remote control in specified brightness according to this monitor feature.

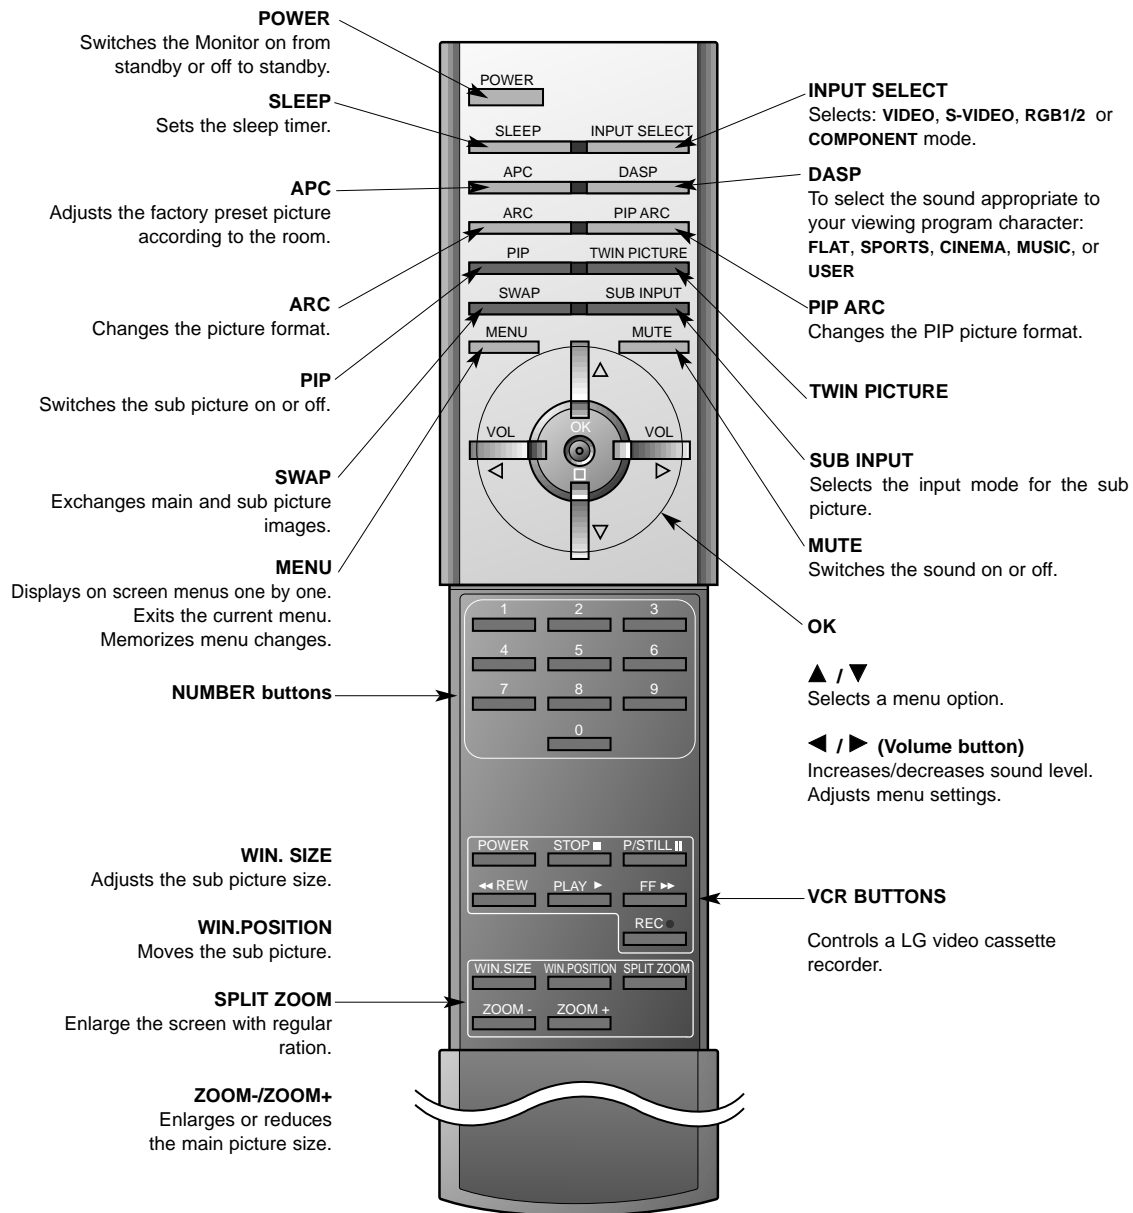

# ADJUSTMENT INSTRUCTIONS

## 1. Application Object

These instructions are applied to all of the PDP monitor, RF-02CA.

## 2. Notes

- (1) Because this is not a hot chassis, it is not necessary to use an isolation transformer. However, the use of isolation transformer will help protect test instrument.
- (2) Adjustment must be done in the correct order.
- (3) The adjustment must be performed in the circumstance of  $25\pm5^{\circ}\text{C}$  of temperature and  $65\pm10\%$  of relative humidity if there is no specific designation.
- (4) The input voltage of the receiver must keep 110~240V, 50/60Hz in adjusting.
- (5) The receiver must be operated for about 15 minutes prior to the adjustment.

- 1) After receiving 100% white pattern(06CH), the receiver must be operate prior to adjustment. (Or white condition in HEAT-RUN mode)
- 2) Enter into HEAT-RUN mode
  - Press the POWER ON KEY on R/C for adjustment.
  - OSD display HEAT-RUN WHITE and screen display 100% full WHITE PATTERN.

- \* Set is activated HEAT-RUN without signal generator in this mode.
- \* Single color pattern of HEAT-RUN mode uses to check PANEL. (RED/BLUE/GREEN)

**[Caution]** If you turn on a still screen more than 20 minutes (Especially Digital pattern(13 CH), Cross Hatch Pattern), a afterimage may be occur in the black level part of the screen.

## 3. RGB Auto Cut-Off & MIN Bias Adjustment

- (1) Input Full Back (0 Gray) signal which generated from Pattern Generator into CVBS and RGB1 Input part.
- (2) Press POWER ON KEY on R/C for adjustment and select AUTO-CUT(Cut-off Auto Adjustment)
- (3) Press Vol. + key and operate TO SET
- (4) Screen adjustment starts with Full Black screen.  
Original Window screen will be presented about 5-6 seconds later. And if there is a mark of OK OSD, then the Auto Cut-off and Min-Bias adjustment will be completed.
- (5) Pass to the next MAX Bias Adjustment after Adjustment.

- \* Replace PDP Module or Power Board, adjust certainly Power PCB Assy Voltage.

## 4. MAX Bias Adjustment

- (1) Input Full White (255 Gray) signal which generated from Pattern Generator into CVBS and RGB1 Input part.
- (2) Press POWER ON KEY on R/C for adjustment and select MAX-BIAS
- (3) Press Vol. + key and operate TO SET
- (4) Original Full White screen will be presented about 1~2 seconds later. And if there is a mark of OK OSD, then the Min-Bias adjustment will be completed.
- (5) After adjustment, press  $\checkmark$  key to save adjustment and come out of the adjustment mode.

- You can check whether circuit adjustment is operated well or not, as below.
  - (1) Display RGB1 to the Main picture, CVBS to the Sub picture in the TWIN PICTURE.
  - (2) To check the MIN-Bias, input Full Black (0 gray) signal into CVBS and RGB1 input part at the same time in the Pattern Generator.
  - (3) To check the MAX-Bias, input Full White (255 gray) signal into CVBS and RGB1 input part at the same time in the Pattern Generator.
  - (4) Compare Black Level with White Level by eyes. And if there is no Level difference, the adjustment is completed well.

- Data value, which adjusted in the board, is valid until the VSC Board is dissued and must be protected. For the protection of data, Micom does not permit any more adjustment after completion.
- In case of re-adjustment, operate First Value Setting.

Each PCB Assy must be checked by Check JIG Set before assembly. (Especially, be careful Power PCB Assy which can cause fatal Damage to PDP Module.)

## 5. POWER PCB Assy Voltage Adjustment (Va, Vs Voltage Adjustment)

### 5-1 Test Equipment : D.M.M 1EA

### 5-2 Connection Diagram for Measuring

Refer to Fig 1.


### 5-3 Adjustment Method

#### (1) Va Adjustment


- 1) After receiving 100% white pattern, HEAT RUN.
- 2) Connect + terminal of D.M.M to Va pin of P805 and connect – terminal to GND pin of P805.
- 3) After turning the VR4, voltage of D.M.M adjustment as same as Va voltage which on label of panel Right/Top.  
(Deviation :  $\pm 0.5\text{V}$ )

## (2) Vs adjustment


- 1) Connect + terminal of D.M.M to Vs pin of P805 and connect – terminal to GND pin of P805.
- 2) After turning the VR1, voltage of D.M.M adjustment as same as Vs voltage which on label of panel Right/Top. (Deviation :  $\pm 0.5V$ )

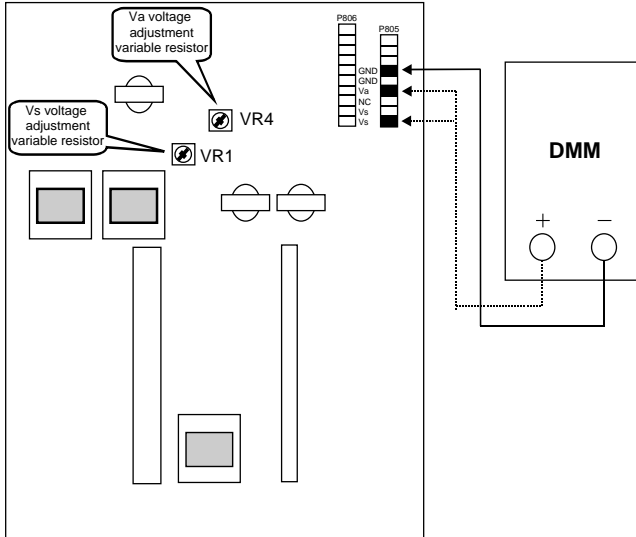

<Fig 1> Connection Diagram of Power Adjustment for Measuring

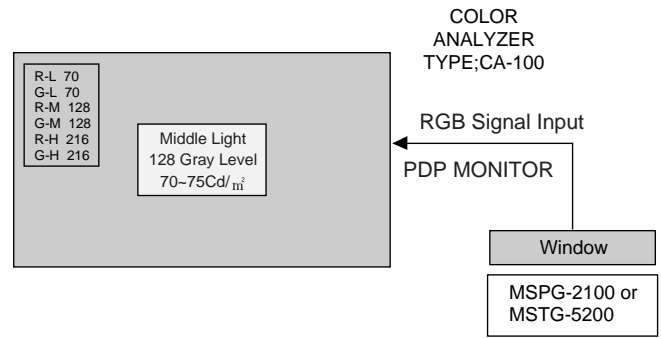

<Fig 3> Connection Diagram of Manual Adjustment(Middle Light)

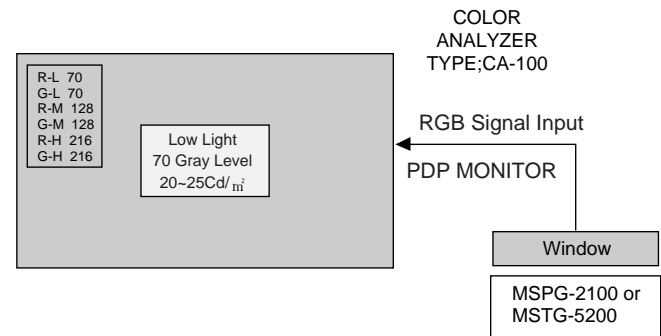


<Fig 4> Connection Diagram of Manual Adjustment(Low Light)

## 6. Adjustment of White Balance

### 6-1. Required Equipment

Color analyzer (CA-100 or same product)

### 6-2. Connection Diagram of Equipment for Measuring (Manual Adjustment)

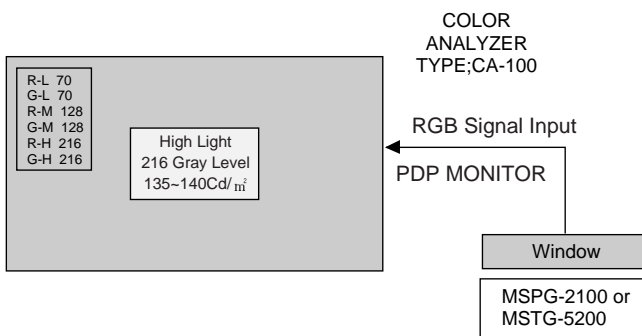

<Fig 2> Connection Diagram of Manual Adjustment(High Light)

### 6-3. Adjustment of White Balance

- Operate the Zero-calibration of the CA-100, then stick sensor to PDP module surface when you adjust.
- For manual adjustment, it is also possible by the following sequence.

- (1) Select WHITE PATTERN of HEAT RUN mode by pressing POWER ON KEY on remote control for adjustment then operate HEAT RUN more than 15 minute.
- (2) Supply 216Gray, 128Gray, 70Gray Level, 50% size length and breadth signal to RGB1 input. (Refer to Fig 2,3,4)
- (3) W/B adjustment must be adjusted once and follow the sequence of Low Light --> Middle Light --> High Light and then save the adjustment value with v Key.
- (4) To adjust Low Light , stick sensor to Gray Level(or 20~25 Cd/m2) Pattern, press ADJ Key on R/C for adjustment and press  $\sigma$ ,  $\tau$  on R/C in adjustment mode to select R-L or G-L, press VOL +, - Key and adjust it until color coordination becomes as below.  
X:  $0.290 \pm 0.003$ , Y:  $0.300 \pm 0.003$ ,  
Color temperature: 8, 500°K $\pm$ 500°K
- (5) To adjust Middle Light , stick sensor to Gray Level(or 70~75 Cd/m2) Pattern, press ADJ Key on R/C for adjustment and press  $\sigma$ ,  $\tau$  on R/C in adjustment mode to select R-M or G-M, press VOL +, - Key and adjust it until color coordination becomes as below.  
X:  $0.290 \pm 0.003$ , Y:  $0.300 \pm 0.003$   
Color temperature: 8, 500°K $\pm$ 500°K

- (6) To adjust High Light, stick sensor to Gray Level(or 135-140 Cd/m<sup>2</sup>) Pattern, press ADJ Key on R/C for adjustment and press  $\sigma$ ,  $\tau$  on R/C in adjustment mode to select R-L or G-L, press VOL +, - Key and adjust it until color coordination becomes as below.

X: 0.290 $\pm$ 0.003, Y: 0.300 $\pm$ 0.003

Color temperature: 8, 500°K $\pm$ 500°K


- (7) Exit adjustment mode using v Key.

## 7. DDC Data Input

### 7-1. Required Test Equipment

- (1) A jig for adjusting PC, DDC. (PC serial to D-sub. Connection equipment)
- (2) S/W for writing DDC(EDID data write & read)
- (3) D-Sub 15P cable, D-Sub to DVI Connector (Connect to DVI Jack)

### 7-2. Setting of Device

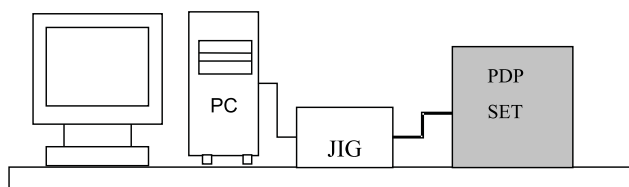

### 7-3. Preparation for Adjustment

- (1) Set devices as above and turn the PC, jig on.
- (2) Put S/W for writing DDC (EDID data write & read) into operation. (operated in DOS mode.)

### 7-4. Sequence of Adjustment

#### (1) DDC Data Input for Analog-RGB

- 1) Put the set on the table and turn the power on.
- 2) Connect PC Serial to D-sub 15P Cable of JIG for DDC Adjustment to RGB1 terminal (D-Sub 15Pin).
- 3) Operate S/W for DDC record and select DDC Data for Analog RGB in Model Menu.
- 4) Operate EDID Write command.
- 5) Operate EDID Read command and check whether Check Sum is OK.
- 6) If Check Sum is NG, repeat 3) ~ 4).
- 7) If Check Sum is OK, DDC Data for Analog-RGB input is completed.

#### (2) DDC Data input for Digital-RGB

- 1) Connect PC Serial to DVI Cable of JIG for DDC Adjustment to RGB2 terminal (DVI Jack).
- 2) Operate S/W for DDC record and select DDC Data for Digital RGB in Model Menu.
- 3) Operate EDID Write command.
- 4) Operate EDID Read command and check whether Check Sum is OK.
- 5) If Check Sum is NG, repeat 3) ~ 4).
- 6) If Check Sum is OK, DDC Data for Digital-RGB input is completed.

## 8. Component Off-Set adjustment

Input the signal to HD-STB(SK-010T) and receive 14Ch.

### 8-1. Required Equipment

HD-STB (SK-010T or same product)


### 8-2. Manual Adjustment of Off-Set

- (1) Input Video signal and Component 720P, 1080i signal of HD-STB into AV1 and Component input part.
- (2) Select Twin Picture by pressing ADJ twice on R/C, check component in the main picture and AV1 in the sub picture.
- (3) Adjust the R-OFFSET, B-OFFSET color impression of component(Main picture) and external Input(Sub picture) same by pressing Volume +,- key.

## 50 PDP VSC Board Block Diagram



# EXPLODED VIEW

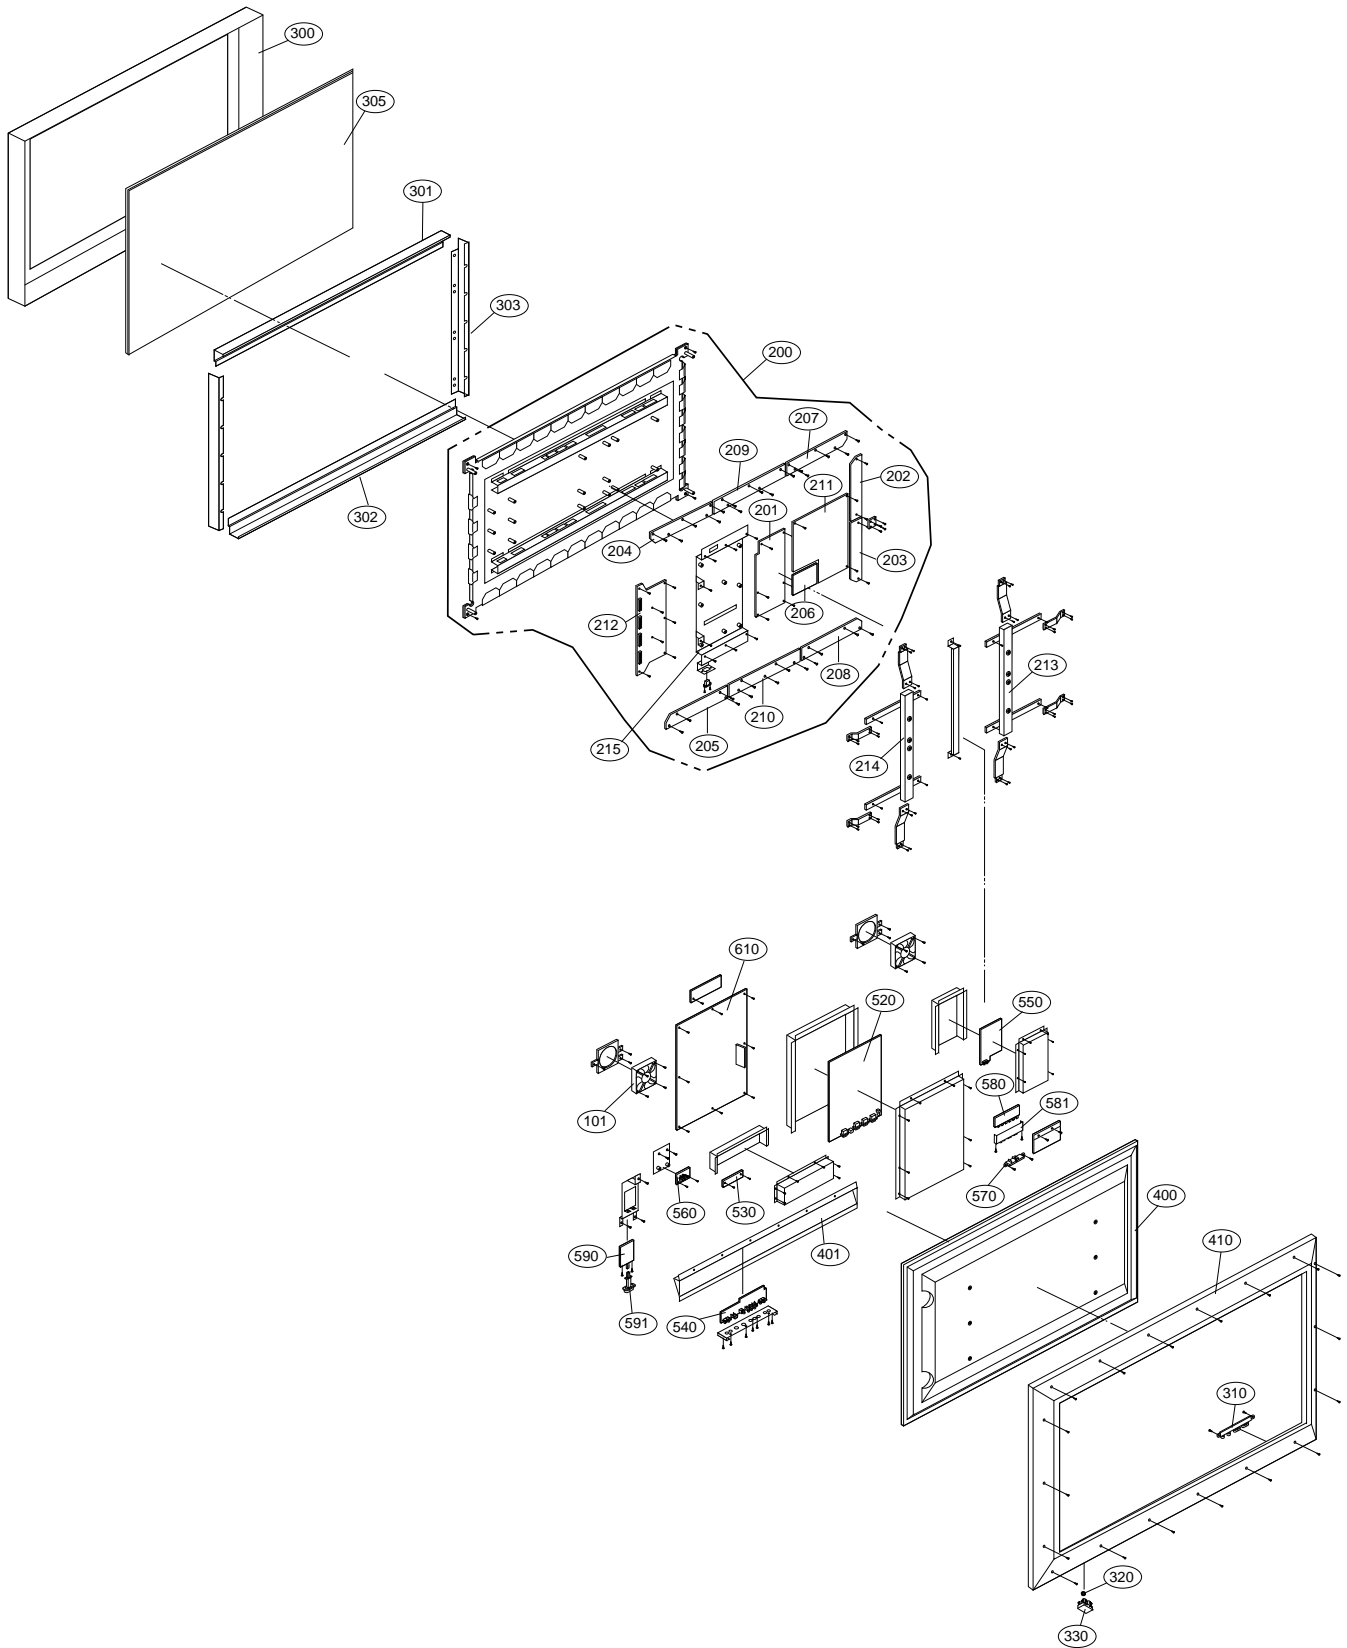

## EXPLODED VIEW PARTS LIST

No.	Part No.	Description
101	5900V12001A	FAN,DC G1225S12B2
200	6348Q-C030C	PDP,50" 16:9 1365*768 DUAL SCAN PO
201	6871QCH019A	PCB ASSEMBLY,CTRL ASSY HAND INSERT 50INCH V
202	6871QDH030A	PCB ASSEMBLY,YDRV ASSY HAND INSERT 50WX1 4
203	6871QDH031A	PCB ASSEMBLY,YDRV ASSY HAND INSERT 50WX1 4
204	6871QLH018A	PCB ASSEMBLY,XRLT ASSY HAND INSERT 50WX1 4L
205	6871QLH019A	PCB ASSEMBLY,XRLT ASSY HAND INSERT 50WX1 4L
206	6871QPH006A	PCB ASSEMBLY,DCDC ASSY HAND INSERT 50WX1
207	6871QRH016A	PCB ASSEMBLY,XRRT ASSY HAND INSERT 50WX1 4L
208	6871QRH017A	PCB ASSEMBLY,XRRT ASSY HAND INSERT 50WX1 4L
209	6871QXH011A	PCB ASSEMBLY,XRCT ASSY HAND INSERT 50WX1 4L
210	6871QXH012A	PCB ASSEMBLY,XRCT ASSY HAND INSERT 50WX1 4L
211	6871QYH020A	PCB ASSEMBLY,YSUS ASSY HAND INSERT 50WX1 4
212	6871QZH021A	PCB ASSEMBLY,ZSUS ASSY HAND INSERT 50WX1 2
213	4980V00416A	SUPPORTER ASSY,MN-50PZ40 RIGHT
214	4980V00416B	SUPPORTER ASSY,MN-50PZ40 LEFT
215	4980V00498B	SUPPORTER ASSY,AL SMPS DELTA
300	3091V00433B	CABINET ASSEMBLY,LG FLATRON PLASMA
	3091V00433F	CABINET ASSEMBLY,MU-50PZ41B STEREO RF
301	4980V00361A	SUPPORTER,FILTER TOP MN-50PZ40
302	4980V00362A	SUPPORTER,FILTER BOTTOM MN-50PZ40
303	4980V00363A	SUPPORTER,FILTER SIDE MN-50PZ40
305	3790V00683A	WINDOW,GLASS FILTER MN50PZ41 MESH 110
310	5020V00688A	BUTTON,CONTROL MN-50PZ41 SET
	5020V00688B	BUTTON,CONTROL MU-50PZ41B
320	320-062H	SPRING,COIL
330	5020V00645A	BUTTON,POWER OUTER MN-50PZ40 SET
	5020V00645B	BUTTON,POWER OUTER MU-50PZ41B
400	3809V00292A	BACK COVER ASSEMBLY,MN-50PZ40 INNER
401	3301V00009D	PLATE ASSEMBLY,AV MU-50PZ41
410	3809V00293B	BACK COVER ASSEMBLY
	3809V00293C	BACK COVER ASSEMBLY,MU-50PZ41B
520	6871VMMN95A	PCB ASSEMBLY,MAIN RF-02KE FOR MU PIVOT MODE
530	6871VSMD10A	PCB ASSEMBLY,EXTRA RF-02CA 50IN IF/FIX
540	6871VSMD04A	PCB ASSEMBLY,INTER RF-02CA I/F NTSC
550	6871VSMD06A	PCB ASSEMBLY,A/V RF-02CA 50IN AUDIO
560	6871VSMD11A	PCB ASSEMBLY,SPK RF-02CA 50IN RIGHT SPK
561	4980V00384A	SUPPORTER,SPK AL INTERFACE,MN-50PZ40
570	3141VSNA57A	CHASSIS ASSEMBLY,SUB RF-02CA PRE AMP
580	6871VSMD08A	PCB ASSEMBLY,SUB KBD RF-02CA 50IN LOCAL KEY
581	5020V00647A	BUTTON,CONTROL S/W INNER MN-50PZ40 SE
590	6871VSMD09A	PCB ASSEMBLY,SUB PSW RF-02CA 50IN POWER SWITCH
591	5020V00648A	BUTTON,POWER INNER MN-50PZ40 SET
600	6871VSMN17A	PCB ASSEMBLY,SUB EXTRA RF02CA RF-02CA FAN CONTR
610	3501V00084C	BOARD ASSEMBLY,POWER BOARD MU50PZ41 RF02KA SO

# REPLACEMENT PARTS LIST

RUN DATE : 2002.9.27

LOCA. NO	PART NO	DESCRIPTION
<b>IC</b>		
IC1	0IMI623200B	M62320FP,I/O EXPANDER 16P SOP
IC2	0IDS162100B	DS1621V 8P SOIC ST THERMOSTAT
IC3	0ISS278050A	KA278R05 4P,TO-220F BK LOW DRO
IC4	0ISH092100A	PQ09RF21 4P 9V S/W REGULATOR -
IC5	0ISH092100A	PQ09RF21 4P 9V S/W REGULATOR -
IC6	0ISS278120A	KA278R12 4P,TO-220F BK LOW DRO
IC101	0IAL242110A	AT24C21-10SI-2.5 8P,SOP TP 1K
IC101	0IMCRMN002A	MSP3440G QA B6 MICRONAS 80 QFP
IC101	0ISO208900A	CXA2089Q 48QFP BK A/V SWITCH
IC102	0IAL242110A	AT24C21-10SI-2.5 8P,SOP TP 1K
IC102	0IKE780800J	KIA7808API 3 ST REGULATOR .
ICN102	0IMCRFA010A	KA7809R, FAIRCHILD 2P D-PAK, R
IC103	0IMCRTI003A	SN74HCT08D TEXAS INSTRUMENT 16
IC103	0ISH052100C	PQ05RD21 4SIP ST REGULATOR
IC104	0IBB368200A	OPA3682E 16P SOP ST BUFFER AMP
IC104	0IKE704200J	KIA7042AF SOT-89 TP 4.2V VOLTA
IC105	0ISA428200A	LA4282 12S 2CHX10W AUDIO AMP
IC201	0IMCRAD003A	AD9888KS-140 ANALOG DEVICE 128
IC202	0IMCRS5003A	SIL169 CL100 SILICON IMAGE 100
IC301	0IMMRNE002A	UPD64083GF3BA NEC 100 QFP ST 3
IC302	0ISA715100D	LA7151M 10SOP R/TP AUDIO SW FD
IC401	0IIT323000D	VPC3230D QA B4 80P QFP TRAY SO
IC402	0IFA741230A	DM74LS123MX 16SOP TP DUAL RETR
IC404	0IMCRG2001A	FLI2200 SAGE 176P,QFP TRAY VID
IC405	0ISS464323A	K4S643232E(C)-TC/L60(70) (KM43
IC501	0IMCROT001A	REMBRANT-1A OPLUS TECHNOLOGIES
IC502	0ISS464323A	K4S643232E(C)-TC/L60(70) (KM43
IC503	0ISS464323A	K4S643232E(C)-TC/L60(70) (KM43
IC504	0ISS464323A	K4S643232E(C)-TC/L60(70) (KM43
IC601	0IS5160000A	SII160 100 TQFP ST PANELLINK D
IC701	0IMCRRS001A	R8820LV RDC SEMICONDUCTOR LTD
IC702	0IMMRSS064A	K6R4016V1C-TC10 SAMSUNG ELECTR
IC703	0IMMRMR006A	COPY MX29LV160TTC-70 MACRONIX
IC704	0IAL241610A	AT24C16N-10SI 8P SOIC ST EEPRO
IC741	0IMCRFA013A	74LCX244MTC FAIRCHILD 20P TSSO
IC742	0IMCRFA013A	74LCX244MTC FAIRCHILD 20P TSSO
IC743	0ITI745740M	SN74HC574NSR 14P,SOP TP D-TYPE
IC744	0IMCRPH017A	74LVC574APW PHILIPS 20P SOT360
IC745	0IPH740800L	74LVT08D 14SOP R/TP LOW VOLTAG
IC746	0IMCRPH015A	74LVC32AD PHILIPS 14P SOT108-1
IC747	0IMCRPH016A	74LVC139D PHILIPS 16P SOT109-1
IC748	0IMCRPH014A	74LV132D PHILIPS 14P SOT108-1
IC749	0IKE702700D	KIA7027AF 3, SOT-89 TP RESET I
IC750	0IDS232000A	DS232AS 16P,SOP TP RS-232 DRIV
IC752	0IMCRTI001A	SN74HCT157D TEXAS INSTRUMENT 1
IC801	0IMCRSJ001A	SC15651ST-1.8 SEMTECH 3P SOT22
IC802	0IPRPM001A	MIC39100 MICREL 3P SOT223 R/TP

LOCA. NO	PART NO	DESCRIPTION
IC803	0IMCRFA010A	KA7809R, FAIRCHILD 2P D-PAK, R
IC850	0IMCRRH001A	BA033FP ROHM 3P-SOP,TO252-3 R/
IC851	0IMCRRH001A	BA033FP ROHM 3P-SOP,TO252-3 R/
IC852	0IMCRRH001A	BA033FP ROHM 3P-SOP,TO252-3 R/
IC853	0IMCRRH001A	BA033FP ROHM 3P-SOP,TO252-3 R/
IC854	0IMCRRH001A	BA033FP ROHM 3P-SOP,TO252-3 R/
<b>TRANSISTOR</b>		
IC7	0TR830009BA	BSS83 TP PHILIPS NON N-CHANNEL
IC8	0TR830009BA	BSS83 TP PHILIPS NON N-CHANNEL
IC105	0TR830009BA	BSS83 TP PHILIPS NON N-CHANNEL
IC106	0TR830009BA	BSS83 TP PHILIPS NON N-CHANNEL
Q001	0TR387500AA	CHIP 2SC3875S(ALY) KEC
Q002	0TR387500AA	CHIP 2SC3875S(ALY) KEC
Q104	0TR387500AA	CHIP 2SC3875S(ALY) KEC
Q150	0TR387500AA	CHIP 2SC3875S(ALY) KEC
Q151	0TR387500AA	CHIP 2SC3875S(ALY) KEC
Q152	0TR387500AA	CHIP 2SC3875S(ALY) KEC
Q153	0TR387500AA	CHIP 2SC3875S(ALY) KEC
Q155	0TR387500AA	CHIP 2SC3875S(ALY) KEC
Q156	0TR387500AA	CHIP 2SC3875S(ALY) KEC
Q157	0TR387500AA	CHIP 2SC3875S(ALY) KEC
Q158	0TR387500AA	CHIP 2SC3875S(ALY) KEC
Q161	0TR150400BA	CHIP 2SA1504S(ASY) KEC
Q162	0TR150400BA	CHIP 2SA1504S(ASY) KEC
Q300	0TR150400BA	CHIP 2SA1504S(ASY) KEC
Q301	0TR150400BA	CHIP 2SA1504S(ASY) KEC
Q302	0TR387500AA	CHIP 2SC3875S(ALY) KEC
Q303	0TR150400BA	CHIP 2SA1504S(ASY) KEC
Q304	0TR150400BA	CHIP 2SA1504S(ASY) KEC
Q305	0TR150400BA	CHIP 2SA1504S(ASY) KEC
Q306	0TR387500AA	CHIP 2SC3875S(ALY) KEC
Q307	0TR150400BA	CHIP 2SA1504S(ASY) KEC
Q308	0TR387500AA	CHIP 2SC3875S(ALY) KEC
Q309	0TR387500AA	CHIP 2SC3875S(ALY) KEC
Q310	0TR150400BA	CHIP 2SA1504S(ASY) KEC
Q314	0TR387500AA	CHIP 2SC3875S(ALY) KEC
Q315	0TR387500AA	CHIP 2SC3875S(ALY) KEC
Q316	0TR150400BA	CHIP 2SA1504S(ASY) KEC
Q317	0TR387500AA	CHIP 2SC3875S(ALY) KEC
Q318	0TR150400BA	CHIP 2SA1504S(ASY) KEC
Q319	0TR387500AA	CHIP 2SC3875S(ALY) KEC
Q320	0TR387500AA	CHIP 2SC3875S(ALY) KEC
Q400	0TR387500AA	CHIP 2SC3875S(ALY) KEC
Q401	0TR387500AA	CHIP 2SC3875S(ALY) KEC
Q402	0TR387500AA	CHIP 2SC3875S(ALY) KEC
Q403	0TR150400BA	CHIP 2SA1504S(ASY) KEC
Q404	0TR387500AA	CHIP 2SC3875S(ALY) KEC
Q405	0TR104009AF	CHIP KRC104S SOT-23 TP KEC - -

For Capacitor & Resistors, the characters at 2nd and 3rd digit in the P/No. means as follows;	CC, CX, CK, CN : Ceramic CQ : Polyester CE : Electrolytic	RD : Carbon Film RS : Metal Oxide Film RN : Metal Film RF : Fusible
--	---	--

LOCA. NO	PART NO	DESCRIPTION
Q407	0TR150400BA	CHIP 2SA1504S(ASY) KEC
QA101	0TR150400BA	CHIP 2SA1504S(ASY) KEC
QA102	0TR150400BA	CHIP 2SA1504S(ASY) KEC
QA103	0TR150400BA	CHIP 2SA1504S(ASY) KEC
QA720	0TR387500AA	CHIP 2SC3875S(ALY) KEC
QA721	0TR387500AA	CHIP 2SC3875S(ALY) KEC
QA722	0TR387500AA	CHIP 2SC3875S(ALY) KEC
QA723	0TR150400BA	CHIP 2SA1504S(ASY) KEC
QA740	0TR387500AA	CHIP 2SC3875S(ALY) KEC
QN101	0TR387500AA	CHIP 2SC3875S(ALY) KEC
QN102	0TR387500AA	CHIP 2SC3875S(ALY) KEC
QN103	0TR387500AA	CHIP 2SC3875S(ALY) KEC
QN104	0TR150400BA	CHIP 2SA1504S(ASY) KEC
QN105	0TR150400BA	CHIP 2SA1504S(ASY) KEC
QN106	0TR387500AA	CHIP 2SC3875S(ALY) KEC
QN107	0TR150400BA	CHIP 2SA1504S(ASY) KEC
QN108	0TR387500AA	CHIP 2SC3875S(ALY) KEC
<b>DIODE</b>		
D1	0DD100009AM	EU1ZV(1) TP SANKEN
D001	0DL200000CA	LED,SAM5670(DL-2LRG) BK Y-GREEN -
D100	0DD226239AA	CHIP KDS226 SOT-23
D101	0DD226239AA	CHIP KDS226 SOT-23
D102	0DD226239AA	CHIP KDS226 SOT-23
D103	0DD226239AA	CHIP KDS226 SOT-23
D104	0DD226239AA	CHIP KDS226 SOT-23
D105	0DD226239AA	CHIP KDS226 SOT-23
D106	0DD226239AA	CHIP KDS226 SOT-23
D107	0DD226239AA	CHIP KDS226 SOT-23
D108	0DD226239AA	CHIP KDS226 SOT-23
D109	0DD226239AA	CHIP KDS226 SOT-23
D110	0DD226239AA	CHIP KDS226 SOT-23
D111	0DD226239AA	CHIP KDS226 SOT-23
D112	0DD226239AA	CHIP KDS226 SOT-23
D113	0DD226239AA	CHIP KDS226 SOT-23
D114	0DD226239AA	CHIP KDS226 SOT-23
D115	0DD226239AA	CHIP KDS226 SOT-23
D117	0DD226239AA	CHIP KDS226 SOT-23
D118	0DD226239AA	CHIP KDS226 SOT-23
D119	0DD226239AA	CHIP KDS226 SOT-23
D120	0DD226239AA	CHIP KDS226 SOT-23
D121	0DD226239AA	CHIP KDS226 SOT-23
D122	0DD226239AA	CHIP KDS226 SOT-23
D123	0DD226239AA	CHIP KDS226 SOT-23
D801	0DD226239AA	CHIP KDS226 SOT-23
D802	0DD226239AA	CHIP KDS226 SOT-23
D803	0DD226239AA	CHIP KDS226 SOT-23
D850	0DD226239AA	CHIP KDS226 SOT-23
D851	0DD226239AA	CHIP KDS226 SOT-23
D852	0DD226239AA	CHIP KDS226 SOT-23
D853	0DD226239AA	CHIP KDS226 SOT-23
D854	0DD226239AA	CHIP KDS226 SOT-23

LOCA. NO	PART NO	DESCRIPTION
D855	0DD226239AA	CHIP KDS226 SOT-23
D857	0DD226239AA	CHIP KDS226 SOT-23
DA101	0DD184009AA	KDS184S CHIP 85V 300MA KEC TP
DA102	0DD184009AA	KDS184S CHIP 85V 300MA KEC TP
DA103	0DD184009AA	KDS184S CHIP 85V 300MA KEC TP
DA104	0DD184009AA	KDS184S CHIP 85V 300MA KEC TP
DA105	0DD226239AA	CHIP KDS226 SOT-23
DA106	0DD226239AA	CHIP KDS226 SOT-23
DN111	0DD226239AA	CHIP KDS226 SOT-23
LD300	0DL233309AC	LED,SAM2333 TP KWANG GREEN/RED GRE
LD460	0DL233309AC	LED,SAM2333 TP KWANG GREEN/RED GRE
LD461	0DL233309AC	LED,SAM2333 TP KWANG GREEN/RED GRE
LD740	0DL233309AC	LED,SAM2333 TP KWANG GREEN/RED GRE
LD741	0DL233309AC	LED,SAM2333 TP KWANG GREEN/RED GRE
LD742	0DL233309AC	LED,SAM2333 TP KWANG GREEN/RED GRE
LD743	0DL233309AC	LED,SAM2333 TP KWANG GREEN/RED GRE
LD804	0DL233309AC	LED,SAM2333 TP KWANG GREEN/RED GRE
LD805	0DL233309AC	LED,SAM2333 TP KWANG GREEN/RED GRE
LD806	0DL233309AC	LED,SAM2333 TP KWANG GREEN/RED GRE
ZD116	0DR050008AA	SD05.TC R/TP SEMTECH SOD323 5V
ZD201	0DR050008AA	SD05.TC R/TP SEMTECH SOD323 5V
ZD750	0DR050008AA	SD05.TC R/TP SEMTECH SOD323 5V
ZD751	0DR050008AA	SD05.TC R/TP SEMTECH SOD323 5V
ZD752	0DR050008AA	SD05.TC R/TP SEMTECH SOD323 5V
<b>CAPACITOR</b>		
C2	0CE106SF6DC	10UF MVG 16V 20% R/TP(SMD) SMD
C003	0CE476SF6DC	47UF MVG 16V M SMD R/TP
C4	0CE106SF6DC	10UF MVG 16V 20% R/TP(SMD) SMD
C8	0CE476SF6DC	47UF MVG 16V M SMD R/TP
C11	0CE477VF6DC	470UF MV 16V 20% R/TP(SMD) SMD
C13	0CE476SF6DC	47UF MVG 16V M SMD R/TP
C14	0CE105SK6DC	1UF MVG 50V M SMD R/TP
C15	0CE105SK6DC	1UF MVG 50V M SMD R/TP
C16	0CE105SK6DC	1UF MVG 50V M SMD R/TP
C109	0CE107SF6DC	100UF MVG 16V M SMD R/TP
C110	0CE107SF6DC	100UF MVG 16V M SMD R/TP
C111	0CE107SF6DC	100UF MVG 16V M SMD R/TP
C112	0CE107SF6DC	100UF MVG 16V M SMD R/TP
C113	0CE107SF6DC	100UF MVG 16V M SMD R/TP
C114	0CE107SF6DC	100UF MVG 16V M SMD R/TP
C115	0CE107SF6DC	100UF MVG 16V M SMD R/TP
C119	0CE477VF6DC	470UF MV 16V 20% R/TP(SMD) SMD
C121	0CE477VF6DC	470UF MV 16V 20% R/TP(SMD) SMD
C123	0CE477VF6DC	470UF MV 16V 20% R/TP(SMD) SMD
C127	0CE476SF6DC	47UF MVG 16V M SMD R/TP
C134	0CE476SF6DC	47UF MVG 16V M SMD R/TP
C150	0CE476SF6DC	47UF MVG 16V M SMD R/TP
C154	0CE476SF6DC	47UF MVG 16V M SMD R/TP
C158	0CE476SF6DC	47UF MVG 16V M SMD R/TP
C179	0CE476SF6DC	47UF MVG 16V M SMD R/TP
C182	0CE476SF6DC	47UF MVG 16V M SMD R/TP

For Capacitor & Resistors, the characters at 2nd and 3rd digit in the P/No. means as follows;	CC, CX, CK, CN : Ceramic	RD : Carbon Film
	CQ : Polyester	RS : Metal Oxide Film
	CE : Electrolytic	RN : Metal Film
		RF : Fusible

LOCA. NO	PART NO	DESCRIPTION
C185	0CE476SF6DC	47UF MVG 16V M SMD R/TP
C300	0CE476SF6DC	47UF MVG 16V M SMD R/TP
C303	0CE476SF6DC	47UF MVG 16V M SMD R/TP
C306	0CE476SF6DC	47UF MVG 16V M SMD R/TP
C311	0CE106SF6DC	10UF MVG 16V 20% R/TP(SMD) SMD
C316	0CN105EJ56A	1.0UF 3216 35V 10% R/TP X7R
C320	0CN105EJ56A	1.0UF 3216 35V 10% R/TP X7R
C322	0CE106SF6DC	10UF MVG 16V 20% R/TP(SMD) SMD
C344	0CE106SF6DC	10UF MVG 16V 20% R/TP(SMD) SMD
C348	0CE106SF6DC	10UF MVG 16V 20% R/TP(SMD) SMD
C400	0CN105EJ56A	1.0UF 3216 35V 10% R/TP X7R
C401	0CE106SF6DC	10UF MVG 16V 20% R/TP(SMD) SMD
C408	0CE106SF6DC	10UF MVG 16V 20% R/TP(SMD) SMD
C409	0CE107SF6DC	100UF MVG 16V M SMD R/TP
C411	0CK224DF56A	220000PF 2012 16V 10% R/TP X7R
C418	0CK224DF56A	220000PF 2012 16V 10% R/TP X7R
C420	0CE106SF6DC	10UF MVG 16V 20% R/TP(SMD) SMD
C425	0CK224DF56A	220000PF 2012 16V 10% R/TP X7R
C426	0CK224DF56A	220000PF 2012 16V 10% R/TP X7R
C427	0CK224DF56A	220000PF 2012 16V 10% R/TP X7R
C436	0CK224DF56A	220000PF 2012 16V 10% R/TP X7R
C452	0CE106SF6DC	10UF MVG 16V 20% R/TP(SMD) SMD
C464	0CE476SF6DC	47UF MVG 16V M SMD R/TP
C800	0CE477VF6DC	470UF MV 16V 20% R/TP(SMD) SMD
C805	0CE477VF6DC	470UF MV 16V 20% R/TP(SMD) SMD
C808	0CE227VF6DC	220UF MV 16V 20% R/TP(SMD) SMD
C812	0CE477VF6DC	470UF MV 16V 20% R/TP(SMD) SMD
C816	0CE477VF6DC	470UF MV 16V 20% R/TP(SMD) SMD
C817	0CE106SF6DC	10UF MVG 16V 20% R/TP(SMD) SMD
C820	0CE107SF6DC	100UF MVG 16V M SMD R/TP
C822	0CE107SF6DC	100UF MVG 16V M SMD R/TP
C825	0CE107SF6DC	100UF MVG 16V M SMD R/TP
C827	0CE227VF6DC	220UF MV 16V 20% R/TP(SMD) SMD
C829	0CE227VF6DC	220UF MV 16V 20% R/TP(SMD) SMD
C832	0CE476SF6DC	47UF MVG 16V M SMD R/TP
C835	0CE476SF6DC	47UF MVG 16V M SMD R/TP
C838	0CE476SF6DC	47UF MVG 16V M SMD R/TP
C840	0CE107SF6DC	100UF MVG 16V M SMD R/TP
C842	0CE107SF6DC	100UF MVG 16V M SMD R/TP
C845	0CE476SF6DC	47UF MVG 16V M SMD R/TP
C848	0CE476SF6DC	47UF MVG 16V M SMD R/TP
C849	0CE477VF6DC	470UF MV 16V 20% R/TP(SMD) SMD
C851	0CE477VF6DC	470UF MV 16V 20% R/TP(SMD) SMD
C853	0CE477VF6DC	470UF MV 16V 20% R/TP(SMD) SMD
C856	0CE107SF6DC	100UF MVG 16V M SMD R/TP
C859	0CE107SF6DC	100UF MVG 16V M SMD R/TP
C862	0CE107SF6DC	100UF MVG 16V M SMD R/TP
C865	0CE107SF6DC	100UF MVG 16V M SMD R/TP
C867	0CE227VF6DC	220UF MV 16V 20% R/TP(SMD) SMD
C869	0CE227VF6DC	220UF MV 16V 20% R/TP(SMD) SMD
C872	0CE476SF6DC	47UF MVG 16V M SMD R/TP
C875	0CE476SF6DC	47UF MVG 16V M SMD R/TP

LOCA. NO	PART NO	DESCRIPTION
C878	0CE106SF6DC	10UF MVG 16V 20% R/TP(SMD) SMD
C892	0CE477VF6DC	470UF MV 16V 20% R/TP(SMD) SMD
C894	0CE477VF6DC	470UF MV 16V 20% R/TP(SMD) SMD
C897	0CE107SF6DC	100UF MVG 16V M SMD R/TP
C900	0CE107SF6DC	100UF MVG 16V M SMD R/TP
C903	0CE107SF6DC	100UF MVG 16V M SMD R/TP
C906	0CE107SF6DC	100UF MVG 16V M SMD R/TP
C908	0CE477VF6DC	470UF MV 16V 20% R/TP(SMD) SMD
C910	0CE477VF6DC	470UF MV 16V 20% R/TP(SMD) SMD
C931	0CE107SF6DC	100UF MVG 16V M SMD R/TP
C933	0CE477VF6DC	470UF MV 16V 20% R/TP(SMD) SMD
C935	0CE477VF6DC	470UF MV 16V 20% R/TP(SMD) SMD
C938	0CE107SF6DC	100UF MVG 16V M SMD R/TP
C941	0CE227VF6DC	220UF MV 16V 20% R/TP(SMD) SMD
C944	0CE476SF6DC	47UF MVG 16V M SMD R/TP
C947	0CE476SF6DC	47UF MVG 16V M SMD R/TP
C949	0CE477VF6DC	470UF MV 16V 20% R/TP(SMD) SMD
C951	0CE477VF6DC	470UF MV 16V 20% R/TP(SMD) SMD
C954	0CE107SF6DC	100UF MVG 16V M SMD R/TP
C957	0CE476SF6DC	47UF MVG 16V M SMD R/TP
C966	0CE107SF6DC	100UF MVG 16V M SMD R/TP
C975	0CE227VF6DC	220UF MV 16V 20% R/TP(SMD) SMD
C977	0CE227VF6DC	220UF MV 16V 20% R/TP(SMD) SMD
C980	0CE476SF6DC	47UF MVG 16V M SMD R/TP
C983	0CE107SF6DC	100UF MVG 16V M SMD R/TP
C986	0CE476SF6DC	47UF MVG 16V M SMD R/TP
C989	0CE107SF6DC	100UF MVG 16V M SMD R/TP
C992	0CE107SF6DC	100UF MVG 16V M SMD R/TP
CA101	0CE477DK618	470UF STD 50V 20% FL TP 5
CA102	0CE477DK618	470UF STD 50V 20% FL TP 5
CA104	0CE107DH618	100UF STD 25V M FL TP5
CA105	0CE105SK6DC	1UF MVG 50V M SMD R/TP
CA106	0CE106SF6DC	10UF MVG 16V 20% R/TP(SMD) SMD
CA107	0CQ6821N509	0.0068U 100V K POLY TP
CA108	0CE107DH618	100UF STD 25V M FL TP5
CA109	0CQ6821N509	0.0068U 100V K POLY TP
CA110	0CE477DK618	470UF STD 50V 20% FL TP 5
CA111	0CE477DK618	470UF STD 50V 20% FL TP 5
CA112	0CE106SF6DC	10UF MVG 16V 20% R/TP(SMD) SMD
CA113	181-120K	2200PF 4KV M E FMTW LEAD 4.5
CA114	181-120K	2200PF 4KV M E FMTW LEAD 4.5
CA115	0CE477DK618	470UF STD 50V 20% FL TP 5
CA116	0CE107DH618	100UF STD 25V M FL TP5
CA117	0CE477DK618	470UF STD 50V 20% FL TP 5
CA118	0CQ1041N509	0.1U 100V K POLY TP
CA119	0CE227VF6DC	220UF MV 16V 20% R/TP(SMD) SMD
CA120	0CE106SF6DC	10UF MVG 16V 20% R/TP(SMD) SMD
CA121	0CQ1041N509	0.1U 100V K POLY TP
CA122	0CE227VF6DC	220UF MV 16V 20% R/TP(SMD) SMD
CA125	0CE107SF6DC	100UF MVG 16V M SMD R/TP
CA126	0CE474SK6DC	0.47UF MVG 50V M SMD R/TP
CA127	0CE474SK6DC	0.47UF MVG 50V M SMD R/TP

For Capacitor & Resistors, the characters at 2nd and 3rd digit in the P/No. means as follows;	CC, CX, CK, CN : Ceramic CQ : Polyester CE : Electrolytic	RD : Carbon Film RS : Metal Oxide Film RN : Metal Film RF : Fusible
--	---	--

LOCA. NO	PART NO	DESCRIPTION
CA128	0CE335SK6DC	3.3UF MVG 50V 20% SMD R/TP
CA129	0CE107SF6DC	100UF MVG 16V M SMD R/TP
CA131	0CE106SF6DC	10UF MVG 16V 20% R/TP(SMD) SMD
CA132	0CE474SK6DC	0.47UF MVG 50V M SMD R/TP
CA133	0CE474SK6DC	0.47UF MVG 50V M SMD R/TP
CA134	0CE106SF6DC	10UF MVG 16V 20% R/TP(SMD) SMD
CA135	0CE106SF6DC	10UF MVG 16V 20% R/TP(SMD) SMD
CA139	0CE106SF6DC	10UF MVG 16V 20% R/TP(SMD) SMD
CA140	0CE107SF6DC	100UF MVG 16V M SMD R/TP
CA153	0CE107SF6DC	100UF MVG 16V M SMD R/TP
CA154	0CE476SF6DC	47UF MVG 16V M SMD R/TP
CA154	0CE476SF6DC	47UF MVG 16V M SMD R/TP
CA155	0CE106SF6DC	10UF MVG 16V 20% R/TP(SMD) SMD
CA156	0CE476SF6DC	47UF MVG 16V M SMD R/TP
CA751	0CE105SK6DC	1UF MVG 50V M SMD R/TP
CN113	0CE476SF6DC	47UF MVG 16V M SMD R/TP
CN114	0CE476SF6DC	47UF MVG 16V M SMD R/TP
CN115	0CE476SF6DC	47UF MVG 16V M SMD R/TP
CN119	0CE105SK6DC	1UF MVG 50V M SMD R/TP
CN120	0CE105SK6DC	1UF MVG 50V M SMD R/TP
CN121	0CE105SK6DC	1UF MVG 50V M SMD R/TP
CN122	0CE105SK6DC	1UF MVG 50V M SMD R/TP
CN123	0CE105SK6DC	1UF MVG 50V M SMD R/TP
CN124	0CE476SF6DC	47UF MVG 16V M SMD R/TP
CN127	0CE105SK6DC	1UF MVG 50V M SMD R/TP
CN130	0CE105SK6DC	1UF MVG 50V M SMD R/TP
CN133	0CE105SK6DC	1UF MVG 50V M SMD R/TP
CN137	0CE476SF6DC	47UF MVG 16V M SMD R/TP
CN138	0CE105SK6DC	1UF MVG 50V M SMD R/TP
CN141	0CE476SF6DC	47UF MVG 16V M SMD R/TP
CN144	0CE476SF6DC	47UF MVG 16V M SMD R/TP
CN145	0CE476SF6DC	47UF MVG 16V M SMD R/TP
CN147	0CE476SF6DC	47UF MVG 16V M SMD R/TP
CN149	0CE476SF6DC	47UF MVG 16V M SMD R/TP
<b>COIL</b>		
L800	6140VB0004B	COIL,CHOKE 26UH 1UEWPHY 22.5TURN
L801	6140VB0004B	COIL,CHOKE 26UH 1UEWPHY 22.5TURN
L803	150-C02F	COIL,CHOKE 82UH PHY TURN
<b>JACK</b>		
P102	380-068B	JACK,PHONE 3.5 EARPHONE WITH SW S
P103	6612BBBH6A	JACK,DIN 440062-1 AMP DVI INTERACED RIG
P103A	6612VLH001A	JACK,RCA SP022B 2P BK/R
P103B	6612VLH001A	JACK,RCA SP022B 2P BK/R
P120	380-068B	JACK,PHONE 3.5 EARPHONE WITH SW S
PN101	380-363J	JACK,DIN PJ6046F H=8.0 W/O S/W
PN102	6612JH003CA	JACK,RCA PPJ137A AUDIO L-MON
PN103	6612VMV002A	JACK,DRAWING UCT-EX-020 UGCOM BNC MONO
PN104	6612J00010A	JACK,RCA PPJ128A-1 A/V 2P MONO
PN105	6612JH003CA	JACK,RCA PPJ137A AUDIO L-MON

LOCA. NO	PART NO	DESCRIPTION
<b>CONNECTOR</b>		
P1	387-B04J	CONNECTOR ASSY,4P SHIELD WIRE (L=500)
P2	387-A03J	CONNECTOR ASSEMBLY,3P 500MM
P101	6630VGA001C	CONNECTOR,D-SUB 15PIN 2.29MM
P104	6630VGA001C	CONNECTOR,D-SUB 15PIN 2.29MM
P741	6630VGA004B	CONNECTOR,D-SUB 9P 2.7MM FOR
<b>RESISTOR</b>		
AR200	0RRZVTA001D	22 OHM 1 / 16 W 1608 5% R/TP 4
AR201	0RRZVTA001D	22 OHM 1 / 16 W 1608 5% R/TP 4
AR202	0RRZVTA001D	22 OHM 1 / 16 W 1608 5% R/TP 4
AR203	0RRZVTA001D	22 OHM 1 / 16 W 1608 5% R/TP 4
AR204	0RRZVTA001D	22 OHM 1 / 16 W 1608 5% R/TP 4
AR205	0RRZVTA001D	22 OHM 1 / 16 W 1608 5% R/TP 4
AR206	0RRZVTA001D	22 OHM 1 / 16 W 1608 5% R/TP 4
AR207	0RRZVTA001D	22 OHM 1 / 16 W 1608 5% R/TP 4
AR208	0RRZVTA001D	22 OHM 1 / 16 W 1608 5% R/TP 4
AR209	0RRZVTA001D	22 OHM 1 / 16 W 1608 5% R/TP 4
AR210	0RRZVTA001D	22 OHM 1 / 16 W 1608 5% R/TP 4
AR211	0RRZVTA001D	22 OHM 1 / 16 W 1608 5% R/TP 4
AR260	0RRZVTA001D	22 OHM 1 / 16 W 1608 5% R/TP 4
AR261	0RRZVTA001D	22 OHM 1 / 16 W 1608 5% R/TP 4
AR262	0RRZVTA001D	22 OHM 1 / 16 W 1608 5% R/TP 4
AR263	0RRZVTA001D	22 OHM 1 / 16 W 1608 5% R/TP 4
AR264	0RRZVTA001D	22 OHM 1 / 16 W 1608 5% R/TP 4
AR265	0RRZVTA001D	22 OHM 1 / 16 W 1608 5% R/TP 4
AR266	0RRZVTA001D	22 OHM 1 / 16 W 1608 5% R/TP 4
AR267	0RRZVTA001D	22 OHM 1 / 16 W 1608 5% R/TP 4
AR268	0RRZVTA001D	22 OHM 1 / 16 W 1608 5% R/TP 4
AR269	0RRZVTA001D	22 OHM 1 / 16 W 1608 5% R/TP 4
AR270	0RRZVTA001D	22 OHM 1 / 16 W 1608 5% R/TP 4
AR271	0RRZVTA001D	22 OHM 1 / 16 W 1608 5% R/TP 4
AR400	0RRZVTA001D	22 OHM 1 / 16 W 1608 5% R/TP 4
AR401	0RRZVTA001D	22 OHM 1 / 16 W 1608 5% R/TP 4
AR402	0RRZVTA001D	22 OHM 1 / 16 W 1608 5% R/TP 4
AR403	0RRZVTA001D	22 OHM 1 / 16 W 1608 5% R/TP 4
AR460	0RRZVTA001D	22 OHM 1 / 16 W 1608 5% R/TP 4
AR461	0RRZVTA001D	22 OHM 1 / 16 W 1608 5% R/TP 4
AR462	0RRZVTA001D	22 OHM 1 / 16 W 1608 5% R/TP 4
AR463	0RRZVTA001D	22 OHM 1 / 16 W 1608 5% R/TP 4
AR464	0RRZVTA001D	22 OHM 1 / 16 W 1608 5% R/TP 4
AR465	0RRZVTA001D	22 OHM 1 / 16 W 1608 5% R/TP 4
AR466	0RRZVTA001D	22 OHM 1 / 16 W 1608 5% R/TP 4
AR467	0RRZVTA001D	22 OHM 1 / 16 W 1608 5% R/TP 4
AR468	0RRZVTA001D	22 OHM 1 / 16 W 1608 5% R/TP 4
AR469	0RRZVTA001D	22 OHM 1 / 16 W 1608 5% R/TP 4
AR470	0RRZVTA001D	22 OHM 1 / 16 W 1608 5% R/TP 4
AR471	0RRZVTA001D	22 OHM 1 / 16 W 1608 5% R/TP 4
AR472	0RRZVTA001D	22 OHM 1 / 16 W 1608 5% R/TP 4
AR473	0RRZVTA001D	22 OHM 1 / 16 W 1608 5% R/TP 4
AR474	0RRZVTA001D	22 OHM 1 / 16 W 1608 5% R/TP 4





For Capacitor & Resistors, the characters at 2nd and 3rd digit in the P/No. means as follows;	CC, CX, CK, CN : Ceramic CQ : Polyester CE : Electrolytic	RD : Carbon Film RS : Metal Oxide Film RN : Metal Film RF : Fusible
--	---	--





LOCA. NO	PART NO	DESCRIPTION
AR475	0RRZVTA001D	22 OHM 1 / 16 W 1608 5% R/TP 4
AR500	0RRZVTA001D	22 OHM 1 / 16 W 1608 5% R/TP 4
AR501	0RRZVTA001D	22 OHM 1 / 16 W 1608 5% R/TP 4
AR502	0RRZVTA001D	22 OHM 1 / 16 W 1608 5% R/TP 4
AR503	0RRZVTA001D	22 OHM 1 / 16 W 1608 5% R/TP 4
AR504	0RRZVTA001D	22 OHM 1 / 16 W 1608 5% R/TP 4
AR505	0RRZVTA001D	22 OHM 1 / 16 W 1608 5% R/TP 4
AR506	0RRZVTA001D	22 OHM 1 / 16 W 1608 5% R/TP 4
AR507	0RRZVTA001D	22 OHM 1 / 16 W 1608 5% R/TP 4
AR508	0RRZVTA001D	22 OHM 1 / 16 W 1608 5% R/TP 4
AR509	0RRZVTA001D	22 OHM 1 / 16 W 1608 5% R/TP 4
AR510	0RRZVTA001D	22 OHM 1 / 16 W 1608 5% R/TP 4
AR511	0RRZVTA001D	22 OHM 1 / 16 W 1608 5% R/TP 4
AR512	0RRZVTA001D	22 OHM 1 / 16 W 1608 5% R/TP 4
AR513	0RRZVTA001D	22 OHM 1 / 16 W 1608 5% R/TP 4
AR514	0RRZVTA001D	22 OHM 1 / 16 W 1608 5% R/TP 4
AR515	0RRZVTA001D	22 OHM 1 / 16 W 1608 5% R/TP 4
AR516	0RRZVTA001D	22 OHM 1 / 16 W 1608 5% R/TP 4
AR517	0RRZVTA001D	22 OHM 1 / 16 W 1608 5% R/TP 4
AR550	0RRZVTA001C	4.7K OHM 1 / 16 W 1608 5% R/TP
AR551	0RRZVTA001C	4.7K OHM 1 / 16 W 1608 5% R/TP
AR552	0RRZVTA001C	4.7K OHM 1 / 16 W 1608 5% R/TP
AR553	0RRZVTA001C	4.7K OHM 1 / 16 W 1608 5% R/TP
R22	0RD0152H609	15 OHM 1/2 W 5.00% TA52
RA101	0RS2701K607	2.7K OHM 2 W 5.00% TA62
RA102	0RS2701K607	2.7K OHM 2 W 5.00% TA62
RA105	0RD4700H609	470 OHM 1/2 W 5.00% TA52
RA109	0RD4700H609	470 OHM 1/2 W 5.00% TA52
RA114	0RS0221H609	2.2 OHM 1/2 W 5.00% TA52
RA117	0RS0221H609	2.2 OHM 1/2 W 5.00% TA52
<b>SWITCH</b>		
SW001	140-315A	SWITCH,TACT SKHV17910B NON 12V
SW002	140-315A	SWITCH,TACT SKHV17910B NON 12V
SW003	140-315A	SWITCH,TACT SKHV17910B NON 12V
SW004	140-315A	SWITCH,TACT SKHV17910B NON 12V
SW005	140-315A	SWITCH,TACT SKHV17910B NON 12V
SW006	140-315A	SWITCH,TACT SKHV17910B NON 12V
SW101	140-275A	SWITCH,PUSH JDPB21SA NON 30V 0
SW742	140-275A	SWITCH,PUSH JDPB21SA NON 30V 0
SW800	6600VM2006A	SWITCH,PUSH SDDF3PATP011 UNIVERSAL
<b>FILTER &amp; CRYSTAL</b>		
IC106	6200VJS001A	FILTER,EMC ZJY51R5-4P TDK DC 50VOLT 2A
IC107	6200VJS001A	FILTER,EMC ZJY51R5-4P TDK DC 50VOLT 2A
IC108	6200VJS001A	FILTER,EMC ZJY51R5-4P TDK DC 50VOLT 2A
L100	6210VC0005A	FILTER,EMC BK2125 HS 750
L101	6210VC0005A	FILTER,EMC BK2125 HS 750
L135	6200JB8007L	FILTER,EMC HH2012 1M221JT
L136	6200JB8007L	FILTER,EMC HH2012 1M221JT
L137	6200JB8007L	FILTER,EMC HH2012 1M221JT
L138	6200JB8007L	FILTER,EMC HH2012 1M221JT





LOCA. NO	PART NO	DESCRIPTION
L150	6210VC0006A	FILTER,EMC FBMH3216 HM501NT
L300	6210VC0005A	FILTER,EMC BK2125 HS 750
L301	6210VC0005A	FILTER,EMC BK2125 HS 750
L302	6210VC0005A	FILTER,EMC BK2125 HS 750
L460	6210VC0006A	FILTER,EMC FBMH3216 HM501NT
L806	6210VC0006A	FILTER,EMC FBMH3216 HM501NT
L807	6210VC0006A	FILTER,EMC FBMH3216 HM501NT
L808	6210VC0006A	FILTER,EMC FBMH3216 HM501NT
L809	6210VC0006A	FILTER,EMC FBMH3216 HM501NT
L810	6210VC0006A	FILTER,EMC FBMH3216 HM501NT
L811	6210VC0006A	FILTER,EMC FBMH3216 HM501NT
L850	6210VC0006A	FILTER,EMC FBMH3216 HM501NT
L851	6210VC0006A	FILTER,EMC FBMH3216 HM501NT
L852	6210VC0006A	FILTER,EMC FBMH3216 HM501NT
L853	6210VC0006A	FILTER,EMC FBMH3216 HM501NT
L854	6210VC0006A	FILTER,EMC FBMH3216 HM501NT
L855	6210VC0006A	FILTER,EMC FBMH3216 HM501NT
L856	6210VC0006A	FILTER,EMC FBMH3216 HM501NT
L857	6210VC0006A	FILTER,EMC FBMH3216 HM501NT
L858	6210VC0006A	FILTER,EMC FBMH3216 HM501NT
L859	6210VC0006A	FILTER,EMC FBMH3216 HM501NT
L860	6210VC0006A	FILTER,EMC FBMH3216 HM501NT
L861	6210VC0006A	FILTER,EMC FBMH3216 HM501NT
L862	6210VC0006A	FILTER,EMC FBMH3216 HM501NT
L863	6210VC0006A	FILTER,EMC FBMH3216 HM501NT
L864	6210VC0006A	FILTER,EMC FBMH3216 HM501NT
L865	6210VC0006A	FILTER,EMC FBMH3216 HM501NT
L866	6210VC0006A	FILTER,EMC FBMH3216 HM501NT
L867	6210VC0006A	FILTER,EMC FBMH3216 HM501NT
L868	6210VC0006A	FILTER,EMC FBMH3216 HM501NT
L871	6210VC0006A	FILTER,EMC FBMH3216 HM501NT
L872	6210VC0006A	FILTER,EMC FBMH3216 HM501NT
L873	6210VC0006A	FILTER,EMC FBMH3216 HM501NT
L874	6210VC0006A	FILTER,EMC FBMH3216 HM501NT
L875	6210VC0006A	FILTER,EMC FBMH3216 HM501NT
L876	6210VC0006A	FILTER,EMC FBMH3216 HM501NT
L877	6210VC0006A	FILTER,EMC FBMH3216 HM501NT
L880	6210VC0006A	FILTER,EMC FBMH3216 HM501NT
L882	6210VC0006A	FILTER,EMC FBMH3216 HM501NT
L883	6210VC0006A	FILTER,EMC FBMH3216 HM501NT
L884	6210VC0006A	FILTER,EMC FBMH3216 HM501NT
L885	6210VC0006A	FILTER,EMC FBMH3216 HM501NT
L886	6210VC0006A	FILTER,EMC FBMH3216 HM501NT
L887	6210VC0006A	FILTER,EMC FBMH3216 HM501NT
L889	6210VC0006A	FILTER,EMC FBMH3216 HM501NT
LA101	150-F09A	FILTER,EMC SQE2222 7-14MH 0.37PHY 48TURN
LA102	6210VC0006A	FILTER,EMC FBMH3216 HM501NT
LA104	6210VC0006A	FILTER,EMC FBMH3216 HM501NT
LA105	6210VC0006A	FILTER,EMC FBMH3216 HM501NT
LA106	6210VC0006A	FILTER,EMC FBMH3216 HM501NT
LN107	6210VC0006A	FILTER,EMC FBMH3216 HM501NT
LN108	6210VC0006A	FILTER,EMC FBMH3216 HM501NT





RD : Carbon Film  
RS : Metal Oxide Film  
RN : Metal Film  
RF : Fusible





LOCA. NO	PART NO	DESCRIPTION

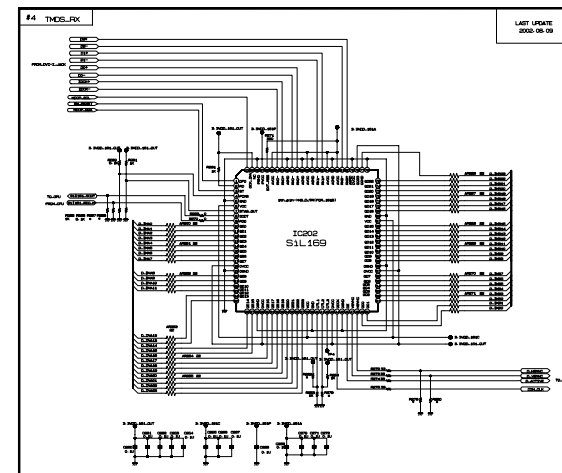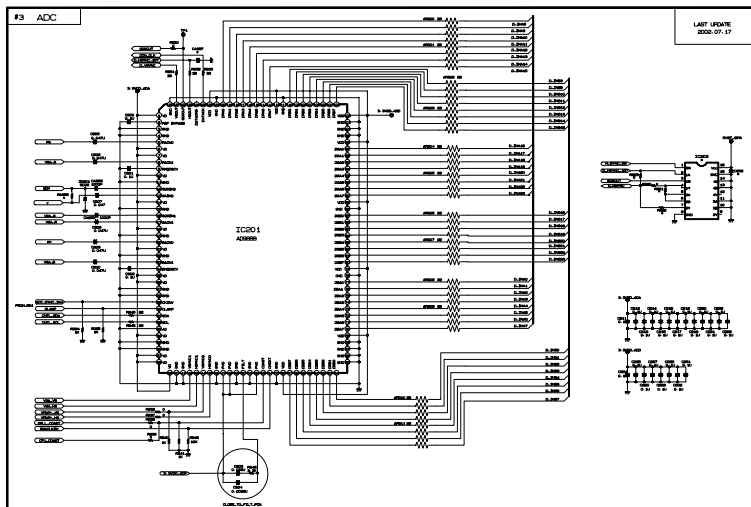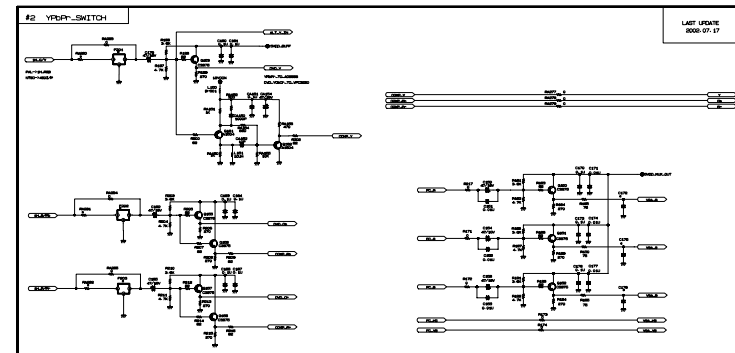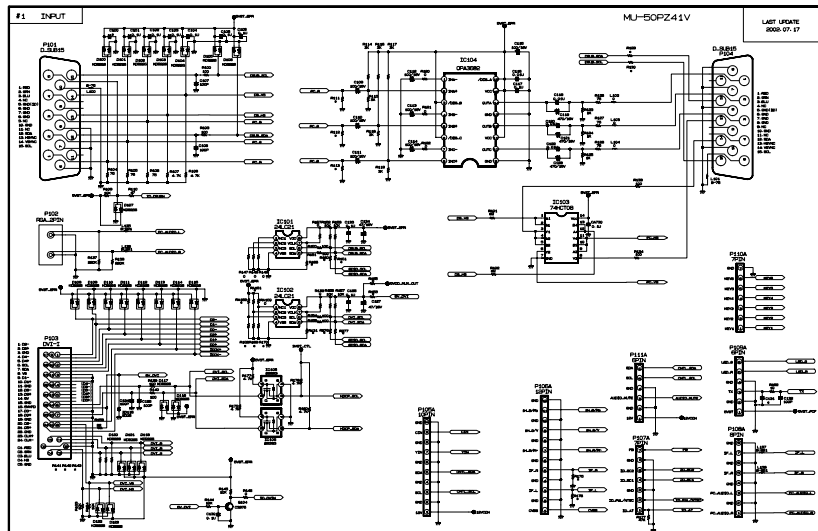

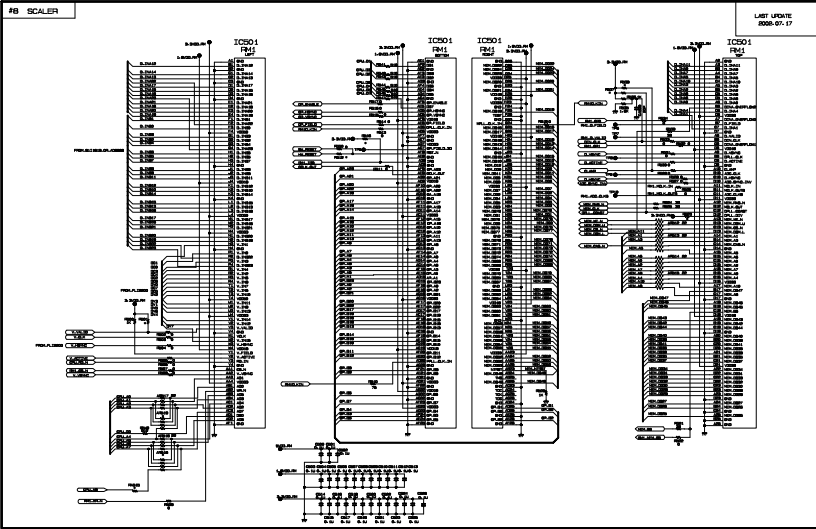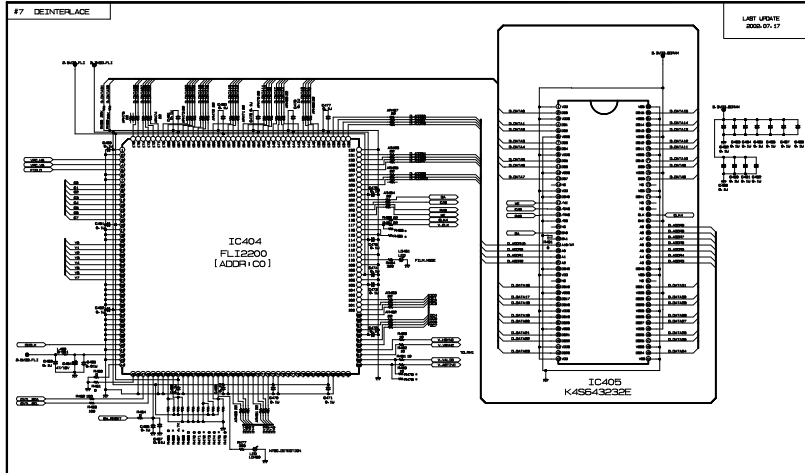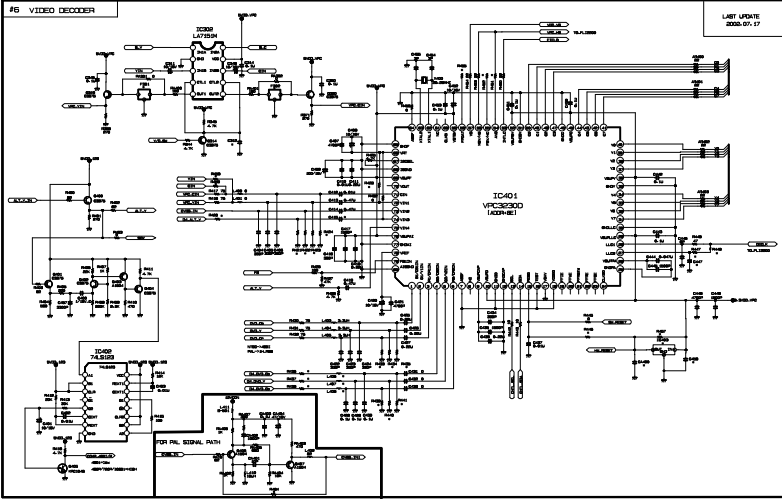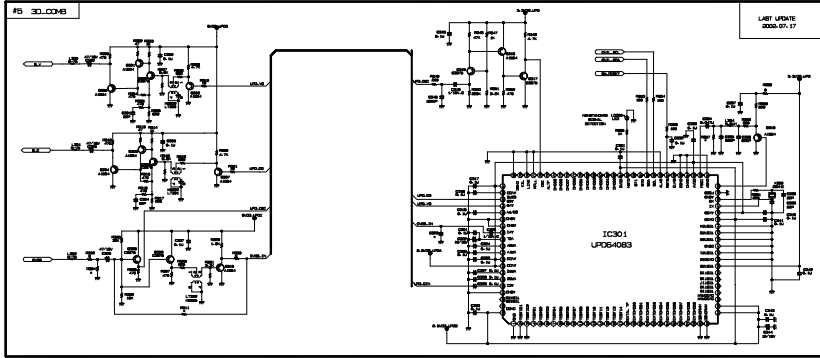

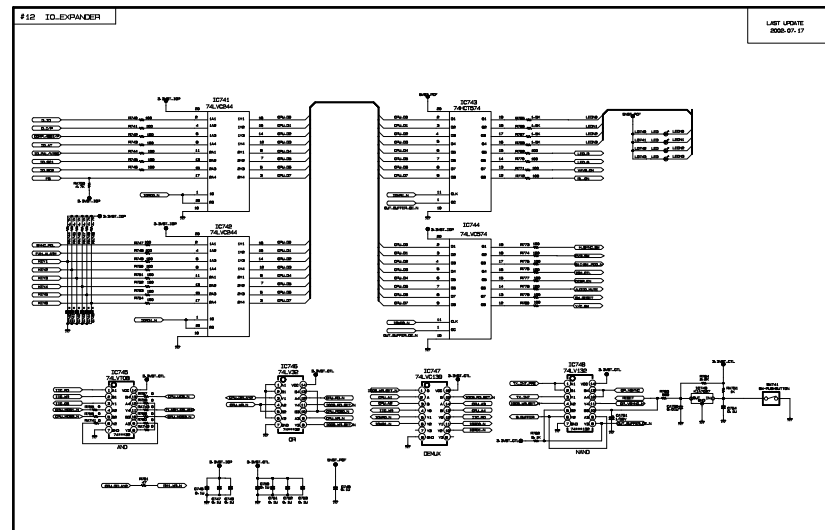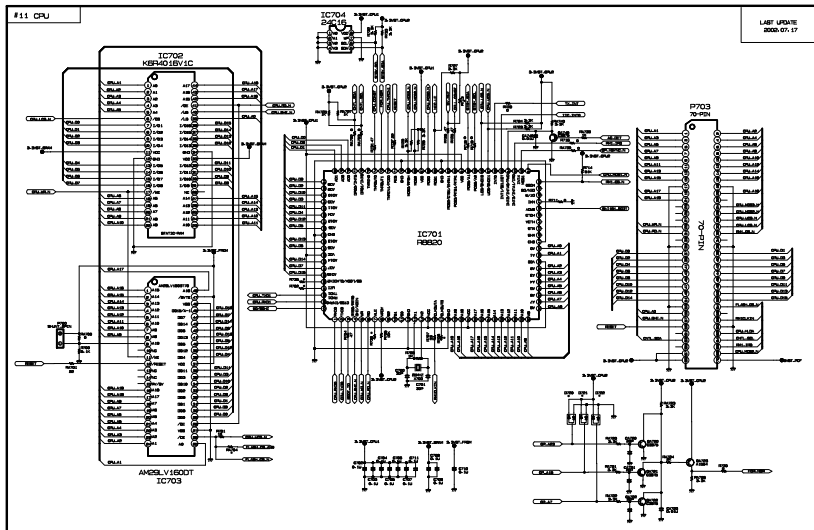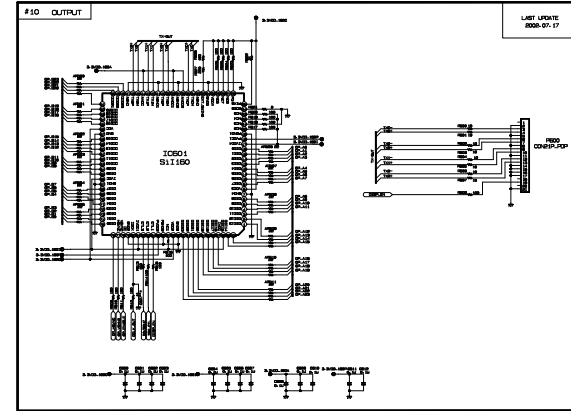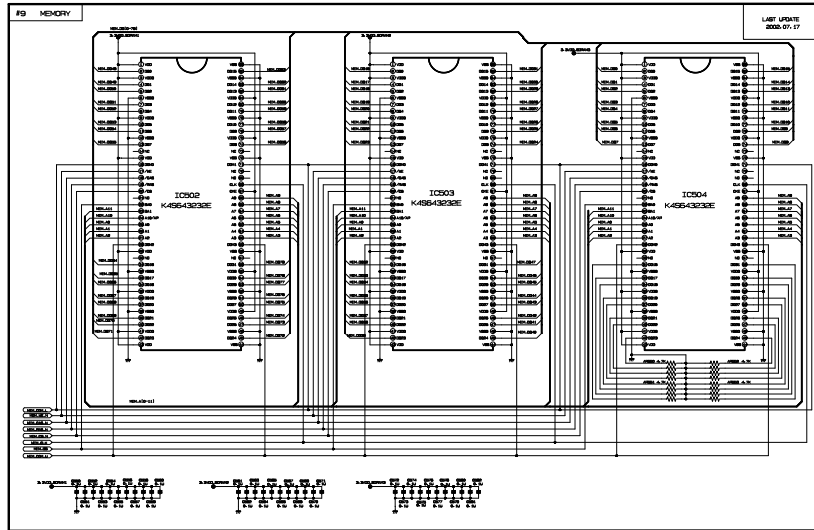


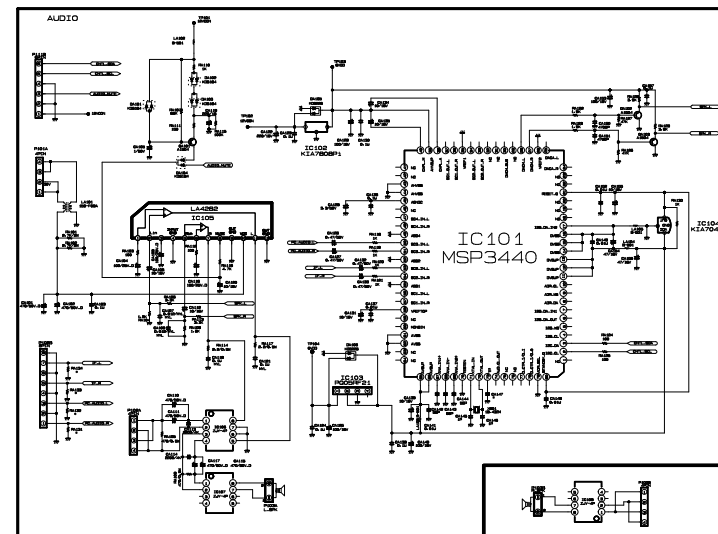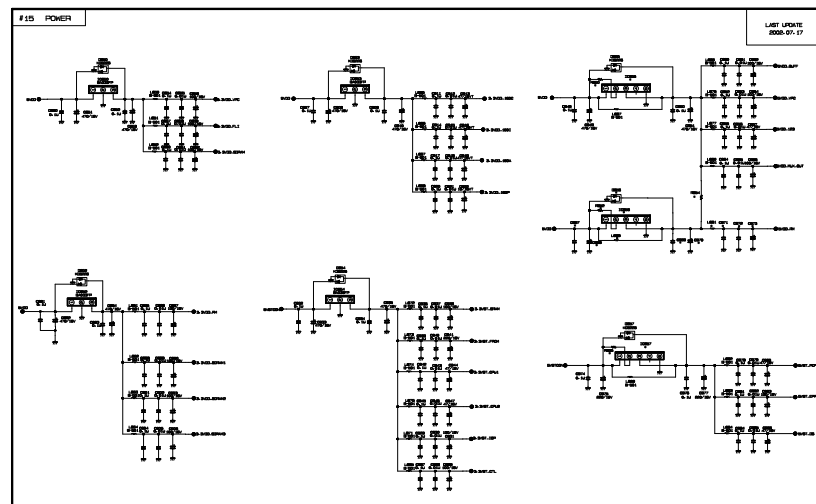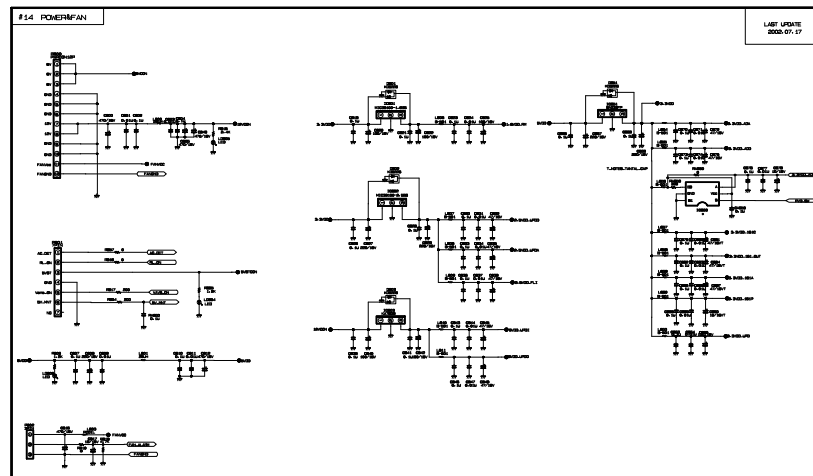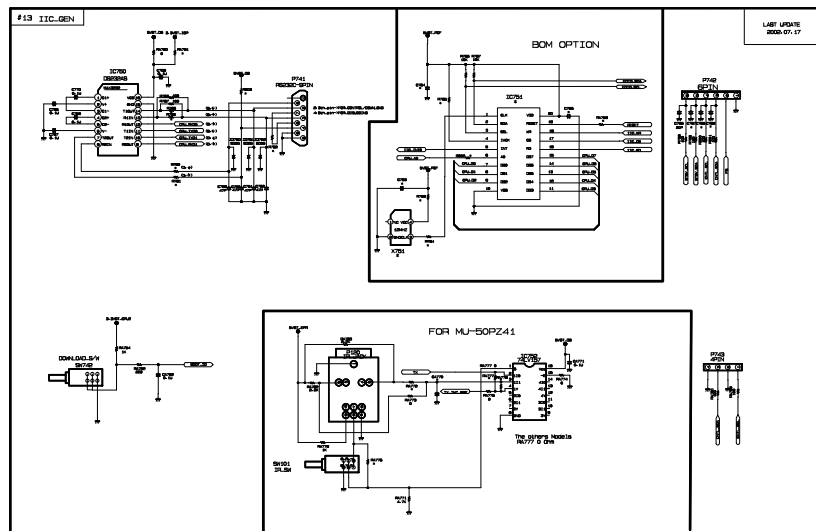

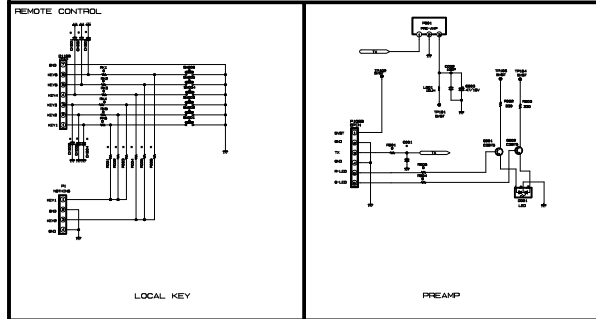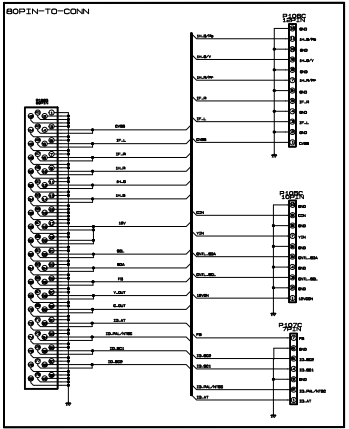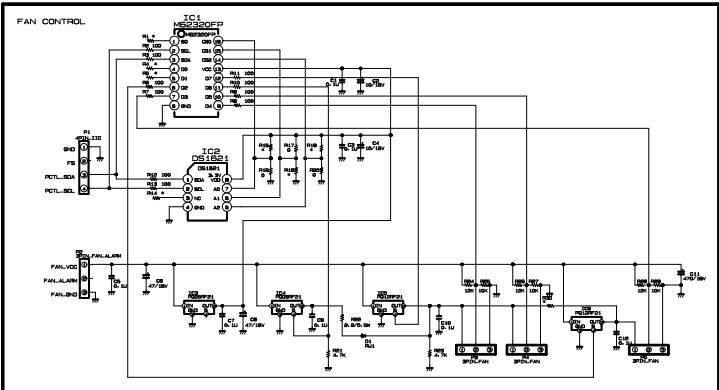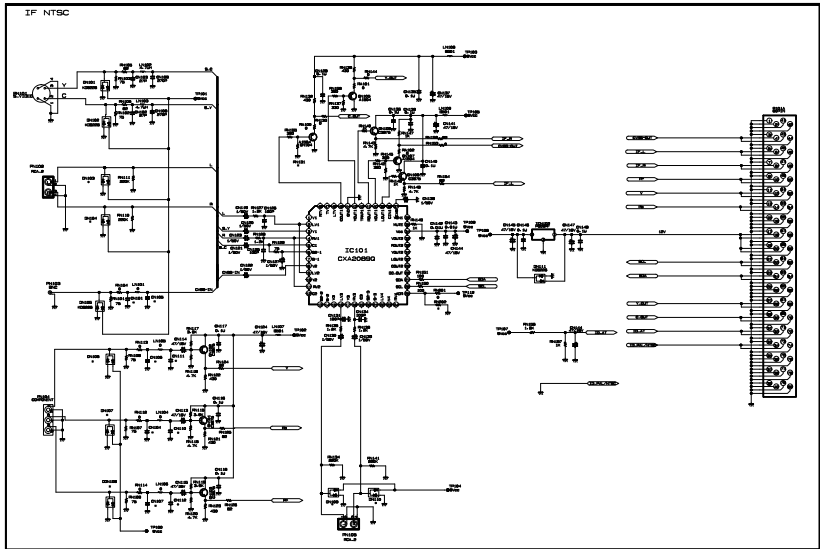


# PRINTED CIRCUIT BOARD


MAIN(TOP)

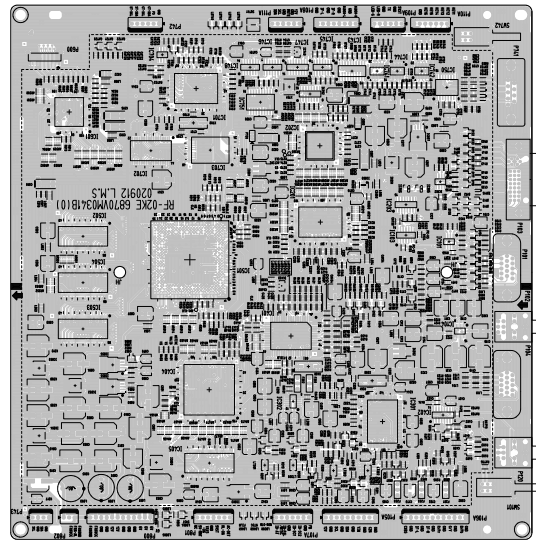


MAIN(BOTTOM)

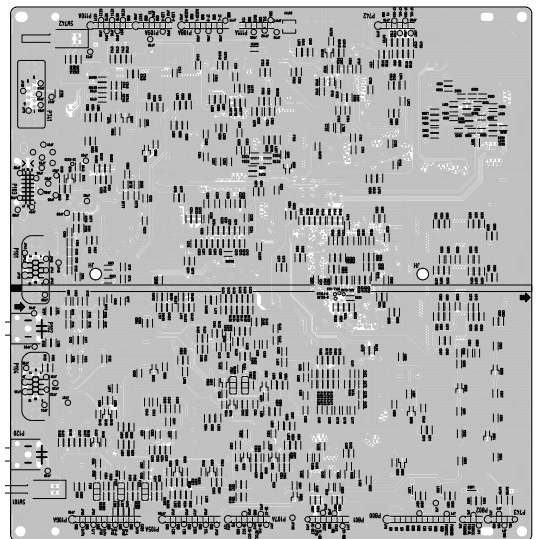


AV NTSC(TOP)

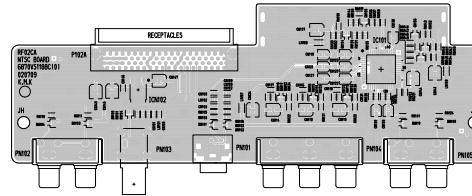


AV NTSC(BOTTOM)

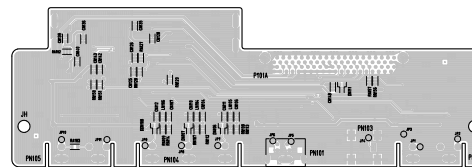


AUDIO(TOP)

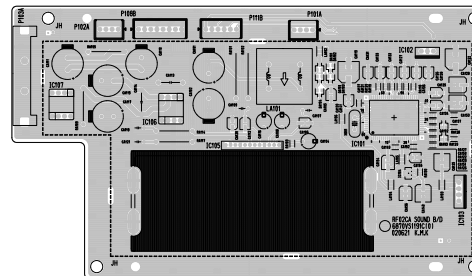


AUDIO(BOTTOM)

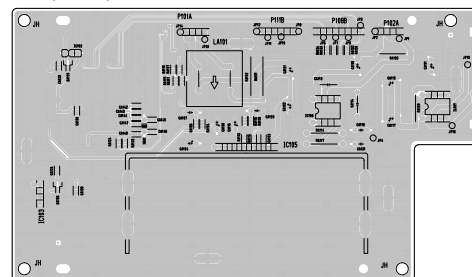


INTERFACE FIX(TOP)




INTERFACE FIX(BOTTOM)




FAN CONTROL(TOP)




FAN CONTROL(BOTTOM)




LOCAL KEY(TOP)




LOCAL KEY(BOTTOM)




POWER S/W(TOP)




POWER S/W(BOTTOM)



RIGHT SPK(TOP)




RIGHT SPK(BOTTOM)



PRE-AMP(TOP)



PRE-AMP(BOTTOM)





P/NO : 3828VD0121H

Sep., 201  
Printed in Korea