


FOLDER 8
SET 489

PHOTOFACT® Folder

CORONADO MODELS
PH3-4045A, PH3-4055A

CORONADO MODELS
PH3-4045A, PH3-4055A

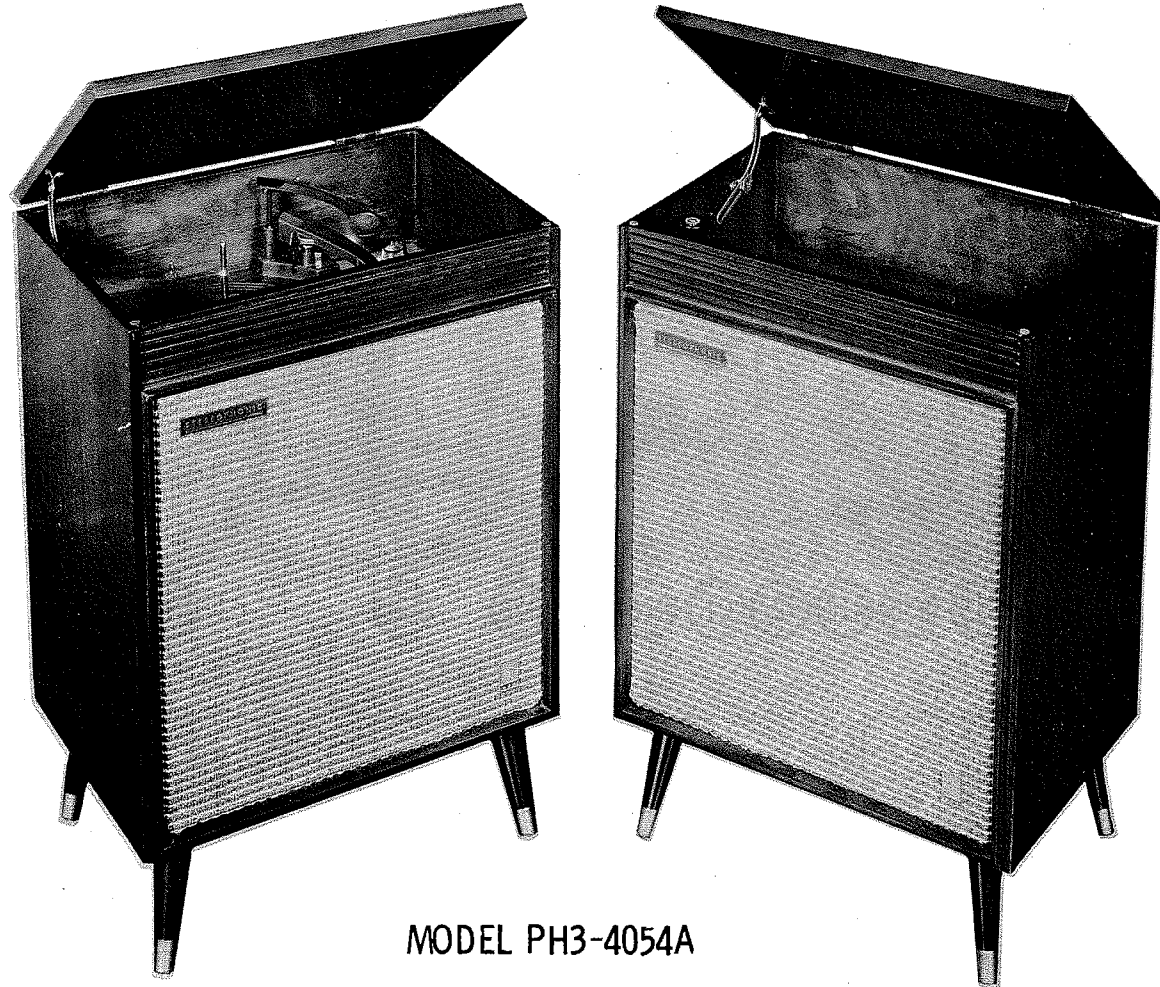

CORONADO MODELS
PH3-4045A, PH3-4055A

TRADE NAME	Coronado Models PH3-4054A, PH3-4055A	
SUPPLIER	Gamble-Skogmo, Inc., 15 N. Eighth Street, Minneapolis 3, Minn.	
TYPE SET	AC Operated 5 Tube Stereo Amplifier with 4 Speed Automatic Record Changer	
POWER SUPPLY	105-125 Volts AC, 60 Cycles	RATING 77 Watts, .84 Amp @ 117 Volts AC (Less Motor)

FOR SERVICE INFORMATION ON RECORD CHANGER PART #28A247 - SEE V-M 1201 - PHOTOFACT SET 436 FOLDER 18

HOWARD W. SAMS & CO., INC. Indianapolis 6, Indiana



The listing of any available replacement part herein does not constitute in any case a recommendation, warranty or guaranty by Howard W. Sams & Co., Inc., as to the quality and suitability of such replacement part. The numbers of these parts have been compiled from information furnished to Howard W. Sams & Co., Inc., by the manufacturers of JT793

the particular type of replacement part listed. Reproduction or use, without express permission, of editorial or pictorial content, in any manner, is prohibited. No patent liability is assumed with respect to the use of the information contained herein. © 1960 Howard W. Sams & Co., Inc., Indianapolis 6, Indiana. Printed in U.S. of America

DATE 6-60

SET489

FOLDER 8

SET489 FOLDER 8

PARTS LIST AND DESCRIPTIONS

TUBES

* CBS * GENERAL ELECTRIC * RAYTHEON * SYLVANIA *					
ITEM No.	USE	TYPE	ITEM No.	USE	TYPE
V1	Left Channel AF Amp	7025	V4	Right Channel Output Rectifier	6BQ5 5Y3GT
V2	Left Channel Output	6BQ5	V5		
V3	Right Channel AF Amp	7025			

ELECTROLYTIC CAPACITORS

ITEM		RATING		REPLACEMENT DATA						
No.		CAP.	VOLT.	CORONADO PART No.	AEROVOX PART No.	CORNELL- DUBILIER PART No.	MALLORY PART No.	PYRAMID PART No.	SPRAGUE PART No.	NOTES
C1A	100	400	400	45X462	AFH4-86-20	C1104	FP431.7		TVL-3755	
C1B	40	400	400			BR4045	TC79		TVA-1714	
C2	100	25	25							
C3	100P	100P	100P	45X426	PR87405	BBR10-50H	TCN105		TVANS-1110*	
C2	5	5	5	45X426	PR87405	BBR10-50H	TCN105		TVANS-1110*	

* Use 2 units. Connect negative terminals together.
* Connect positive terminals into circuit the same as the original non-polarized unit.
* Not normally in distributor's stock. Available thru distributor on order to manufacturer.

FIXED CAPACITORS

Capacity values given in the rating column are in mfd. for Paper Capacitors, and in mmfd. for Mica and Ceramic Capacitors.

REPLACEMENT DATA									
ITEM No.	RATING	REMARKS	AEROVOX PART No.	CENTRALAB PART No.	CORNELL-DUBILIER PART No.	ELMICO PART No.	MALLORY PART No.	SPRAGUE PART No.	
C4	10%		DL-47	DD-470	L10Q47	CCD-470	GP447	10T5-Q47	
C5	10000		BPD-01	DD-103	BYA10S1	CCD-103	GP110	5HK-510	
C6	.0047	200V	P28BN-0047	D6-472	CUB8D47	6DP-1-472	GEM-6247	6TM-D47	
C7	.1	400V	P48BN-1	DF-104	CUB4P1	4DP-3-104	GEM-401	4TM-51	
C8A	4700		BPD-2X0047	DD3-503	BYC6DD47	CCD-472	B2X250	5HK-2D47	
C9	100	N150	P48BN-047	DD-503	CUB6S47	4DP-3-503	GEM-4147	4TM-S47	
C10	.047	400V	DL-47	DD-470	L10Q47	CCD-470	GP447	10T5-Q47	
C11	47	10%	BPD-01	DD-103	BYA10S1	CCD-103	GP110	5HK-510	
C12	10000	200V	P28BN-0047	D6-472	CUB8D47	6DP-1-472	GEM-6247	6TM-D47	
C13	.0047	100V	P28BN-1.0	DF-104	CUB2P1	4DP-3-104	GEM-21	2TM-M1	
C14	.1	400V	P28BN-1	DF-104	CUB4P1	4DP-3-104	GEM-401	4TM-51	
C15	100K		BPD-2X0047	DD3-502	BYC6DD47	CCD-472	B2X250	5HK2D47	
C16A	4700		P48BN-047	DD-503	CUB6S47	4DP-3-503	GEM-4147	4TM-S47	
C17	100	N150	DL-47	DD-470	L10Q47	CCD-470	GP447	10T5-Q47	
C18	.047	400V	BPD-01	DD-103	BYA10S1	CCD-103	GP110	5HK-510	

*Coronado Part Number
*Not normally in distributor's stock. Available thru distributor on order to manufacturer.

CONTROLS

ITEM No.	RATING		REPLACEMENT DATA						INSTALLATION NOTES
	RESIST-ANCE	WATTS	CORONADO PART No.	CENTRALAB PART No.	CLAROSTAT PART No.	CTS-IRC PART No.	MALLORY PART No.		
R1A	2meg		30X426	BT-167				Level, Right Channel	
B	200K tap			STR-167 *				Level, Left Channel	
R2A	2 meg							Balance	
R3A	200K tap		30X427	B-50	A47-500K-S	Q1-133	U50	Treble, Left Channel	
R4A	500K		40X479	Not Req.	FS-3	Not Req.	Not Req.	Treble, Right Channel	
B	500K			SR-59	AD47-500K-S		FA55L	Treble, Left Channel	
R5A	500K			Not Req.	FS-3		RU55L	Treble, Right Channel	
C	500K			Not Req.	FS-3		CS3500	Base, Left Channel	
R6A	1meg		40X480	B-69	AD47-1meg-S		FA16L	Base, Right Channel	
B	1meg			SR-69	Not Req.		RU16L	Base, Left Channel	
C	1meg			Not Req.	FS-3		CS3500	Base, Right Channel	