

PARTS LIST AND DESCRIPTIONS (Continued)

CONTROLS

ITEM No.	RATING	REPLACEMENT DATA			
		RESISTANCE	WATTS	Lafayette PART No.	CENTRALAB PART No.
R1A	500K	100K Tap	1/2	11-17	
B	500K	500K Tap	1/2		
R2A	500K	500K Tap	1/2	11-18	
B	500K	500K Tap	1/2		
C	500K	500K Tap	1/2		
R3A	500K	500K Tap	1/2	11-21	
B	500K	500K Tap	1/2		
R4A	500K	500K Tap	1/2	11-20	
B	500K	500K Tap	1/2		
R5A	500K	500K Tap	1/2	11-19	
B	500K	500K Tap	1/2		
R6A	500K	500K Tap	1/2	11-16	
B	500K	500K Tap	1/2		
R7A	500K	500K Tap	1/2	11-16	
B	500K	500K Tap	1/2		
R8A	500K	500K Tap	1/2	11-16	
B	500K	500K Tap	1/2		
R9A	500K	500K Tap	1/2	11-16	
B	500K	500K Tap	1/2		

† "Concentrit" equivalent: K-5 kit with base elements and shafts: B19-133X, P1-030 (Panel).
Not available as a factory assembled unit.
‡ "Concentrit" equivalent: K-5 kit with base elements and shafts: B19-133X, P1-030 (Panel).
†† "Concentrit" equivalent: K-5 kit with base elements and shafts: B19-133X, P1-030 (Panel).
‡‡ "Concentrit" equivalent: K-5 kit with base elements and shafts: B19-133X, P1-030 (Panel).
• "STA-LOC" equivalent: FA254L, RU254L, OK625, IS875.
▪ "STA-LOC" equivalent: FB8755, RU8755, CS937A, IS1250.
* Use when tap is not used.

RESISTORS (cont)

ITEM No.	RATING	REMARKS	ITEM No.	RATING	REMARKS
R85	1meg		R92	820K	
R86	100K		R93	470K	
R87	820K		R94	470K	
R88	240K 5%		R95	100K	
R89	1meg		R96	220K	
R90	240K 5%		R97	47K 2W	
R91	100K		R98	820K	

TRANSFORMER (POWER)

ITEM No.	RATING			REPLACEMENT DATA			
	PRI.	SEC. 1	SEC. 2	Lafayette PART No.	Holderson PART No.	Merit PART No.	Thorndson PART No.
T1	117V @ .35A	330V @ .015A	12 VCT @ 1.2A	15-9			

RECTIFIERS

ITEM No.	RATING	CURRENT (Measured)	Lafayette PART No.	ITT PART No.	SARKES PART No.	SYLVANIA PART No.	NOTES
M1	.015A		17-7		128-25H-QC		① Selenium Type
M2	1.2A		17-6		5526-1B1-RVQ		

FUSES

ITEM No.	TYPE	RATING	REPLACEMENT DATA		
			Lafayette PART No.	Littlefuse PART No.	BUSS PART No.
M3	3AG	1A 250V	FUSE 20-9	FUSE 312001	FUSE 342001
			HOLDER 20-14	HOLDER 312001	HOLDER 342001
				(3AG 1A 250V)	AGC 1
					HKP

MISCELLANEOUS

ITEM No.	PART NAME	Lafayette PART No.	NOTES
M4A	Switch	14-14	Selector (Phono Turnover) Dual Concentric Channel A
B	Switch	14-13	Roll Off, Dual Concentric Channel B
M5A	Switch	14-12	Rumble Filter (Off-On) Channel A
B	Switch	14-12	Rumble Filter (Off-On) Channel B
M6	Switch	14-12	Presence (Off-On)
M7	Switch	14-12	Stereo Function (Input)
M8A	Switch	14-15	Stereo Function (Output)
B	Switch	14-12	Scratch Filter (Off-On)
M9	Switch	14-11	Loudness
M10	Switch	14-20	Play-Monitor
M11	Printed Board	16-9	

WIRING DATA

General-use Unshielded Hook-up Wire Use BELDEN No. 8530 (Solid) Available in Ten Colors
Power Cord Use BELDEN No. 8524 (Stranded) Available in Ten Colors
..... Use BELDEN No. 1725-K (7 1/2 Ft. Length)

FOLDER 7
SET 476

PHOTOFACT® Folder




with CIRCUITRACE®



LAFAYETTE MODELS
KT-600, LT-600

LAFAYETTE MODELS
KT-600, LT-600

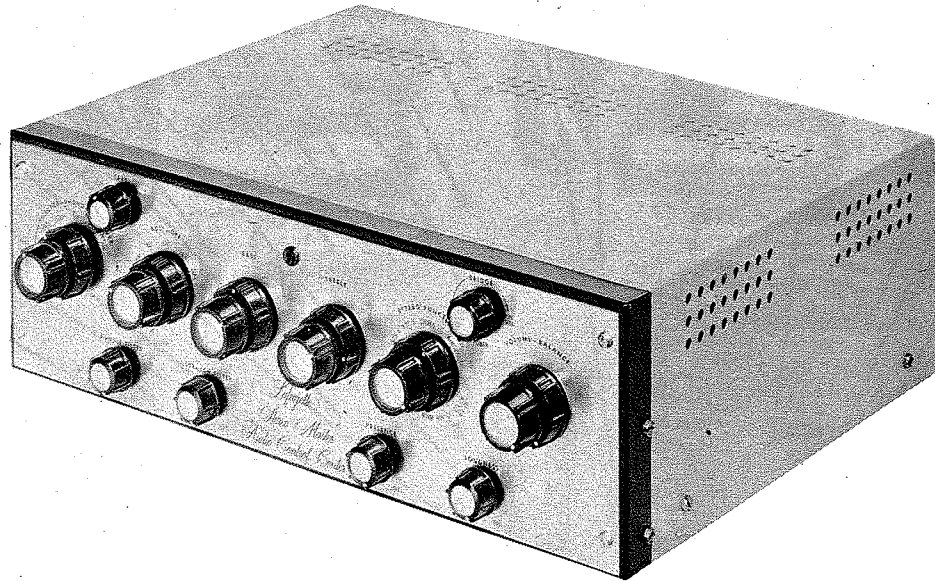

TRADE NAME	Lafayette Models KT-600, LA-600
SUPPLIER	Lafayette Radio, 165-08 Liberty Ave., Jamaica 33, N. Y.
TYPE SET	AC Operated 7 Tube Multi-Input Stereo Preamplifier.
POWER SUPPLY	110-120 Volts AC, 60 Cycles
RATING	31 Watts, .35 Amp. @117 Volts AC


HOWARD W. SAMS & CO., INC. Indianapolis 6, Indiana

The listing of any available replacement part herein does not constitute in any case a recommendation, warranty or guaranty by Howard W. Sams & Co., Inc., as to the quality and suitability of such replacement part. The numbers of these parts have been compiled from information furnished to Howard W. Sams & Co., Inc., by the manufacturers of JU501

the particular type of replacement part listed. Reproduction or use, without express permission, of editorial or pictorial content, in any manner, is prohibited. No patent liability is assumed with respect to the use of the information contained herein. © 1960 Howard W. Sams & Co., Inc., Indianapolis 6, Indiana. Printed in U.S. of America

PRINTED BOARD

ARROWS INDICATING TUBE LOCATIONS ARE POINTING TO PIN 1 UNLESS OTHERWISE INDICATED

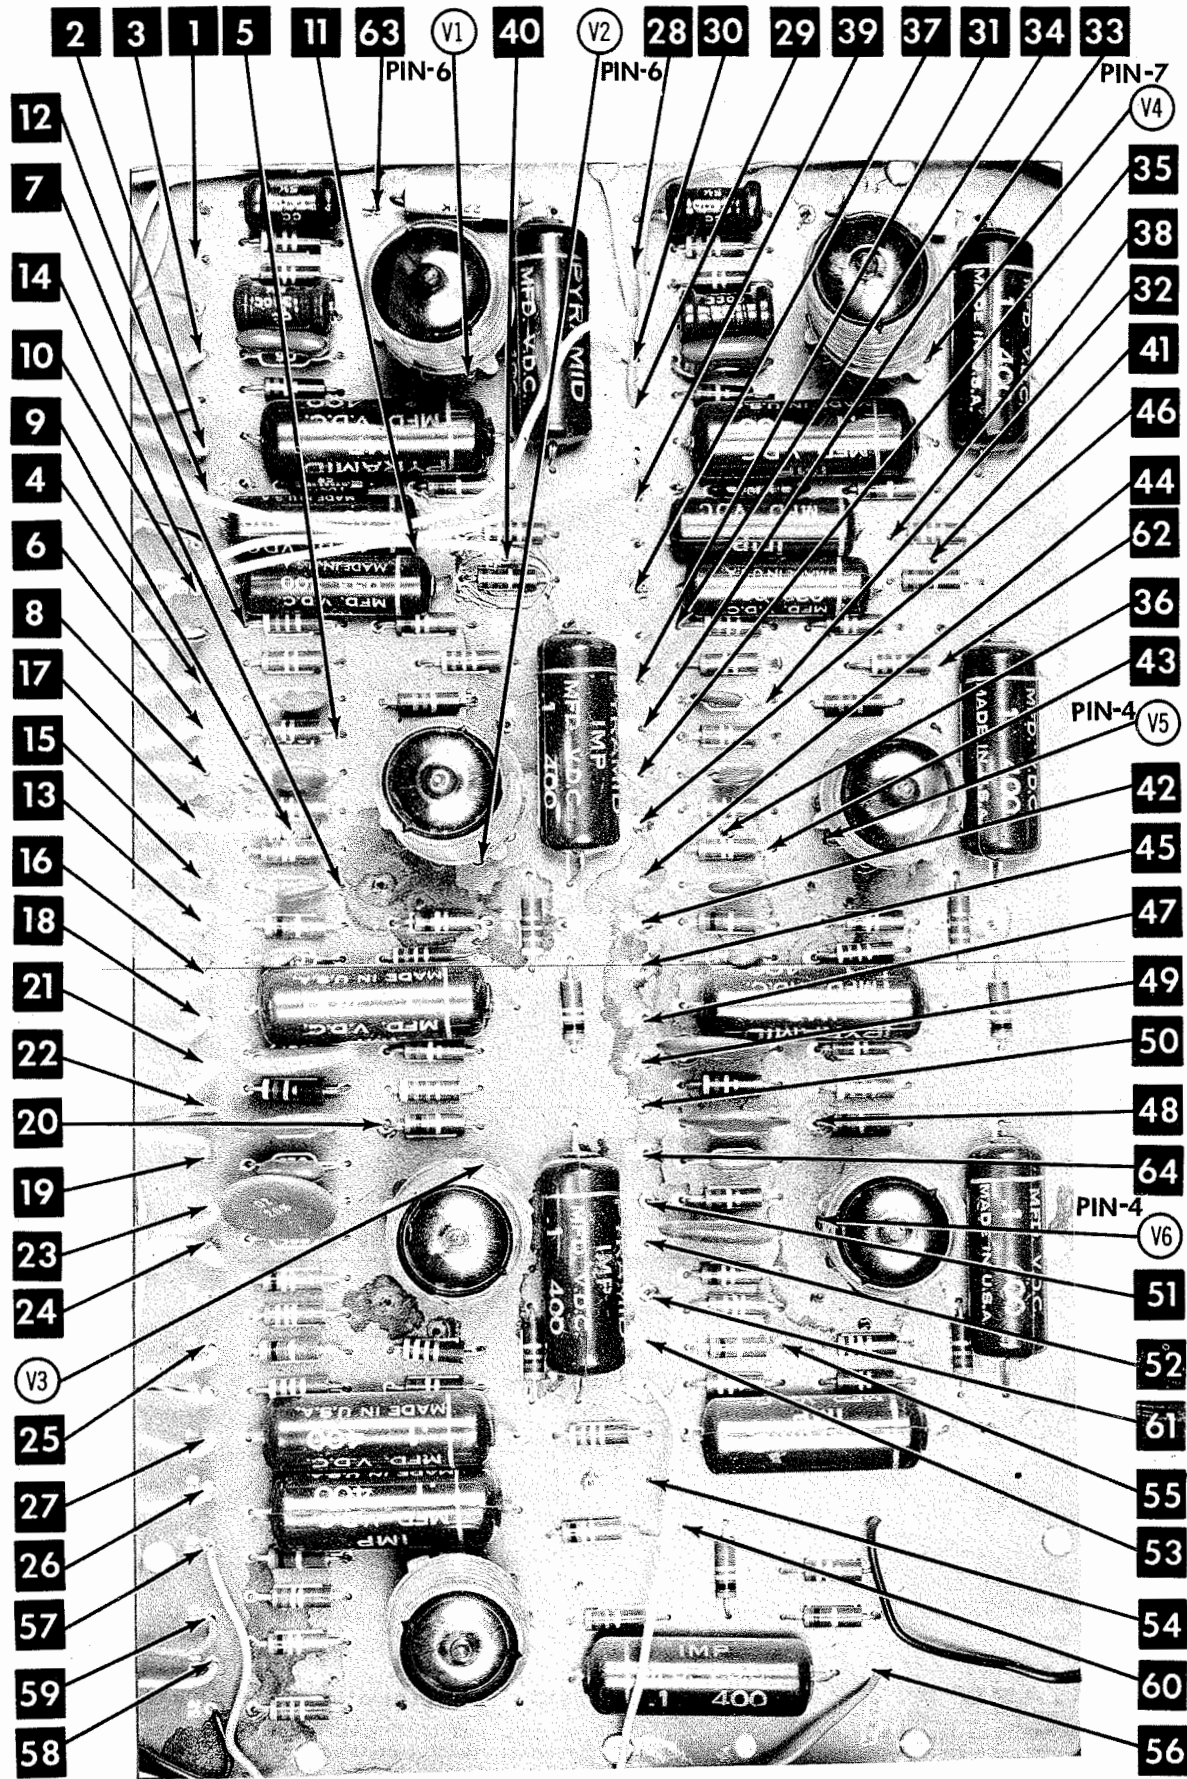


PARTS LIST AND DESCRIPTIONS
TUBES

CBS		GENERAL ELECTRIC		RAYTHEON		SYLVANIA	
ITEM No.	USE	TYPE		ITEM No.	USE	TYPE	
V1	Channel A Preamplifier	7025		V5	Channel B A F Amplifier	7025	
V2	Channel A AF Amplifier	7025		V6	Channel B A F Amplifier	7025	
V3	Channel A AF Amplifier	7025		V7	Calibration Amp. -	7025	
V4	Channel B Preamplifier	7025			Channel A-B Mixer		

ELECTROLYTIC CAPACITORS

ITEM		RATING		REPLACEMENT DATA					NOTES
No.		CAP.	VOLT.	Lafayette PART No.	AEROVOX PART No.	CORNELL- DUBIER PART No.	MALLOY PART No.	PYRAMID PART No.	SPRAGUE PART No.
C1A	10	475		12-49	AFH3-50-07	C0373	FF396.12	TMD-92 TD-30-500	TVL-3842.6
B	30	475							
C	40	475							
C2A	40	350		12-50	AFH4-53	D0460	FF346 TC78	TMQ-58	TVL-4622.3
B	40	350							
C	40	350							
D	40	25							
C3	3000	15							
C4A	40	25		12-47	AFH1-04	A0080	WP042	TMS-6	TVL-1070
B	40	25		12-48	AFH3-02	C0020	WP520	TMT-2	TVL-3230
C	40	25							

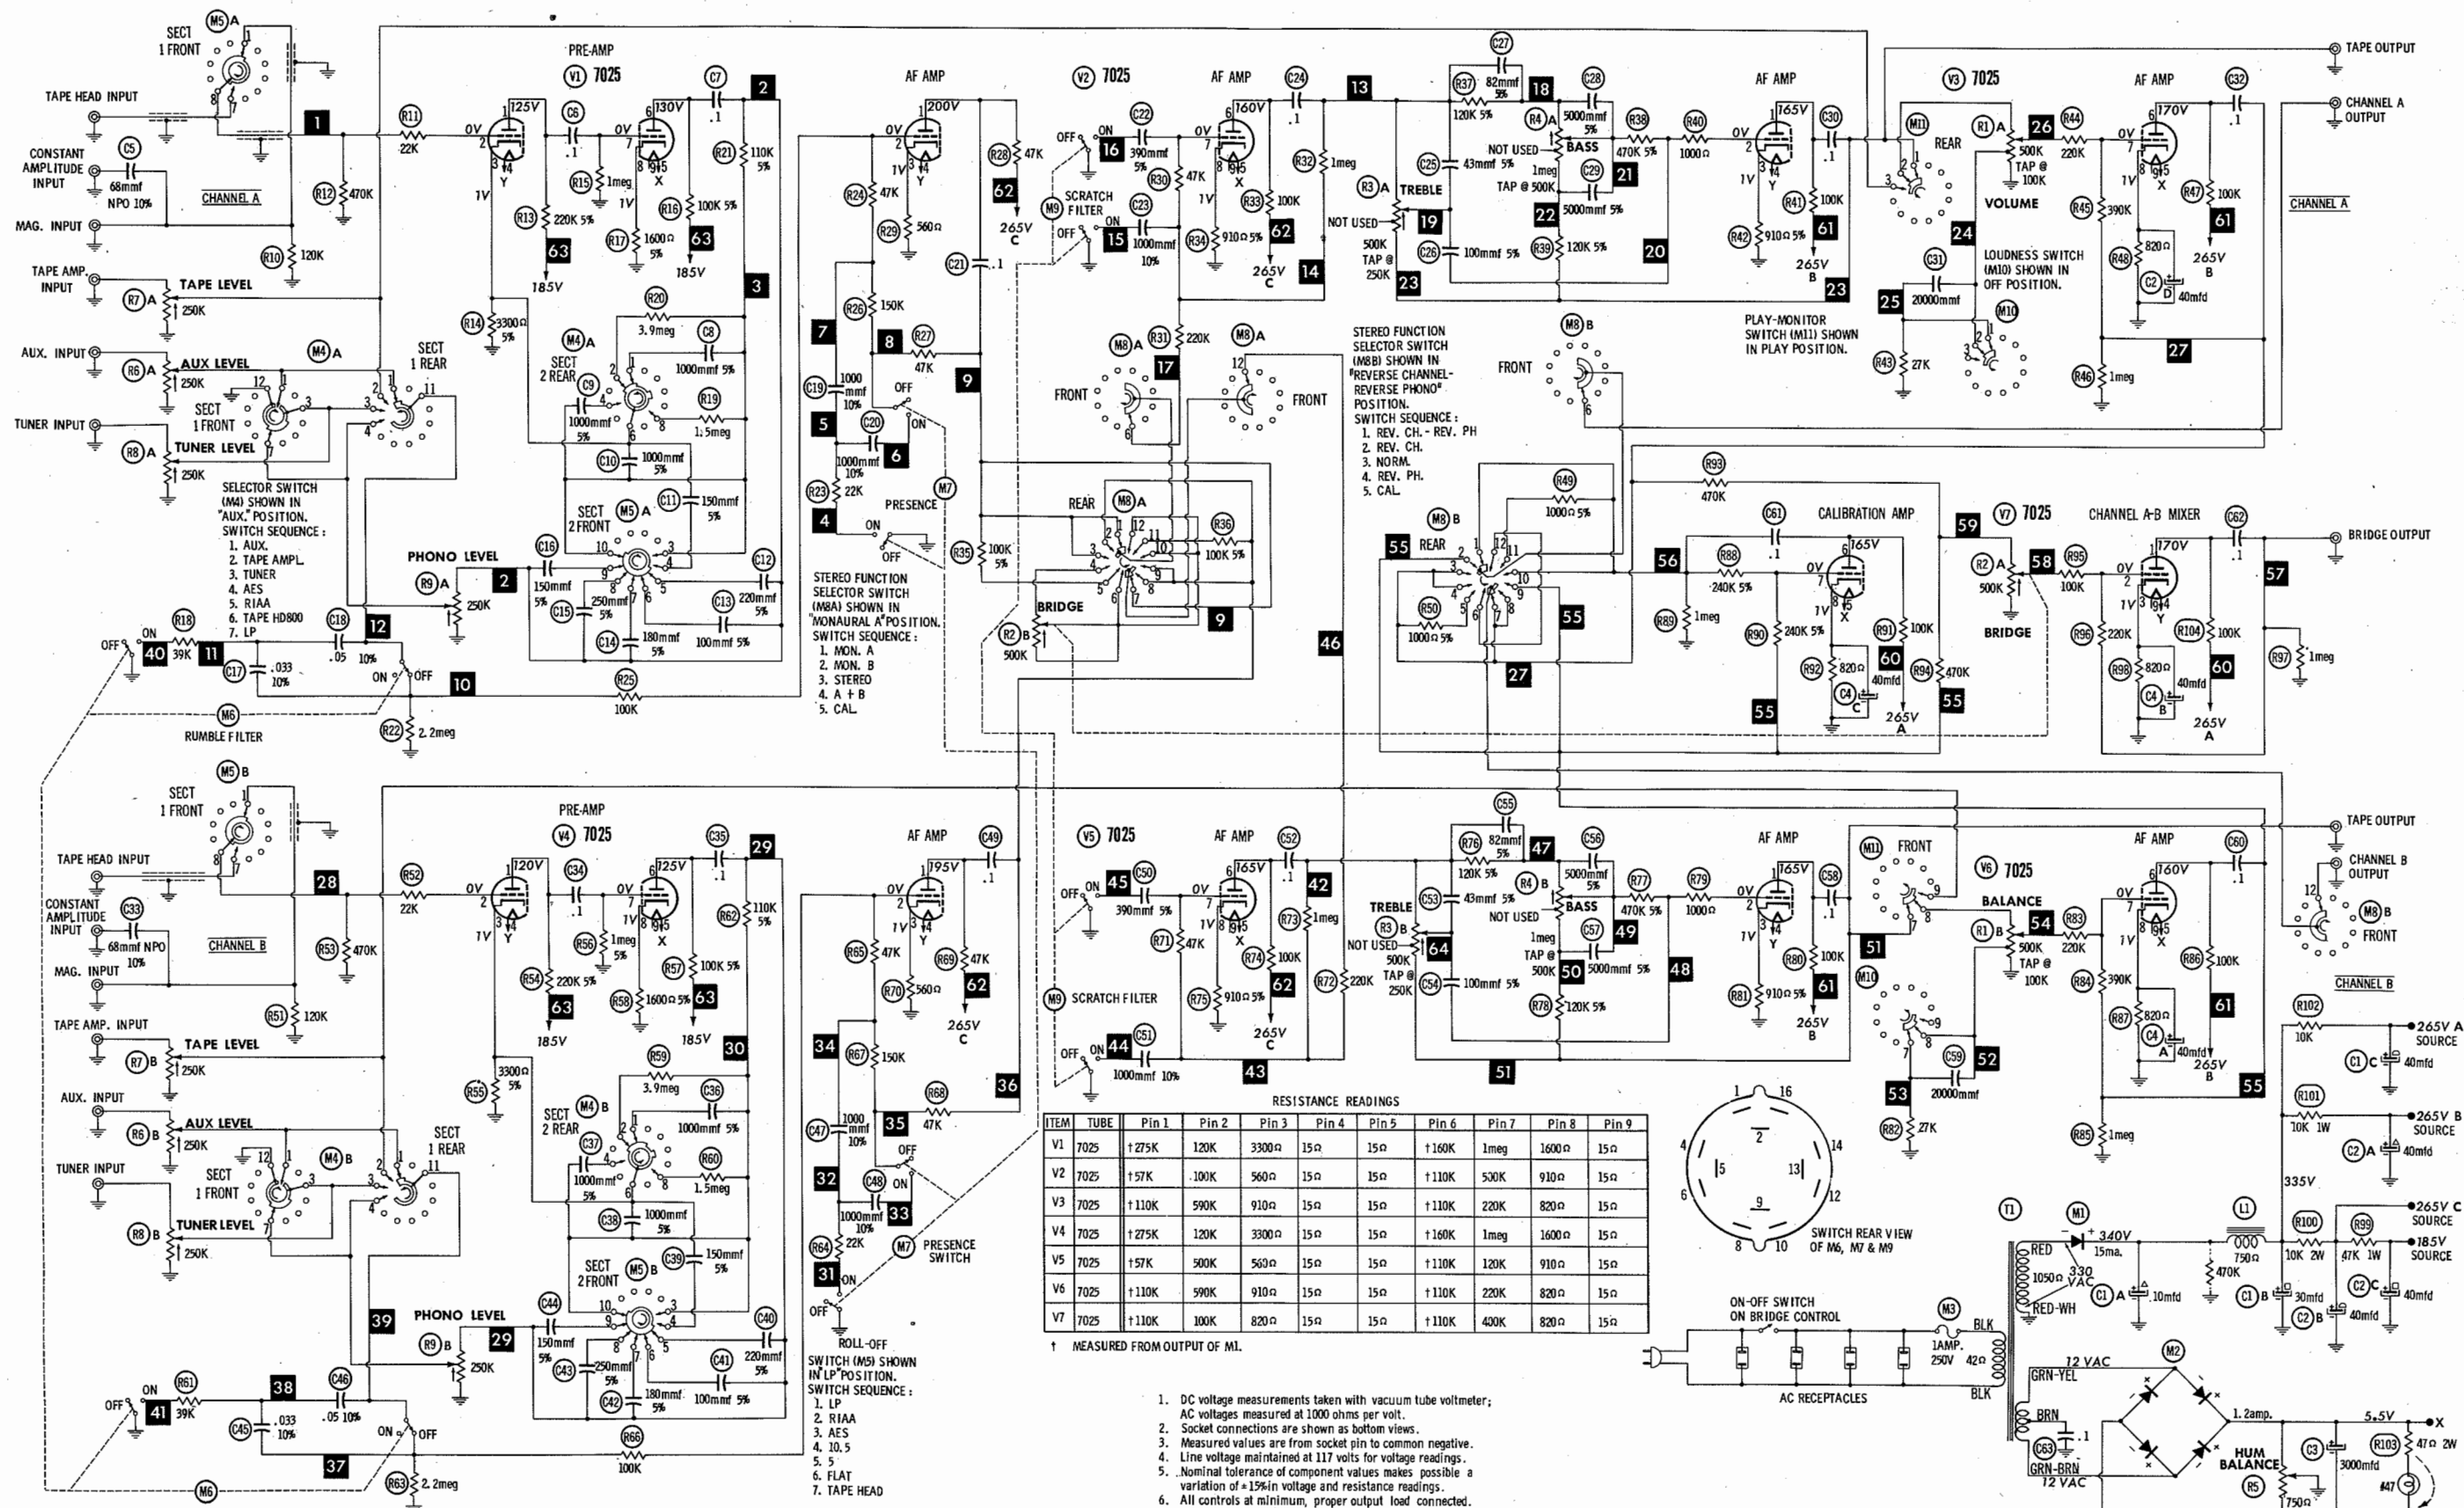

A PHOTOFAC STANDARD NOTATION SCHEMATIC
with **CIRCUITRACE**
© Howard W. Sams & Co., Inc. 1960

LAFAYETTE MODELS
KT-600, LT-600