




ZENITH MODELS
YP6B, YP6F



TRADE NAME	Zenith Model YP6B, YP6F
MANUFACTURER	Zenith Radio Corp., 6001 Dickens Ave., Chicago 39, Ill.
TYPE SET	AC Operated Phono Amplifier With 4 Speed Manual Record Player
TUBES (One)	Type 25L6GT Output
POWER SUPPLY	110-120 Volts AC - 60 Cycles
	RATING .40 Amp. @ 117 Volts AC

ZENITH MODELS
YP6B, YP6F

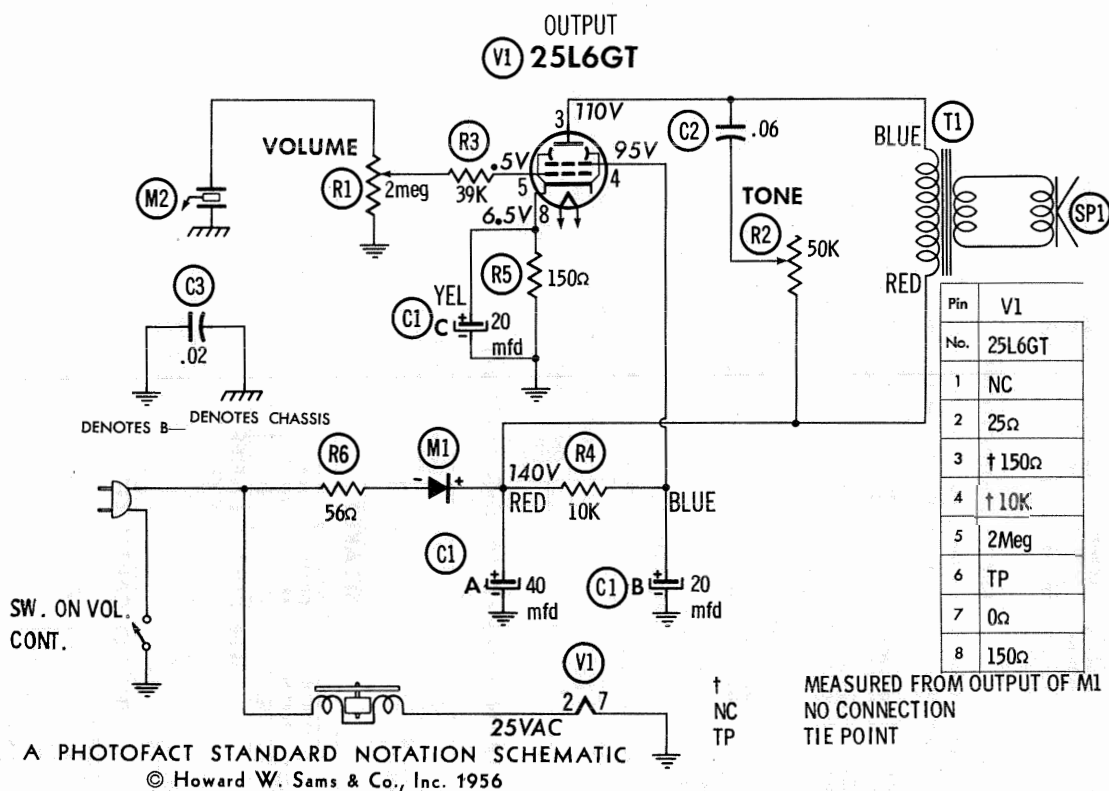

HOWARD W. SAMs & CO., INC. • Indianapolis 5, Indiana

"The listing of any available replacement part herein does not constitute in any case a recommendation, warranty or guaranty by Howard W. Sams & Co., Inc., as to the quality and suitability of such replacement part. The numbers of these parts have been compiled from information furnished to Howard W. Sams & Co., Inc., by the manufacturers of the particular type of replacement part listed."

"Reproduction or use, without express permission, of editorial or pictorial content, in any manner, is prohibited. No patent liability is assumed with respect to the use of the information contained herein. Copyright 1957 by Howard W. Sams & Co., Inc., Indianapolis 5, Indiana, U. S. of America. Copyright under international Copyright Union. All rights reserved under Inter-American Copyright Union (1910) by Howard W. Sams & Co., Inc." Printed in U. S. of America

PARTS LIST AND DESCRIPTIONS
TUBES (GENERAL ELECTRIC, SYLVANIA)

CHASSIS—TOP VIEW

ITEM No.	USE	TYPE	NOTES	ITEM No.	USE	TYPE	NOTES
V1	Output	25L6GT					

ELECTROLYTIC CAPACITORS

ITEM No.	RATING		ZENITH PART No.	REPLACEMENT DATA			
	CAP.	VOLT.		CORNELL-DUBILIER PART No.	MALORY PART No.	PYRAMID PART No.	SPRAGUE PART No.
C1A	40	150	WC11747	PBS150/25V 4020/20	TCT3114	TML-2	TVA-3423
C1B	20	150					
C1C	20	25					

FIXED CAPACITORS

Capacity values given in the rating column are in mfd. for Paper Capacitors, and in mmfd. for Mica and Ceramic Capacitors.

ITEM No.	RATING		ZENITH PART No.	REPLACEMENT DATA				NOTES
	CAP.	VOLT.		CORNELL-DUBILIER PART No.	ERIE PART No.	MALORY PART No.	SPRAGUE PART No.	
C2	.06	200	WC11509	P688N-06	PT616	PT412	6TM-86	
C3	.02	200	WC11508	BPD-02	817-02	PT412	2TM-82	

CONTROLS

ITEM No.	RATING		ZENITH PART No.	REPLACEMENT DATA		MALLORY PART No.	INSTALLATION NOTES
	RESISTANCE	WATTS		CENTRALAB PART No.	CLAROSTAT PART No.		
R1	2Meg	1	11748				Volume & Switch
R2	50K	1	11749				

RESISTORS

All wattages 1/2 watt, or less, unless otherwise listed.

ITEM No.	RATING		ZENITH PART No.	REPLACEMENT DATA		NOTES
	OHMS	WATT		ZENITH PART No.	IRC PART No.	
R3	39K			BTS-39K		
R4	10K			BTS-10K		

TRANSFORMER (AUDIO OUTPUT)

ITEM No.	IMPEDANCE		ZENITH PART No.	REPLACEMENT DATA				NOTES
	PRI.	SEC.		Holderson PART No.	Merit PART No.	Stancor PART No.	Tried PART No.	
T1	1980Ω	3-4Ω	WC11752	21101	A-3025	A-3332	26558	S-12X

SPEAKER

ITEM No.	RATINGS		ZENITH PART No.	REPLACEMENT DATA		NOTES
	SIZE 4"	FIELD V. C. IMP 3-4Ω		QUAM PART No.	RCA TYPE No.	
SP1		PM	WL1762	4A07	223S1	


SELENIUM RECTIFIER

ITEM No.	RATING		ZENITH PART No.	REPLACEMENT DATA				NOTES
	CURRENT			FEDERAL PART No.	MALORY PART No.	RADIO RECEPTOR PART No.	SARKES TARTZIAN PART No.	
M1	.044A		WC11756	1386	RS065Q	6S85	8J1	65

PHONO CARTRIDGE

ITEM No.	REPLACEMENT DATA		ZENITH PART No.	REPLACEMENT DATA		REMARKS
	ASTATIC CARTRIDGE	ELECTRO-VOICE CARTRIDGE		ASTATIC CARTRIDGE	ELECTRO-VOICE CARTRIDGE	
M2	142-81	66-TS K and K-78				

ASTATIC NEEDLE LISTINGS SHOWN ABOVE ARE SPECIFIED FOR THE RESPECTIVE REPLACEMENT CARTRIDGE LISTED. FOR ORIGINAL CARTRIDGE NEEDLE REPLACEMENTS SEE BELOW.

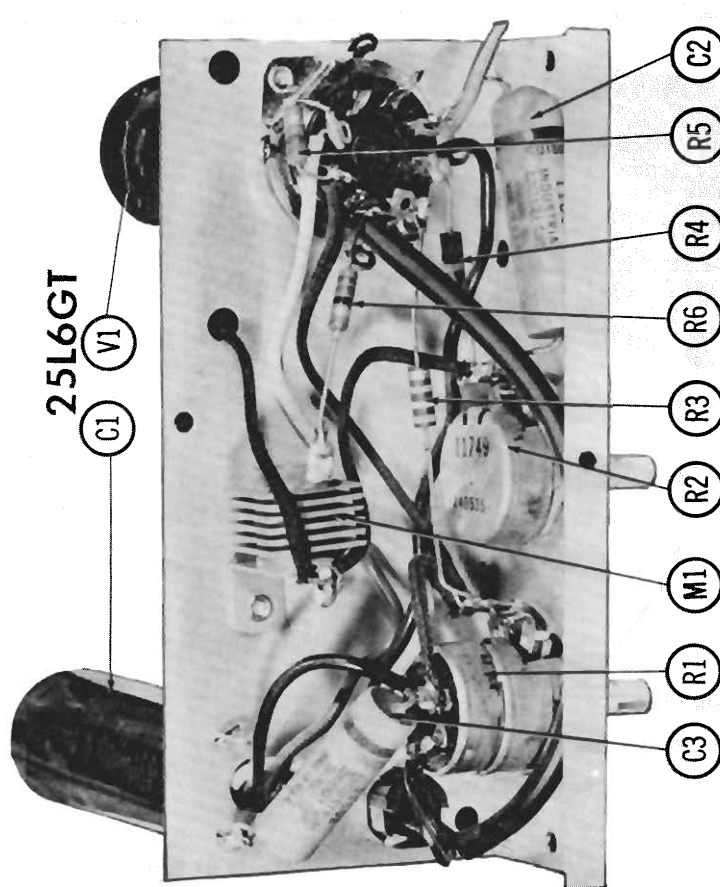

PHONO NEEDLE

(FOR REPLACEMENT IN ORIGINAL EQUIPMENT CARTRIDGE)

ITEM No.	REPLACEMENT DATA		ZENITH PART No.	REPLACEMENT DATA		REMARKS
	JENSEN PART No.	WALCO PART No.		JENSEN PART No.	WALCO PART No.	
M3	56-353 (16 2/3-33 1/3-45 Needle) 56-354 (78 Needle)	*A-76LP or †A-67LP or ♦A-76 or †A-67 or ♦A-67D		*A-76LP or †A-67LP or ♦A-76 or †A-67 or ♦A-67D	*W-39MGA or *W-39A	* Metal † Jewel ♦ Diamond