


TRADE NAME	Televox, Model 27-P-T		
MANUFACTURER	Televox, Inc., 451 S. 5th Ave., Mt. Vernon, N.Y.		
TYPE SET	AC Operated Phonograph with 2 Tube Amplifier & Speaker		
TUBES (TWO)	Types, 50L6GT Power Output, 35Z5GT Rectifier.		
POWER SUPPLY	110-120 Volts AC	RATING	.200 Amp. @ 117 Volts AC



THE COOPERATION OF THE MANUFACTURER OF THIS
RECEIVER MAKES IT POSSIBLE TO BRING YOU THIS SERVICE

4712-28

1. DC Voltage measurements are at 20,000 ohms per volt; AC Voltages measured at 1,000 ohms.
2. Socket connections are shown as bottom views.
3. Measured values are from socket pin to common negative.
4. Line voltage maintained at 117 volts for voltage readings.
5. Nominal tolerance on component values makes possible a variation of $\pm 15\%$ in voltage and resistance readings.
6. Volume control at maximum; no signal applied for voltage measurements.

Indianapolis Indiana

"The listing of any available replacement part herein does not constitute in any case a recommendation, warranty or guaranty by Howard W. Sams & Co., Inc., as to the quality and suitability of such replacement part. The numbers of these parts have been compiled from information furnished to Howard W. Sams & Co., Inc., by the manufacturers of the particular type of replacement part listed."

"Reproduction or use, without express permission, of editorial or pictorial content is prohibited."

tent, in any manner, is prohibited. No patent liability is assumed with respect to the use of the information contained herein. Copyright 1948 by Howard W. Sams & Co., Inc., Indianapolis, Indiana, U. S. A. Copyright under International Copyright Union. All rights reserved under Inter-American Copyright Union (1910) by Howard W. Sams & Co., Inc." Printed in U. S. of America

Printed in U. S. of America

TELEVOX
MODEL 27-P-T

PARTS LIST AND DESCRIPTIONS TUBES (SYLVANIA or Equivalent)

ITEM No.	USE	REPLACEMENT DATA			INSTALLATION NOTES
		TELEVOX PART No.	STANDARD REPLACEMENT	RMA BASE TYPE	
1	Power Output	50L6GT	50L6GT	7AC	
2	Rectifier	35Z5GT	35Z5GT	6AD	

CAPACITORS

Capacity values given in the rating column are in mfd. for Electrolytic and Paper Capacitors, and in mmfd. for Mica and Ceramic Capacitors.

ITEM No.	RATING	REPLACEMENT DATA				IDENTIFICATION CODES AND INSTALLATION NOTES
		TELEVOX PART No.	CORNELL-DUBIERRE PART No.	MALLORY PART No.	SOLAR PART No.	
3	40 CAP. 150 VOLT		PR4015	PR4015	PR4015	Filter
4	30 CAP. 150 VOLT		PR3015	PR3015	PR3015	"
5	20 CAP. 150 VOLT		PR2015	PR2015	PR2015	"
6	.02 CAP. 400 VOLT		PR4020	PR4020	PR4020	Output Plate Bypass
7	.1 CAP. 200 VOLT		PR4020	PR4020	PR4020	Tone Compensation
8	.1 CAP. 200 VOLT		PR4020	PR4020	PR4020	Cath. Bypass

CONTROLS

ITEM No.	RATING	REPLACEMENT DATA				INSTALLATION NOTES
		TELEVOX PART No.	MALLORY PART No.	IRC PART No.	CLAROSTAT PART No.	
9A	500KΩ 1 WATT		PR4015	PR4015	PR4015	Volume Control
10A	100KΩ 1 WATT		PR4015	PR4015	PR4015	Attach to 9A per Instructions
11A	100KΩ 1 WATT		PR4015	PR4015	PR4015	Tone Control
12A	100KΩ 1 WATT		PR4015	PR4015	PR4015	Attach to 10A per Instructions

RESISTORS

ITEM No.	RATING	REPLACEMENT DATA		IDENTIFICATION CODES
		TELEVOX PART No.	IRC PART No.	
11	150Ω 1 WATT		PR4015	Br.-Blk.-Grn. Output Grid
12	150Ω 1 WATT		PR4015	Br.-Grn.-Br. Output Cathode
13	2400Ω 1 WATT		PR4015	Red-VI.-Red Output Screen Dropping
14	47Ω 1 WATT		PR4015	YL.-VI.-Blk. Filter
15	200Ω 1 WATT		PR4015	Line Dropping

TRANSFORMER (OUTPUT)

ITEM No.	RATING	REPLACEMENT DATA		INSTALLATION NOTES
		TELEVOX PART No.	STANCOR PART No.	
16	2400Ω 3.5W 145V .442		PR4015	

SPEAKER

ITEM No.	RATINGS	REPLACEMENT DATA		INSTALLATION NOTES
		TELEVOX PART No.	JENSEN PART No.	
17	FIELD 8.50 INCH		PR4015	
18	CONC. DIA. 1 1/2 INCH		PR4015	


DIAL LIGHT

ITEM No.	BASE TYPE	VOLTS	AMPS.	REPLACEMENT DATA		INSTALLATION NOTES
				BEAD COLOR	TELEVOX PART No.	
19	Bayonet	6-8	0.15	Brown		Type 47

MISCELLANEOUS

ITEM No.	PART NAME	TELEVOX PART No.	NOTES
	Crystal	CR4015	ASTATIC Type L-72-A

CHASSIS—TOP VIEW

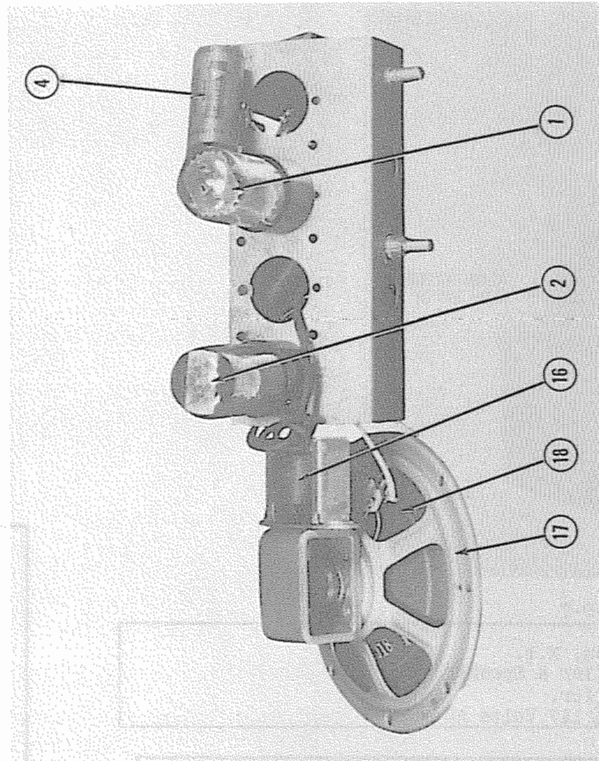

CHASSIS—BOTTOM VIEW

