

Service Manual

Release 1

Stereo Color Television

CHASSIS : CM-916F


PAL/SECAM-B/G, D/K, I SYSTEM
NTSC 4.43/3.58-M SYSTEM

MODEL : DTD-29U9WPT

DTD-29U9WP

DTD-29U9

FP-68T30(NEC model)

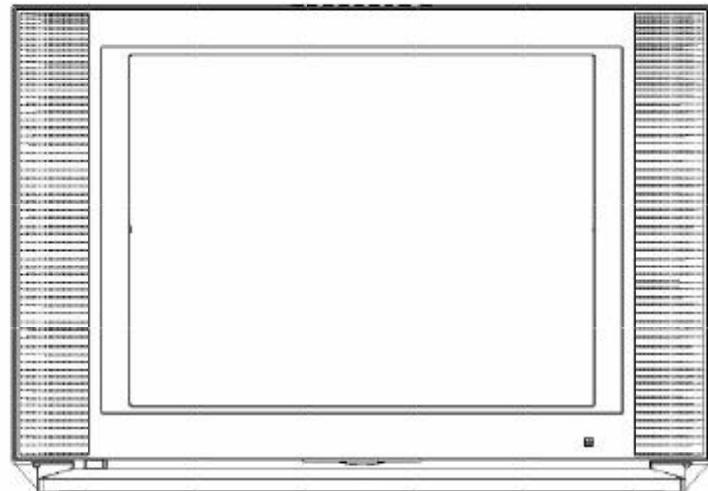

✓ Caution

: In this Manual, some parts can be changed for improving, their performance without notice in the parts list. So, if you need the latest parts information, please refer to PPL(Parts Price List) in Service Information Center (<http://svc.dwe.co.kr>).

DAEWOO ELECTRONICS CO., LTD

<http://svc.dwe.co.kr>

Oct.2000

CONTENTS

Specification	2
Block Diagram	3
Connection Diagram	4
Alignment Instruction.....	5
Trouble Shooting Charts	14
Part List	24
Option Part List.....	48
Printed Circuit Boards.....	50
Circuit Schematics	55
Wave Form	63
Exploded View.....	64

Safety Instruction

NOTE

BEFORE SERVICING THIS CHASSIS READ THE "X-RAY RADIATION PRECAUTIONS", "SAFETY PRECAUTIONS" AND "PRODUCT SAFETY NOTICE" BELOW.

X-RAY RADIATION PRECAUTIONS

1. Excessive high voltage can produce potentially hazardous X-RAY RADIATION. To avoid such hazards, the high voltage must not exceed the specified limit. The nominal value of the high voltage of this receiver is 29kV(29") at max beam current. The high voltage must not, under any circumstances, exceed 30.5kV(29"). Each time a receiver requires servicing, the high voltage should be checked. It is recommended the reading

of the high voltage recorded as a part of the service recorded as a part of the service records. It is important to use an accurate and reliable high voltage meter.

2. The only source of X-RAY RADIATION in this TV receiver is the picture tube. For continuous RADIATION protection, the replacement tube must be exactly the same type tube as specified in the "PART LIST".

SAFETY PRECAUTIONS

1. Potentials of high voltage are present when this receiver is operating. Operation of the receiver outside the cabinet or with the back cover removed involves a shock hazard from the receiver.
 - 1) Servicing should not be attempted by anyone who is not thoroughly familiar with the precautions necessary when working on high voltage equipment.
 - 2) Always discharge the picture tube to avoid the shock hazard before removing the anode cap.
 - 3) Discharge the high potential of the picture tube before handling the tube. The picture tube is highly evacuated and if broken, glass fragments will be violently expelled.

2. If any FUSE in this TV receiver is blown, replace it with the FUSE specified in the "PART LIST".
3. When replacing a high wattage resistor (oxide metal film resistor) in circuit board, keep the resistor 10mm away from circuit board.
4. Keep wires away from high voltage or high temperature components.
5. This receiver must operate between AC100~240 volts, 50/60Hz. NEVER connect to DC supply or any other power or frequency.

PRODUCT SAFETY

Many electrical and mechanical parts in this chassis have special safety-related characteristics.

These characteristics are often passed unnoticed by a visual inspection and the X-RAY RADIATION protection afforded by them cannot necessarily be obtained by using replacement components rated for higher voltage, wattage, etc.

Replacement parts which have these special safety characteristics are identified in this manual and its supple-

ments, electrical components having such features are identified by designated symbol  on the "PART LIST".

Before replacing any of these components, read the "PART LIST" in this manual carefully.

The use of substitute replacement part which do not have the same safety characteristics as specified in the "PART LIST" may create X-RAY RADIATION.

■ Specification


1. DTD-29U9WP(T)

TV Standard	Color System	PAL, SECAM, 4.43NTSC(AV), 3.58NTSC
	Sound System	B/G, D/K, I, M
Rated Voltage		AC 110V~240V, 50/60Hz
Power Consumption(at AC 220V, 50Hz)		152W
Sound Output Power		Main 15W × 2, Woofer 15W (at 80% MOD)
Channel Coverage		HYPER + CHINA + IVORY COAST
		VHF L : K1(43.25MHz) ~ S7(147.25MHz)
		VHF H : S8(154.25MHz) ~ S41(463.25MHz)
		UHF : E21(471.25MHz) ~ C57(863.25MHz)
Tuning System		Frequency Synthesizer Tuning System
Channel Indication		On-Screen Display
Programme Selection		100 Programmes
Aux. Terminal		AV-input: 1, 2, 3, 4 AV-output: Scart out, Monitor out
Remote Control Unit		R-30F31(Required two 1.5V batteries type with AAM size)
Dimention		843(W) × 504(H) × 592(D)mm
Weight		51.5Kg
Picture tube		29" flat Type


2. DTD-29U9/FP-68T30

TV Standard	Color System	PAL, SECAM, 4.43NTSC(AV), 3.58NTSC
	Sound System	B/G, D/K, I, M
Rated Voltage		AC 110V~240V, 50/60Hz
Power Consumption(at AC 220V, 50Hz)		152W
Sound Output Power		Main 15W × 2, (at 80% MOD)
Channel Coverage		HYPER + CHINA + IVORY COAST
		VHF L : K1(43.25MHz) ~ S7(147.25MHz)
		VHF H : S8(154.25MHz)~S41(463.25MHz)
		UHF : E21(471.25MHz) ~ C57(863.25MHz)
Tuning System		Frequency Synthesizer Tuning System
Channel Indication		On-Screen Display
Programme Selection		100 Programmes
Aux. Terminal		AV-input: 1, 2, 3, AV-output: Monitor out
Remote Control Unit		R-30F34(Required two 1.5V batteries type with AAM size)
Dimention		843(W) × 504(H) × 592(D)mm
Weight		49.1Kg
Picture tube		29" flat Type

■ Block Diagram

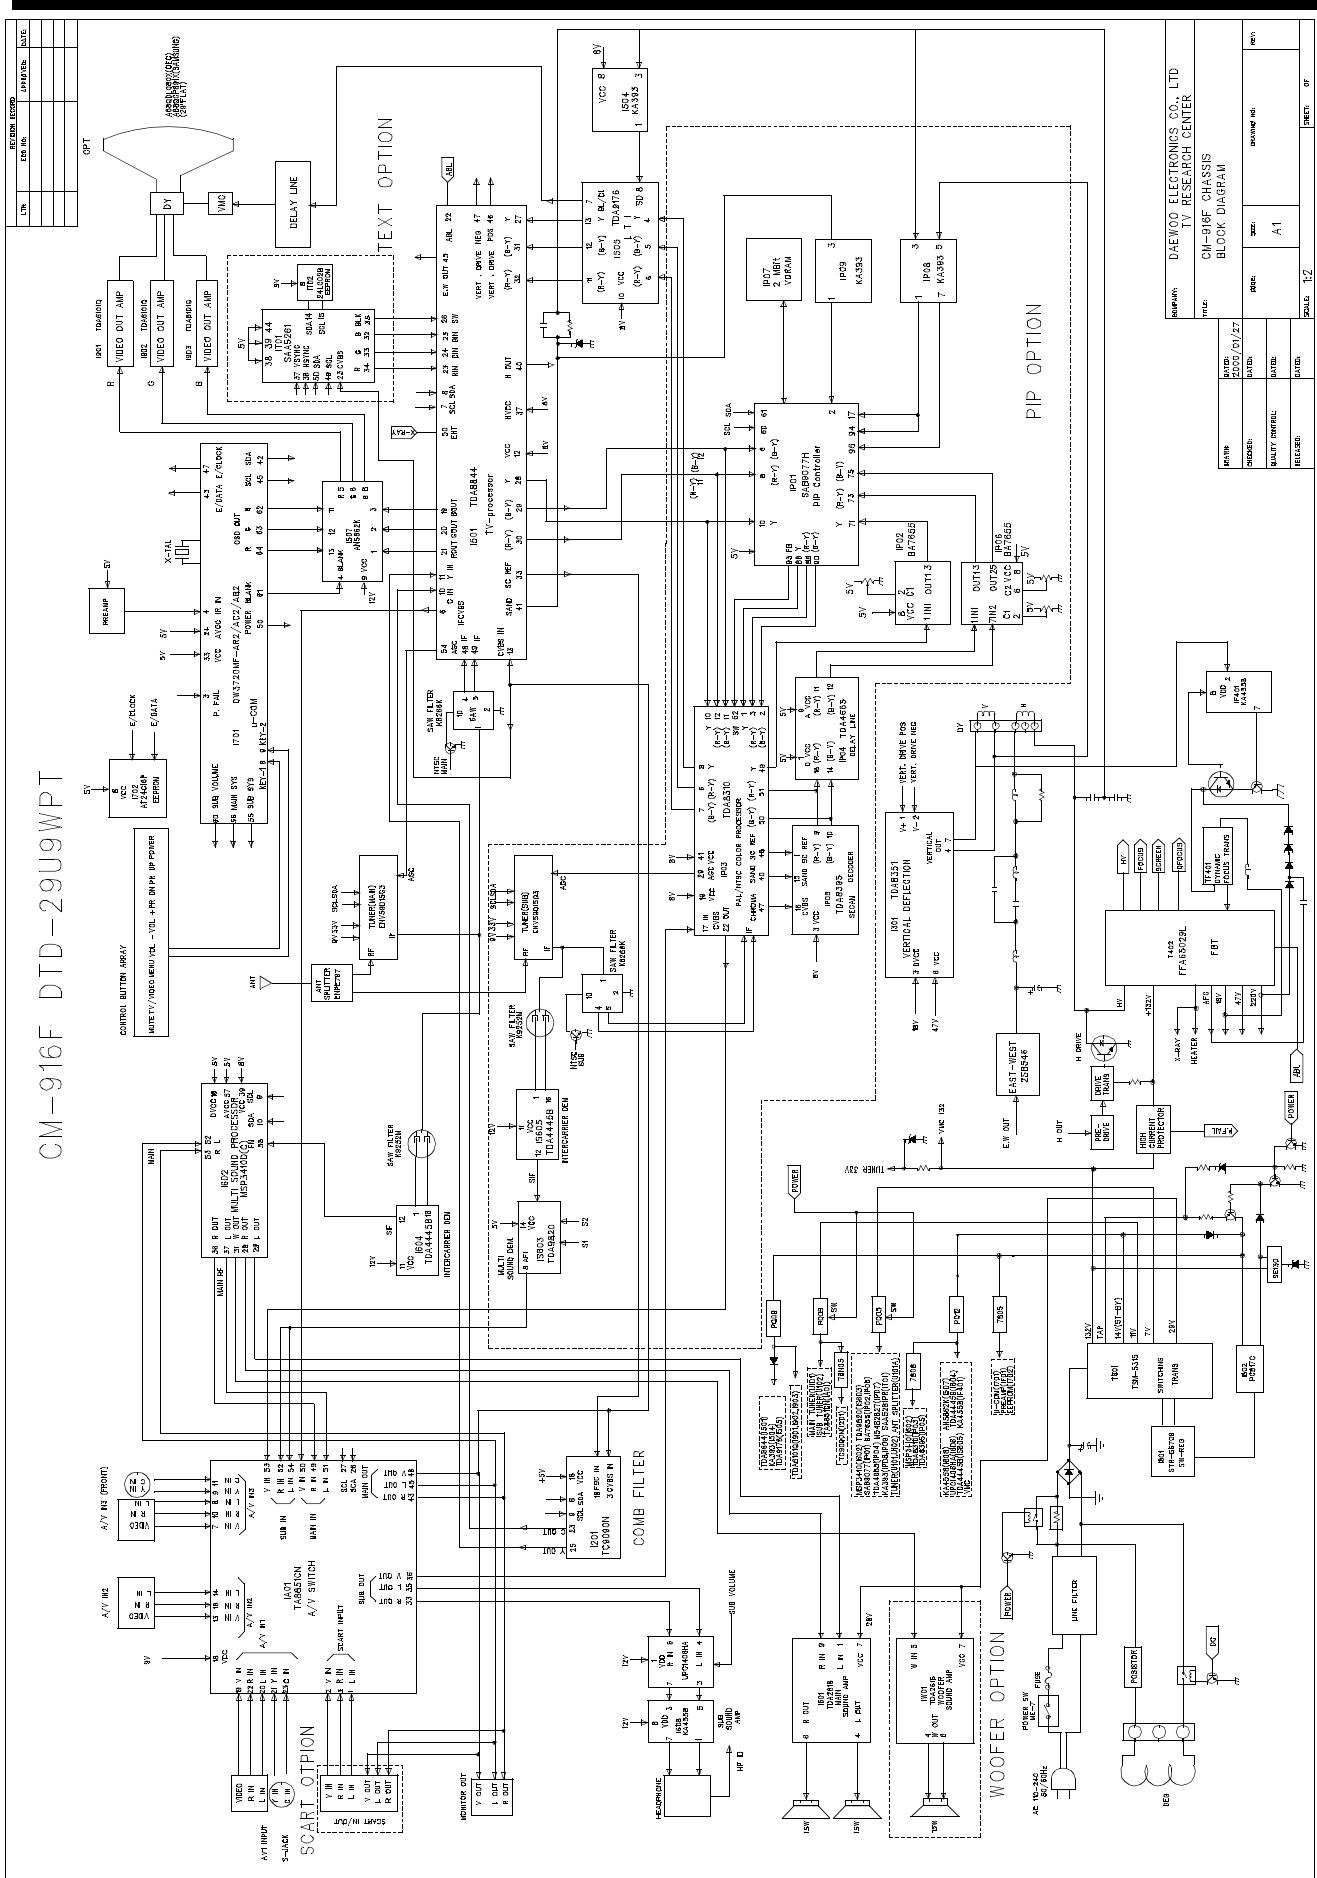

■ Connection Diagram

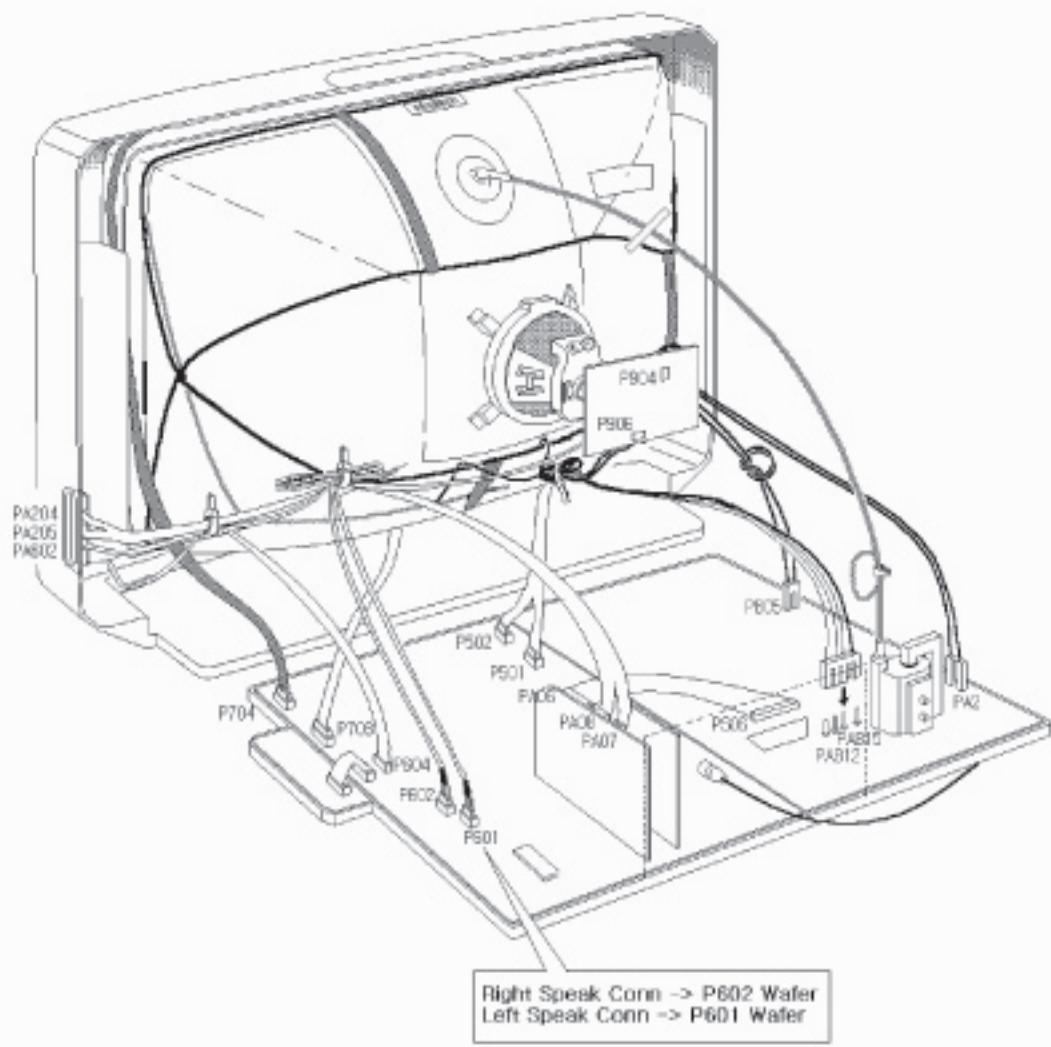

NO	FROM		TO		PIN NUMBER	NO	FROM		TO		PIN NUMBER
1	VMC	VMC	CRT	P904	2	12	JACK	PA205	AV	PA07	6
2		PA901	MAIN	P501	6	13		PA204		PA08	5
3		PA903		P502	3	14	LED	PAF3	MAIN	P703	5
4		PA905	POWER	P401	4	15	CONTROL	PC12	MAIN	P712	7
5		PA902		P402	5	16	JACK	PA602	MAIN	P604	3
6		P804	MAIN	P603	3	17		RIGHT	MAIN	P602	4
7		P801		P701	7	18	SPEAK	LEFT		P601	3
8		P802		P702	7	19		WOOFER	WOOFER AS	P606	3
9		P803		P503	10	20	DG COIL	DG COIL	POWER	P805	2
10	PW SW	PPS1	POWER	PA2	2	21	GND AS	GND AS	CRT	P906	2
11	DY	DY	POWER	PA812	4	22	WOOFER AS	PA605	MAIN	P605	7
						23	SCART	PS02	AV	PA06	9

* Woofer ass'y is option.

Scart is option.

■ Alignment Instruction

1. MAIN ADJUSTMENTS


1-1. 2-CARRIER + NICAM(MSP3410D) SOUND DETECTOR ADJUSTMENT

At first, you must put off Main Power Cord.

1) Test Equipments

- (1) VTVM or VOLTAGE METER
- (2) DC Power Supply X 2
- (3) PIF Sweep Marker Generator
- (4) Oscilloscope

2) Connection

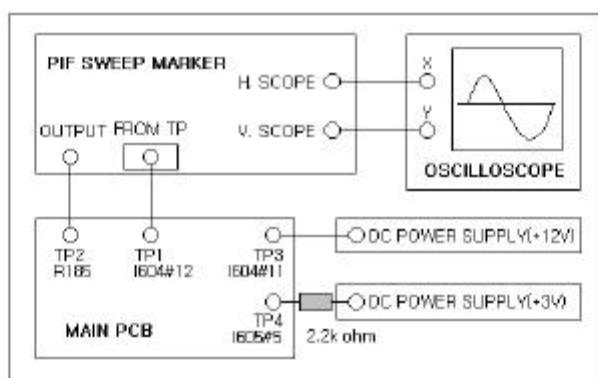


3) Preparation

- (1) Connect H-output of PIF Sweep Marker Generator to X-axis of Scope, and connect V-output to Y-axis.
- (2) Connect Sweep Signal IF output to TP2.(Set attenuator to 0dB)
- (3) After set Power Supply at 12V, connect this output to TP3.
- (4) Oscilloscope Scaling
 - a. The Horizontal(X)-axis and the Vertical(Y)-axis must be located on DC level.
 - b. The Horizontal time display is located on X-Y axis.
 - c. Set the Horizontal(X)-axis scale at 1V/DIV, to check frequency and marker.
 - d. Set the Vertical(Y)-axis scale at 2V/DIV.
- (5) Set Marker Frequency of PIF Sweep Marker Generator as follows.(MHz)

SYSTEM	Fp(n+1)	Fs	Fc	Fp-2	Fp	Fs(n-1)
P/S/N-BG/,DK,I,M	31	32.5	33.57	36	38	39.5

4) SIF Adjustment

- (1) Connect 'FROM TP' of PIF Sweep Marker Generator to TP1(I604 #12).
- (2) Turn the L106(SIF Coil) so that the P marker point is located on the reference level.

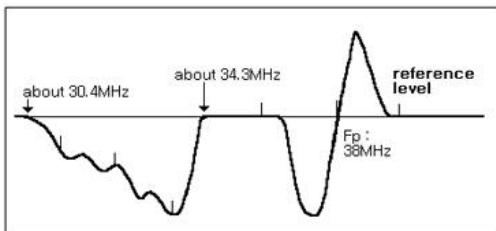

1-2. MAIN VIDEO OUTPUT ADJUSTMENT

At first, put on Main Power Cord

- 1) Pattern : PAL B/G Color Bar(RF level = above 60dB)
- 2) Adjust the R569 to make the Video signal of JA12(AV PCB RA16 Voltage) to be 1Vp-p.
- 3) Adjust the R579 to make the Video signal of TP5(Main PCB C508 Voltage) to be 1Vp-p.



1-3. COMB FILTER OUTPUT ADJUSTMENT

- 1) Pattern : PAL B/G Color Bar(RF level = above 60dB)
- 2) Adjust the R259 to make the Y(Luminance) signal of TP "Y"(AV PCB JA47 Voltage) to be 1Vp-p.

1-4. RF AGC ADJUSTMENT

- 1) Pattern : PAL B/G 10CH Color BAR(RF Level = 60dB)
- 2) Connect the probe of Oscilloscope to P101(Left & Right) of Main PCB.
- 3) Set the switch of antenna splitter to be down.
- 4) Main RF AGC ADJUSTMENT

After press the 'S9' key of Service Remocon to enter the "AGC" mode.
and adjust "AGC bar " to be MAX-8step.





- 5) Press the 'S11' key of Service Remocon to set the "2-Picture" mode.
- 6) Connect the probe of Oscilloscope to P102(Left & Right) of main PCB.
- 7) Sub RF AGC ADJUSTMENT
 - (1) Turn the RP01 of PIP PCB to be the maximum voltage.
 - (2) Turn the RP01 of PIP PCB the voltage to be dropt 1V~1.2Vdc blow its maximum voltage.
- 8) Press the 'S11' key of Service Remocon to cancel the "2-Picture" mode.

2. SCREEN & FOCUS ADJUSTMENTS

2-1. SCREEN ADJUSTMENT

- 1) Pattern : PAL B/G Retma
- 2) Press the  key to set the "STANDARD" mode.
- 3) Connect the probe of Oscilloscope J914 of B-input and check the below measurement pulse.
(Time : 5msec/DIV, Voltage : DC 1V/DIV)
- 4) Adjust the SCREEN VOLUME on FBT so that the measurement pulse voltage to be 3.1V.

Time : 5msec/DIV, Voltage : DC 1V/DIV

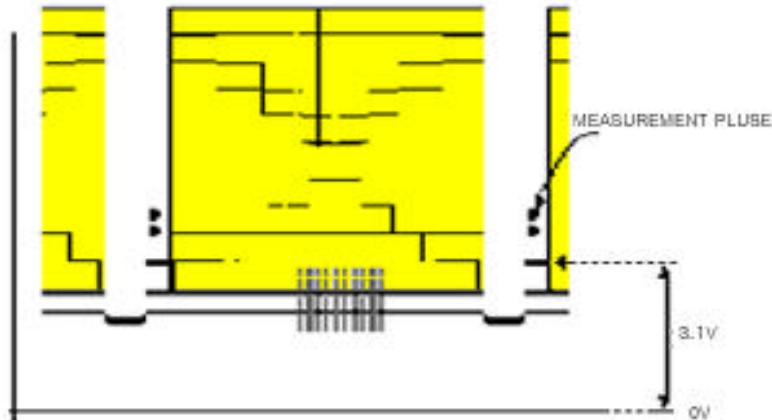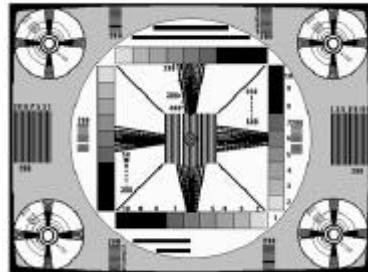

2-2. FOCUS ADJUSTMENT

- 1) Pattern : Cross Hatch
- 2) Adjust the FOCUS TOP VOLUME(" H " remark) on FBT
so that horizontal second line will be appeared clearly.[Dynamic focus adjustment]
Adjust the FOCUS BOTTOM VOLUME(" V " remark) on FBT
so that vertical second line will be appeared clearly.[Static focus adjustment]

2-3. WHITE BALANCE ADJUSTMENT

- 1) Press the  key to set the "STANDARD" mode.
- 2) Press the 'S7' key of Service Remocon to enter the "White Balance" mode.
- 3) Set each R, G, B level to be center(32step) using the 'VOLUME UP', 'VOLUME DOWN' keys.
- 4) Set the reference of MINOLTA(Chroma analyzer) to be "B".
- 5) At high beam, set each R, G, B level to be center using the 'VOLUME UP', 'VOLUME DOWN' keys.
- 6) Adjust the reference to be X=0.288, Y=0.30

3. SIF PCB ADJUSTMENT

3-1. SIF PCB ADJUSTMENT


- 1) Pattern : PAL B/G Color BAR 400Hz Mono
- 2) Use the 'MENU' key and check the Sound broadcast system is "AUTO".
- 3) Press the 'S11' key of Service Remocon to set the "2-Picture" mode.
- 4) Connect the probe of Oscilloscope to PS602(Left & Right).
- 5) Adjust SIF coil(L105) to make the display of Oscilloscope be sine curve.
- 6) Press the 'S11' key of Service Remocon twice to cancel the "2-Picture" mode.

4. GEOMETRIC ADJUSTMENTS

4-1. GEOMETRIC ADJUSTMENT : VERTICAL SERVICE REMOCON 'S4' HORIZONTAL SERVICE REMOCON 'S5'


4-2. VERTICAL CENTER ADJUSTMENT

- 1) Pattern : PAL B/G Monoscope
- 2) Press the  key to set the "STANDARD" mode.
- 3) Choose the "VSH" using the 'PR UP', 'PR DOWN' keys.
- 4) Adjust the horizontal line of picture to coincide with the mechanical center marks of the CRT using the 'VOLUME UP', 'VOLUME DOWN' keys.
* If the pattern is smaller than the screen, adjust the V-size to fit.

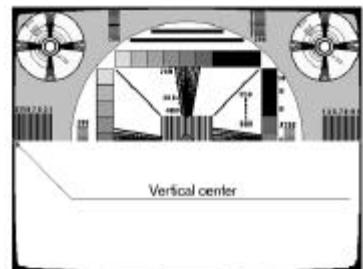

4-3. VERTICAL SIZE ADJUSTMENT

- 1) Pattern : PAL B/G Monoscope
- 2) Press the  key to set the "STANDARD" mode.
- 3) Choose the "VA" using the 'PR UP', 'PR DOWN' keys.
- 4) Adjust the upper part of the picture using the 'VOLUME UP', 'VOLUME DOWN' keys.

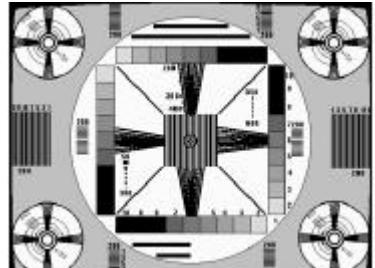


4-4. VERTICAL SLOPE ADJUSTMENT

- 1) Pattern : PAL B/G Monoscope
- 2) Press the  key to set the "STANDARD" mode.
- 3) Choose the "VS" using the 'PR UP', 'PR DOWN' keys.
- 4) Adjust the lower part of the picture using the 'VOLUME UP', 'VOLUME DOWN' keys.

4-5. S-CORRECTION ADJUSTMENT

- 1) Pattern : PAL B/G Crosshatch
- 2) Press the  key to set the "STANDARD" mode.
- 3) Choose the "SC" using the 'PR UP', 'PR DOWN' keys.
- 4) Adjust each distance of horizontal line to be the same using the 'VOLUME UP', 'VOLUME DOWN' keys.

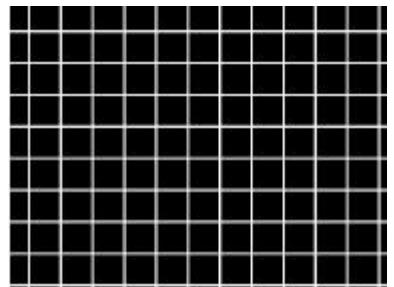

4-6. HORIZONTAL CENTER ADJUSTMENT


- 1) Pattern : PAL B/G Monoscope
- 2) Press the  key to set the "STANDARD" mode.
- 3) Choose the "HSH" using the 'PR UP', 'PR DOWN' keys.
- 4) Adjust the vertical line of picture to coincide with the mechanical center marks of the CRT using the 'VOLUME UP', 'VOLUME DOWN' keys.

4-7. WIDTH ADJUSTMENT

- 1) Pattern : PAL B/G Monoscope
- 2) Press the  key to set the "STANDARD" mode.
- 3) Choose the "EW" using the 'PR UP', 'PR DOWN' keys.
- 4) Set each side over scan to be 10% using the 'VOLUME UP', 'VOLUME DOWN' keys.

4-8. PINCUSHION ADJUSTMENT


- 1) Pattern : PAL B/G Crosshatch
- 2) Press the  key to set the "STANDARD" mode.
- 3) Choose the "PW" using the 'PR UP', 'PR DOWN' keys.
Adjust parabola width to fit on screen.
- 4) Choose the "CP" using the 'PR UP', 'PR DOWN' keys.
Adjust coner parabola to fit on screen.
- 5) Choose the "TC" using the 'PR UP', 'PR DOWN' keys.
Adjust trapezium to fit on screen.

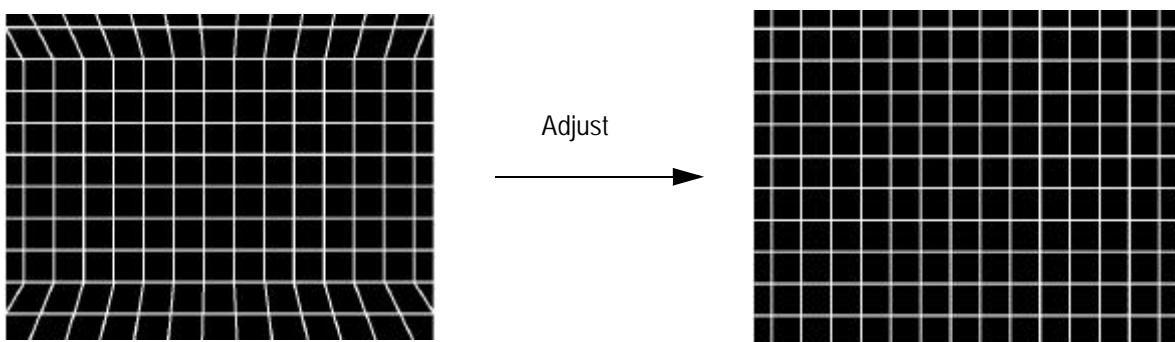

5. PICTURE ADJUSTMENTS

5-1. SUB-BRIGHTNESS ADJUSTMENT

- 1) Pattern : PAL B/G Retma
- 2) Press the  key to set the "STANDARD" mode.
- 3) Choose the "DP" using the 'PR UP', 'PR DOWN' keys.
- 4) Check the Color 34step, the Tint 32step.
- 5) Maximize the Contrast.
- 6) Adjust the Brightness so that the second line of top appears , as follow.

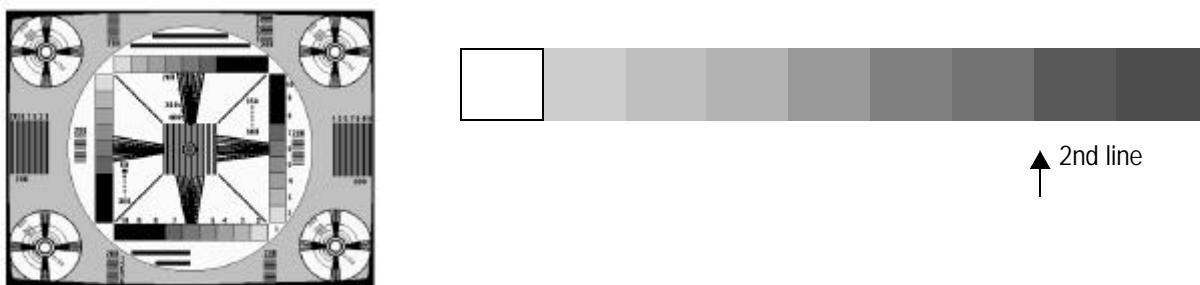

5-2. PIP SUB VIDEO LEVEL ADJUSTMENT

- 1) Pattern : PAL B/G Color Bar
- 2) Press the 'S11' key of Service Remocon to set the "2-Picture" mode.
- 3) Press the 'SERVICE' key of Service Remocon to cancel the "MENU" mode.
- 4) Connect the probe of Oscilloscope to PP01 of "Sub Video out".
- 5) Turn the RP14 of PIP PCB to make the voltage to be 1Vp-p.
- 6) Press the 'S11' key of Service Remocon twice to cancel the "2-Picture" mode.

5-3. PIP Y, U, V LEVEL ADJUSTMENT


- 1) Pattern : PAL B/G Color Bar
- 2) Press the 'S11' key of Service Remocon to set "2-Picture" mode.
- 3) Press the 'SERVICE' key of Service Remocon to cancel the "MENU" mode.
- 4) Connect the probe of Oscilloscope to "Y out" of PP02.
- 5) Adjust the RP11 to make the voltage of Main Y coincide with the Sub Y.
- 6) Connect the probe of Oscilloscope to "U out" of PP02.
- 7) Adjust the RP13 to make the voltage of Main U coincide with the Sub U.
- 8) Connect the probe of Oscilloscope to "V out" of PP02.
- 9) Adjust the RP12 to make the voltage of Main V coincide with the Sub V.
- 10) Press the 'S11' key of Service Remocon twice to cancel the "2-Picture" mode.

5-4. 2-PICTURE CENTER ADJUSTMENT


- 1) Pattern : PAL B/G 10CH Color Bar 400Hz Mono
- 2) Press the 'S11' key of Service Remocon twice to enter the "BG-H POSITION" menu of the "2-Piture" mode.
- 3) Adjust the horizontal line of picture to coincide with the mechanical center marks of the CRT using the 'VOLUME UP', 'VOLUME DOWN' keys.
- 4) Press the 'S11' key of Service Remocon twice to cancel the "2-Picture" mode.

6. REMOCON


6-1 SERVICE REMOCON

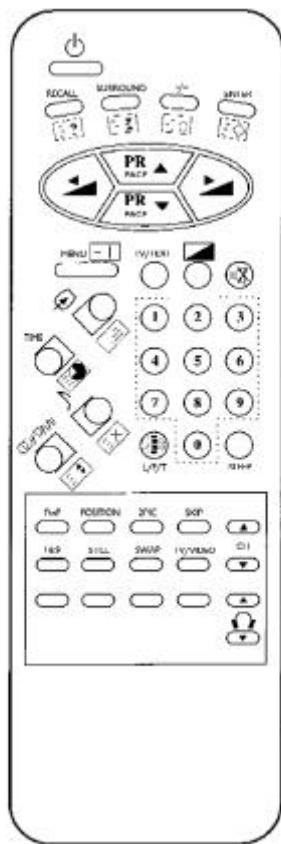

6-2. USER REMOCON

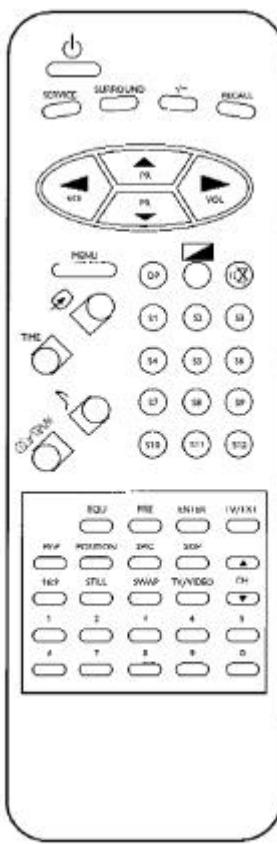


6-3. USER NEC REMOCON

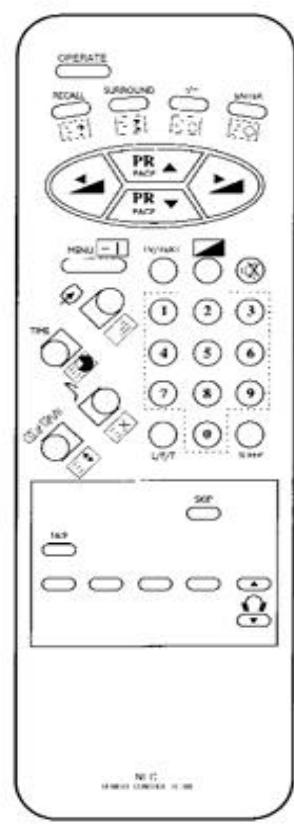

6-3. ADJUSTMENT WITHOUT SERVICE REMOCON

- 1) Enter 'SERVICE MODE': Press keys of User Remocon, as follows.
'ENTER', 'MUTE', 'PR UP', 'PR DOWN', 
- 2) Exit 'SERVICE MODE': 'ENTER'
- 3) Choice 'SERVICE MENU': 'PR UP', 'PR DOWN'
- 4) Enter 'SERVICE SUB MENU': 'VOL UP', 'VOL DOWN'
- 5) Adjust 'SERVICE MENU': 'VOL UP', 'VOL DOWN'

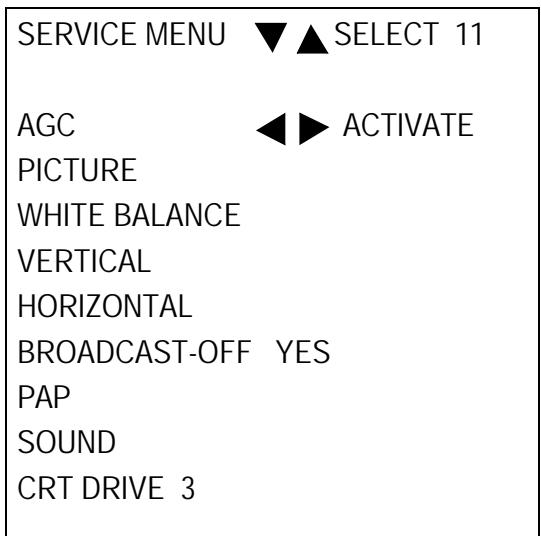


* The data of respective SETs may be different from below data.


1. DP	2. AGC(S9)		
CONTRAST	63		
BRIGHT	27		
COLOR	34		
TINT	32		
SHARP	32		
3. VERTICAL(S4)	4. HORIZONTAL(S5)		
VSH	32		
VA	40		
VS	40		
SC	22		
VX	23		
VSC	32		
5. CRT DRIVE(S6)	6. WHITE BALANCE		
3	R 46		
	G 43		
7. BROADCAST OFF	B 32		
YES			
8. PAP(S11)			
P1 MD-H	14	P7 MA-V	4
P2 SD-H	92	P8 SA-V	28
P3 MD-V	5	PED.-U	0
P4 SD-V	5	PED.-V	0
P5 MA-H	8	BG-V	11
P6 SA-H	13	BG-H	3
9. EQUALIZER(EQU)			
BAND1	15	16	7
BAND211	15	10	10
BAND3	11	11	11
BAND413	16	12	12
BAND5	14	16	13
	MOVIE	MUSIC	NEWS
10. PRE VOLUME(PRE)	CM-916F Typical Service Data		
35			

■ Trouble Shooting Charts


1. NO RASTER

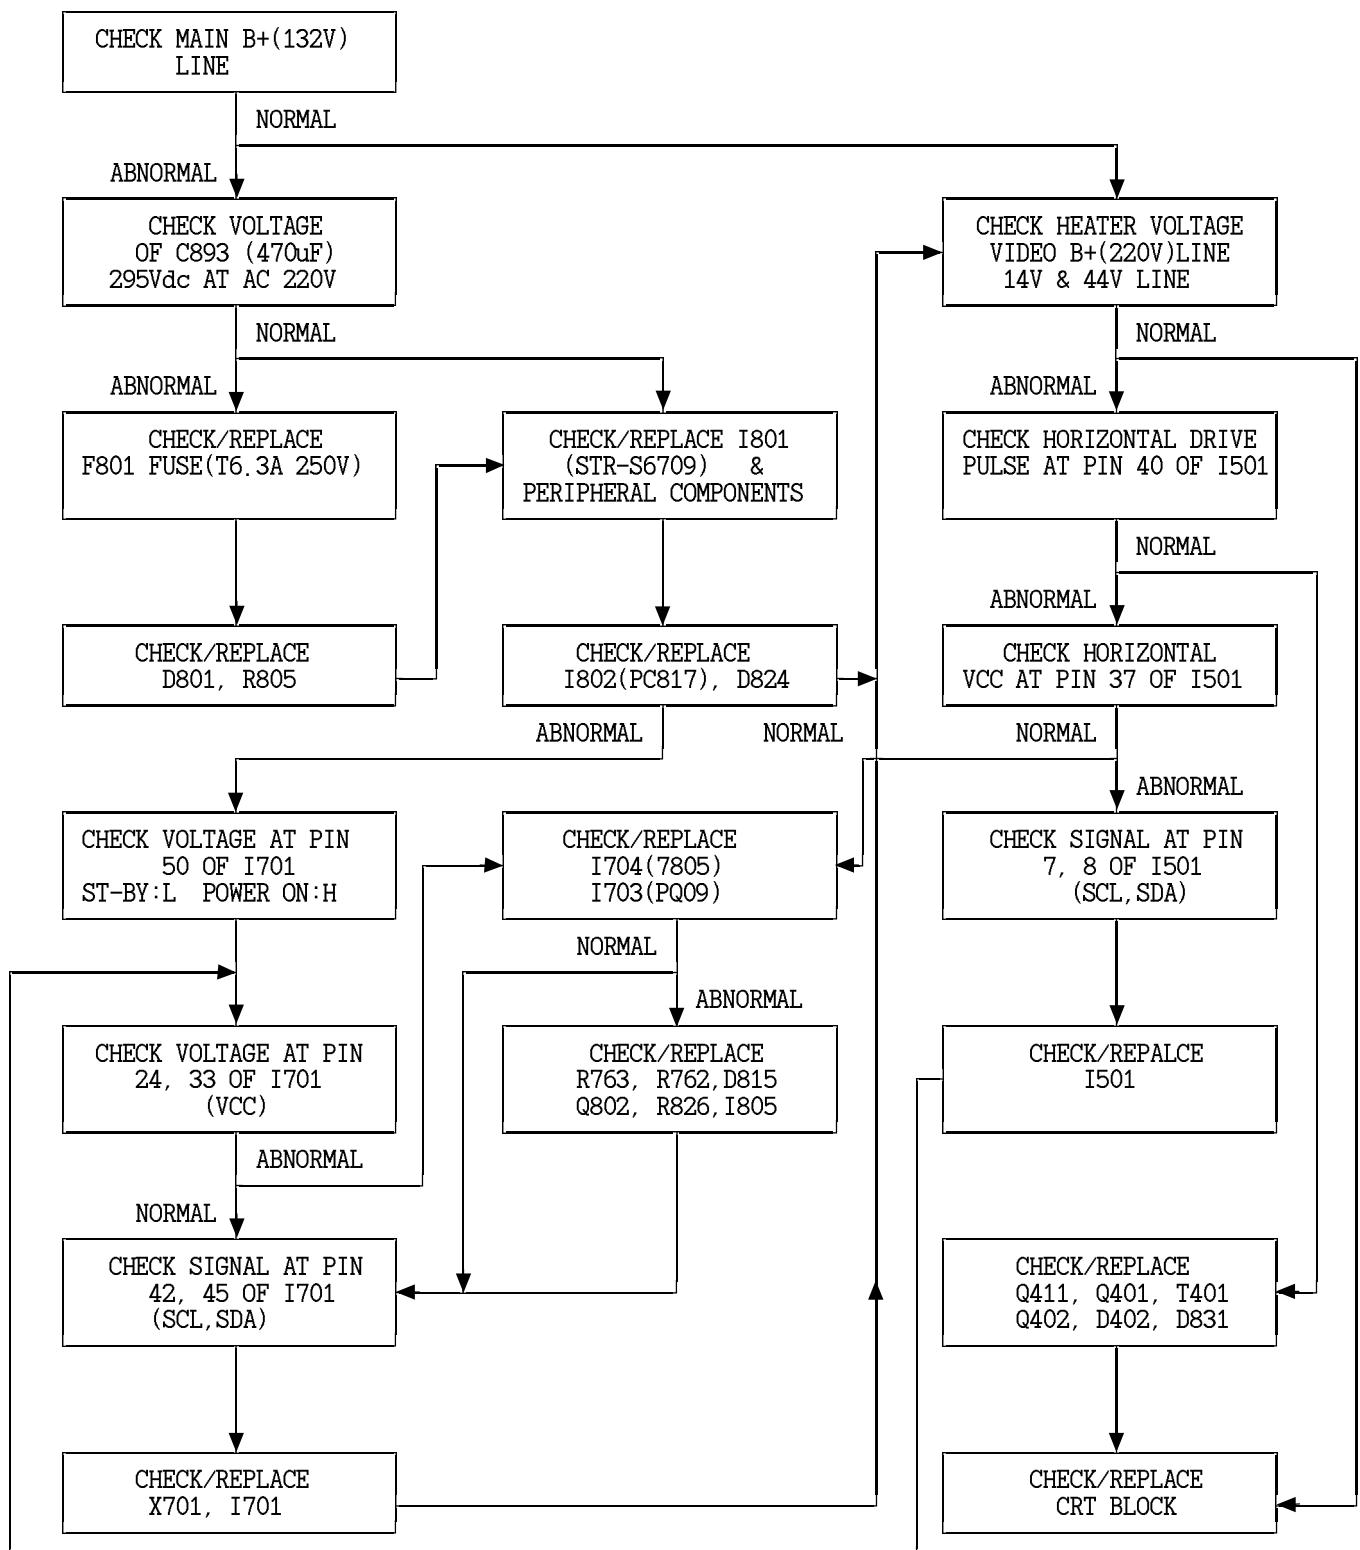


2. NO PICTURE (RASTER OK)

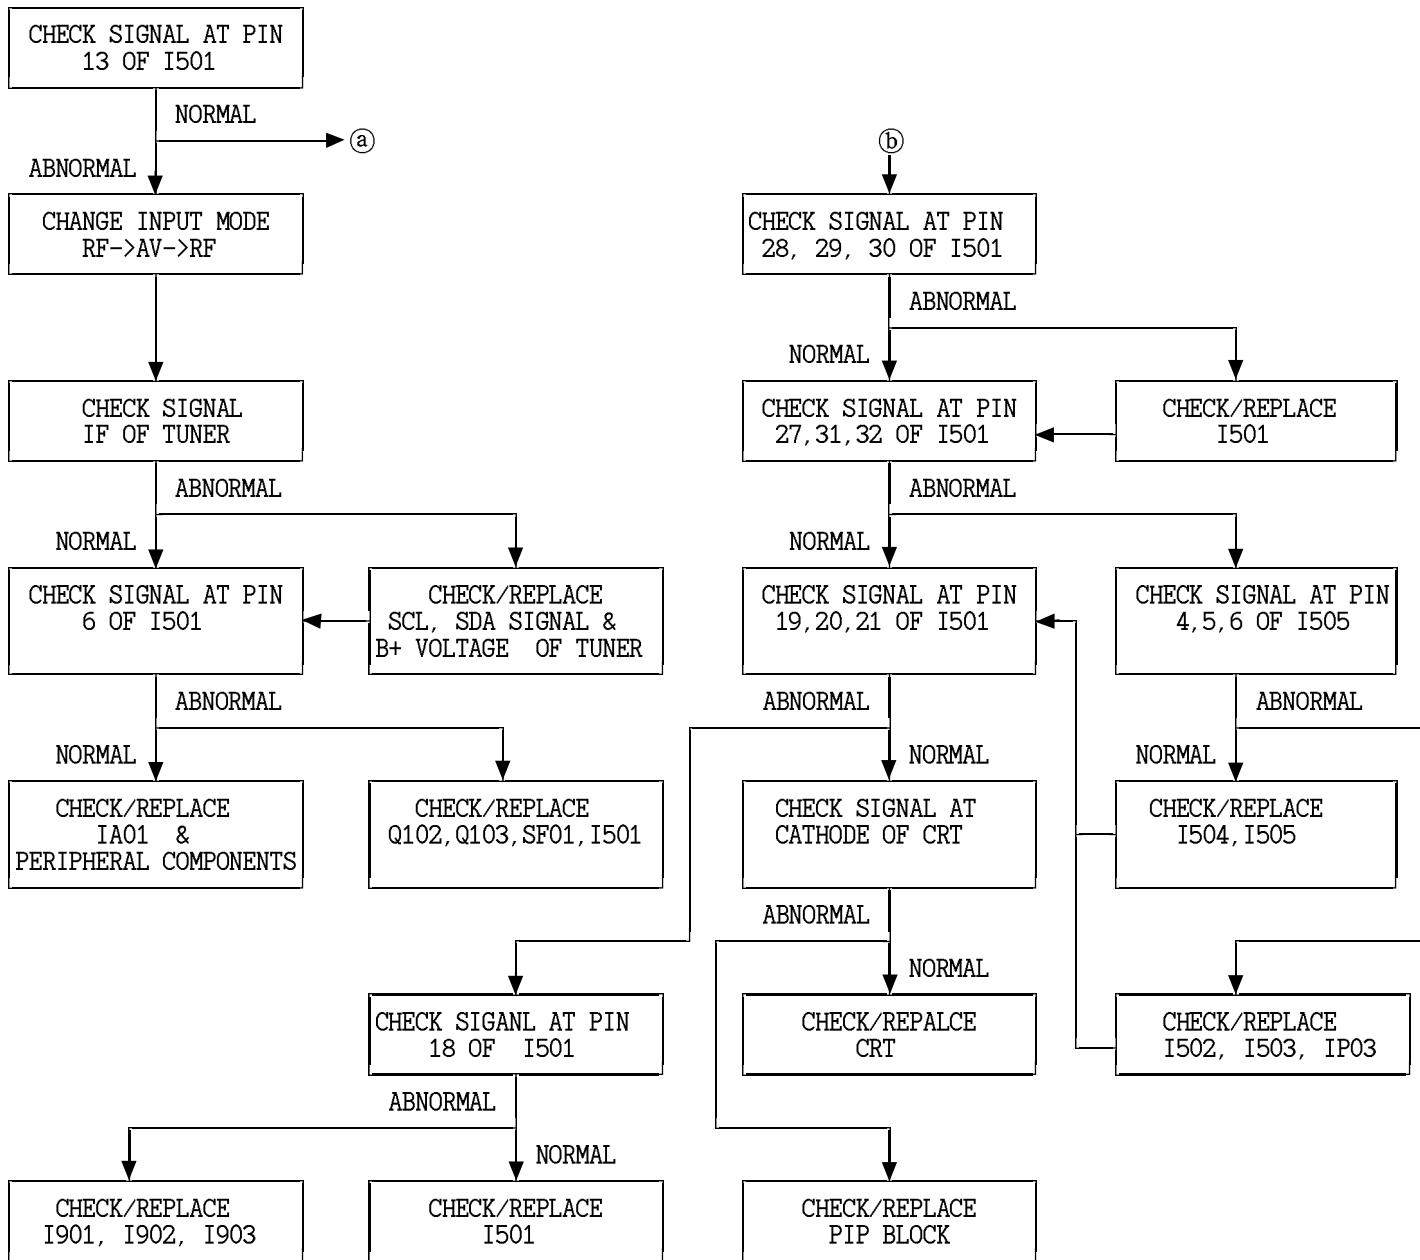


2-1. NO PICTURE (RASTER OK)

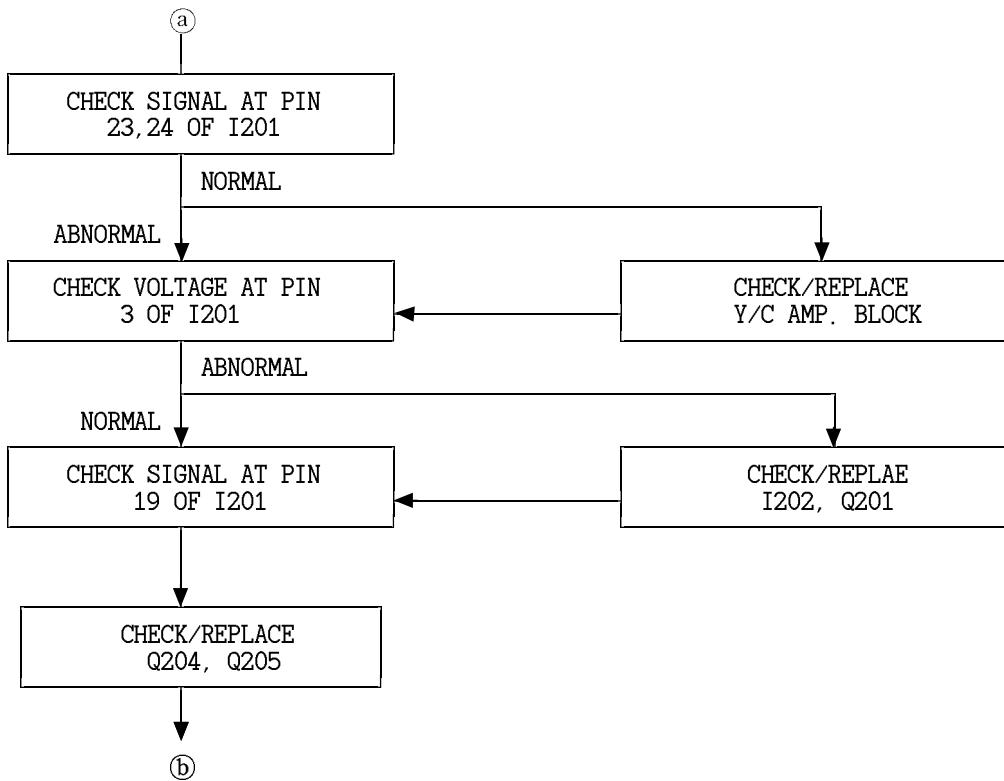


3. NO WOOFER SOUND (PICTURE OK) (WITHOUT FP-68T30 model)

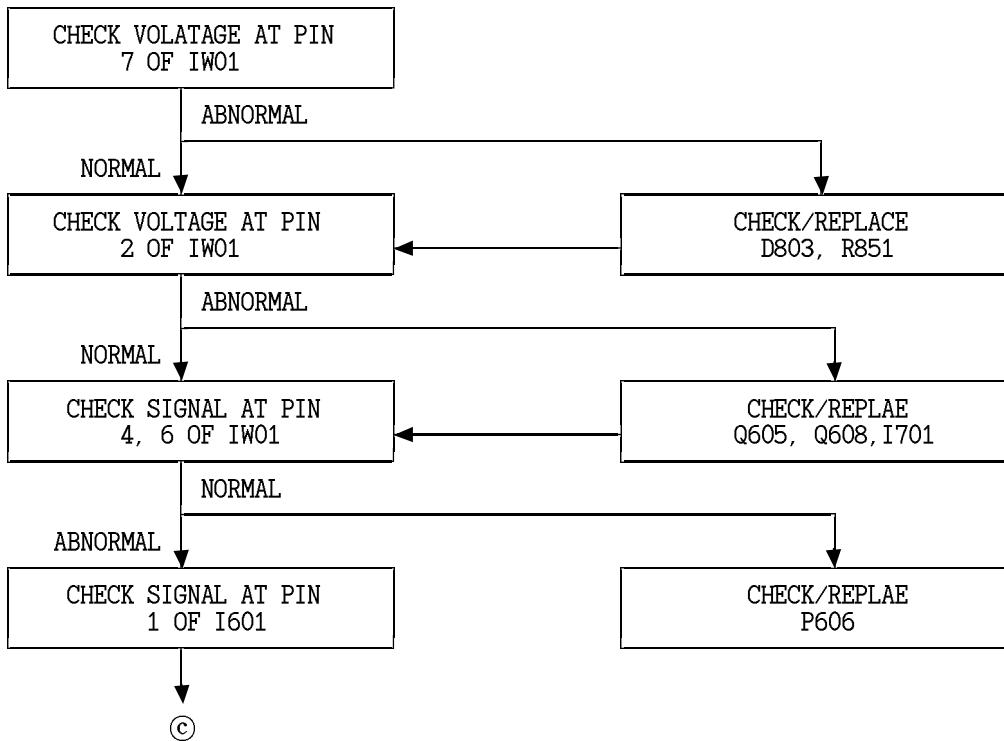


4. NO MAIN SOUND (PICTURE OK)

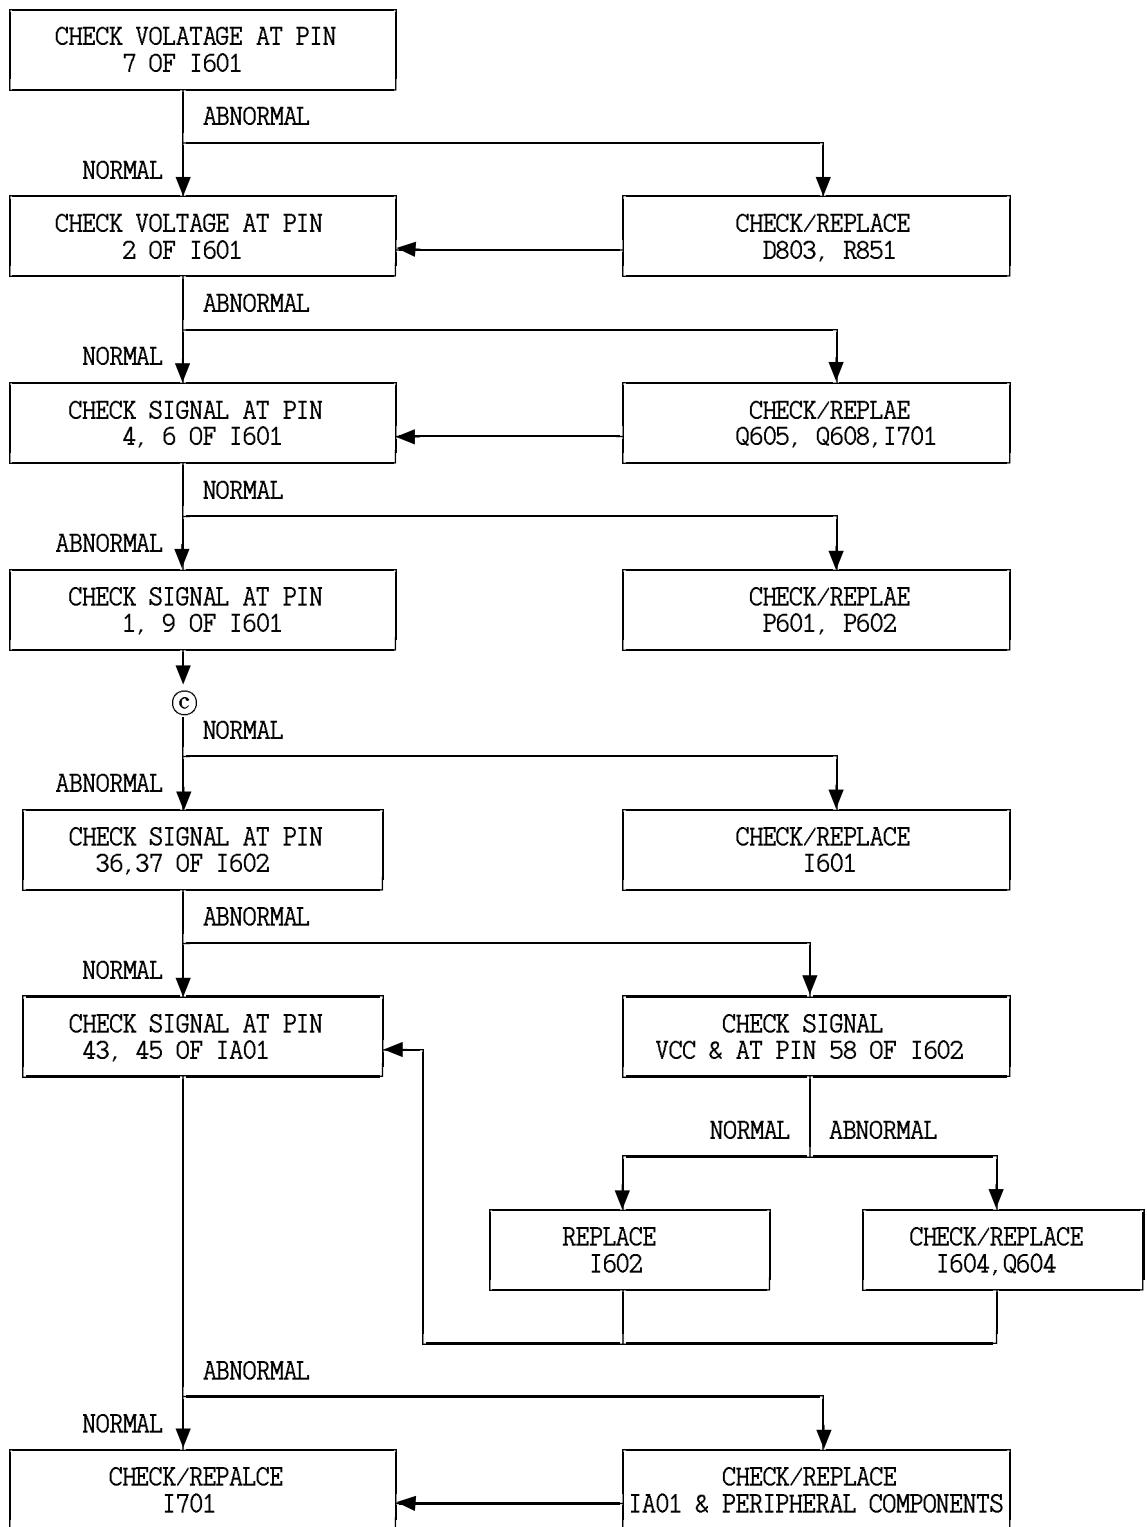


5. NO COLOR

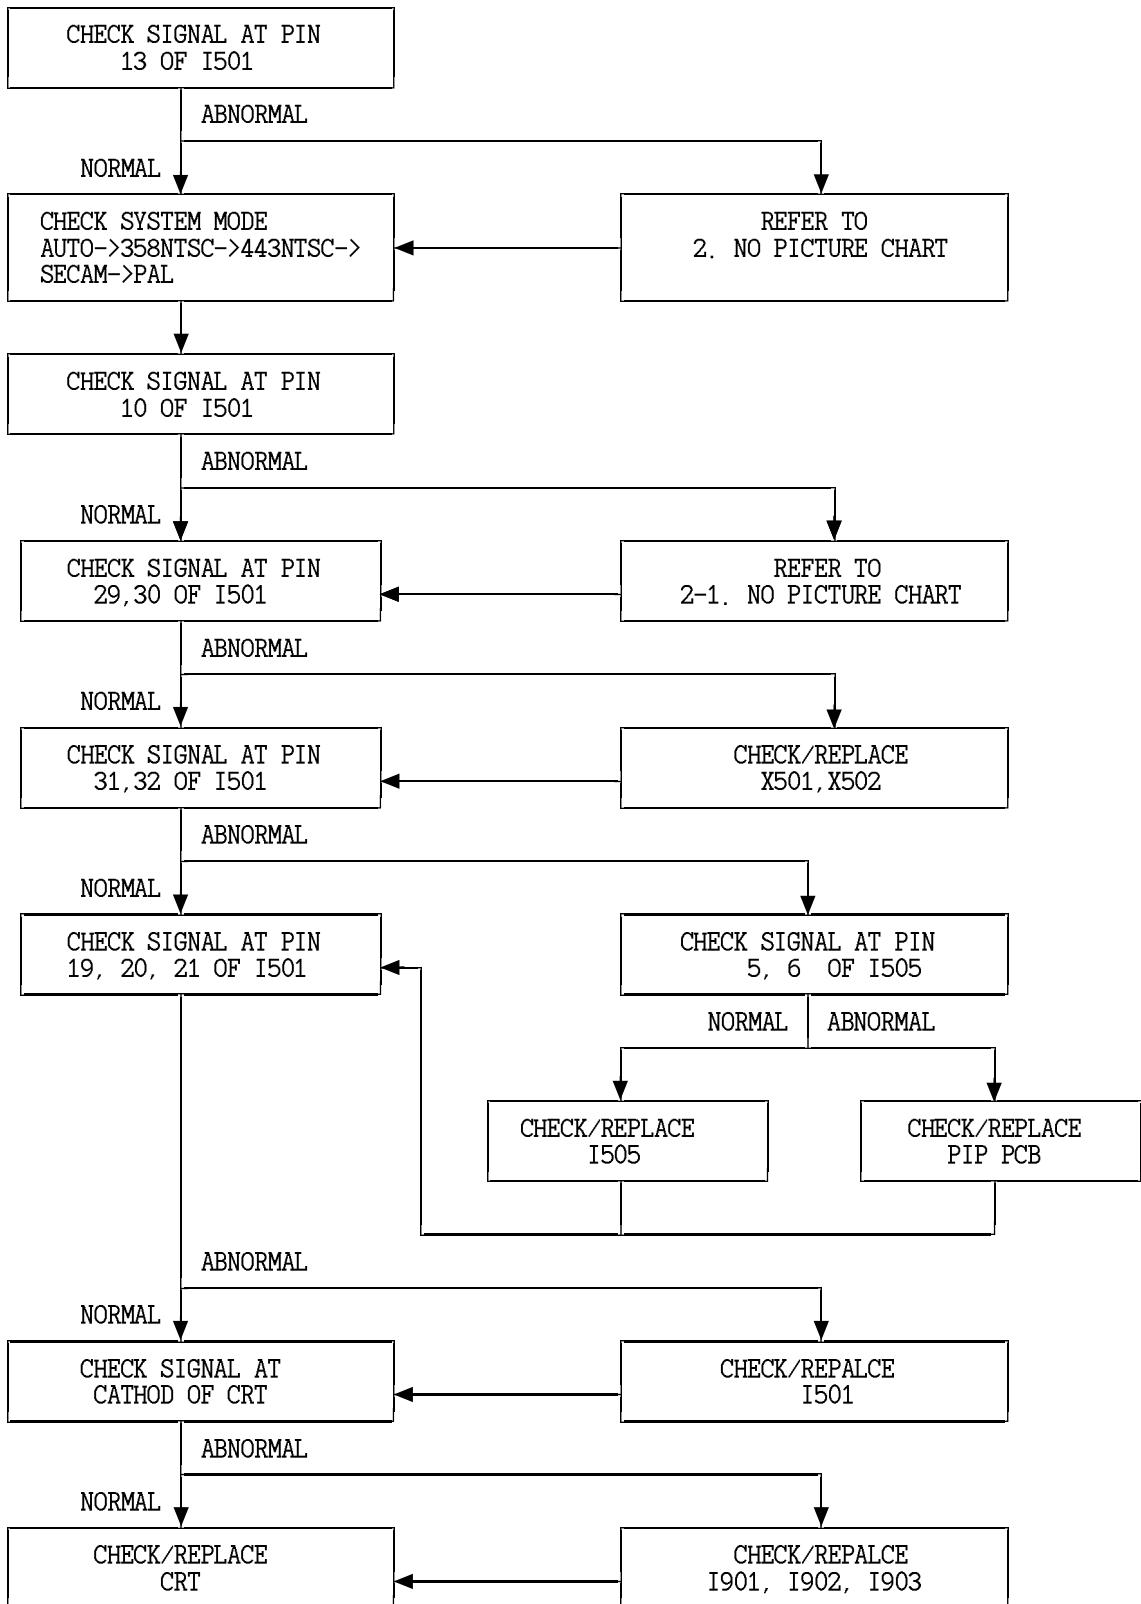


6. NO VERTICAL SCANNING (ONE HORIZONTAL LINE RASTER)

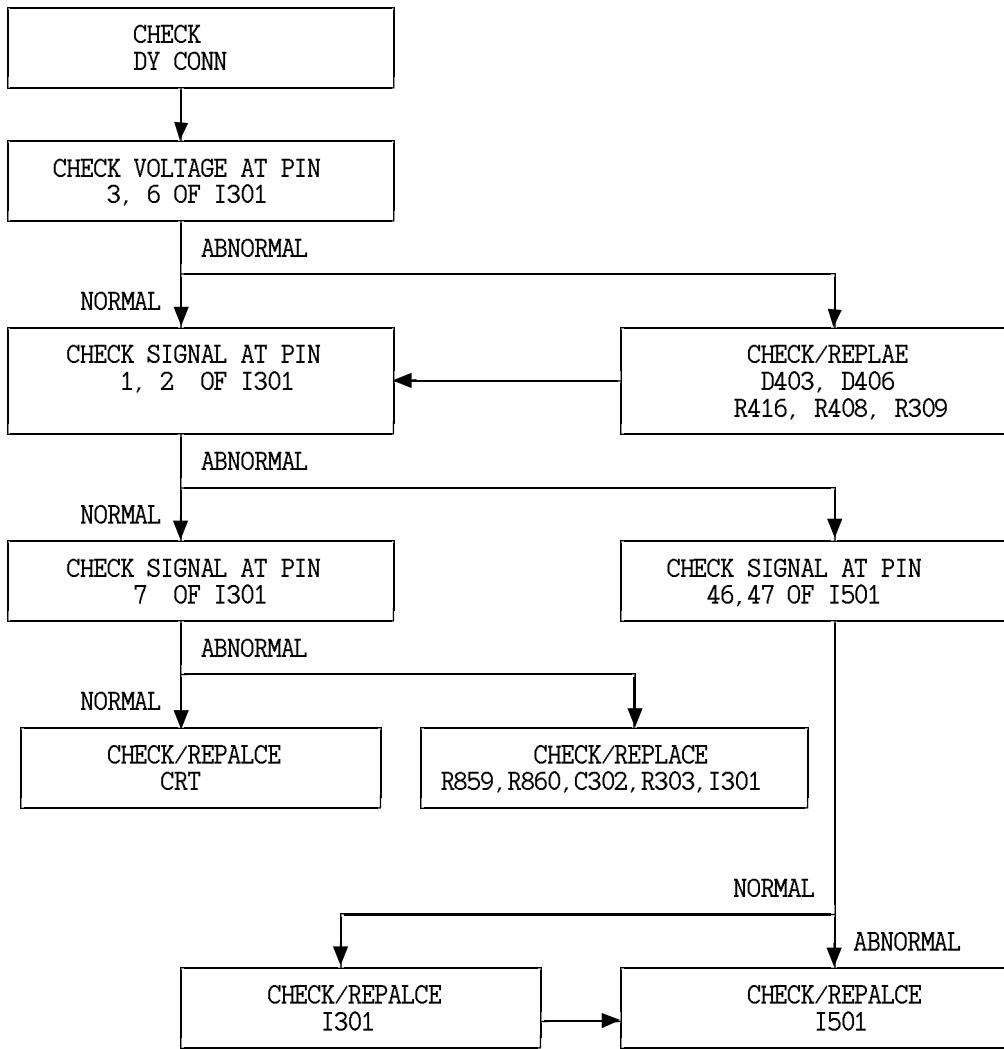


7. NO PIP PICTURE (WITHOUT FP-68T30 model)

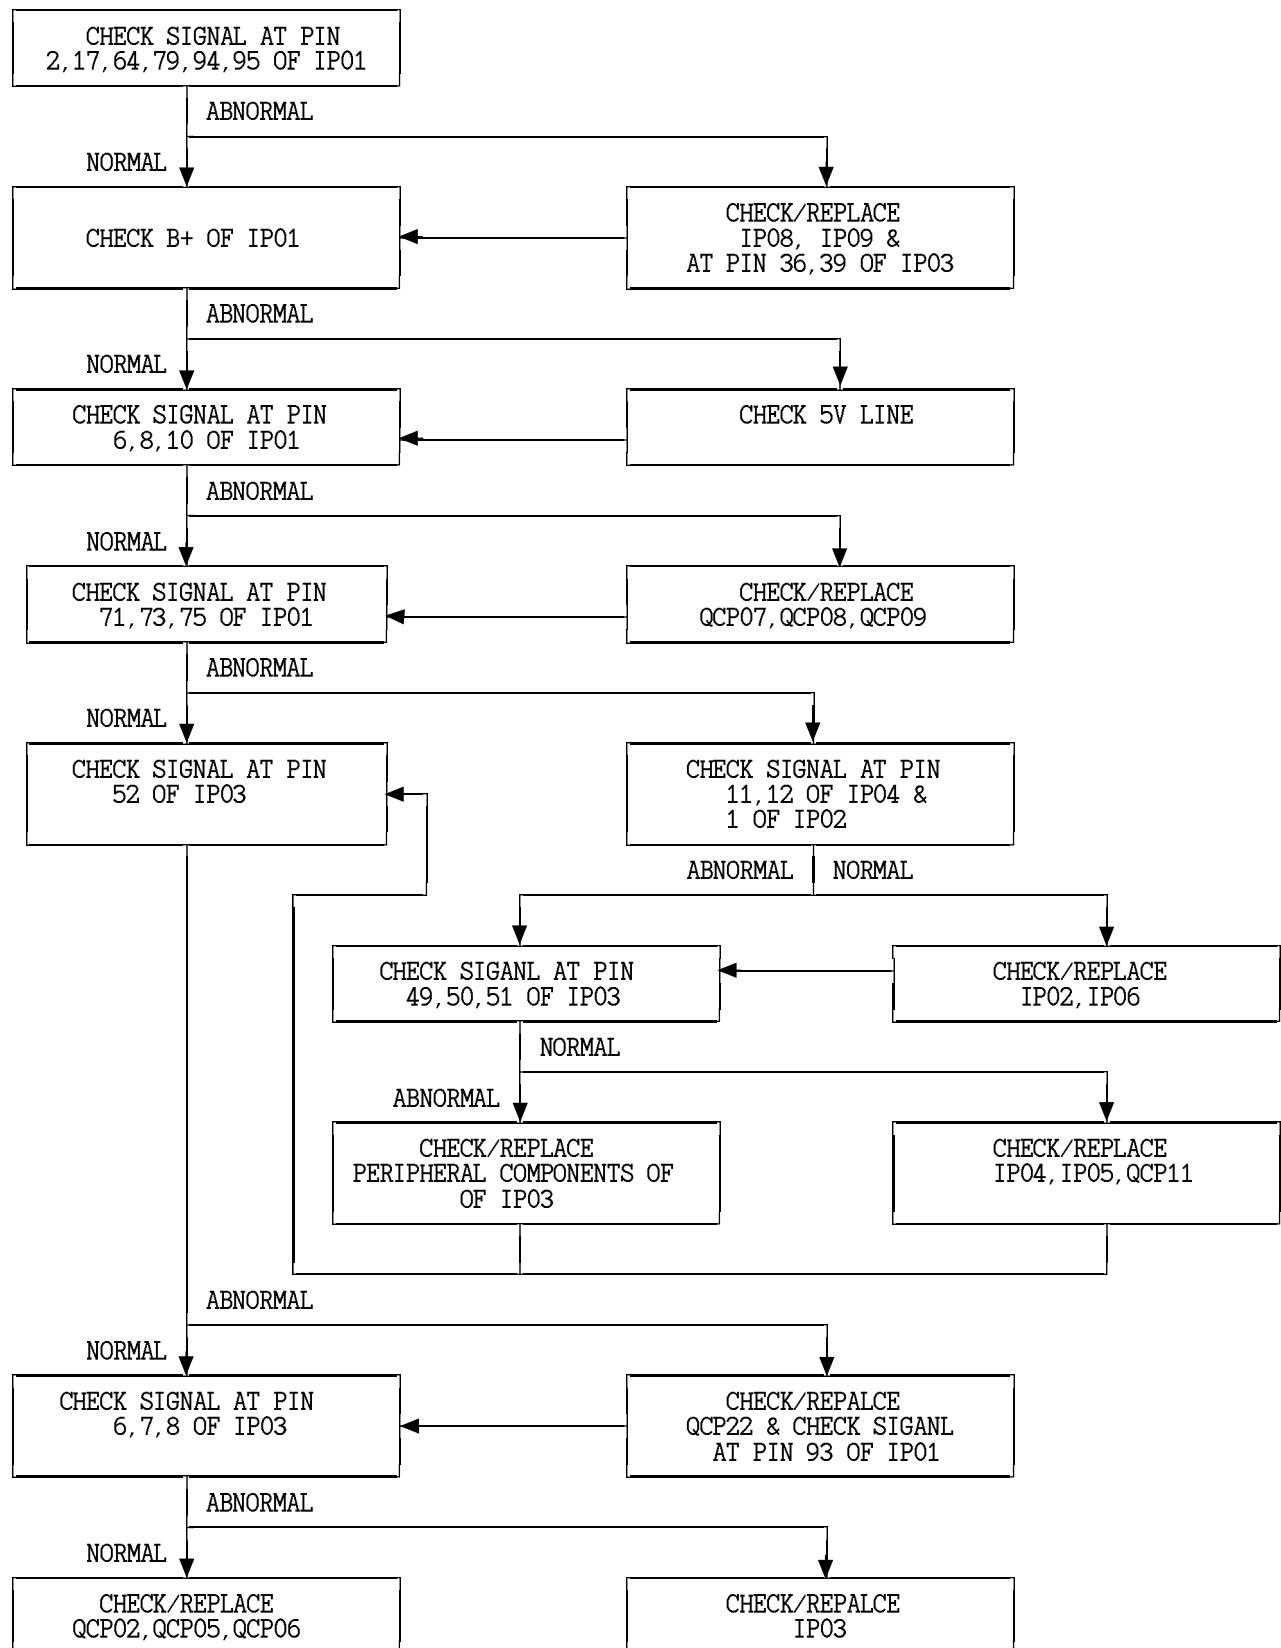


8. NO EXTERNAL A/V (RF OK)

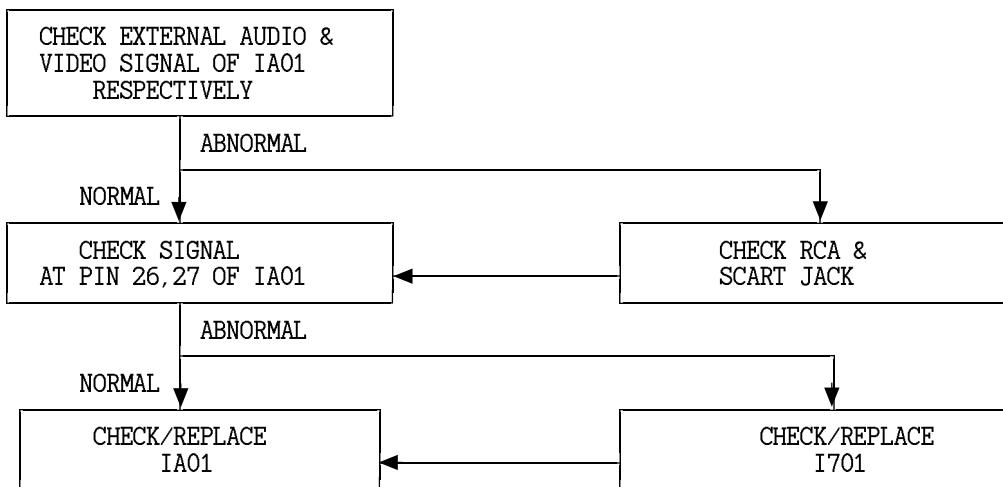


9. NO ON-SCREEN DISPLAY (PICTURE OK)

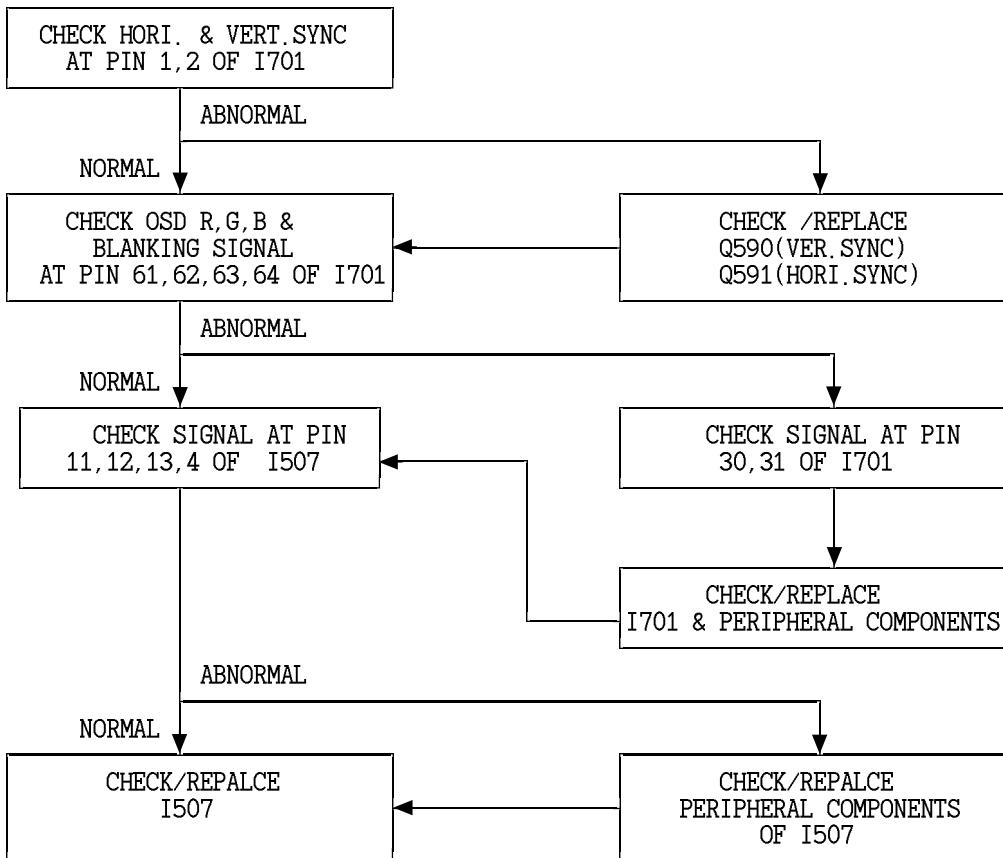


10. REMOTE CONTROL UNIT TROUBLE (LOCAL CONTROL OK)

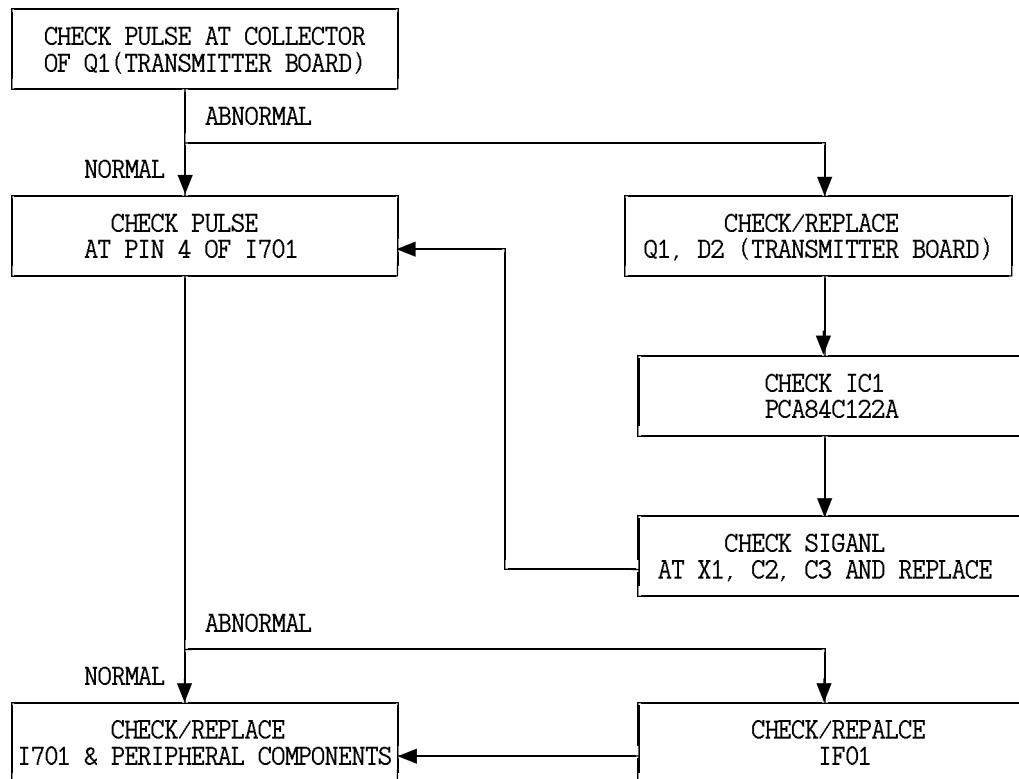

11. NO TELETEXT (TEXT IC:SAA 5281 version)

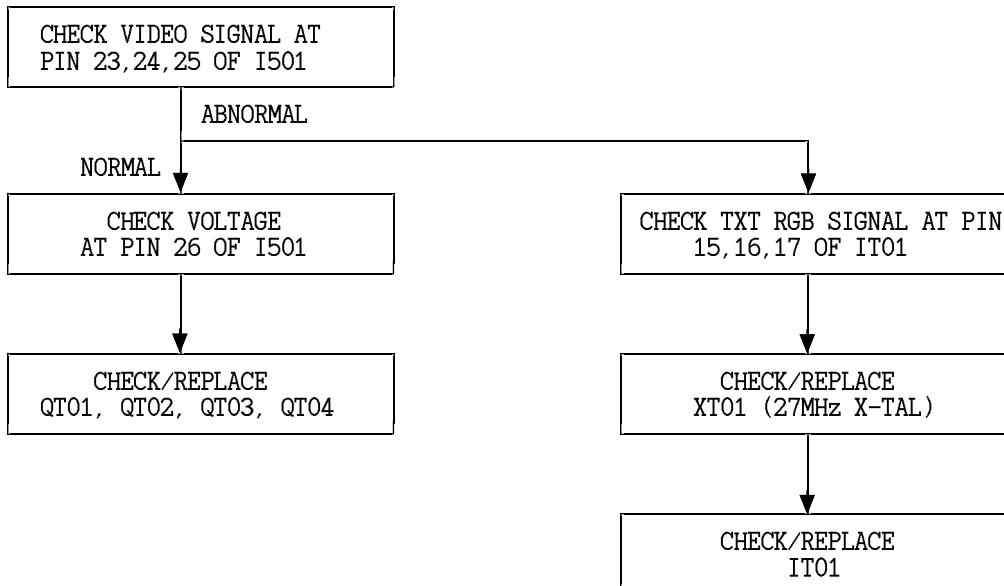

12. NO TELETEXT (TEXT IC:SAA 5261 version)

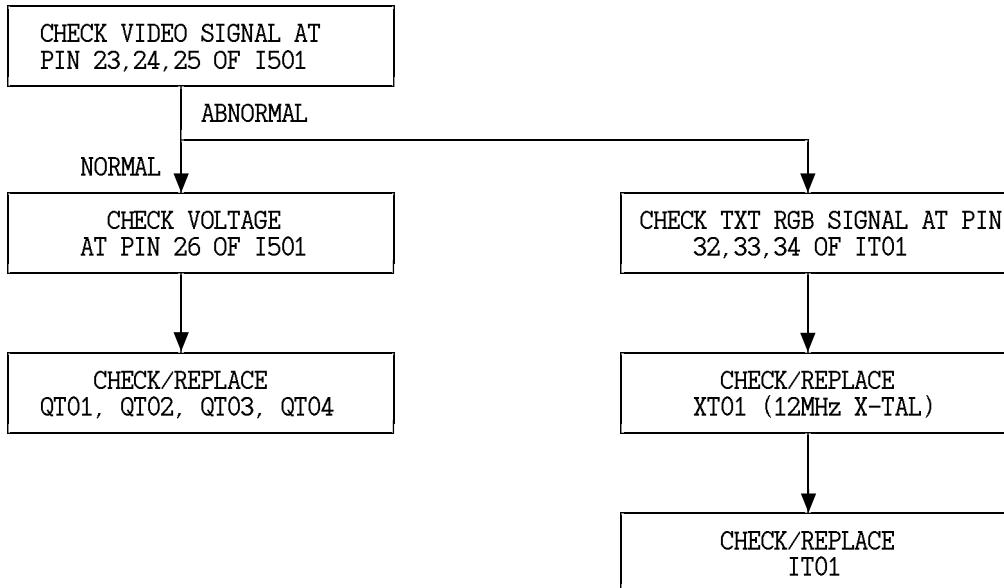

■ Part List (DTD-29U9WPT)

✓ **Caution:** In this Service Manual, some parts can be changed for improving, their performance without notice in the parts list. So, if you need the latest parts information, please refer to PPL(Parts Price List) in Service information Center(<http://svc.dwe.co.kr>)

CAUTION

'⚠' is safety component, so it must be used the same component.

'R' is a recommendable part for stock.

Loc	Part_Cd	Part_Name	Part_Desc	REMARK	Loc	Part_Cd	Part_Name	Part_Desc	REMARK
ZZ100	48B2830F31	TRANSMITTER REMOCON	R-30F31		V901A	4856015820	SCREW CRT FIX	SWRM+SK5 L=35	
ZZ110	PTACPWID167	ACCESSORY AS	DTC-29U9WPT		V901B	4856215402	WASHER RUBBER	CR T2.0	
100	48500Q00810	BATTERY	R6P/LN		ZZ200	PTFMSJD351	MASK FRONT AS	DTD-29U9WPT	
M821	4858213800	BAG INSTRUCTION	L.D.P.E T0.05X250X400		M201	4852072901	MASK FRONT	HIPS BK	
M861	48586910C1	MANUAL INSTRUCTION	DTD-29X5FMP		M251	4852539001	GRILL R	PS SHEET	
ZZ120	PTBCSHD351	COVER BACK AS	DTD-29U9WPT		M252	4852539101	GRILL L	PS SHEET	
M211	4852154901	COVER BACK	HIPS BK		M371	4853748101	RETA	HIPS	
M781	4857817610	CLOTH BLACK	FELT 300X20X0.7		ZZ202	PTU2MSD351	PCB UNION-2 MANUAL A	DTD-29U9WPT	
M782	4857817630	CLOTH BLACK	FELT 400X20X0.7		DE01	DSD50RH51B	LED	SD50-RH51BGRW	
ZZ130	PTPKCPD351	PACKING AS	DTD-29U9WPT		DE02	DSV50B570T	LED	SV50-R32B570T	
M641	6520010100	STAPLE PIN	18MM J D O		HP01	4859105240	JACK PHONO	LGT151-0100	
M681	4856812400	BAND	18MM X 3M		IE01	1SR5HP----	IC PREAMP	SR-5HP	
M801	4858055400	BOX CARTON	SW-4		JP05	4859105450	JACK PIN BOARD	YSC03P-4120-9S	
M811	4858192300	PAD	EPS 29U9		JP06	4859105340	JACK S-VHS	YK51-5359	
M821	4858218700	BAG P.E	PE FOAM I0.5x1880x1380		M231	4852326001	PANEL AV	HIPS BK	
ZZ131	58G0000094	COIL DEGAUSSING	DC-2901	⚠	M231A	7178301212	SCREW TAPPTITE	TT2 WAS 3X12 MFZN BK	
ZZ132	48519A4210	CRT GROUND NET	2901H-1015-2P		M593	4855933211	DECO AV	PVC T0.2	
ZZ140	PTCACACD351	CABINET AS	DTD-29U9WPT		P205A	4856812001	TIE CABLE	NYLON66 DA100	
M191	4851938500	DECO WOOFER AS	29340+59333+7122401612		P602A	4856812001	TIE CABLE	NYLON66 DA100	
M201A	7178301212	SCREW TAPPTITE	TT2 WAS 3X12 MFZN BK		PA204	4850705S12	CONNECTOR	YH025-05+YST025+ULW=500	
M201B	7178301212	SCREW TAPPTITE	TT2 WAS 3X12 MFZN BK		PA205	4850706S18	CONNECTOR	YH025-06+YST025+USW=500	
M201C	7178301011	SCREW TAPPTITE	TT2 WAS 3X10 MFZN		PA602	4850703S19	CONNECTOR	YH025-03+YST025+ULW=300	
M211A	7172401612	SCREW TAPPTITE	TT2 TRS 4X16 MFZN BK		PAF3	4850705S12	CONNECTOR	YH025-05+YST025+ULW=500	
M211B	7172401612	SCREW TAPPTITE	TT2 TRS 4X16 MFZN BK		PAF3A	4856812001	TIE CABLE	NYLON66 DA100	
M211C	7172401612	SCREW TAPPTITE	TT2 TRS 4X16 MFZN BK		PC11	4859236420	CONN WAFER	YAW025-07	
M211D	7172401612	SCREW TAPPTITE	TT2 TRS 4X16 MFZN BK		PC11A	4850707N08	CONNECTOR	YH025-07+YST025+ULW=800	
M231B	7172401612	SCREW TAPPTITE	TT2 TRS 4X16 MFZN BK		PC11B	4856812001	TIE CABLE	NYLON66 DA100	
M291A	7172401612	SCREW TAPPTITE	TT2 TRS 4X16 MFZN BK		PPS1	4850702S11	CONNECTOR	BL102NG+MXH40058-02=600	
M353	4853526600	HOLDER CORD	NYLON6(DACB-183)		PPS1A	4856812001	TIE CABLE	NYLON66 DA100	
M353A	7172401612	SCREW TAPPTITE	TT2 TRS 4X16 MFZN BK		SW801	5S40202142	SW POWER PUSH	ME-7 (70063-072)	⚠
M481	4854855501	BUTTON POWER	ABS BK		ZZ200	PTU2JRD351	PCB RADIAL AS	DTD-29U9WPT	
M491	4854944401	BUTTON CH	ABS BK		CE01	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP	
M491A	7172401612	SCREW TAPPTITE	TT2 TRS 4X16 MFZN BK		SWF2	5S50101Z90	SW TACT	THVV502GDA	
M501	4855059201	DECO CTRL	AL1050-H24		SWF3	5S50101Z90	SW TACT	THVV502GDA	
M541	4855415800	SPEC PLATE	150ART P/E FILM (C/TV)		SWF4	5S50101Z90	SW TACT	THVV502GDA	
M551	4855539601	DECO SENSOR	ABS		SWF5	5S50101Z90	SW TACT	THVV502GDA	
M561	48556174SD	MARK BRAND	SILVER DIA-CUTTING		SWF6	5S50101Z90	SW TACT	THVV502GDA	
M564	4856816300	CLAMP WIRE	NYLON 6 (V0)		SWF7	5S50101Z90	SW TACT	THVV502GDA	
M591	4855934800	DECO PLATE	AL T0.5		SWF8	5S50101Z90	SW TACT	THVV502GDA	
M592	4855933501	DECO A	HIPS BK		SWF9	5S50101Z90	SW TACT	THVV502GDA	
M592A	7172401612	SCREW TAPPTITE	TT2 TRS 4X16 MFZN BK		ZZ200	PTU2JAD351	PCB AXIAL AS	DTD-29U9WPT	
M592B	7172401612	SCREW TAPPTITE	TT2 TRS 4X16 MFZN BK		10	2TM14006LB	TAPE MASKING	3M #232 6.0X2000M	
M671	4856717900	SPRING	SWPA T0.5		20	2TM10006LB	TAPE MASKING	3M #232-MAP-C 6.2X2000M	
M672	4856812001	TIE CABLE	NYLON66 DA100		A001	4859805960	PCB UNION 2	197X123(197X246/2) D1B	
SP01	48A8305800	WOOFER SYSTEM	SS-130A02 15W 8 OHM		CE02	CBZF1H104Z	C CERA SEMI	50V F 0.1MF Z	
SP01A	4856016100	SCREW SPECIAL	SWRM		JF01	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING	
SP02	48A8305600	SPEAKER SYSTEM	SS-80A04 15W 8 OHM		RE14	RD-4Z511J-	R CARBON FILM	1/4 510 OHM J	
SP02A	4856016100	SCREW SPECIAL	SWRM		RE15	RD-4Z241J-	R CARBON FILM	1/4 240 OHM J	
V901	4859632662	CRT	A68QLD080X011(B) P38	⚠	RE16	RD-4Z241J-	R CARBON FILM	1/4 240 OHM J	

Loc	Part_Cd	Part_Name	Part_Desc	REMARK	Loc	Part_Cd	Part_Name	Part_Desc	REMARK
RF01	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J		SF03	5PK9252M--	FILTER SAW	K9252M	
RF02	RD-AZ332J-	R CARBON FILM	1/6 3.3K OHM J		U101	4859715930	TUNER VARACTOR	ENV59D15G3	
RF03	RD-AZ472J-	R CARBON FILM	1/6 4.7K OHM J		U102	4859715930	TUNER VARACTOR	ENV59D15G3	
RF04	RD-AZ472J-	R CARBON FILM	1/6 4.7K OHM J		U102A	4859003750	PLUG PHONE AS	PLUG+CABLE 1365AWG26=150B	
RF05	RD-AZ332J-	R CARBON FILM	1/6 3.3K OHM J		U102B	4859003750	PLUG PHONE AS	PLUG+CABLE 1365AWG26=150B	
RF16	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J		U103	4850M02510	MODULE RF	ENPE797	
ZZ290	PTMPMSD351	PCB MAIN MANUAL AS	DTD-29U9WPT		X601	5XE18R432E	CRYSTAL QUARTZ	HC-49U 18.43200MHZ 30PPM	
C603	CEYF1H222V	C ELECTRO	50V RSS 2200MF (18X35.5)		ZZ200	PTMPJ0D351	PCB MAIN (RHU) AS	DTD-29U9WPT	
C721	CN4XB-101M	C ARRAY	5P(4) 100PF M 50V 2.54MM		C111	CEXF1C102V	C ELECTRO	16V RSS 1000MF (10X20) TP	
C797	CCZB1H102K	C CERA	50V B 1000PF K (AXIAL)		C130	CEXF1E471V	C ELECTRO	25V RSS 470MF (10X16) TP	
C798	CCZB1H102K	C CERA	50V B 1000PF K (AXIAL)		C133	CEXF1E471V	C ELECTRO	25V RSS 470MF (10X16) TP	
I501	1TDA8844N2	IC VIDEO	TDA8844/N2	R	C134	CEXF1C102V	C ELECTRO	16V RSS 1000MF (10X20) TP	
I504	1KA393----	IC LOGIC	KA393		C647	CEXF1V102V	C ELECTRO	35V RSS 1000MF (13X25) TP	
I505	1TDA9176--	IC LTI	TDA9176		C648	CEXF1V102V	C ELECTRO	35V RSS 1000MF (13X25) TP	
I507	1AN5862K--	IC	AN5862K		C675	CEXF1C471V	C ELECTRO	16V RSS 470MF (10X12.5)TP	
I601	PTC2SW3335	HEAT SINK ASS'Y	1TDA2616-- + 7128301011	R	C701	CEXF1C102V	C ELECTRO	16V RSS 1000MF (10X20) TP	
I601	1TDA2616--	IC	TDA2616		C715	CEXF1C471V	C ELECTRO	16V RSS 470MF (10X12.5)TP	
I601A	4857023335	HEAT SINK	AL EX T3.0		C763	CEXF1C102V	C ELECTRO	16V RSS 1000MF (10X20) TP	
I601B	7178301011	SCREW TAPPTITE	TT2 WAS 3X10 MFZN		C764	CEXF1C102V	C ELECTRO	16V RSS 1000MF (10X20) TP	
I602	1MSP3410D-	IC AUDIO	MSP3410D		C767	CEXF1C102V	C ELECTRO	16V RSS 1000MF (10X20) TP	
I604	1TDA445B-	IC	TDA445B		C769	CEXF1C102V	C ELECTRO	16V RSS 1000MF (10X20) TP	
I606	1UPC1406HA	IC	UPC 1406HA		C771	CEXF1C102V	C ELECTRO	16V RSS 1000MF (10X20) TP	
I608	1KA4558---	IC AMP	KA4558		C772	CEXF1C102V	C ELECTRO	16V RSS 1000MF (10X20) TP	
I701	1DW270FAR2	IC MICOM	DW37270MF-AR2(185SP)	R	ZZ200	PTMPJBD351	PCB MAIN M-10 AS	DTD-29U9WPT	
I702	1AT24C16PC	IC	AT24C16-10PC		10	2TM18006BE	TAPE MASKING	6.2X500	
I703	PTR2SW4900	HEAT SINK ASS'Y	1K78R09--- + 7174300811		P102	485923162S	CONN WAFER	YW025-03 (STICK)	
1	1K78R09---	IC REGULATOR	KIA78R09PI		P501	485923192S	CONN WAFER	YW025-06 (STICK)	
0000A	4857024900	HEAT SINK	AL EX		P502	485923162S	CONN WAFER	YW025-03 (STICK)	
0000B	7174300811	SCREW TAPPTITE	TT2 RND 3X8 MFZN		P601	485923172S	CONN WAFER	YW025-04 (STICK)	
I704	1KA7805---	IC REGULATOR	KA7805		P602	485923162S	CONN WAFER	YW025-03 (STICK)	
I708	1KA7808---	IC REGULATOR	KA7808		P603	485923162S	CONN WAFER	YW025-03 (STICK)	
L105	58C5580019	COIL CHOKE	TRF-9225 (0.55UH)		P604	485923162S	CONN WAFER	YW025-03 (STICK)	
L106	58M38R9006	COIL DET	TRF-1490		P605	485923202S	CONN WAFER	YW025-07 (STICK)	
L511	58Q0000090	COIL DELAY LINE	G286LAIS-K5367		P701	485923202S	CONN WAFER	YW025-07 (STICK)	
M351	4853529901	HOLDER CORD	HIPS BK		P702	485923202S	CONN WAFER	YW025-07 (STICK)	
M351A	7172401412	SCREW TAPPTITE	TT2 TRS 4X14 MFZN BK		P703	485923182S	CONN WAFER	YW025-05 (STICK)	
M361A	7172401412	SCREW TAPPTITE	TT2 TRS 4X14 MFZN BK		P712	485923202S	CONN WAFER	YW025-07 (STICK)	
M361B	7178301212	SCREW TAPPTITE	TT2 WAS 3X12 MFZN BK		R763	RS02Z270J-	R M-OXIDE FILM	2W 27 OHM J (TAPPING)	
M381	4853812800	FRAME MAIN PCB	FR HIPS BK		R764	RS02Z150JS	R M-OXIDE FILM	2W 15 OHM J SMALL	
M381A	7178301212	SCREW TAPPTITE	TT2 WAS 3X12 MFZN BK		ZZ200	PTMPJRD351	PCB MAIN RADIAL AS	DTD-29U9WPT	
M381B	7178301212	SCREW TAPPTITE	TT2 WAS 3X12 MFZN BK		C132	CEXF1H479V	C ELECTRO	50V RSS 4.7MF (5X11) TP	
P503	4859235320	CONN WAFER	YW025-10		C136	CEXF1H470V	C ELECTRO	50V RSS 47MF (6.3X11) TP	
P707	4859249620	CONN WAFER	YF254-10		C138	CEXF1H479V	C ELECTRO	50V RSS 4.7MF (5X11) TP	
P708	4859249920	CONN WAFER	YF254-13		C142	CEXF1H470V	C ELECTRO	50V RSS 47MF (6.3X11) TP	
P709	4859249620	CONN WAFER	YF254-10		C162	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP	
PP01	4859281320	CONN WAFER	TAC-L18X-A1		C163	CEXF1H479V	C ELECTRO	50V RSS 4.7MF (5X11) TP	
PP02	4859281320	CONN WAFER	TAC-L18X-A1		C164	CXCH1H680J	C CERA	50V CH 68PF J (TAPPING)	
PT11	4859249320	CONN WAFER	YF254-07		C165	CEXF1E101V	C ELECTRO	25V RSS 100MF (6.3X11) TP	
PT21	4859249620	CONN WAFER	YF254-10		C171	CEXF1E101V	C ELECTRO	25V RSS 100MF (6.3X11) TP	
R710	RA-85X103J	R ARRAY	5P(4) 1/8 10K OHM J		C502	CMXM2A473J	C MYLAR	100V 0.047MF J (TP)	
R717	RA-85X103J	R ARRAY	5P(4) 1/8 10K OHM J		C503	CEXF1E101V	C ELECTRO	25V RSS 100MF (6.3X11) TP	
R727	RA-86X103J	R ARRAY	6P(5) 1/8 10K OHM J		C504	CEXF1H229V	C ELECTRO	50V RSS 2.2MF (5X11) TP	
R749	RA-86X103J	R ARRAY	6P(5) 1/8 10K OHM J		C506	CEXF1E221V	C ELECTRO	25V RSS 220MF (8X11.5) TP	
SF01	5PK6266K--	FILTER SAW	K6266K		C508	CMXM2A473J	C MYLAR	100V 0.047MF J (TP)	

Loc	Part_Cd	Part_Name	Part_Desc	REMARK	Loc	Part_Cd	Part_Name	Part_Desc	REMARK
C509	CMXM2A224J	C MYLAR	100V 0.22MF J		C622	CEXF1H479V	C ELECTRO	50V RSS 4.7MF (5X11) TP	
C510	CMXM2A473J	C MYLAR	100V 0.047MF J (TP)		C623	CEXF1H479V	C ELECTRO	50V RSS 4.7MF (5X11) TP	
C511	CMXM2A223J	C MYLAR	100V 0.022MF J TP		C624	CMXM2A104J	C MYLAR	100V 0.1MF J (TP)	
C512	CMXM2A223J	C MYLAR	100V 0.022MF J TP		C625	CMXM2A104J	C MYLAR	100V 0.1MF J (TP)	
C513	CMXM2A223J	C MYLAR	100V 0.022MF J TP		C626	CMXM2A104J	C MYLAR	100V 0.1MF J (TP)	
C514	CMXM2A104J	C MYLAR	100V 0.1MF J (TP)		C627	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP	
C515	CMXM2A104J	C MYLAR	100V 0.1MF J (TP)		C630	CXCH1H509D	C CERA	50V CH 5PF D (TAPPING)	
C518	CMXM2A332J	C MYLAR	100V 3300PF J (TP)		C631	CXCH1H509D	C CERA	50V CH 5PF D (TAPPING)	
C519	CMXM2A104J	C MYLAR	100V 0.1MF J (TP)		C633	CEXF1E101V	C ELECTRO	25V RSS 100MF (6.3X11) TP	
C520	CEXF1E221V	C ELECTRO	25V RSS 220MF (8X11.5) TP		C643	CCXF1H103Z	C CERA	50V F 0.01MF Z (TAPPING)	
C521	CMXM2A223J	C MYLAR	100V 0.022MF J TP		C644	CEXF1E101V	C ELECTRO	25V RSS 100MF (6.3X11) TP	
C522	CEXF1H109V	C ELECTRO	50V RSS 1MF (5X11) TP		C645	CEXF1H479V	C ELECTRO	50V RSS 4.7MF (5X11) TP	
C523	CMXM2A103J	C MYLAR	100V 0.01MF J (TP)		C649	CMXM2A224J	C MYLAR	100V 0.22MF J	
C524	CEXF1H109V	C ELECTRO	50V RSS 1MF (5X11) TP		C650	CEXF1H470V	C ELECTRO	50V RSS 47MF (6.3X11) TP	
C525	CMXM2A222J	C MYLAR	100V 2200PF J (TP)		C652	CMXM2A224J	C MYLAR	100V 0.22MF J	
C526	CCXB1H102K	C CERA	50V B 1000PF K (TAPPING)		C653	CMXM2A682J	C MYLAR	100V 6800PF J (TP)	
C527	CCXB1H102K	C CERA	50V B 1000PF K (TAPPING)		C660	CEXF1E101V	C ELECTRO	25V RSS 100MF (6.3X11) TP	
C530	CMXL2E104K	C MYLAR	250V MEU 0.1MF K		C661	CMXM2A103J	C MYLAR	100V 0.01MF J (TP)	
C531	CEXF1H229V	C ELECTRO	50V RSS 2.2MF (5X11) TP		C662	CMXM2A103J	C MYLAR	100V 0.01MF J (TP)	
C532	CMXM2A223J	C MYLAR	100V 0.022MF J TP		C665	CEXF1H479V	C ELECTRO	50V RSS 4.7MF (5X11) TP	
C533	CMXM2A104J	C MYLAR	100V 0.1MF J (TP)		C666	CEXF1H479V	C ELECTRO	50V RSS 4.7MF (5X11) TP	
C542	CEXF1E101V	C ELECTRO	25V RSS 100MF (6.3X11) TP		C667	CEXF1E470V	C ELECTRO	25V RSS 47MF (5X11) TP	
C551	CMXM2A104J	C MYLAR	100V 0.1MF J (TP)		C668	CEXF1E470V	C ELECTRO	25V RSS 47MF (5X11) TP	
C553	CMXM2A104J	C MYLAR	100V 0.1MF J (TP)		C676	CEXF1E101V	C ELECTRO	25V RSS 100MF (6.3X11) TP	
C554	CMXM2A104J	C MYLAR	100V 0.1MF J (TP)		C677	CMXM2A104J	C MYLAR	100V 0.1MF J (TP)	
C555	CMXM2A104J	C MYLAR	100V 0.1MF J (TP)		C680	CEXF1E101V	C ELECTRO	25V RSS 100MF (6.3X11) TP	
C558	CMXM2A104J	C MYLAR	100V 0.1MF J (TP)		C681	CEXF1H479V	C ELECTRO	50V RSS 4.7MF (5X11) TP	
C560	CMXM2A104J	C MYLAR	100V 0.1MF J (TP)		C682	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP	
C561	CEXF1E101V	C ELECTRO	25V RSS 100MF (6.3X11) TP		C683	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP	
C562	CCXB2H221K	C CERA	500V B 220PF K (TAPPING)		C684	CEXF1H479V	C ELECTRO	50V RSS 4.7MF (5X11) TP	
C563	CBXF1H104Z	C CERA SEMI	50V F 0.1MF Z (TAPPING)		C685	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP	
C571	CEXF1E470V	C ELECTRO	25V RSS 47MF (5X11) TP		C686	CEXF1H479V	C ELECTRO	50V RSS 4.7MF (5X11) TP	
C572	CEXF1E470V	C ELECTRO	25V RSS 47MF (5X11) TP		C688	CEXF1H229V	C ELECTRO	50V RSS 2.2MF (5X11) TP	
C573	CEXF1E101V	C ELECTRO	25V RSS 100MF (6.3X11) TP		C703	CEXF1H229V	C ELECTRO	50V RSS 2.2MF (5X11) TP	
C575	CEXF1E470V	C ELECTRO	25V RSS 47MF (5X11) TP		C710	CEXF1H479V	C ELECTRO	50V RSS 4.7MF (5X11) TP	
C588	CEXF1E470V	C ELECTRO	25V RSS 47MF (5X11) TP		C716	CXCH1H120J	C CERA	50V CH 12PF J (TAPPING)	
C590	CMXM2A102J	C MYLAR	100V 1000PF J (TP)		C717	CXCH1H160J	C CERA	50V CH 16PF J (TAPPING)	
C591	CEXF1H470V	C ELECTRO	50V RSS 47MF (6.3X11) TP		C731	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP	
C592	CEXF1E101V	C ELECTRO	25V RSS 100MF (6.3X11) TP		C768	CBXF1H104Z	C CERA SEMI	50V F 0.1MF Z (TAPPING)	
C595	CMXM2A473J	C MYLAR	100V 0.047MF J (TP)		C770	CBXF1H104Z	C CERA SEMI	50V F 0.1MF Z (TAPPING)	
C596	CMXM2A104J	C MYLAR	100V 0.1MF J (TP)		C780	CBXF1H104Z	C CERA SEMI	50V F 0.1MF Z (TAPPING)	
C601	CEXF1H229V	C ELECTRO	50V RSS 2.2MF (5X11) TP		D131	1UPC574J--	IC	UPC574J	
C602	CEXF1E101V	C ELECTRO	25V RSS 100MF (6.3X11) TP		D132	1UPC574J--	IC	UPC574J	
C604	CMXM2A104J	C MYLAR	100V 0.1MF J (TP)		I706	1K1A7042AP	IC REGULATOR	KIA7042AP	
C605	CEXF1H229V	C ELECTRO	50V RSS 2.2MF (5X11) TP		L705	5CPX220J--	COIL PEAKING	22UH J (RADIAL)	
C606	CMXM2A682J	C MYLAR	100V 6800PF J (TP)		Q102	TKTC3197--	TR	KTC3197 (TP)	
C608	CEXF1H479V	C ELECTRO	50V RSS 4.7MF (5X11) TP		Q103	TKTC3198Y-	TR	KTC3198Y	
C609	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP		Q501	TKTC3198Y-	TR	KTC3198Y	
C614	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP		Q502	TKTC3198Y-	TR	KTC3198Y	
C615	CEXF1E101V	C ELECTRO	25V RSS 100MF (6.3X11) TP		Q503	TKTA1266Y-	TR	KTA1266Y (TP)	
C616	CMXM2A104J	C MYLAR	100V 0.1MF J (TP)		Q504	TKTA1266Y-	TR	KTA1266Y (TP)	
C617	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP		Q505	TKTA1266Y-	TR	KTA1266Y (TP)	
C618	CEXF1H339V	C ELECTRO	50V RSS 3.3MF (5X11) TP		Q571	TKTC3198Y-	TR	KTC3198Y	
C619	CMXM2A104J	C MYLAR	100V 0.1MF J (TP)		Q573	TKTC3198Y-	TR	KTC3198Y	

Loc	Part_Cd	Part_Name	Part_Desc	REMARK	Loc	Part_Cd	Part_Name	Part_Desc	REMARK
Q575	TKTC3198Y-	TR	KTC3198Y		C632	CBZF1H104Z	C CERA SEMI	50V F 0.1MF Z	
Q576	TKTA1266Y-	TR	KTA1266Y (TP)		C641	CCZB1H102K	C CERA	50V B 1000PF K (AXIAL)	
Q577	TKTC3198Y-	TR	KTC3198Y		C642	CCZB1H102K	C CERA	50V B 1000PF K (AXIAL)	
Q578	TKTC3198Y-	TR	KTC3198Y		C663	CCZB1H101K	C CERA	50V B 100PF K (AXIAL)	
Q579	TKTC3198Y-	TR	KTC3198Y		C664	CCZB1H101K	C CERA	50V B 100PF K (AXIAL)	
Q580	TKTC3198Y-	TR	KTC3198Y		C672	CBZF1H104Z	C CERA SEMI	50V F 0.1MF Z	
Q590	TKTC3198Y-	TR	KTC3198Y		C702	CBZF1H104Z	C CERA SEMI	50V F 0.1MF Z	
Q591	TKTC3198Y-	TR	KTC3198Y		C705	CCZB1H102K	C CERA	50V B 1000PF K (AXIAL)	
Q592	TKTC3198Y-	TR	KTC3198Y		C706	CZCH1H120J	C CERA	50V CH 12PF J (AXIAL)	
Q596	TKTA1266Y-	TR	KTA1266Y (TP)		C707	CZCH1H120J	C CERA	50V CH 12PF J (AXIAL)	
Q604	TKTC3198Y-	TR	KTC3198Y		C711	CCZB1H102K	C CERA	50V B 1000PF K (AXIAL)	
Q605	TKTC3198Y-	TR	KTC3198Y		C714	CBZF1H104Z	C CERA SEMI	50V F 0.1MF Z	
Q607	TKTC3198Y-	TR	KTC3198Y		C720	CCZB1H101K	C CERA	50V B 100PF K (AXIAL)	
Q608	TKTC3198Y-	TR	KTC3198Y		C732	CBZF1H104Z	C CERA SEMI	50V F 0.1MF Z	
Q701	TKTC3198Y-	TR	KTC3198Y		C740	CCZF1H103Z	C CERA	50V F 0.01MF Z	
Q702	TKTC3198Y-	TR	KTC3198Y		C762	CBZF1H104Z	C CERA SEMI	50V F 0.1MF Z	
Q771	TKTC3198Y-	TR	KTC3198Y		C766	CBZF1H104Z	C CERA SEMI	50V F 0.1MF Z	
Q772	TKTC3198Y-	TR	KTC3198Y		C773	CBZF1H104Z	C CERA SEMI	50V F 0.1MF Z	
Q773	TKTC3198Y-	TR	KTC3198Y		C799	CCZF1H103Z	C CERA	50V F 0.01MF Z	
R569	RV5426501P	R SEMI FIXED	EVN-DJAA03 500 OHM		D102	D1N4148---	DIODE	1N4148 (TAPPING)	
R579	RV5426102P	R SEMI FIXED	EVN-DJAA03B13 1K OHM B		D103	D1SS85TA--	DIODE	1SS85TA	
X501	5XEX4R436C	CRYSTAL QUARTZ	HC-49U 4.433619M 20PP TA		D104	D1N4004S--	DIODE	1N4004S	
X502	5XEX3R579C	CRYSTAL QUARTZ	HC-49U 3.579545M (TP)		D133	D1N4148---	DIODE	1N4148 (TAPPING)	
X701	5XEX8R000E	CRYSTAL QUARTZ	HC-49U 8.000MHZ 30PPM TP		D134	D1N4148---	DIODE	1N4148 (TAPPING)	
ZZ200	PTMPJAD351	PCB MAIN AXIAL AS	DTD-29U9WPT		D501	DUZ6R2BM--	DIODE ZENER	UZ-6.2BM	
10	2TM14006LB	TAPE MASKING	3M #232 6.0X2000M		D502	DUZ8R2BM--	DIODE ZENER	UZ-8.2B	
A001	4859803296	PCB MAIN	246X330 D1B		D503	D1N4004S--	DIODE	1N4004S	
C120	CCZF1H103Z	C CERA	50V F 0.01MF Z		D504	DUZ6R8BL--	DIODE ZENER	UZ-6.8BL	
C121	CCZF1H103Z	C CERA	50V F 0.01MF Z		D505	DUZ9R1BMM-	DIODE ZENER	UZ-9.1BM	
C122	CCZF1H103Z	C CERA	50V F 0.01MF Z		D506	D1N4148---	DIODE	1N4148 (TAPPING)	
C124	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		D507	DUZ6R8BL--	DIODE ZENER	UZ-6.8BL	
C161	CCZF1H103Z	C CERA	50V F 0.01MF Z		D509	DUZ9R1BMM-	DIODE ZENER	UZ-9.1BM	
C166	CCZF1H103Z	C CERA	50V F 0.01MF Z		D601	DUZ6R8BL--	DIODE ZENER	UZ-6.8BL	
C167	CZSL1H470J	C CERA	50V SL 47PF J (AXIAL)		D602	DUZ6R8BL--	DIODE ZENER	UZ-6.8BL	
C168	CZSL1H470J	C CERA	50V SL 47PF J (AXIAL)		D603	DUZ6R8BL--	DIODE ZENER	UZ-6.8BL	
C169	CCZF1H103Z	C CERA	50V F 0.01MF Z		D604	D1N4148---	DIODE	1N4148 (TAPPING)	
C170	CZCH1H220J	C CERA	50V CH 22PF J (AXIAL)		D605	D1N4148---	DIODE	1N4148 (TAPPING)	
C174	CCZF1H103Z	C CERA	50V F 0.01MF Z		D606	D1N4148---	DIODE	1N4148 (TAPPING)	
C505	CCZF1H223Z	C CERA	50V F 0.022MF Z		D607	DUZ10BM---	DIODE ZENER	UZ-10BM	
C507	CCZF1H223Z	C CERA	50V F 0.022MF Z		D670	D1N4148---	DIODE	1N4148 (TAPPING)	
C516	CZCH1H130J	C CERA	50V CH 13PF J		D671	D1N4148---	DIODE	1N4148 (TAPPING)	
C517	CZCH1H150J	C CERA	50V CH 15PF J (AXIAL)		D672	D1N4148---	DIODE	1N4148 (TAPPING)	
C552	CBZF1H104Z	C CERA SEMI	50V F 0.1MF Z		D701	DUZ5R6BM--	DIODE ZENER	UZ-5.6BM	
C556	CCZF1H103Z	C CERA	50V F 0.01MF Z		D703	D1N4148---	DIODE	1N4148 (TAPPING)	
C557	CBZF1H104Z	C CERA SEMI	50V F 0.1MF Z		D705	RD-AZ824J-	R CARBON FILM	1/6 820K OHM J	
C559	CBZR1C152M	C CERA	16V Y5R 1500PF M (AXIAL)		D706	DUZ6R2BM--	DIODE ZENER	UZ-6.2BM	
C574	CBZF1H104Z	C CERA SEMI	50V F 0.1MF Z		D707	DUZ6R2BM--	DIODE ZENER	UZ-6.2BM	
C589	CBZF1H104Z	C CERA SEMI	50V F 0.1MF Z		D710	DUZ6R8BL--	DIODE ZENER	UZ-6.8BL	
C594	CCZB1H561K	C CERA	50V B 560PF K		D711	DUZ6R8BL--	DIODE ZENER	UZ-6.8BL	
C610	CCZB1H391K	C CERA	50V B 390PF K (AXIAL)		D719	D1N4148---	DIODE	1N4148 (TAPPING)	
C611	CCZB1H102K	C CERA	50V B 1000PF K (AXIAL)		D721	DUZ5R6BM--	DIODE ZENER	UZ-5.6BM	
C620	CCZB1H471K	C CERA	50V B 470PF K (AXIAL)		D798	DUZ6R2BM--	DIODE ZENER	UZ-6.2BM	
C621	CCZB1H471K	C CERA	50V B 470PF K (AXIAL)		D799	DUZ6R2BM--	DIODE ZENER	UZ-6.2BM	
C629	CCZF1H103Z	C CERA	50V F 0.01MF Z		J001	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING	

Loc	Part_Cd	Part_Name	Part_Desc	REMARK	Loc	Part_Cd	Part_Name	Part_Desc	REMARK
J242	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		J298	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING	
J243	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		L107	5CPZ150K02	COIL PEAKING	15UH K (AXIAL 3.5MM)	
J244	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		L502	5CPZ569K02	COIL PEAKING	5.6UH K (AXIAL 3.5MM)	
J245	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		L503	5CPZ569K02	COIL PEAKING	5.6UH K (AXIAL 3.5MM)	
J246	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		L504	5CPZ569K02	COIL PEAKING	5.6UH K (AXIAL 3.5MM)	
J247	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		L590	5CPZ569K02	COIL PEAKING	5.6UH K (AXIAL 3.5MM)	
J248	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		L601	5CPZ479K02	COIL PEAKING	4.7UH K (AXIAL 3.5MM)	
J249	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		L602	5CPZ479K02	COIL PEAKING	4.7UH K (AXIAL 3.5MM)	
J250	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		L608	5CPZ479K02	COIL PEAKING	4.7UH K (AXIAL 3.5MM)	
J251	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		L701	5CPZ569K02	COIL PEAKING	5.6UH K (AXIAL 3.5MM)	
J252	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		L702	5CPZ569K02	COIL PEAKING	5.6UH K (AXIAL 3.5MM)	
J253	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R104	RD-AZ910J-	R CARBON FILM	1/6 91 OHM J	
J254	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R106	RD-AZ391J-	R CARBON FILM	1/6 390 OHM J	
J255	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R121	RD-AZ221J-	R CARBON FILM	1/6 220 OHM J	
J256	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R123	RD-AZ562J-	R CARBON FILM	1/6 5.6K OHM J	
J257	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R124	RD-AZ472J-	R CARBON FILM	1/6 4.7K OHM J	
J258	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R125	RD-AZ122J-	R CARBON FILM	1/6 1.2K OHM J	
J259	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R127	RD-AZ122J-	R CARBON FILM	1/6 1.2K OHM J	
J260	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R128	RD-AZ270J-	R CARBON FILM	1/6 27 OHM J	
J261	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R129	RD-AZ563J-	R CARBON FILM	1/6 56K OHM J	
J262	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R130	RD-AZ562J-	R CARBON FILM	1/6 5.6K OHM J	
J263	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R138	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J	
J264	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R157	RD-AZ123J-	R CARBON FILM	1/6 12K OHM J	
J265	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R158	RD-AZ822J-	R CARBON FILM	1/6 8.2K OHM J	
J266	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R165	RD-AZ221J-	R CARBON FILM	1/6 220 OHM J	
J267	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R166	RD-AZ221J-	R CARBON FILM	1/6 220 OHM J	
J268	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R168	RD-AZ123J-	R CARBON FILM	1/6 12K OHM J	
J269	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R169	RD-AZ822J-	R CARBON FILM	1/6 8.2K OHM J	
J270	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R176	RD-AZ472J-	R CARBON FILM	1/6 4.7K OHM J	
J271	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R177	RD-AZ472J-	R CARBON FILM	1/6 4.7K OHM J	
J272	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R178	RD-AZ472J-	R CARBON FILM	1/6 4.7K OHM J	
J273	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R179	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J	
J276	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R180	RD-AZ820J-	R CARBON FILM	1/6 82 OHM J	
J277	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R181	RD-AZ271J-	R CARBON FILM	1/6 270 OHM J	
J278	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R182	RD-AZ271J-	R CARBON FILM	1/6 270 OHM J	
J279	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R183	RD-AZ271J-	R CARBON FILM	1/6 270 OHM J	
J280	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R185	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J	
J281	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R195	RD-AZ221J-	R CARBON FILM	1/6 220 OHM J	
J282	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R196	RD-AZ221J-	R CARBON FILM	1/6 220 OHM J	
J283	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R197	RD-AZ229J-	R CARBON FILM	1/4 2.2 OHM J	
J284	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R500	RD-AZ472J-	R CARBON FILM	1/6 4.7K OHM J	
J285	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R501	RD-AZ821J-	R CARBON FILM	1/6 820 OHM J	
J286	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R502	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J	
J287	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R503	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J	
J288	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R504	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J	
J289	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R505	RD-AZ479J-	R CARBON FILM	1/4 4.7 OHM J	
J290	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R506	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J	
J291	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R507	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J	
J292	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R508	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J	
J293	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R510	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J	
J294	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R511	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J	
J295	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R512	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J	
J296	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R513	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J	
J297	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R514	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J	

Loc	Part_Cd	Part_Name	Part_Desc	REMARK	Loc	Part_Cd	Part_Name	Part_Desc	REMARK
R515	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J		R575	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J	
R516	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J		R576	RD-4Z479J-	R CARBON FILM	1/4 4.7 OHM J	
R517	RD-AZ104J-	R CARBON FILM	1/6 100K OHM J		R577	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J	
R518	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J		R578	RD-AZ271J-	R CARBON FILM	1/6 270 OHM J	
R520	RD-AZ332J-	R CARBON FILM	1/6 3.3K OHM J		R581	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J	
R521	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J		R582	RD-AZ105J-	R CARBON FILM	1/6 1M OHM J	
R522	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J		R583	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J	
R524	RD-AZ153J-	R CARBON FILM	1/6 15K OHM J		R584	RD-AZ472J-	R CARBON FILM	1/6 4.7K OHM J	
R525	RN-AZ3902F	R METAL FILM	1/6 39K OHM F		R585	RD-AZ272J-	R CARBON FILM	1/6 2.7K OHM J	
R526	RD-AZ273J-	R CARBON FILM	1/6 27K OHM J		R586	RD-AZ330J-	R CARBON FILM	1/6 33 OHM J	
R527	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J		R587	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J	
R528	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J		R588	RD-AZ333J-	R CARBON FILM	1/6 33K OHM J	
R529	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J		R589	RD-AZ122J-	R CARBON FILM	1/6 1.2K OHM J	
R530	RD-AZ562J-	R CARBON FILM	1/6 5.6K OHM J		R590	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J	
R531	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J		R591	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J	
R532	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J		R592	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J	
R533	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J		R593	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J	
R535	RD-AZ561J-	R CARBON FILM	1/6 560 OHM J		R594	RD-AZ224J-	R CARBON FILM	1/6 220K OHM J	
R536	RD-AZ561J-	R CARBON FILM	1/6 560 OHM J		R595	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J	
R537	RD-AZ561J-	R CARBON FILM	1/6 560 OHM J		R596	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J	
R538	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J		R597	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J	
R539	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J		R598	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J	
R540	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J		R599	RD-4Z479J-	R CARBON FILM	1/4 4.7 OHM J	
R541	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J		R601	RD-AZ472J-	R CARBON FILM	1/6 4.7K OHM J	
R542	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J		R602	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J	
R544	RD-AZ333J-	R CARBON FILM	1/6 33K OHM J		R604	RD-AZ472J-	R CARBON FILM	1/6 4.7K OHM J	
R545	RD-4Z432J-	R CARBON FILM	1/4 4.3K OHM J		R605	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J	
R546	RD-AZ223J-	R CARBON FILM	1/6 22K OHM J		R608	RD-4Z829J-	R CARBON FILM	1/4 8.2 OHM J	
R547	RD-AZ223J-	R CARBON FILM	1/6 22K OHM J		R609	RD-4Z829J-	R CARBON FILM	1/4 8.2 OHM J	
R548	RD-AZ913J-	R CARBON FILM	1/6 91K OHM J		R610	RD-AZ221J-	R CARBON FILM	1/6 220 OHM J	
R549	RD-AZ203J-	R CARBON FILM	1/6 20K OHM J		R611	RD-AZ221J-	R CARBON FILM	1/6 220 OHM J	
R550	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J		R625	RD-AZ223J-	R CARBON FILM	1/6 22K OHM J	
R551	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J		R627	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J	
R552	RD-AZ222J-	R CARBON FILM	1/6 2.2K OHM J		R628	RD-4Z471J-	R CARBON FILM	1/4 470 OHM J	
R553	RD-AZ202J-	R CARBON FILM	1/6 2K OHM J		R629	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J	
R554	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J		R630	RD-4Z471J-	R CARBON FILM	1/4 470 OHM J	
R555	RD-AZ202J-	R CARBON FILM	1/6 2K OHM J		R642	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J	
R556	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J		R643	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J	
R557	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J		R644	RD-4Z479J-	R CARBON FILM	1/4 4.7 OHM J	
R558	RD-AZ302J-	R CARBON FILM	1/6 3K OHM J		R650	RD-2Z473J-	R CARBON FILM	1/2 47K OHM J	
R559	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J		R651	RD-2Z227J-	R CARBON FILM	1/2 27K OHM J	
R560	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J		R661	RD-AZ473J-	R CARBON FILM	1/6 47K OHM J	
R561	RD-AZ433J-	R CARBON FILM	1/6 43K OHM J		R662	RD-AZ473J-	R CARBON FILM	1/6 47K OHM J	
R562	RD-AZ433J-	R CARBON FILM	1/6 43K OHM J		R663	RD-AZ473J-	R CARBON FILM	1/6 47K OHM J	
R563	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J		R664	RD-AZ473J-	R CARBON FILM	1/6 47K OHM J	
R564	RD-AZ223J-	R CARBON FILM	1/6 22K OHM J		R665	RD-AZ472J-	R CARBON FILM	1/6 4.7K OHM J	
R565	RD-AZ472J-	R CARBON FILM	1/6 4.7K OHM J		R666	RD-AZ223J-	R CARBON FILM	1/6 22K OHM J	
R566	RD-AZ474J-	R CARBON FILM	1/6 470K OHM J		R667	RD-AZ221J-	R CARBON FILM	1/6 220 OHM J	
R567	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J		R668	RD-AZ104J-	R CARBON FILM	1/6 100K OHM J	
R568	RD-AZ151J-	R CARBON FILM	1/6 150 OHM J		R669	RD-AZ221J-	R CARBON FILM	1/6 220 OHM J	
R570	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J		R670	RD-AZ104J-	R CARBON FILM	1/6 100K OHM J	
R572	RD-AZ222J-	R CARBON FILM	1/6 2.2K OHM J		R671	RD-AZ472J-	R CARBON FILM	1/6 4.7K OHM J	
R573	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J		R672	RD-AZ223J-	R CARBON FILM	1/6 22K OHM J	
R574	RD-AZ512J-	R CARBON FILM	1/6 5.1K OHM J		R677	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J	

Loc	Part_Cd	Part_Name	Part_Desc	REMARK	Loc	Part_Cd	Part_Name	Part_Desc	REMARK
R678	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J		R794	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J	
R681	RD-AZ392J-	R CARBON FILM	1/6 3.9K OHM J		R795	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J	
R682	RD-AZ333J-	R CARBON FILM	1/6 33K OHM J		R799	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J	
R683	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J		ZZ300	PTCPMSD351	PCB CRT MANUAL AS	DTD-29U9WPT	
R684	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J		20	2193011101	SOLDER WIRE	RS 60-1.2 1.6A	
R685	RD-AZ472J-	R CARBON FILM	1/6 4.7K OHM J		30	2291050615	FLUX SOLDER	DF-2012U	
R686	RD-AZ151J-	R CARBON FILM	1/6 150 OHM J		40	2291050301	FLUX SOLVENT	IM-1000	
R699	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J		50	2291140501	WAX COVER		
R701	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J		C915	CEXF2C470V	C ELECTRO	160V RSS 47MF (13X25) TP	
R702	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J		C916	CEXF2C100V	C ELECTRO	160V RSS 10MF (10X16) TP	
R703	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J		C917	CEXF2C100V	C ELECTRO	160V RSS 10MF (10X16) TP	
R704	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J		C920	CEXF2C470V	C ELECTRO	160V RSS 47MF (13X25) TP	
R705	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J		C923	CMYL2G104J	C MYLAR	400V MEU 0.1MF J	
R707	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		C924	CEXF2E100V	C ELECTRO	250V RSS 10MF (10X20) TP	
R708	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J		C927	CEXF1C102V	C ELECTRO	16V RSS 1000MF (10X20) TP	
R711	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J		C932	CMYL2G104J	C MYLAR	400V MEU 0.1MF J	
R712	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J		C940	CMYL2G104J	C MYLAR	400V MEU 0.1MF J	
R714	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J		C942	CEXF2E220V	C ELECTRO	250V RSS 22MF (13X20) TP	
R715	RD-AZ472J-	R CARBON FILM	1/6 4.7K OHM J		C946	ASG0D00103	SPARK GAP	S-23 900V-1.5KV	
R716	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J		C947	ASG0D00103	SPARK GAP	S-23 900V-1.5KV	
R719	RD-AZ151J-	R CARBON FILM	1/6 150 OHM J		C948	ASG0D00103	SPARK GAP	S-23 900V-1.5KV	
R720	RD-AZ392J-	R CARBON FILM	1/6 3.9K OHM J		C949	CCYB3D472K	C CERA	2KV B 4700PF K	
R724	RD-AZ272J-	R CARBON FILM	1/6 2.7K OHM J		I901	1TDA6101Q-	IC VIDEO AMP	TDA6101Q	
R725	RD-AZ272J-	R CARBON FILM	1/6 2.7K OHM J		I902	1TDA6101Q-	IC VIDEO AMP	TDA6101Q	
R726	RD-AZ272J-	R CARBON FILM	1/6 2.7K OHM J		I903	1TDA6101Q-	IC VIDEO AMP	TDA6101Q	
R729	RD-AZ152J-	R CARBON FILM	1/6 1.5K OHM J		M900	4856812001	TIE CABLE	NYLON66 DA100	
R730	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J		P904	4859205620	CONN WAFER	LW-0640-03	
R732	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J		P906	4859238620	CONN WAFER	YPW500-02	
R733	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J		PA901	4850706S18	CONNECTOR	YH025-06+YST025+USW=500	
R735	RD-AZ472J-	R CARBON FILM	1/6 4.7K OHM J		PA902	4850705S04	CONNECTOR	YH025-05+YST025+ULW=400	
R736	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J		PA903	4850703S44	CONNECTOR	YH025-03+YST025+ULW=500	
R737	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J		PA905	4850704S04	CONNECTOR	YH025-04+YST025+ULW=400	
R738	RD-AZ563J-	R CARBON FILM	1/6 56K OHM J		Q907	PTE2SW6901	HEAT SINK ASS'Y	TKTA1659Y- + 7174300811	
R739	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J		1	TKTA1659AY	TR	KTA1659AY	
R740	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J		0000A	4857026901	HEAT SINK	AL EX BK	
R741	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J		0000B	7174300811	SCREW TAPPTITE	TT2 RND 3X8 MFZN	
R743	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J		Q908	PTB2SW6900	HEAT SINK ASS'Y	TKTC4370Y- + 7174300811	
R744	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J		0000A	4857026900	HEAT SINK	AL EX	
R745	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J		0000B	7174300811	SCREW TAPPTITE	TT2 RND 3X8 MFZN	
R748	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J		001--	TKTC4370AY	TR	KTC4370AY	
R750	RD-AZ331J-	R CARBON FILM	1/6 330 OHM J		R901	RF-4Y229J-	R FUSIBLE	1/4W 2.2 OHM J	
R751	RD-AZ331J-	R CARBON FILM	1/6 330 OHM J		R925	RS01Y471J-	R M-OXIDE FILM	1W 470 OHM J	
R752	RD-AZ331J-	R CARBON FILM	1/6 330 OHM J		R946	RS02Y221J-	R M-OXIDE FILM	2W 220 OHM J	
R753	RD-AZ222J-	R CARBON FILM	1/6 2.2K OHM J		SCT1	4859303730	SOCKET CRT	ISD-07S	⚠
R754	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J		ZZ200	PTCPJRD351	PCB CRT RADIAL AS	DTD-29U9WPT	
R755	RD-4Z101J-	R CARBON FILM	1/4 100 OHM J		C901	CXCH1H240J	C CERA	50V CH 24PF J (TAPPING)	
R759	RD-AZ511J-	R CARBON FILM	1/6 510 OHM J		C903	CXCH1H240J	C CERA	50V CH 24PF J (TAPPING)	
R761	RD-AZ272J-	R CARBON FILM	1/6 2.7K OHM J		C904	CEXF1E101V	C ELECTRO	25V RSS 100MF (6.3X11) TP	
R778	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J		C905	CCXF1H103Z	C CERA	50V F 0.01MF Z (TAPPING)	
R779	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J		C906	CCXF1H103Z	C CERA	50V F 0.01MF Z (TAPPING)	
R783	RD-AZ272J-	R CARBON FILM	1/6 2.7K OHM J		C907	CCXF1H103Z	C CERA	50V F 0.01MF Z (TAPPING)	
R791	RD-4Z103J-	R CARBON FILM	1/4 10K OHM J		C908	CCXB1H102K	C CERA	50V B 1000PF K (TAPPING)	
R792	RD-4Z103J-	R CARBON FILM	1/4 10K OHM J		C909	CEXF1H479V	C ELECTRO	50V RSS 4.7MF (5X11) TP	
R793	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J		C910	CEXF1H479V	C ELECTRO	50V RSS 4.7MF (5X11) TP	

Loc	Part_Cd	Part_Name	Part_Desc	REMARK	Loc	Part_Cd	Part_Name	Part_Desc	REMARK
C911	CXCH1H101J	C CERA	50V CH 100PF J (TAPPING)		J914	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING	
C912	CXCH1H101J	C CERA	50V CH 100PF J (TAPPING)		J916	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING	
C913	CCXB2H101K	C CERA	500V B 100PF K (TAPPING)		J917	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING	
C914	CCXE2H472P	C CERA	500V E 4700PF P (TAPPING)		J921	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING	
C918	CCXE2H472P	C CERA	500V E 4700PF P (TAPPING)		J923	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING	
C922	CCXB2H471K	C CERA	500V B 470PF K (TAPPING)		J924	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING	
C925	CEXF2E229V	C ELECTRO	250V RSS 2.2MF (8X11.5)TP		J926	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING	
C928	CEXF1E101V	C ELECTRO	25V RSS 100MF (6.3X11)TP		J928	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING	
C929	CMXM2A104J	C MYLAR	100V 0.1MF J (TP)		J930	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING	
C930	CMXM2A104J	C MYLAR	100V 0.1MF J (TP)		J931	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING	
C935	CMXM2A104J	C MYLAR	100V 0.1MF J (TP)		L902	5MC0000100	COIL BEAD	HC-3550	
C936	CMXM2A104J	C MYLAR	100V 0.1MF J (TP)		L903	5MC0000100	COIL BEAD	HC-3550	
C937	CCXB2H471K	C CERA	500V B 470PF K (TAPPING)		L904	5MC0000100	COIL BEAD	HC-3550	
C938	CMXM2A104K	C MYLAR	100V 0.1MF K (TP)		R902	RD-AZ222J-	R CARBON FILM	1/6 2.2K OHM J	
C939	CMXM2A104K	C MYLAR	100V 0.1MF K (TP)		R903	RD-AZ182J-	R CARBON FILM	1/6 1.8K OHM J	
C941	CCXB2H471K	C CERA	500V B 470PF K (TAPPING)		R904	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J	
C950	CEXF1E470V	C ELECTRO	25V RSS 47MF (5X11)TP		R905	RD-AZ222J-	R CARBON FILM	1/6 2.2K OHM J	
L901	5CPX470J-	COIL PEAKING	47UH J (RADIAL)		R906	RD-AZ223J-	R CARBON FILM	1/6 22K OHM J	
Q901	TKTC3198Y-	TR	KTC3198Y		R907	RD-AZ273J-	R CARBON FILM	1/6 27K OHM J	
Q902	TKTC3198Y-	TR	KTC3198Y		R908	RD-AZ333J-	R CARBON FILM	1/6 33K OHM J	
Q903	TKTC3198Y-	TR	KTC3198Y		R909	RD-AZ471J-	R CARBON FILM	1/6 470 OHM J	
Q904	TKTC3198Y-	TR	KTC3198Y		R910	RD-AZ471J-	R CARBON FILM	1/6 470 OHM J	
Q905	TKTA1266Y-	TR	KTA1266Y (TP)		R911	RD-AZ471J-	R CARBON FILM	1/6 470 OHM J	
Q906	TKTC3198Y-	TR	KTC3198Y		R912	RD-4Z470J-	R CARBON FILM	1/4 47 OHM J	
Q909	TKTC3198Y-	TR	KTC3198Y		R913	RD-AZ182J-	R CARBON FILM	1/6 1.8K OHM J	
Q910	TKTC3198Y-	TR	KTC3198Y		R914	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J	
R932	RN01B101JS	R METAL FILM	1W 100 OHM J SMALL		R915	RD-AZ473J-	R CARBON FILM	1/6 47K OHM J	
ZZ200	PTCPJAD351	PCB CRT AXIAL AS	DTD-29U9WPT		R916	RD-AZ223J-	R CARBON FILM	1/6 22K OHM J	
10	2TM14006LB	TAPE MASKING	3M #232 6.0X2000M		R917	RD-AZ222J-	R CARBON FILM	1/6 2.2K OHM J	
20	2TM10006LB	TAPE MASKING	3M #232-MAP-C 6.2X2000M		R918	RD-4Z100J-	R CARBON FILM	1/4 10 OHM J	
A001	4859827613	PCB CRT	154X109(330X246/4X1) D1B		R919	RD-AZ820J-	R CARBON FILM	1/6 82 OHM J	
C951	CZCH1H130J	C CERA	50V CH 13PF J		R920	RD-AZ820J-	R CARBON FILM	1/6 82 OHM J	
C952	CZCH1H130J	C CERA	50V CH 13PF J		R921	RD-AZ152J-	R CARBON FILM	1/6 1.5K OHM J	
C953	CZCH1H130J	C CERA	50V CH 13PF J		R922	RD-AZ683J-	R CARBON FILM	1/6 68K OHM J	
D901	D1N4148--	DIODE	1N4148 (TAPPING)		R923	RD-AZ683J-	R CARBON FILM	1/6 68K OHM J	
D902	D1N4148--	DIODE	1N4148 (TAPPING)		R924	RD-AZ122J-	R CARBON FILM	1/6 1.2K OHM J	
D903	D1N4148--	DIODE	1N4148 (TAPPING)		R926	RD-AZ122J-	R CARBON FILM	1/6 1.2K OHM J	
D904	D1N4148--	DIODE	1N4148 (TAPPING)		R927	RD-4Z123J-	R CARBON FILM	1/4 12K OHM J	
D905	D1N4004S--	DIODE	1N4004S		R928	RD-2Z680J-	R CARBON FILM	1/2 68 OHM J	
D906	D1N4004S--	DIODE	1N4004S		R929	RD-ZZ279J-	R CARBON FILM	1/2 2.7 OHM J	
D920	D1N4937G--	DIODE	1N4937G (TAPPING)		R930	RD-ZZ680J-	R CARBON FILM	1/2 68 OHM J	
D921	D1N4937G--	DIODE	1N4937G (TAPPING)		R931	RD-AZ152J-	R CARBON FILM	1/6 1.5K OHM J	
D923	D1N4937G--	DIODE	1N4937G (TAPPING)		R933	RN-AZ2001F	R METAL FILM	1/6 2.0K OHM F	
D924	D1N4937G--	DIODE	1N4937G (TAPPING)		R934	RN-AZ2001F	R METAL FILM	1/6 2.0K OHM F	
D925	DUZ9R1BM--	DIODE ZENER	UZ-9.1BM		R935	RN-AZ2001F	R METAL FILM	1/6 2.0K OHM F	
D926	DUZ9R1BM--	DIODE ZENER	UZ-9.1BM		R936	RN-AZ2001F	R METAL FILM	1/6 2.0K OHM F	
D927	DUZ9R1BM--	DIODE ZENER	UZ-9.1BM		R937	RN-AZ2001F	R METAL FILM	1/6 2.0K OHM F	
D928	D1N4148--	DIODE	1N4148 (TAPPING)		R938	RN-AZ2001F	R METAL FILM	1/6 2.0K OHM F	
D929	D1N4148--	DIODE	1N4148 (TAPPING)		R939	RN-ZZ2003F	R METAL FILM	1/2 200.0K OHM F	
D930	D1N4148--	DIODE	1N4148 (TAPPING)		R940	RN-ZZ2003F	R METAL FILM	1/2 200.0K OHM F	
D932	D1N4937G--	DIODE	1N4937G (TAPPING)		R941	RN-ZZ2003F	R METAL FILM	1/2 200.0K OHM F	
D936	DUZ6R2BM--	DIODE ZENER	UZ-6.2BM		R942	RC-2Z102K-	R CARBON COMP	1/2 1K OHM K	
J904	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R943	RC-2Z102K-	R CARBON COMP	1/2 1K OHM K	
J913	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R944	RC-2Z102K-	R CARBON COMP	1/2 1K OHM K	

Loc	Part_Cd	Part_Name	Part_Desc	REMARK	Loc	Part_Cd	Part_Name	Part_Desc	REMARK
R945	RD-2Z279J-	R CARBON FILM	1/2 2.7 OHM J		F801	5F3GB6322L	FUSE GLASS TUBE	V/S TL 6.3A 250V MF51	⚠ R
R951	RD-2Z102J-	R CARBON FILM	1/2 1K OHM J		I301	PTA2SW7501	HEAT SINK ASS'Y	1TDA8351-- + 7174301011	R
R952	RD-4Z105J-	R CARBON FILM	1/4 1M OHM J		I301	1TDA8351--	IC VERTICAL	TDA8351	
R955	RN-AZ6800F	R METAL FILM	1/6 680 OHM F		I301A	4857027501	HEAT SINK	AL EX	
R956	RN-AZ1301F	R METAL FILM	1/6 1.3K OHM F		I301B	7174301011	SCREW TAPPTITE	TT2 RND 3X10 MFZN	
R965	RC-2Z102K-	R CARBON COMP	1/2 1K OHM K		I801	PTB2SW7525	HEAT SINK ASS'Y	1STRS6709- + 7174301211	
R967	RN-2Z2003F	R METAL FILM	1/2 200.0K OHM F		I801	1STRS6709-	IC POWER	STR-S6709	
R969	RN-2Z2003F	R METAL FILM	1/2 200.0K OHM F		I801A	4857027525	HEAT SINK	AL EX	
R971	RN-2Z2003F	R METAL FILM	1/2 200.0K OHM F		I801B	7174301211	SCREW TAPPTITE	TT2 RND 3X12 MFZN	
R972	RD-AZ471J-	R CARBON FILM	1/6 470 OHM J		I802	1LTV817C--	IC PHOTO COUPLER	LTV-817C	⚠
R973	RD-4Z100J-	R CARBON FILM	1/4 10 OHM J		I804	PTS2SW7800	HEAT SINK ASS'Y	1K78R09--- + 7174300811	
R974	RD-AZ123J-	R CARBON FILM	1/6 12K OHM J		1	1K78R09---	IC REGULATOR	KIA78R09PI	
R975	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J		0000A	4857027800	HEAT SINK	AL EX	
R976	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J		0000B	7174300811	SCREW TAPPTITE	TT2 RND 3X8 MFZN	
ZZ400	PTPWMSD351	PCB POWER MANUAL AS	DTD-29U9WPT		I805	1SE130N---	IC	SE130N	
10	2193100710	SOLDER POWER BAR	S62S-PB37-SB1		I806	PT52SW6900	HEAT SINK ASS'Y	1K78R05--- + 7174301011	
20	2193011101	SOLDER WIRE	RS 60-1.2 1.6A		1	1K78R05---	IC REGULATOR	KIA78R05PI	
30	2291050615	FLUX SOLDER	DF-2012U		0000A	4857026900	HEAT SINK	AL EX	
40	2291050301	FLUX SOLVENT	IM-1000		0000B	7174301011	SCREW TAPPTITE	TT2 RND 3X10 MFZN	
50	2291140501	WAX COVER			I807	PTT2SW7800	HEAT SINK ASS'Y	1K78R12--- + 7174300811	
C401	CEYD1H689V	C ELECTRO	50V RUB 6.8MF (16*35.5)		1	1K78R12---	IC REGULATOR	KIA78R12PI	
C404	CCYB2H103K	C CERA	500V B 0.01MF K		0000A	4857027800	HEAT SINK	AL EX	
C405	CMYH3D722J	C MYLAR	2KV BUP 7200PF J		0000B	7174300811	SCREW TAPPTITE	TT2 RND 3X8 MFZN	
C406	CMYH3C702J	C MYLAR	1.6KV BUP 7000PF J		IF401	1KA4558---	IC AMP	KA4558	
C407	CMXE2J333J	C MYLAR	630V PU 0.033MF J (TP)		L403	58H0000064	COIL H-LINEARITY	TRL-350B	
C408	CEYF2A221V	C ELECTRO	100V RSS 220MF (16X25)		L404	58W0000020	COIL WIDTH	TRW-400(60908061)	
C411	CEXF2E220V	C ELECTRO	250V RSS 22MF (13X20) TP		L801	5PLF35A1--	FILTER LINE	LF-35A1	
C416	CMYE2G394J	C MYLAR	400V PU 0.39MF J		L802	5PLF3143G-	FILTER LINE	LF-3143 G	
C801	CL1JB3104M	C LINE ACROSS	AC250V 0.1MF M ECO-UV WRL	⚠	L807	58C4500079	COIL CHOKE	L-45	
C802	CL1JB3474K	C LINE ACROSS	AC250V 0.47MF U/C/SNDF/SV	⚠	LF401	58C0000119	COIL CHOKE	CH-402U	
C803	CH1BFE472M	C CERA AC	AC400V 4700PF M U/C/V		M352	4853535500	HOLDER CORD	NYROLN 66	
C813	CMYH3C222J	C MYLAR	1.6KV BUP 2200PF J		M681	4856812001	TIE CABLE	NYLON66 DA100	
C819	CEYN2D221T	C ELECTRO	200V FWS 220MF (22X30)		P801	4850707S10	CONNECTOR	YH025-07+YST025+ULW=100	
C840	CMXM2A334J	C MYLAR	100V 0.33MF J BULK		P802	4850707S10	CONNECTOR	YH025-07+YST025+ULW=100	
C848	CH1BFE472M	C CERA AC	AC400V 4700PF M U/C/V	⚠	P803	4850710V02	CONNECTOR	YH025-10+YBNH250+ULW=100	
C882	CMYH3C122J	C MYLAR	1.6KV BUP 1200PF J		P804	4850703S20	CONNECTOR	YH025-03+YST025+ULW=400	
C886	CMYE2D103J	C MYLAR	200V PU 0.01MF J		PW801	PTWASW2910	CORD POWER ASS'Y	4859901111+ HOUSING	⚠
C893	CEYN2W471P	C ELECTRO	450V LHS 470MF (35X50)		PW000	4859901111	CORD POWER	KKP-419C KLCE-2F (2.1ME)	
CF401	CMYH3C912J	C MYLAR	1.6KV BUP 9100PF J		Q302	PTA2SW7607	HEAT SINK ASS'Y	T2SB546L-- + 7174301011	
CF411	CMXE2J333J	C MYLAR	630V PU 0.033MF J (TP)		Q302	T2SB546L--	TR	2SB546-L	
D401	DRGP30J---	DIODE	RGP30J		Q302A	4857027607	HEAT SINK	AL EX	
D402	DRGP30J---	DIODE	RGP30J		Q302B	7174301011	SCREW TAPPTITE	TT2 RND 3X10 MFZN	
D406	DRGP30J---	DIODE	RGP30J		Q401	T2SC1569--	TR	2SC1569	
D801	PTH2SW7701	HEAT SINK ASS'Y	DGBJ606--- + 7174301211	R	Q402	PTF2SW8200	HEAT SINK ASS'Y	T2SD2553--- + 7174301011	R
1	DGBJ606---	DIODE BRIDGE	GBJ606		Q402	T2SD2553--	TR	2SD2553	
0000A	4857027701	HEAT SINK	AL EX		Q402A	4857028200	HEAT SINK	AL EX BK	
0000B	7174301211	SCREW TAPPTITE	TT2 RND 3X12 MFZN		Q402B	7174301011	SCREW TAPPTITE	TT2 RND 3X10 MFZN	
D803	DEGP50D---	DIODE	EGP50D (TAPPING)		Q801	TKTD1414--	TR	KTD1414	
D813	DRGP30J---	DIODE	RGP30J		Q802	TKTA940---	TR	KTA940	
D824	PTS2SW6900	HEAT SINK ASS'Y	DFMLG16S-- + 7128301011		Q807	TKTA968AY-	TR	KTA968AY	
1	DFMLG16S--	DIODE	FML-G16S		QF402	T4636LSRB-	TR	2SC4636LS-RB	
0000A	4857026900	HEAT SINK	AL EX		R403	RX10T512J-	R CEMENT	10W 5.1K OHM J TRIPOD	
0000B	7178301011	SCREW TAPPTITE	TT2 WAS 3X10 MFZN		R801	DEC140M290	POSISTOR	ECPCC140M290	
D831	DDG3-----	DIODE	DG3		R805	RX10T100J-	R CEMENT	10W 10 OHM J TRIPOD	R

Loc	Part_Cd	Part_Name	Part_Desc	REMARK	Loc	Part_Cd	Part_Name	Part_Desc	REMARK
R813	RM02Y158J-	R METAL FLAT	2W 0.15 OHM J		E023	4856310300	EYE LET	BSR T0.2 (R1.6)	
R844	RW02Z418F-	R WIRE WOUND	2W 0.41 OHM F		E026	4856310300	EYE LET	BSR T0.2 (R1.6)	
T401	5TD00000018	TRANS DRIVE	THD-120		E028	4856310300	EYE LET	BSR T0.2 (R1.6)	
T402	50H0000213	FBT	FFA65029L	⚠	E029	4856310300	EYE LET	BSR T0.2 (R1.6)	
T402A	7178301212	SCREW TAPPTITE	TT2 WAS 3X12 MFZN BK		E030	4856310300	EYE LET	BSR T0.2 (R1.6)	
T402B	4856812001	TIE CABLE	NYLON66 DA100		E031	4856310300	EYE LET	BSR T0.2 (R1.6)	
T402M	4857246400	SHIELD PLATE	SPCC T0.2		E038	4856310300	EYE LET	BSR T0.2 (R1.6)	
T801	50M0000096	TRANS SMPS	TSM-5315	⚠	E039	4856310300	EYE LET	BSR T0.2 (R1.6)	
TF401	50D28A---	TRANS DRIVE	TD-28A1		E040	4856310600	EYE LET	BSR T0.2 (R2.3)	
Y801	5SC0101003	SW RELAY	DG12D1-0(M)-II 1C-1P	⚠	E041	4856310600	EYE LET	BSR T0.2 (R2.3)	
Y802	5SC0101003	SW RELAY	DG12D1-0(M)-II 1C-1P	⚠	E042	4856310600	EYE LET	BSR T0.2 (R2.3)	
Z801	DSVC471D14	VARISTOR	SVC471D14A		E043	4856310600	EYE LET	BSR T0.2 (R2.3)	
ZZ200	PTPWJD351	PCB POWER ODD SHAPE	DTD-29U9WPT		E044	4856310600	EYE LET	BSR T0.2 (R2.3)	
C306	CEXF2A331V	C ELECTRO	100V RSS 330MF (16X25) TP		E045	4856310600	EYE LET	BSR T0.2 (R2.3)	
C409	CEXF2E330V	C ELECTRO	250V RSS 33MF (13X25) TP		E046	4856310600	EYE LET	BSR T0.2 (R2.3)	
C410	CEXF2E330V	C ELECTRO	250V RSS 33MF (13X25) TP		E047	4856310600	EYE LET	BSR T0.2 (R2.3)	
C415	CEXF1E102V	C ELECTRO	25V RSS 1000MF (13X20) TP		E048	4856310600	EYE LET	BSR T0.2 (R2.3)	
C805	CEXF1C222V	C ELECTRO	16V RSS 2200MF (13X25) TP		E049	4856310600	EYE LET	BSR T0.2 (R2.3)	
C806	CH1BEE472M	C CERA AC	U/C V 2.5KV 4700PF TP		E050	4856310600	EYE LET	BSR T0.2 (R2.3)	
C807	CH1BEE472M	C CERA AC	U/C V 2.5KV 4700PF TP		E051	4856310600	EYE LET	BSR T0.2 (R2.3)	
C808	CH1BEE472M	C CERA AC	U/C V 2.5KV 4700PF TP		E052	4856310300	EYE LET	BSR T0.2 (R1.6)	
C809	CH1BEE472M	C CERA AC	U/C V 2.5KV 4700PF TP		E056	4856310600	EYE LET	BSR T0.2 (R2.3)	
C811	CEXF1C102V	C ELECTRO	16V RSS 1000MF (10X20) TP		E057	4856310600	EYE LET	BSR T0.2 (R2.3)	
C814	CEXF1V331C	C ELECTRO	35V RUS 330MF (10X20) TP		E058	4856310600	EYE LET	BSR T0.2 (R2.3)	
C815	CEXF1V331V	C ELECTRO	35V RSS 330MF 10X16		E059	4856310600	EYE LET	BSR T0.2 (R2.3)	
C816	CEXF2C100V	C ELECTRO	160V RSS 10MF (10X16) TP		E060	4856310600	EYE LET	BSR T0.2 (R2.3)	
C820	CCXB3D471K	C CERA	2KV B 4700PF K (TAPPING)		E061	4856310600	EYE LET	BSR T0.2 (R2.3)	
C821	CEXF2C100C	C ELECTRO	160V RUS 10MF (10X16)TP		E062	4856310600	EYE LET	BSR T0.2 (R2.3)	
C826	CEXF1C222V	C ELECTRO	16V RSS 2200MF (13X25) TP		E063	4856310600	EYE LET	BSR T0.2 (R2.3)	
C828	CEXF1E102V	C ELECTRO	25V RSS 1000MF (13X20) TP		E064	4856310600	EYE LET	BSR T0.2 (R2.3)	
C829	CEXF1E102V	C ELECTRO	25V RSS 1000MF (13X20) TP		E065	4856310600	EYE LET	BSR T0.2 (R2.3)	
C837	CCXB3D102K	C CERA	2KV B 1000PF K (TAPPING)		E070	4856310600	EYE LET	BSR T0.2 (R2.3)	
C838	CEXF1H471V	C ELECTRO	50V RSS 470MF (13X20) TP		E071	4856310600	EYE LET	BSR T0.2 (R2.3)	
C839	CEXF1H471V	C ELECTRO	50V RSS 470MF (13X20) TP		E072	4856310600	EYE LET	BSR T0.2 (R2.3)	
C842	CEXF1E222V	C ELECTRO	25V RSS 2200MF (16X25) TP		E073	4856310600	EYE LET	BSR T0.2 (R2.3)	
C843	CEXF1C102V	C ELECTRO	16V RSS 1000MF (10X20) TP		E074	4856310600	EYE LET	BSR T0.2 (R2.3)	
C845	CEXF1C222V	C ELECTRO	16V RSS 2200MF (13X25) TP		E075	4856310600	EYE LET	BSR T0.2 (R2.3)	
C851	CCXB3D102K	C CERA	2KV B 1000PF K (TAPPING)		E076	4856310600	EYE LET	BSR T0.2 (R2.3)	
C857	CEXF1E102V	C ELECTRO	25V RSS 1000MF (13X20) TP		E077	4856310600	EYE LET	BSR T0.2 (R2.3)	
C858	CEXF1E102V	C ELECTRO	25V RSS 1000MF (13X20) TP		E078	4856310600	EYE LET	BSR T0.2 (R2.3)	
C859	CEXF1H471V	C ELECTRO	50V RSS 470MF (13X20) TP		E079	4856310600	EYE LET	BSR T0.2 (R2.3)	
CF408	CEXF1V221C	C ELECTRO	35V RUS 220MF (10X12.5)TP		E082	4856310300	EYE LET	BSR T0.2 (R1.6)	
CF410	CMXE2J333J	C MYLAR	630V PU 0.033MF J (TP)		E083	4856310300	EYE LET	BSR T0.2 (R1.6)	
CF412	CMXE2J333J	C MYLAR	630V PU 0.033MF J (TP)		E089	4856310600	EYE LET	BSR T0.2 (R2.3)	
CF416	CMXE2J333J	C MYLAR	630V PU 0.033MF J (TP)		E090	4856310600	EYE LET	BSR T0.2 (R2.3)	
ZZ200	PTPWJD351	PCB POWER M-10 AS	DTD-29U9WPT		E095	4856310600	EYE LET	BSR T0.2 (R2.3)	
10	2TM18006BE	TAPE MASKING	6.2X500		E096	4856310600	EYE LET	BSR T0.2 (R2.3)	
E005	4856310300	EYE LET	BSR T0.2 (R1.6)		E097	4856310300	EYE LET	BSR T0.2 (R1.6)	
E006	4856310300	EYE LET	BSR T0.2 (R1.6)		E098	4856310300	EYE LET	BSR T0.2 (R1.6)	
E007	4856310300	EYE LET	BSR T0.2 (R1.6)		E099	4856310300	EYE LET	BSR T0.2 (R1.6)	
E008	4856310300	EYE LET	BSR T0.2 (R1.6)		E100	4856310300	EYE LET	BSR T0.2 (R1.6)	
E018	4856310300	EYE LET	BSR T0.2 (R1.6)		E101	4856310300	EYE LET	BSR T0.2 (R1.6)	
E019	4856310300	EYE LET	BSR T0.2 (R1.6)		E102	4856310300	EYE LET	BSR T0.2 (R1.6)	
E022	4856310300	EYE LET	BSR T0.2 (R1.6)		E103	4856310300	EYE LET	BSR T0.2 (R1.6)	

Loc	Part_Cd	Part_Name	Part_Desc	REMARK	Loc	Part_Cd	Part_Name	Part_Desc	REMARK
E104	4856310300	EYE LET	BSR T0.2 (R1.6)		R402	RS01Z472J-	R M-OXIDE FILM	1W 4.7K OHM J (TAPPING)	
E105	4856310300	EYE LET	BSR T0.2 (R1.6)		R408	RF01Z278K-	R FUSIBLE	1W 0.27 OHM K (TP)	
E106	4856310300	EYE LET	BSR T0.2 (R1.6)		R410	RS02Z519J-	R M-OXIDE FILM	2W 5.1 OHM J (TAPPING)	
E107	4856310300	EYE LET	BSR T0.2 (R1.6)		R416	RF01Z278K-	R FUSIBLE	1W 0.27 OHM K (TP)	
E108	4856310300	EYE LET	BSR T0.2 (R1.6)		R419	RF01Z278K-	R FUSIBLE	1W 0.27 OHM K (TP)	
E109	4856310300	EYE LET	BSR T0.2 (R1.6)		R482	RS01Z229J-	R M-OXIDE FILM	1W 2.2 OHM J (TAPPING)	
E110	4856310300	EYE LET	BSR T0.2 (R1.6)		R803	RS02Z180JS	R M-OXIDE FILM	2W 18 OHM J SMALL	
E111	4856310300	EYE LET	BSR T0.2 (R1.6)		R809	RS01Z103J-	R M-OXIDE FILM	1W 10K OHM J (TAPPING)	
E112	4856310300	EYE LET	BSR T0.2 (R1.6)		R814	RS02Z180JS	R M-OXIDE FILM	2W 18 OHM J SMALL	
E113	4856310300	EYE LET	BSR T0.2 (R1.6)		R815	RS02Z153JS	R M-OXIDE FILM	2W 15K OHM J SMALL	
E114	4856310600	EYE LET	BSR T0.2 (R2.3)		R816	RS02Z153JS	R M-OXIDE FILM	2W 15K OHM J SMALL	
E115	4856310600	EYE LET	BSR T0.2 (R2.3)		R819	RS02Z912JS	R M-OXIDE FILM	2W 9.1K OHM J SMALL	
E116	4856310300	EYE LET	BSR T0.2 (R1.6)		R826	RS02Z220JS	R M-OXIDE FILM	2W 22 OHM J SMALL	
E117	4856310300	EYE LET	BSR T0.2 (R1.6)		R837	RS01Z220J-	R M-OXIDE FILM	1W 22 OHM J (TAPPING)	
E118	4856310300	EYE LET	BSR T0.2 (R1.6)		R848	RF01Z278K-	R FUSIBLE	1W 0.27 OHM K (TP)	
E119	4856310300	EYE LET	BSR T0.2 (R1.6)		R849	RF01Z278K-	R FUSIBLE	1W 0.27 OHM K (TP)	
E120	4856310300	EYE LET	BSR T0.2 (R1.6)		R851	RF01Z278K-	R FUSIBLE	1W 0.27 OHM K (TP)	
E121	4856310600	EYE LET	BSR T0.2 (R2.3)		R852	RF01Z278K-	R FUSIBLE	1W 0.27 OHM K (TP)	
E122	4856310600	EYE LET	BSR T0.2 (R2.3)		R881	RS02Z912JS	R M-OXIDE FILM	2W 9.1K OHM J SMALL	
E123	4856310300	EYE LET	BSR T0.2 (R1.6)		RF401	RF01Z278K-	R FUSIBLE	1W 0.27 OHM K (TP)	
E124	4856310300	EYE LET	BSR T0.2 (R1.6)		RF402	RS02Z473JS	R M-OXIDE FILM	2W 47K OHM J SMALL	
E125	4856310300	EYE LET	BSR T0.2 (R1.6)		RF425	RF01Z278K-	R FUSIBLE	1W 0.27 OHM K (TP)	
E126	4856310600	EYE LET	BSR T0.2 (R2.3)		RF427	RF02Z478K-	R FUSIBLE	2W 0.47 OHM K (TAPPING)	
E127	4856310600	EYE LET	BSR T0.2 (R2.3)		ZZ200	PTPWJRD351	PCB POWER RADIAL AS	DTD-29U9WPT	
E128	4856310300	EYE LET	BSR T0.2 (R1.6)		C301	CMXM2A104J	C MYLAR	100V 0.1MF J (TP)	
E129	4856310600	EYE LET	BSR T0.2 (R2.3)		C302	CMXM2A104J	C MYLAR	100V 0.1MF J (TP)	
E130	4856310300	EYE LET	BSR T0.2 (R1.6)		C303	CMXM2A103J	C MYLAR	100V 0.01MF J (TP)	
E131	4856310300	EYE LET	BSR T0.2 (R1.6)		C304	CEXF1E101V	C ELECTRO	25V RSS 100MF (6.3X11) TP	
E132	4856310300	EYE LET	BSR T0.2 (R1.6)		C305	CMXM2A104J	C MYLAR	100V 0.1MF J (TP)	
E133	4856310300	EYE LET	BSR T0.2 (R1.6)		C307	CMXM2A104J	C MYLAR	100V 0.1MF J (TP)	
E134	4856310300	EYE LET	BSR T0.2 (R1.6)		C309	CMXM2A103J	C MYLAR	100V 0.01MF J (TP)	
E135	4856310300	EYE LET	BSR T0.2 (R1.6)		C402	CCXB2H102K	C CERA	500V B 1000PF K (TAPPING)	
E136	4856310300	EYE LET	BSR T0.2 (R1.6)		C413	CEXF1H220V	C ELECTRO	50V RSS 22MF (5X11) TP	
E137	4856310300	EYE LET	BSR T0.2 (R1.6)		C414	CCXB2H102K	C CERA	500V B 1000PF K (TAPPING)	
E138	4856310300	EYE LET	BSR T0.2 (R1.6)		C421	CMXM2A104J	C MYLAR	100V 0.1MF J (TP)	
E139	4856310300	EYE LET	BSR T0.2 (R1.6)		C422	CCXB2H471K	C CERA	500V B 470PF K (TAPPING)	
E140	4856310300	EYE LET	BSR T0.2 (R1.6)		C481	CEXF1H479V	C ELECTRO	50V RSS 4.7MF (5X11) TP	
E141	4856310300	EYE LET	BSR T0.2 (R1.6)		C817	CMXM2A102J	C MYLAR	100V 1000PF J (TP)	
E142	4856310300	EYE LET	BSR T0.2 (R1.6)		C818	CCXB3A471K	C CERA	1KV B 470PF K (T)	
E143	4856310300	EYE LET	BSR T0.2 (R1.6)		C825	CMXM2A104J	C MYLAR	100V 0.1MF J (TP)	
E144	4856310300	EYE LET	BSR T0.2 (R1.6)		C835	CMXM2A104J	C MYLAR	100V 0.1MF J (TP)	
N003	4857417500	TERM PIN	DA-IB0214(D2.3/DY PIN)		C841	CCXB2H102K	C CERA	500V B 1000PF K (TAPPING)	
N004	4857417500	TERM PIN	DA-IB0214(D2.3/DY PIN)		C844	CMXM2A104J	C MYLAR	100V 0.1MF J (TP)	
N005	4857417500	TERM PIN	DA-IB0214(D2.3/DY PIN)		C846	CMXM2A104J	C MYLAR	100V 0.1MF J (TP)	
N006	4857417500	TERM PIN	DA-IB0214(D2.3/DY PIN)		C847	CED1H109F	C ELECTRO	50V RND 1MF (5X11) TP	
N007	4857417500	TERM PIN	DA-IB0214(D2.3/DY PIN)		C850	CMXM2A104J	C MYLAR	100V 0.1MF J (TP)	
N008	4857417500	TERM PIN	DA-IB0214(D2.3/DY PIN)		C852	CMXM2A104J	C MYLAR	100V 0.1MF J (TP)	
N009	4857417500	TERM PIN	DA-IB0214(D2.3/DY PIN)		C853	CMXM2A103J	C MYLAR	100V 0.01MF J (TP)	
N010	4857417500	TERM PIN	DA-IB0214(D2.3/DY PIN)		C854	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP	
N011	4857417500	TERM PIN	DA-IB0214(D2.3/DY PIN)		C855	CEXF1H479V	C ELECTRO	50V RSS 4.7MF (5X11) TP	
N012	4857417500	TERM PIN	DA-IB0214(D2.3/DY PIN)		C870	CCXB3A471K	C CERA	1KV B 470PF K (T)	
P401	485923172S	CONN WAFER	YW025-04 (STICK)		C881	CMXM2A222J	C MYLAR	100V 2200PF J (TP)	
P402	485923182S	CONN WAFER	YW025-05 (STICK)		C883	CBXF1H104Z	C CERA SEMI	50V F 0.1MF Z (TAPPING)	
R311	RS02Z220JS	R M-OXIDE FILM	2W 22 OHM J SMALL		C885	CBXF1H104Z	C CERA SEMI	50V F 0.1MF Z (TAPPING)	

Loc	Part_Cd	Part_Name	Part_Desc	REMARK	Loc	Part_Cd	Part_Name	Part_Desc	REMARK
C887	CEXF2E229V	C ELECTRO	250V RSS 2.2MF (8X11.5)TP		D802	DUZ15BM--	DIODE ZENER	UZ-15BM	
CF403	CEXF1C101A	C ELECTRO	16V RSM 100MF (6.3X7) TP		D804	D1N4937G--	DIODE	1N4937G (TAPPING)	
CF404	CEXF1C221V	C ELECTRO	16V RSS 220MF (8X11.5) TP		D805	D1N4937G--	DIODE	1N4937G (TAPPING)	
CF405	CEXF1C101V	C ELECTRO	16V RSS 100MF (6.3X11) TP		D806	D1N4937G--	DIODE	1N4937G (TAPPING)	
CF406	CEXF1C101A	C ELECTRO	16V RSM 100MF (6.3X7) TP		D807	DUZ7R5BM--	DIODE ZENER	UZ-7.5BM	
CF407	CEXF1C101A	C ELECTRO	16V RSM 100MF (6.3X7) TP		D808	DUZ15BM--	DIODE ZENER	UZ-15BM	
CF413	CEXF1C330V	C ELECTRO	16V RSS 33MF (6.3X7) TP		D809	D1N4148---	DIODE	1N4148 (TAPPING)	
F801A	4857415001	CLIP FUSE	PFC5000-0702		D811	D1N4937G--	DIODE	1N4937G (TAPPING)	
F801B	4857415001	CLIP FUSE	PFC5000-0702		D815	D1N4004S--	DIODE	1N4004S	
L402	58C0000096	COIL CHOKE	610G0233(470K)		D816	D1N4004S--	DIODE	1N4004S	
L808	58C0000096	COIL CHOKE	610G0233(470K)		D819	DRGP15J--	DIODE	RGP15J	
L810	58C0000096	COIL CHOKE	610G0233(470K)		D821	D1N4148---	DIODE	1N4148 (TAPPING)	
L811	58C0000096	COIL CHOKE	610G0233(470K)		D822	D1N4148---	DIODE	1N4148 (TAPPING)	
Q301	TKTC3198Y-	TR	KTC3198Y		D825	DRGP15J--	DIODE	RGP15J	
Q483	TKTC3198Y-	TR	KTC3198Y		D828	DLT2A05G--	DIODE	LT2A05G (TP)	
Q484	TKTC3198Y-	TR	KTC3198Y		D842	NRD11JSB3-	DIODE ZENER	RD11JSB3	
Q803	TKTC3207--	TR	KTC3207 (TP)		D843	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING	
Q804	TKTC3203Y-	TR	KTC3203-Y		D881	D1N4148---	DIODE	1N4148 (TAPPING)	
Q805	TKTC3203Y-	TR	KTC3203-Y		D894	DUZ30BL---	DIODE ZENER	UZ-30BL	
Q806	TKTC3207--	TR	KTC3207 (TP)		D895	D1N4148---	DIODE	1N4148 (TAPPING)	
Q812	TKTC3198Y-	TR	KTC3198Y		D896	D1N4148---	DIODE	1N4148 (TAPPING)	
QF401	TKTA1266Y-	TR	KTA1266Y (TP)		D897	D1N4937G--	DIODE	1N4937G (TAPPING)	
QF403	TKTA1266Y-	TR	KTA1266Y (TP)		D899	D1N4148---	DIODE	1N4148 (TAPPING)	
QF404	TKTC3198Y-	TR	KTC3198Y		DF401	D1N4937G--	DIODE	1N4937G (TAPPING)	
R303	RN02B181JS	R METAL FILM	2W 180 OHM J SMALL		DF402	D1N4937G--	DIODE	1N4937G (TAPPING)	
R306	RN02B100JS	R METAL FILM	2W 10 OHM J SMALL		DF403	D1N4937G--	DIODE	1N4937G (TAPPING)	
R309	RN01B330JS	R METAL FILM	1W 33 OHM J SMALL		DF404	D1N4937G--	DIODE	1N4937G (TAPPING)	
R401	RN01B151JS	R METAL FILM	1W 150 OHM J SMALL		J410	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING	
R407	RN02B102JS	R METAL FILM	2W 1K OHM J SMALL		J802	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING	
R409	RN01B152JS	R METAL FILM	1W 1.5K OHM J SMALL		J804	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING	
R802	RN02B180JS	R METAL FILM	2W 18 OHM J SMALL		J805	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING	
R804	RN01B184JS	R METAL FILM	1W 180K OHM J SMALL		J808	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING	
R807	RN01B184JS	R METAL FILM	1W 180K OHM J SMALL		J809	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING	
R824	RN02B109JS	R METAL FILM	2W 1 OHM J SMALL		J810	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING	
R825	RN02B109JS	R METAL FILM	2W 1 OHM J SMALL		J811	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING	
R833	RN01B910JS	R METAL FILM	1W 91 OHM J SMALL		J812	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING	
R841	RN02B109JS	R METAL FILM	2W 1 OHM J SMALL		J813	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING	
R863	RN02B912JS	R METAL FILM	2W 9.1K OHM J SMALL		J814	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING	
R897	RN02B473JS	R METAL FILM	2W 47K OHM J SMALL		J815	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING	
R899	RN02B912JS	R METAL FILM	2W 9.1K OHM J SMALL		J816	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING	
RF420	RN01B431JS	R METAL FILM	1W 430 OHM J SMALL		J817	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING	
RF422	RN02B333JS	R METAL FILM	2W 33K OHM J SMALL		J818	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING	
RF423	RN02B333JS	R METAL FILM	2W 33K OHM J SMALL		J819	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING	
RF424	RN02B333JS	R METAL FILM	2W 33K OHM J SMALL		J821	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING	
ZZ200	PTPWJAD351	PCB POWER AXIAL AS	DTD-29U9WPT		J822	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING	
10	2TM14006LB	TAPE MASKING	3M #232 6.0X2000M		J823	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING	
20	2TM10006LB	TAPE MASKING	3M #232-MAP-C 6.2X2000M		J826	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING	
A001	4859813311	PCB POWER	330X246 D1B		J827	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING	
C884	CBZF1H104Z	C CERA SEMI	50V F 0.1MF Z		J828	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING	
D301	DUZ15BM--	DIODE ZENER	UZ-15BM		J829	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING	
D403	D1N4937G--	DIODE	1N4937G (TAPPING)		J830	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING	
D404	D1N4937G--	DIODE	1N4937G (TAPPING)		J831	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING	
D405	D1N4937G--	DIODE	1N4937G (TAPPING)		J832	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING	
D481	D1N4148---	DIODE	1N4148 (TAPPING)		J833	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING	

Loc	Part_Cd	Part_Name	Part_Desc	REMARK	Loc	Part_Cd	Part_Name	Part_Desc	REMARK
J834	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R485	RD-4Z472J-	R CARBON FILM	1/4 4.7K OHM J	
J836	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R806	RD-4Z472J-	R CARBON FILM	1/4 4.7K OHM J	
J839	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R811	RD-4Z222J-	R CARBON FILM	1/4 2.2K OHM J	
J840	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R812	RD-4Z102J-	R CARBON FILM	1/4 1K OHM J	
J844	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R817	RD-4Z202J-	R CARBON FILM	1/4 2K OHM J	
J848	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R820	RD-4Z472J-	R CARBON FILM	1/4 4.7K OHM J	
J850	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R821	RD-4Z473J-	R CARBON FILM	1/4 47K OHM J	
J851	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R822	RD-4Z102J-	R CARBON FILM	1/4 1K OHM J	
J854	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R823	RD-4Z563J-	R CARBON FILM	1/4 56K OHM J	
J855	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R827	RD-4Z101J-	R CARBON FILM	1/4 100 OHM J	
J856	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R828	RD-4Z432J-	R CARBON FILM	1/4 4.3K OHM J	
J857	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R829	RD-4Z223J-	R CARBON FILM	1/4 22K OHM J	
J858	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R830	RD-4Z472J-	R CARBON FILM	1/4 4.7K OHM J	
J860	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R831	RC-2Z565KP	R CARBON COMP	1/2 5.6M OHM K	⚠
J861	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R834	RD-4Z102J-	R CARBON FILM	1/4 1K OHM J	
J862	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R835	RD-4Z432J-	R CARBON FILM	1/4 4.3K OHM J	
J863	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R836	RD-AZ472J-	R CARBON FILM	1/6 4.7K OHM J	
J864	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R838	RD-4Z623J-	R CARBON FILM	1/4 62K OHM J	
J865	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R839	RD-4Z223J-	R CARBON FILM	1/4 22K OHM J	
J866	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R840	RD-4Z472J-	R CARBON FILM	1/4 4.7K OHM J	
J867	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R842	RN-4Z2701F	R METAL FILM	1/4 2.70K OHM F	
J868	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R843	RN-4Z6202F	R METAL FILM	1/4 62.0K OHM F	
J869	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R846	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING	
J870	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R853	RD-4Z204J-	R CARBON FILM	1/4 200K OHM J	
J872	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R859	RD-2Z159J-	R CARBON FILM	1/2 1.5 OHM J	
J873	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R860	RD-2Z129J-	R CARBON FILM	1/2 1.2 OHM J	
JF406	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R871	RD-2Z820J-	R CARBON FILM	1/2 82 OHM J	
JF407	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R890	RD-4Z153J-	R CARBON FILM	1/4 15K OHM J	
L406	58C0000026	COIL BEAD	HC-4035		R891	RD-2Z562J-	R CARBON FILM	1/2 5.6K OHM J	
L407	58C0000026	COIL BEAD	HC-4035		R892	RD-2Z103J-	R CARBON FILM	1/2 10K OHM J	
L803	5MC0000100	COIL BEAD	HC-3550		R893	RD-2Z473J-	R CARBON FILM	1/2 47K OHM J	
L804	58C0000026	COIL BEAD	HC-4035		R894	RD-2Z153J-	R CARBON FILM	1/2 15K OHM J	
L805	5MC0000100	COIL BEAD	HC-3550		RF403	RD-AZ221J-	R CARBON FILM	1/6 220 OHM J	
L806	5MC0000100	COIL BEAD	HC-3550		RF404	RD-AZ221J-	R CARBON FILM	1/6 220 OHM J	
L830	5MC0000100	COIL BEAD	HC-3550		RF405	RD-AZ911J-	R CARBON FILM	1/6 910 OHM J	
L837	58C0000026	COIL BEAD	HC-4035		RF406	RD-AZ153J-	R CARBON FILM	1/6 15K OHM J	
L839	58C0000026	COIL BEAD	HC-4035		RF407	RD-4Z111J-	R CARBON FILM	1/4 110 OHM J	
L842	58C0000026	COIL BEAD	HC-4035		RF408	RD-AZ163J-	R CARBON FILM	1/6 16K OHM J	
L843	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		RF409	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J	
R301	RN-4Z2401F	R METAL FILM	1/4 2.40K OHM F		RF410	RD-AZ563J-	R CARBON FILM	1/6 56K OHM J	
R302	RD-2Z223J-	R CARBON FILM	1/2 22K OHM J		RF411	RD-AZ361J-	R CARBON FILM	1/6 360 OHM J	
R305	RD-2Z471J-	R CARBON FILM	1/2 470 OHM J		RF412	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J	
R307	RD-4Z242J-	R CARBON FILM	1/4 2.4K OHM J		RF413	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J	
R308	RD-4Z272J-	R CARBON FILM	1/4 2.7K OHM J		RF414	RD-4Z104J-	R CARBON FILM	1/4 100K OHM J	
R310	RD-4Z683J-	R CARBON FILM	1/4 68K OHM J		RF415	RD-AZ332J-	R CARBON FILM	1/6 3.3K OHM J	
R412	RD-4Z562J-	R CARBON FILM	1/4 5.6K OHM J		RF416	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J	
R413	RN-4Z2402F	R METAL FILM	1/4 24K OHM F		RF417	RD-4Z123J-	R CARBON FILM	1/4 12K OHM J	
R414	RN-4Z2402F	R METAL FILM	1/4 24K OHM F		RF418	RD-4Z242J-	R CARBON FILM	1/4 2.4K OHM J	
R415	RD-4Z102J-	R CARBON FILM	1/4 1K OHM J		RF419	RD-4Z561J-	R CARBON FILM	1/4 560 OHM J	
R421	RD-4Z561J-	R CARBON FILM	1/4 560 OHM J		RF421	RD-4Z182J-	R CARBON FILM	1/4 1.8K OHM J	
R451	RD-4Z151J-	R CARBON FILM	1/4 150 OHM J		ZZ500	PTPMMSD167	PCB PIP MANUAL AS	DTC-29Z9WPT	
R452	RD-4Z561J-	R CARBON FILM	1/4 560 OHM J		10	2193100710	SOLDER POWER BAR	S62S-PB37-SB1	
R471	RD-4Z330J-	R CARBON FILM	1/4 33 OHM J		20	2193011101	SOLDER WIRE	RS 60-1.2 1.6A	
R481	RD-4Z472J-	R CARBON FILM	1/4 4.7K OHM J		30	2291050615	FLUX SOLDER	DF-2012U	

Loc	Part_Cd	Part_Name	Part_Desc	REMARK	Loc	Part_Cd	Part_Name	Part_Desc	REMARK
40	2291050301	FLUX SOLVENT	IM-1000		CCP18	HCFK104ZCA	C CHIP CERA	50V Y5V 0.1MF Z 2012	
50	2291140501	WAX COVER			CCP19	HCFK104ZCA	C CHIP CERA	50V Y5V 0.1MF Z 2012	
B001	4853946000	BRKT JUMPER A	SECC T1.0 (VCR-63DB)		CCP20	HCFK104ZCA	C CHIP CERA	50V Y5V 0.1MF Z 2012	
B002	4853946000	BRKT JUMPER A	SECC T1.0 (VCR-63DB)		CCP21	HCFK104ZCA	C CHIP CERA	50V Y5V 0.1MF Z 2012	
CP143	CEXF1C471V	C ELECTRO	16V RSS 470MF (10X12.5)TP		CCP22	HCFK104ZCA	C CHIP CERA	50V Y5V 0.1MF Z 2012	
IP03	1TDA8310--	IC PIP	TDA8310		CCP23	HCFK104ZCA	C CHIP CERA	50V Y5V 0.1MF Z 2012	
IP04	1TDA4665V4	IC DELAY	TDA4665/V4		CCP24	HCFK104ZCA	C CHIP CERA	50V Y5V 0.1MF Z 2012	
IP05	1TDA8395--	IC	TDA8395		CCP25	HCFK105ZCA	C CHIP CERA	50V Y5V 1MF Z 2012	
LP13	58C5580019	COIL CHOKE	TRF-9225 (0.55UH)		CCP26	HCFK105ZCA	C CHIP CERA	50V Y5V 1MF Z 2012	
M681	4856818400	CLAMP SUPPORT	NYLON 66		CCP27	HCFK104ZCA	C CHIP CERA	50V Y5V 0.1MF Z 2012	
M721	4857233500	SHIELD COVER	SPTE-C T0.5 1ZF		CCP28	HCFK105ZCA	C CHIP CERA	50V Y5V 1MF Z 2012	
M722	4857232700	SHIELD COVER	SPTE-C T0.3		CCP29	HCFK105ZCA	C CHIP CERA	50V Y5V 1MF Z 2012	
M723	4857233900	SHIELD PLATE	SPTE-C T0.3 1ZF		CCP30	HCFK104ZCA	C CHIP CERA	50V Y5V 0.1MF Z 2012	
PP01	4859279820	CONN WAFER	TAC-L18P-A1 (ANGLE)		CCP31	HCFK104ZCA	C CHIP CERA	50V Y5V 0.1MF Z 2012	
PP02	4859279820	CONN WAFER	TAC-L18P-A1 (ANGLE)		CCP32	HCFK104ZCA	C CHIP CERA	50V Y5V 0.1MF Z 2012	
RP01	RV5221103-	R SEMI FIXED	EVN D2A A03 10K OHM B		CCP33	HCFK104ZCA	C CHIP CERA	50V Y5V 0.1MF Z 2012	
SFP1	5PK6266K--	FILTER SAW	K6266K		CCP34	HCFK104ZCA	C CHIP CERA	50V Y5V 0.1MF Z 2012	
ZP01	5PYXT4R5MB	FILTER CERA	XT 4.5MB		CCP35	HCFK104ZCA	C CHIP CERA	50V Y5V 0.1MF Z 2012	
ZP02	5PYXT5R5MB	FILTER CERA	XT 5.5MB		CCP36	HCFK104ZCA	C CHIP CERA	50V Y5V 0.1MF Z 2012	
ZP03	5PYXT6R0MB	FILTER CERA	XT 6.0MB		CCP37	HCFK104ZCA	C CHIP CERA	50V Y5V 0.1MF Z 2012	
ZP04	5PYXT6R5MB	FILTER CERA	XT 6.5MB		CCP38	HCBK472KCA	C CHIP CERA	50V X7R 4700PF K 2012	
ZZ200	PTPMJ1D167	PCB PIP CHIP A AS	DTC-29Z9WPT		CCP39	HCKQ130JCA	C CHIP CERA	50V CH 13PF J 2012	
A001	4859807424	PCB PIP	123X150(246X197/2)H2V		CCP40	HCKQ130JCA	C CHIP CERA	50V CH 13PF J 2012	
IP01	1SAB9077HQ	IC CHIP PIP	SAB9077H		CCP41	HCBK472KCA	C CHIP CERA	50V X7R 4700PF K 2012	
IP02	1BA7655Afp	IC CHIP CONTROLLER	BA7655AF		CCP42	HCFK104ZCA	C CHIP CERA	50V Y5V 0.1MF Z 2012	
IP06	1BA7655Afp	IC CHIP CONTROLLER	BA7655AF		CCP43	HCFK104ZCA	C CHIP CERA	50V Y5V 0.1MF Z 2012	
IP07	1M54826270	IC CHIP MEMORY	MSM548262-70JS		CCP44	HCFK104ZCA	C CHIP CERA	50V Y5V 0.1MF Z 2012	
IP08	1KA393D--C	IC CHIP LOGIC	KA393/D		CCP45	HCBK103KCA	C CHIP CERA	50V X7R 0.01MF K 2012	
IP09	1KA393D--C	IC CHIP LOGIC	KA393/D		CCP46	HCBK103KCA	C CHIP CERA	50V X7R 0.01MF K 2012	
RP04	HRTS4E101J	R CHIP ARRAY	1/16W 4P 100 OHM J 3216		CCP47	HCBK103KCA	C CHIP CERA	50V X7R 0.01MF K 2012	
RP05	HRTS4E101J	R CHIP ARRAY	1/16W 4P 100 OHM J 3216		CCP48	HCBK223KCA	C CHIP CERA	50V X7R 0.022MF K 2012	
RP06	HRTS4E101J	R CHIP ARRAY	1/16W 4P 100 OHM J 3216		CCP49	HCFK104ZCA	C CHIP CERA	50V Y5V 0.1MF Z 2012	
RP07	HRTS4E101J	R CHIP ARRAY	1/16W 4P 100 OHM J 3216		CCP51	HCFK104ZCA	C CHIP CERA	50V Y5V 0.1MF Z 2012	
RP08	HRTS4E101J	R CHIP ARRAY	1/16W 4P 100 OHM J 3216		CCP52	HRFT000-CA	R CHIP	1/10 0 OHM 2012	
RP09	HRTS4E101J	R CHIP ARRAY	1/16W 4P 100 OHM J 3216		CCP53	HCFK104ZCA	C CHIP CERA	50V Y5V 0.1MF Z 2012	
RP10	HRTS4E101J	R CHIP ARRAY	1/16W 4P 100 OHM J 3216		CCP54	HCFK104ZCA	C CHIP CERA	50V Y5V 0.1MF Z 2012	
ZZ200	PTPMJ2D167	PCB PIP CHIP B AS	DTC-29Z9WPT		CCP56	HCFK104ZCA	C CHIP CERA	50V Y5V 0.1MF Z 2012	
CCP01	HCFK104ZCA	C CHIP CERA	50V Y5V 0.1MF Z 2012		CCP57	HCFK104ZCA	C CHIP CERA	50V Y5V 0.1MF Z 2012	
CCP02	HCFK104ZCA	C CHIP CERA	50V Y5V 0.1MF Z 2012		CCP58	HCFK104ZCA	C CHIP CERA	50V Y5V 0.1MF Z 2012	
CCP03	HCFK104ZCA	C CHIP CERA	50V Y5V 0.1MF Z 2012		CCP59	HCBK102KCA	C CHIP CERA	50V X7R 1000PF K 2012	
CCP04	HCFK104ZCA	C CHIP CERA	50V Y5V 0.1MF Z 2012		CCP60	HCBK102KCA	C CHIP CERA	50V X7R 1000PF K 2012	
CCP05	HCFK104ZCA	C CHIP CERA	50V Y5V 0.1MF Z 2012		CCP61	HCFK104ZCA	C CHIP CERA	50V Y5V 0.1MF Z 2012	
CCP06	HCFK104ZCA	C CHIP CERA	50V Y5V 0.1MF Z 2012		CCP62	HCFK104ZCA	C CHIP CERA	50V Y5V 0.1MF Z 2012	
CCP07	HCFK105ZCA	C CHIP CERA	50V Y5V 1MF Z 2012		CCP63	HCFK104ZCA	C CHIP CERA	50V Y5V 0.1MF Z 2012	
CCP08	HCFK104ZCA	C CHIP CERA	50V Y5V 0.1MF Z 2012		CCP64	HCFK104ZCA	C CHIP CERA	50V Y5V 0.1MF Z 2012	
CCP09	HCFK104ZCA	C CHIP CERA	50V Y5V 0.1MF Z 2012		CCP65	HCFK104ZCA	C CHIP CERA	50V Y5V 0.1MF Z 2012	
CCP10	HCFK104ZCA	C CHIP CERA	50V Y5V 0.1MF Z 2012		CCP66	HCFK104ZCA	C CHIP CERA	50V Y5V 0.1MF Z 2012	
CCP11	HCFK105ZCA	C CHIP CERA	50V Y5V 1MF Z 2012		CCP67	HCFK104ZCA	C CHIP CERA	50V Y5V 0.1MF Z 2012	
CCP12	HCFK104ZCA	C CHIP CERA	50V Y5V 0.1MF Z 2012		CCP68	HCFK104ZCA	C CHIP CERA	50V Y5V 0.1MF Z 2012	
CCP13	HCFK104ZCA	C CHIP CERA	50V Y5V 0.1MF Z 2012		CCP69	HCFK104ZCA	C CHIP CERA	50V Y5V 0.1MF Z 2012	
CCP14	HCFK104ZCA	C CHIP CERA	50V Y5V 0.1MF Z 2012		CCP70	HCFK105ZCA	C CHIP CERA	50V Y5V 1MF Z 2012	
CCP15	HCFK104ZCA	C CHIP CERA	50V Y5V 0.1MF Z 2012		CCP71	HCFK104ZCA	C CHIP CERA	50V Y5V 0.1MF Z 2012	
CCP16	HCFK104ZCA	C CHIP CERA	50V Y5V 0.1MF Z 2012		CCP72	HCFK104ZCA	C CHIP CERA	50V Y5V 0.1MF Z 2012	
CCP17	HCFK104ZCA	C CHIP CERA	50V Y5V 0.1MF Z 2012		CCP73	HCBK223KCA	C CHIP CERA	50V X7R 0.022MF K 2012	

Loc	Part_Cd	Part_Name	Part_Desc	REMARK	Loc	Part_Cd	Part_Name	Part_Desc	REMARK
CCP74	HCFK104ZCA	C CHIP CERA	50V Y5V 0.1MF Z 2012		OCP21	T2SC2412KB	TR CHIP	2SC2412K-T146-BR	
CCP75	HCFK104ZCA	C CHIP CERA	50V Y5V 0.1MF Z 2012		OCP22	T2SC2412KB	TR CHIP	2SC2412K-T146-BR	
CCP76	HCBK473KCA	C CHIP CERA	50V X7R 0.047MF K 2012		OCP23	T2SC2412KB	TR CHIP	2SC2412K-T146-BR	
CCP77	HCFK104ZCA	C CHIP CERA	50V Y5V 0.1MF Z 2012		OCP24	T2SC2412KB	TR CHIP	2SC2412K-T146-BR	
CCP78	HCFK104ZCA	C CHIP CERA	50V Y5V 0.1MF Z 2012		OCP25	T2SC2412KB	TR CHIP	2SC2412K-T146-BR	
CCP79	HCFK105ZCA	C CHIP CERA	50V Y5V 1MF Z 2012		OCP26	T2SC2412KB	TR CHIP	2SC2412K-T146-BR	
CCP80	HCFK104ZCA	C CHIP CERA	50V Y5V 0.1MF Z 2012		OCP27	T2SC2412KB	TR CHIP	2SC2412K-T146-BR	
CCP81	HCFK105ZCA	C CHIP CERA	50V Y5V 1MF Z 2012		RCP01	HRFT221JCA	R CHIP	1/10 220 OHM J 2012	
CCP82	HCQK181JCA	C CHIP CERA	50V CH 180PF J 2012		RCP02	HRFT221JCA	R CHIP	1/10 220 OHM J 2012	
CCP83	HCQK181JCA	C CHIP CERA	50V CH 180PF J 2012		RCP04	HRFT202JCA	R CHIP	1/10 2K OHM J 2012	
CCP84	HCQK181JCA	C CHIP CERA	50V CH 180PF J 2012		RCP05	HRFT221JCA	R CHIP	1/10 220 OHM J 2012	
CCP85	HCQK181JCA	C CHIP CERA	50V CH 180PF J 2012		RCP06	HRFT202JCA	R CHIP	1/10 2K OHM J 2012	
CCP86	HCQK181JCA	C CHIP CERA	50V CH 180PF J 2012		RCP07	HRFT221JCA	R CHIP	1/10 220 OHM J 2012	
CCP87	HCQK181JCA	C CHIP CERA	50V CH 180PF J 2012		RCP08	HRFT221JCA	R CHIP	1/10 220 OHM J 2012	
CCP88	HCFK104ZCA	C CHIP CERA	50V Y5V 0.1MF Z 2012		RCP09	HRFT102JCA	R CHIP	1/10 1K OHM J 2012	
CCP89	HCFK104ZCA	C CHIP CERA	50V Y5V 0.1MF Z 2012		RCP10	HRFT104JCA	R CHIP	1/10 100K OHM J 2012	
CCP90	HCFK104ZCA	C CHIP CERA	50V Y5V 0.1MF Z 2012		RCP11	HRFT822JCA	R CHIP	1/10 8.2K OHM J 2012	
CCP91	HCFK104ZCA	C CHIP CERA	50V Y5V 0.1MF Z 2012		RCP12	HRFT822JCA	R CHIP	1/10 8.2K OHM J 2012	
CCP92	HCFK104ZCA	C CHIP CERA	50V Y5V 0.1MF Z 2012		RCP13	HRFT123JCA	R CHIP	1/10 12K OHM J 2012	
CCP93	HCQK101JCA	C CHIP CERA	50V CH 100PF J 2012		RCP14	HRFT562JCA	R CHIP	1/10 5.6K OHM J 2012	
CCP94	HCBK473KCA	C CHIP CERA	50V X7R 0.047MF K 2012		RCP15	HRFT101JCA	R CHIP	1/10 100 OHM J 2012	
CCP95	HCFK104ZCA	C CHIP CERA	50V Y5V 0.1MF Z 2012		RCP16	HRFT472JCA	R CHIP	1/10 4.7K OHM J 2012	
CCP96	HCFK104ZCA	C CHIP CERA	50V Y5V 0.1MF Z 2012		RCP17	HRFT472JCA	R CHIP	1/10 4.7K OHM J 2012	
CCP97	HCFK104ZCA	C CHIP CERA	50V Y5V 0.1MF Z 2012		RCP18	HRFT101JCA	R CHIP	1/10 100 OHM J 2012	
CCP98	HCFK104ZCA	C CHIP CERA	50V Y5V 0.1MF Z 2012		RCP19	HRFT101JCA	R CHIP	1/10 100 OHM J 2012	
CCP99	HCFK104ZCA	C CHIP CERA	50V Y5V 0.1MF Z 2012		RCP20	HRFT101JCA	R CHIP	1/10 100 OHM J 2012	
CCPA1	HCFK104ZCA	C CHIP CERA	50V Y5V 0.1MF Z 2012		RCP21	HRFT101JCA	R CHIP	1/10 100 OHM J 2012	
CCPA2	HCFK104ZCA	C CHIP CERA	50V Y5V 0.1MF Z 2012		RCP22	HRFT101JCA	R CHIP	1/10 100 OHM J 2012	
CCPA3	HCFK104ZCA	C CHIP CERA	50V Y5V 0.1MF Z 2012		RCP23	HRFT472JCA	R CHIP	1/10 4.7K OHM J 2012	
CCPA4	HCFK104ZCA	C CHIP CERA	50V Y5V 0.1MF Z 2012		RCP24	HRFT103JCA	R CHIP	1/10 10K OHM J 2012	
CCPA5	HCFK104ZCA	C CHIP CERA	50V Y5V 0.1MF Z 2012		RCP25	HRFT153JCA	R CHIP	1/10 15K OHM J 2012	
CCPA6	HCFK104ZCA	C CHIP CERA	50V Y5V 0.1MF Z 2012		RCP27	HRFT472JCA	R CHIP	1/10 4.7K OHM J 2012	
CCPA7	HCFK104ZCA	C CHIP CERA	50V Y5V 0.1MF Z 2012		RCP28	HRFT472JCA	R CHIP	1/10 4.7K OHM J 2012	
CCPA8	HCFK104ZCA	C CHIP CERA	50V Y5V 0.1MF Z 2012		RCP29	HRFT511JCA	R CHIP	1/10 510 OHM J 2012	
QCP01	T2SA1037KB	TR CHIP	2SA1037AKT146-R		RCP30	HRFT561JCA	R CHIP	1/10 560 OHM J 2012	
QCP02	T2SC2412KB	TR CHIP	2SC2412K-T146-BR		RCP31	HRFT101JCA	R CHIP	1/10 100 OHM J 2012	
QCP03	T2SA1037KB	TR CHIP	2SA1037AKT146-R		RCP32	HRFT101JCA	R CHIP	1/10 100 OHM J 2012	
QCP04	T2SA1037KB	TR CHIP	2SA1037AKT146-R		RCP33	HRFT102JCA	R CHIP	1/10 1K OHM J 2012	
QCP05	T2SC2412KB	TR CHIP	2SC2412K-T146-BR		RCP34	HRFT101JCA	R CHIP	1/10 100 OHM J 2012	
QCP06	T2SC2412KB	TR CHIP	2SC2412K-T146-BR		RCP35	HRFT102JCA	R CHIP	1/10 1K OHM J 2012	
QCP07	T2SC2412KB	TR CHIP	2SC2412K-T146-BR		RCP36	HRFT101JCA	R CHIP	1/10 100 OHM J 2012	
QCP08	T2SC2412KB	TR CHIP	2SC2412K-T146-BR		RCP37	HRFT102JCA	R CHIP	1/10 1K OHM J 2012	
QCP09	T2SC2412KB	TR CHIP	2SC2412K-T146-BR		RCP38	HRFT102JCA	R CHIP	1/10 1K OHM J 2012	
QCP10	T2SC2412KB	TR CHIP	2SC2412K-T146-BR		RCP39	HRFT102JCA	R CHIP	1/10 1K OHM J 2012	
QCP11	T2SC2412KB	TR CHIP	2SC2412K-T146-BR		RCP40	HRFT102JCA	R CHIP	1/10 1K OHM J 2012	
QCP12	T2SC2412KB	TR CHIP	2SC2412K-T146-BR		RCP41	HRFT151JCA	R CHIP	1/10 150 OHM J 2012	
QCP13	T2SC27592B	TR CHIP	2SC2759-T2B		RCP45	HRFT202JCA	R CHIP	1/10 2K OHM J 2012	
QCP14	T2SC2412KB	TR CHIP	2SC2412K-T146-BR		RCP46	HRFT102JCA	R CHIP	1/10 1K OHM J 2012	
QCP15	T2SC2412KB	TR CHIP	2SC2412K-T146-BR		RCP47	HRFT222JCA	R CHIP	1/10 2.2K OHM J 2012	
QCP16	T2SC2412KB	TR CHIP	2SC2412K-T146-BR		RCP48	HRFT222JCA	R CHIP	1/10 2.2K OHM J 2012	
QCP17	T2SC2412KB	TR CHIP	2SC2412K-T146-BR		RCP49	HRFT222JCA	R CHIP	1/10 2.2K OHM J 2012	
QCP18	T2SC2412KB	TR CHIP	2SC2412K-T146-BR		RCP50	HRFT222JCA	R CHIP	1/10 2.2K OHM J 2012	
QCP19	T2SA1037KB	TR CHIP	2SA1037AKT146-R		RCP51	HRFT392JCA	R CHIP	1/10 3.9K OHM J 2012	
QCP20	T2SA1037KB	TR CHIP	2SA1037AKT146-R		RCP52	HRFT123JCA	R CHIP	1/10 12K OHM J 2012	

Loc	Part_Cd	Part_Name	Part_Desc	REMARK	Loc	Part_Cd	Part_Name	Part_Desc	REMARK
RCP53	HRFT122JCA	R CHIP	1/10 1.2K OHM J 2012		RCPD4	HRFT100JCA	R CHIP	1/10 10 OHM J 2012	
RCP54	HRFT333JCA	R CHIP	1/10 33K OHM J 2012		RCPD5	HRFT100JCA	R CHIP	1/10 10 OHM J 2012	
RCP55	HRFT102JCA	R CHIP	1/10 1K OHM J 2012		RCPD6	HRFT100JCA	R CHIP	1/10 10 OHM J 2012	
RCP56	HRFT101JCA	R CHIP	1/10 100 OHM J 2012		RCPD7	HRFT100JCA	R CHIP	1/10 10 OHM J 2012	
RCP57	HRFT101JCA	R CHIP	1/10 100 OHM J 2012		RCPD8	HRFT100JCA	R CHIP	1/10 10 OHM J 2012	
RCP58	HRFT101JCA	R CHIP	1/10 100 OHM J 2012		RCPD9	HRFT100JCA	R CHIP	1/10 10 OHM J 2012	
RCP59	HRFT153JCA	R CHIP	1/10 15K OHM J 2012		RCPE0	HRFT682JCA	R CHIP	1/10 6.8K OHM J 2012	
RCP60	HRFT472JCA	R CHIP	1/10 4.7K OHM J 2012		RCPE1	HRFT203JCA	R CHIP	1/10 20K OHM J 2012	
RCP61	HRFT103JCA	R CHIP	1/10 10K OHM J 2012		RCPE2	HRFT472JCA	R CHIP	1/10 4.7K OHM J 2012	
RCP62	HRFT101JCA	R CHIP	1/10 100 OHM J 2012		RCPE3	HRFT182JCA	R CHIP	1/10 1.8K OHM J 2012	
RCP63	HRFT102JCA	R CHIP	1/10 1K OHM J 2012		RCPE4	HRFT182JCA	R CHIP	1/10 1.8K OHM J 2012	
RCP64	HRFT101JCA	R CHIP	1/10 100 OHM J 2012		RCPE5	HRFT101JCA	R CHIP	1/10 100 OHM J 2012	
RCP65	HRFT152JCA	R CHIP	1/10 1.5K OHM J 2012		RCPE6	HRFT361JCA	R CHIP	1/10 360 OHM J 2012	
RCP66	HRFT512JCA	R CHIP	1/10 5.1K OHM J 2012		RCPE7	HRFT103JCA	R CHIP	1/10 10K OHM J 2012	
RCP67	HRFT151JCA	R CHIP	1/10 150 OHM J 2012		RCPE8	HRFT102JCA	R CHIP	1/10 1K OHM J 2012	
RCP68	HRFT221JCA	R CHIP	1/10 220 OHM J 2012		RCPE9	HRFT101JCA	R CHIP	1/10 100 OHM J 2012	
RCP69	HRFT151JCA	R CHIP	1/10 150 OHM J 2012		RCPF0	HRFT102JCA	R CHIP	1/10 1K OHM J 2012	
RCP70	HRFT151JCA	R CHIP	1/10 150 OHM J 2012		RCPF1	HRFT241JCA	R CHIP	1/10 240 OHM J 2012	
RCP71	HRFT151JCA	R CHIP	1/10 150 OHM J 2012		RCPF5	HRFT000-CA	R CHIP	1/10 0 OHM 2012	
RCP72	HRFT221JCA	R CHIP	1/10 220 OHM J 2012		RCPF6	HRFT000-CA	R CHIP	1/10 0 OHM 2012	
RCP77	HRFT512JCA	R CHIP	1/10 5.1K OHM J 2012		RCPF7	HRFT000-CA	R CHIP	1/10 0 OHM 2012	
RCP81	HRFT202JCA	R CHIP	1/10 2K OHM J 2012		RCPF8	HRFT101JCA	R CHIP	1/10 100 OHM J 2012	
RCP84	HRFT101JCA	R CHIP	1/10 100 OHM J 2012		RCPF9	HRFT101JCA	R CHIP	1/10 100 OHM J 2012	
RCP89	HRFT101JCA	R CHIP	1/10 100 OHM J 2012		RCPG0	HRFT202JCA	R CHIP	1/10 2K OHM J 2012	
RCP93	HRFT101JCA	R CHIP	1/10 100 OHM J 2012		RCPG1	HRFT472JCA	R CHIP	1/10 4.7K OHM J 2012	
RCP97	HRFT103JCA	R CHIP	1/10 10K OHM J 2012		RCPG2	HRFT101JCA	R CHIP	1/10 100 OHM J 2012	
RCP98	HRFT101JCA	R CHIP	1/10 100 OHM J 2012		RCPG3	HRFT102JCA	R CHIP	1/10 1K OHM J 2012	
RCP99	HRFT103JCA	R CHIP	1/10 10K OHM J 2012		RCPG4	HRFT202JCA	R CHIP	1/10 2K OHM J 2012	
RCPA3	HRFT302JCA	R CHIP	1/10 3K OHM J 2012		RCPG5	HRFT472JCA	R CHIP	1/10 4.7K OHM J 2012	
RCPA4	HRFT472JCA	R CHIP	1/10 4.7K OHM J 2012		RCPG6	HRFT101JCA	R CHIP	1/10 100 OHM J 2012	
RCPA5	HRFT472JCA	R CHIP	1/10 4.7K OHM J 2012		RCPG7	HRFT102JCA	R CHIP	1/10 1K OHM J 2012	
RCPA6	HRFT101JCA	R CHIP	1/10 100 OHM J 2012		RCPG8	HRFT472JCA	R CHIP	1/10 4.7K OHM J 2012	
RCPA8	HRFT000-CA	R CHIP	1/10 0 OHM 2012		RCPK1	HRFT910JCA	R CHIP	1/10 91 OHM J 2012	
RCPB1	HRFT332JCA	R CHIP	1/10 3.3K OHM J 2012		RCPK2	HRFT122JCA	R CHIP	1/10 1.2K OHM J 2012	
RCPB2	HRFT821JCA	R CHIP	1/10 820 OHM J 2012		RCPK3	HRFT472JCA	R CHIP	1/10 4.7K OHM J 2012	
RCPB3	HRFT821JCA	R CHIP	1/10 820 OHM J 2012		RCPK4	HRFT122JCA	R CHIP	1/10 1.2K OHM J 2012	
RCPB4	HRFT182JCA	R CHIP	1/10 1.8K OHM J 2012		RCPK5	HRFT221JCA	R CHIP	1/10 220 OHM J 2012	
RCPB5	HRFT100JCA	R CHIP	1/10 10 OHM J 2012		RCPK6	HRFT563JCA	R CHIP	1/10 56K OHM J 2012	
RCPB6	HRFT100JCA	R CHIP	1/10 10 OHM J 2012		RCPK7	HRFT562JCA	R CHIP	1/10 5.6K OHM J 2012	
RCPB7	HRFT100JCA	R CHIP	1/10 10 OHM J 2012		RCPK8	HRFT270JCA	R CHIP	1/10 27 OHM J 2012	
RCPB8	HRFT101JCA	R CHIP	1/10 100 OHM J 2012		RCPK9	HRFT391JCA	R CHIP	1/10 390 OHM J 2012	
RCPB9	HRFT102JCA	R CHIP	1/10 1K OHM J 2012		RCPN1	HRFT562JCA	R CHIP	1/10 5.6K OHM J 2012	
RCPC0	HRFT100JCA	R CHIP	1/10 10 OHM J 2012		RCPN2	HRFT101JCA	R CHIP	1/10 100 OHM J 2012	
RCPC1	HRFT100JCA	R CHIP	1/10 10 OHM J 2012		RCPN3	HRFT102JCA	R CHIP	1/10 1K OHM J 2012	
RCPC2	HRFT100JCA	R CHIP	1/10 10 OHM J 2012		RCPN4	HRFT101JCA	R CHIP	1/10 100 OHM J 2012	
RCPC3	HRFT182JCA	R CHIP	1/10 1.8K OHM J 2012		RCPN5	HRFT681JCA	R CHIP	1/10 680 OHM J 2012	
RCPC4	HRFT106JCA	R CHIP	1/10 10M OHM J 2012		RCPN6	HRFT101JCA	R CHIP	1/10 100 OHM J 2012	
RCPC6	HRFT100JCA	R CHIP	1/10 10 OHM J 2012		RCPN7	HRFT102JCA	R CHIP	1/10 1K OHM J 2012	
RCPC7	HRFT100JCA	R CHIP	1/10 10 OHM J 2012		ZZ200	PTPMJRD167	PCB PIP RADIAL AS	DTC-29Z9WPT	
RCPC8	HRFT100JCA	R CHIP	1/10 10 OHM J 2012		CP120	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP	
RCPC9	HRFT100JCA	R CHIP	1/10 10 OHM J 2012		CP121	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP	
RCPD0	HRFT106JCA	R CHIP	1/10 10M OHM J 2012		CP122	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP	
RCPD2	HRFT100JCA	R CHIP	1/10 10 OHM J 2012		CP123	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP	
RCPD3	HRFT100JCA	R CHIP	1/10 10 OHM J 2012		CP124	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP	

Loc	Part_Cd	Part_Name	Part_Desc	REMARK	Loc	Part_Cd	Part_Name	Part_Desc	REMARK
CP125	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP		LP06	5CPZ229M02	COIL PEAKING	2.2UH M (AXIAL 3.5MM)	
CP126	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP		LP07	5CPZ229M02	COIL PEAKING	2.2UH M (AXIAL 3.5MM)	
CP128	CEXF1H109V	C ELECTRO	50V RSS 1MF (5X11) TP		LP08	5CPZ229M02	COIL PEAKING	2.2UH M (AXIAL 3.5MM)	
CP129	CEXF1E101V	C ELECTRO	25V RSS 100MF (6.3X11) TP		LP09	5CPZ229M02	COIL PEAKING	2.2UH M (AXIAL 3.5MM)	
CP130	CEXF1E470V	C ELECTRO	25V RSS 47MF (5X11) TP		LP10	5CPZ569K02	COIL PEAKING	5.6UH K (AXIAL 3.5MM)	
CP131	CEXF1E470V	C ELECTRO	25V RSS 47MF (5X11) TP		LP11	5CPZ569K02	COIL PEAKING	5.6UH K (AXIAL 3.5MM)	
CP133	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP		LP12	5CPZ569K02	COIL PEAKING	5.6UH K (AXIAL 3.5MM)	
CP134	CEXF1H109V	C ELECTRO	50V RSS 1MF (5X11) TP		LP14	5CPZ229M02	COIL PEAKING	2.2UH M (AXIAL 3.5MM)	
CP135	CEXF1H229V	C ELECTRO	50V RSS 2.2MF (5X11) TP		LP15	5CPZ229M02	COIL PEAKING	2.2UH M (AXIAL 3.5MM)	
CP136	CEXF1H229V	C ELECTRO	50V RSS 2.2MF (5X11) TP		LP17	5CPZ470K02	COIL PEAKING	47UH K (AXIAL 3.5MM)	
CP138	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP		LP18	5CPZ479K02	COIL PEAKING	4.7UH K (AXIAL 3.5MM)	
CP139	CEXF1E470V	C ELECTRO	25V RSS 47MF (5X11) TP		LP19	5CPZ829K02	COIL PEAKING	8.2UH K (AXIAL 3.5MM)	
CP140	CEXF1E101V	C ELECTRO	25V RSS 100MF (6.3X11) TP		LP20	5MC0000100	COIL BEAD	HC-3550	
CP141	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP		ZZ600	PTSBSDW167	PCB SUB AS	DTC-29Z9WPT	
CP142	CEXF1E101V	C ELECTRO	25V RSS 100MF (6.3X11) TP		IS603	1TDA9820-	IC AUDIO	TDA9820	
CP144	CEXF1E101V	C ELECTRO	25V RSS 100MF (6.3X11) TP		IS605	1TDA4445B-	IC	TDA4445B	
CP145	CEXF1H479V	C ELECTRO	50V RSS 4.7MF (5X11) TP		LS105	58M38R9006	COIL DET	TRF-1490	
CP146	CEXF1E470V	C ELECTRO	25V RSS 47MF (5X11) TP		PS601	4859253720	CONN WAFER	YFAW025-510	
CP150	CMXM2A104J	C MYLAR	100V 0.1MF J (TP)		PS602	4859253120	CONN WAFER	YFAW025-504	
CP152	CMXM2A223J	C MYLAR	100V 0.022MF J TP		SFS5	5PK9252M--	FILTER SAW	K9252M	
CP153	CMXM2A224J	C MYLAR	100V 0.22MF J		ZZ200	PTSBJRD167	PCB SUB RADIAL AS	DTC-29Z9WPT	
CP154	CMXM2A104J	C MYLAR	100V 0.1MF J (TP)		CS125	CMXM2A223J	C MYLAR	100V 0.022MF J TP	
CP155	CMXM2A223J	C MYLAR	100V 0.022MF J TP		CS149	CEXF1E101V	C ELECTRO	25V RSS 100MF (6.3X11) TP	
RP11	RV5426103P	R SEMI FIXED	ENV-DJAA03B14 10K OHM B		CS150	CEXF1H229V	C ELECTRO	50V RSS 2.2MF (5X11) TP	
RP12	RV5426103P	R SEMI FIXED	ENV-DJAA03B14 10K OHM B		CS151	CEXF1H229V	C ELECTRO	50V RSS 2.2MF (5X11) TP	
RP13	RV5426103P	R SEMI FIXED	ENV-DJAA03B14 10K OHM B		CS152	CEXF1H229V	C ELECTRO	50V RSS 2.2MF (5X11) TP	
RP14	RV5426501P	R SEMI FIXED	EVN-DJAA03 500 OHM		CS153	CEXF1E101V	C ELECTRO	25V RSS 100MF (6.3X11) TP	
XP01	5XEX3R579C	CRYSTAL QUARTZ	HC-49U 3.579545M (TP)		CS155	CXCH1H680J	C CERA	50V CH 68PF J (TAPPING)	
XP02	5XEX4R436C	CRYSTAL QUARTZ	HC-49U 4.433619M 20PP TA		CS156	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP	
ZP06	5PD91F223Z	FILTER EMI	DSS306-91F223Z16 (TP)		CS157	CEXF1H479V	C ELECTRO	50V RSS 4.7MF (5X11) TP	
ZP12	5PD91F223Z	FILTER EMI	DSS306-91F223Z16 (TP)		CS193	CEXF1E101V	C ELECTRO	25V RSS 100MF (6.3X11) TP	
ZZ200	PTPMJAD167	PCB PIP AXIAL AS	DTC-29Z9WPT		QS131	TKTC3198Y-	TR	KTC3198Y	
10	2TM14006LB	TAPE MASKING	3M #232 6.0X2000M		QS134	TKTC3198Y-	TR	KTC3198Y	
20	2TM10006LB	TAPE MASKING	3M #232-MAP-C 6.2X2000M		QS135	TKTC3198Y-	TR	KTC3198Y	
DP02	DUZ6R8BL--	DIODE ZENER	UZ-6.8BL		QS136	TKTC3198Y-	TR	KTC3198Y	
DP03	D1N4148--	DIODE	1N4148 (TAPPING)		ZS101	5PXL75R5MH	FILTER CERA	LT 5.5MH	
DP04	D1N4148--	DIODE	1N4148 (TAPPING)		ZS102	5PXL76R5MH	FILTER CERA	LT 6.5MH	
DP06	DUZ6R8BL--	DIODE ZENER	UZ-6.8BL		ZS104	5PXL74R5MH	FILTER CERA	LT 4.5MH	
DP07	D1N4148--	DIODE	1N4148 (TAPPING)		ZS105	5PXL76R0MH	FILTER CERA	LT 6.0MH	
DP08	D1N4148--	DIODE	1N4148 (TAPPING)		ZZ200	PTSBJAD167	PCB SUB AXIAL AS	DTC-29Z9WPT	
DP09	D1N4148--	DIODE	1N4148 (TAPPING)		10	2TM14006LB	TAPE MASKING	3M #232 6.0X2000M	
DP10	D1N4148--	DIODE	1N4148 (TAPPING)		20	2TM10006LB	TAPE MASKING	3M #232-MAP-C 6.2X2000M	
DP11	D1SS85TA--	DIODE	1SS85TA		A001	4859808324	PCB SUB SOUND	75X72(246X246/9)D1B	
DP12	D1N4148--	DIODE	1N4148 (TAPPING)		CS147	CCZF1H103Z	C CERA	50V F 0.01MF Z	
DP13	D1N4148--	DIODE	1N4148 (TAPPING)		CS148	CCZF1H103Z	C CERA	50V F 0.01MF Z	
DP14	D1N4148--	DIODE	1N4148 (TAPPING)		CS154	CCZF1H103Z	C CERA	50V F 0.01MF Z	
DP15	D1N4148--	DIODE	1N4148 (TAPPING)		CS158	CZSL1H470J	C CERA	50V SL 47PF J (AXIAL)	
DP16	D1N4148--	DIODE	1N4148 (TAPPING)		CS159	CZSL1H470J	C CERA	50V SL 47PF J (AXIAL)	
LP01	5CPZ229M02	COIL PEAKING	2.2UH M (AXIAL 3.5MM)		CS160	CCZF1H103Z	C CERA	50V F 0.01MF Z	
LP02	5CPZ229M02	COIL PEAKING	2.2UH M (AXIAL 3.5MM)		CS191	CCZF1H103Z	C CERA	50V F 0.01MF Z	
LP03	5CPZ229M02	COIL PEAKING	2.2UH M (AXIAL 3.5MM)		CS192	CCZF1H103Z	C CERA	50V F 0.01MF Z	
LP04	5CPZ229M02	COIL PEAKING	2.2UH M (AXIAL 3.5MM)		JS01	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING	
LP05	5CPZ229M02	COIL PEAKING	2.2UH M (AXIAL 3.5MM)		JS02	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING	

Loc	Part_Cd	Part_Name	Part_Desc	REMARK	Loc	Part_Cd	Part_Name	Part_Desc	REMARK
JS03	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		ZA01	5PYXT4R5MB	FILTER CERA	XT 4.5MB	
JS04	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		ZA02	5PYXT6R5MB	FILTER CERA	XT 6.5MB	
LS134	5CPZ150K02	COIL PEAKING	15UH K (AXIAL 3.5MM)		ZA03	5PYXT6R0MB	FILTER CERA	XT 6.0MB	
RS121	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J		ZA04	5PYXT5R5MB	FILTER CERA	XT 5.5MB	
RS122	RD-AZ112J-	R CARBON FILM	1/6 1.1K OHM J		ZZ200	PTU1JRD167	PCB UNION1 RADIAL AS	DTC-29Z9WPT	
RS123	RD-AZ182J-	R CARBON FILM	1/6 1.8K OHM J		C251	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP	
RS126	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J		C253	CEXF1H109V	C ELECTRO	50V RSS 1MF (5X11) TP	
RS127	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J		C255	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP	
RS128	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J		C256	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP	
RS129	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J		C257	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP	
RS130	RD-AZ472J-	R CARBON FILM	1/6 4.7K OHM J		C258	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP	
RS131	RD-AZ472J-	R CARBON FILM	1/6 4.7K OHM J		C259	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP	
RS132	RD-AZ472J-	R CARBON FILM	1/6 4.7K OHM J		C260	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP	
RS133	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J		C263	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP	
RS134	RD-AZ820J-	R CARBON FILM	1/6 82 OHM J		C264	CEXF1E101V	C ELECTRO	25V RSS 100MF (6.3X11) TP	
RS135	RD-AZ621J-	R CARBON FILM	1/6 620 OHM J		C270	CEXF1E101V	C ELECTRO	25V RSS 100MF (6.3X11) TP	
RS136	RD-AZ621J-	R CARBON FILM	1/6 620 OHM J		CA01	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP	
RS137	RD-AZ621J-	R CARBON FILM	1/6 620 OHM J		CA02	CEXF1H229V	C ELECTRO	50V RSS 2.2MF (5X11) TP	
RS138	RD-AZ621J-	R CARBON FILM	1/6 620 OHM J		CA03	CEXF1H229V	C ELECTRO	50V RSS 2.2MF (5X11) TP	
RS141	RD-AZ222J-	R CARBON FILM	1/6 2.2K OHM J		CA04	CEXF1H229V	C ELECTRO	50V RSS 2.2MF (5X11) TP	
RS142	RD-AZ273J-	R CARBON FILM	1/6 27K OHM J		CA07	CEXF1H229V	C ELECTRO	50V RSS 2.2MF (5X11) TP	
RS172	RD-AZ271J-	R CARBON FILM	1/6 270 OHM J		CA08	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP	
RS173	RD-AZ271J-	R CARBON FILM	1/6 270 OHM J		CA12	CEXF1H229V	C ELECTRO	50V RSS 2.2MF (5X11) TP	
RS174	RD-AZ271J-	R CARBON FILM	1/6 270 OHM J		CA15	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP	
RS195	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J		CA25	CEXF1H229V	C ELECTRO	50V RSS 2.2MF (5X11) TP	
RS196	RD-4Z479J-	R CARBON FILM	1/4 4.7 OHM J		CA28	CEXF1E101V	C ELECTRO	25V RSS 100MF (6.3X11) TP	
ZZ700	PTU1MSD167	PCB UNION1 MANUAL AS	DTC-29Z9WPT		CA29	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP	
CA27	CEXF1C471V	C ELECTRO	16V RSS 470MF (10X12.5)TP		CA32	CEXF1H229V	C ELECTRO	50V RSS 2.2MF (5X11) TP	
CA38	CEXF1C471V	C ELECTRO	16V RSS 470MF (10X12.5)TP		CA34	CEXF1H229V	C ELECTRO	50V RSS 2.2MF (5X11) TP	
CA83	CEXF1C471V	C ELECTRO	16V RSS 470MF (10X12.5)TP		CA37	CEXF1E101V	C ELECTRO	25V RSS 100MF (6.3X11) TP	
CW01	CEYF1H222V	C ELECTRO	50V RSS 2200MF (18X35.5)		CA39	CEXF1E101V	C ELECTRO	25V RSS 100MF (6.3X11) TP	
CW07	CEYF1H222V	C ELECTRO	50V RSS 2200MF (18X35.5)		CA40	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP	
CW08	CMXM2A224J	C MYLAR	100V 0.22MF J		CA41	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP	
CW10	CMXM2A224J	C MYLAR	100V 0.22MF J		CA51	CEXF1H229V	C ELECTRO	50V RSS 2.2MF (5X11) TP	
I201	1TC9090AN-	IC Y/C	TC9090AN		CA52	CEXF1H229V	C ELECTRO	50V RSS 2.2MF (5X11) TP	
I270	1AN78N05-	IC REGULATOR	AN78N05		CA56	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP	
IA01	1TA8851CN-	IC SWITCHING	TA8851CN		CA57	CEXF1H229V	C ELECTRO	50V RSS 2.2MF (5X11) TP	
IW01	PTB2SW3332	HEAT SINK ASS'Y	1TDA2616-- 7128301011		CA58	CEXF1H229V	C ELECTRO	50V RSS 2.2MF (5X11) TP	
IW01	1TDA2616--	IC	TDA2616		CA62	CEXF1H229V	C ELECTRO	50V RSS 2.2MF (5X11) TP	
IW01A	4857023332	HEAT SINK	AL EX		CA63	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP	
IW01B	7178301011	SCREW TAPPTITE	TT2 WAS 3X10 MFZN		CA73	CEXF1H229V	C ELECTRO	50V RSS 2.2MF (5X11) TP	
JP01	4859106950	JACK PIN BOARD	PH-JB-9511		CA75	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP	
JP04	4859106440	JACK S-VHS	PH-SJ-9503		CA77	CEXF1E101V	C ELECTRO	25V RSS 100MF (6.3X11) TP	
M381	4853816900	FRAME SUB PCB	FR HIPS BK		CA80	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP	
M381A	7178301212	SCREW TAPPTITE	TT2 WAS 3X12 MFZN BK		CA82	CEXF1E101V	C ELECTRO	25V RSS 100MF (6.3X11) TP	
P606	4859231620	CONN WAFER	YW025-03		CA84	CEXF1E101V	C ELECTRO	25V RSS 100MF (6.3X11) TP	
PA06	4859235220	CONN WAFER	YW025-09		CA85	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP	
PA07	4859231920	CONN WAFER	YW025-06		CA86	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP	
PA08	4859231820	CONN WAFER	YW025-05		CW02	CEXF1H229V	C ELECTRO	50V RSS 2.2MF (5X11) TP	
PA12	4859231910	CONN HOUSING	BH254-10		CW03	CMXM2A223J	C MYLAR	100V 0.022MF J TP	
PA22	4859232210	CONN HOUSING	BH254-13		CW04	CMXM2A104J	C MYLAR	100V 0.1MF J (TP)	
PA32	4859231910	CONN HOUSING	BH254-10		CW06	CEXF1E101V	C ELECTRO	25V RSS 100MF (6.3X11) TP	
PA605	4850707S10	CONNECTOR	YH025-07+YST025+ULW=100		CW09	CMXM2A823J	C MYLAR	100V 0.082MF J (TP)	
RA56	RS01Y109J-	R M-OXIDE FILM	1W 1 OHM J		Q201	TKTC3198Y-	TR	KTC3198Y	

Loc	Part_Cd	Part_Name	Part_Desc	REMARK	Loc	Part_Cd	Part_Name	Part_Desc	REMARK
Q204	TKTC3198Y-	TR	KTC3198Y		CA06	CCZB1H102K	C CERA	50V B 1000PF K (AXIAL)	
Q205	TKTC3198Y-	TR	KTC3198Y		CA09	CCZF1H103Z	C CERA	50V F 0.01MF Z	
Q207	TKTC3198Y-	TR	KTC3198Y		CA10	CCZB1H391K	C CERA	50V B 390PF K (AXIAL)	
Q208	TKTA1266Y-	TR	KTA1266Y (TP)		CA11	CCZF1H103Z	C CERA	50V F 0.01MF Z	
Q209	TKTC3198Y-	TR	KTC3198Y		CA13	CCZB1H391K	C CERA	50V B 390PF K (AXIAL)	
Q210	TKTC3198Y-	TR	KTC3198Y		CA14	CCZF1H103Z	C CERA	50V F 0.01MF Z	
Q211	TKTC3198Y-	TR	KTC3198Y		CA22	CCZF1H103Z	C CERA	50V F 0.01MF Z	
Q212	TKTA1266Y-	TR	KTA1266Y (TP)		CA33	CCZF1H103Z	C CERA	50V F 0.01MF Z	
Q213	TKTC3198Y-	TR	KTC3198Y		CA46	CCZF1H103Z	C CERA	50V F 0.01MF Z	
Q216	TKTC3198Y-	TR	KTC3198Y		CA48	CCZF1H103Z	C CERA	50V F 0.01MF Z	
QA09	TKTA1266Y-	TR	KTA1266Y (TP)		CA49	CCZF1H103Z	C CERA	50V F 0.01MF Z	
QA10	TKTC3198Y-	TR	KTC3198Y		CA50	CCZB1H391K	C CERA	50V B 390PF K (AXIAL)	
QA11	TKTC3198Y-	TR	KTC3198Y		CA54	CCZB1H391K	C CERA	50V B 390PF K (AXIAL)	
QA13	TKTC3198Y-	TR	KTC3198Y		CA55	CCZB1H391K	C CERA	50V B 390PF K (AXIAL)	
QA14	TKTC3198Y-	TR	KTC3198Y		CA59	CCZB1H391K	C CERA	50V B 390PF K (AXIAL)	
QA15	TKTA1266Y-	TR	KTA1266Y (TP)		CA60	CCZB1H391K	C CERA	50V B 390PF K (AXIAL)	
QA16	TKTC3198Y-	TR	KTC3198Y		CA78	CCZF1H103Z	C CERA	50V F 0.01MF Z	
QA17	TKTC3198Y-	TR	KTC3198Y		CA79	CCZF1H103Z	C CERA	50V F 0.01MF Z	
QA81	TKTA1266Y-	TR	KTA1266Y (TP)		CA81	CCZF1H103Z	C CERA	50V F 0.01MF Z	
QA82	TKTC3198Y-	TR	KTC3198Y		DA01	DUZ10BM---	DIODE ZENER	UZ-10BM	
QA83	TKTC3198Y-	TR	KTC3198Y		DA02	DUZ10BM---	DIODE ZENER	UZ-10BM	
R259	RV5426202P	R SEMI FIXED	EVN-DJAA03B 2K OHM		DA03	DUZ10BM---	DIODE ZENER	UZ-10BM	
ZZ200	PTU1JAD167	PCB UNION1 AXIAL AS	DTC-29ZWPWT		DA04	DUZ10BM---	DIODE ZENER	UZ-10BM	
10	2TM14006LB	TAPE MASKING	3M #232 6.0X2000M		DA07	DUZ10BM---	DIODE ZENER	UZ-10BM	
20	2TM10006LB	TAPE MASKING	3M #232-MAP-C 6.2X2000M		DA08	DUZ10BM---	DIODE ZENER	UZ-10BM	
A001	4859804960	PCB UNION 1	200X199(246X246/2)D1B		DA09	DUZ10BM---	DIODE ZENER	UZ-10BM	
C201	CCZF1H103Z	C CERA	50V F 0.01MF Z		DA17	DUZ10BM---	DIODE ZENER	UZ-10BM	
C202	CCZF1H103Z	C CERA	50V F 0.01MF Z		DA21	D1N4148---	DIODE	1N4148 (TAPPING)	
C203	CCZF1H103Z	C CERA	50V F 0.01MF Z		DA22	D1N4148---	DIODE	1N4148 (TAPPING)	
C204	CCZF1H103Z	C CERA	50V F 0.01MF Z		DA23	D1N4148---	DIODE	1N4148 (TAPPING)	
C206	CZSL1H220J	C CERA	50V SL 22PF J (AXIAL)		DA24	D1N4148---	DIODE	1N4148 (TAPPING)	
C207	CZSL1H100J	C CERA	50V SL 10PF J (AXIAL)		DA25	DUZ10BM---	DIODE ZENER	UZ-10BM	
C209	CCZF1H103Z	C CERA	50V F 0.01MF Z		DA26	DUZ10BM---	DIODE ZENER	UZ-10BM	
C210	CCZB1H181K	C CERA	50V B 180PF K (AXIAL)		DA38	DUZ10BM---	DIODE ZENER	UZ-10BM	
C211	CCZF1H103Z	C CERA	50V F 0.01MF Z		DA39	DUZ10BM---	DIODE ZENER	UZ-10BM	
C212	CCZB1H121K	C CERA	50V B 120PF K (AXIAL)		DA40	DUZ10BM---	DIODE ZENER	UZ-10BM	
C213	CCZF1H103Z	C CERA	50V F 0.01MF Z		DA41	DUZ5R1B---	DIODE ZENER	UZ-5.1B	
C214	CCZF1H103Z	C CERA	50V F 0.01MF Z		DA47	DUZ10BM---	DIODE ZENER	UZ-10BM	
C216	CZSL1H560J	C CERA	50V SL 56PF J (AXIAL)		DA48	DUZ10BM---	DIODE ZENER	UZ-10BM	
C218	CCZF1H103Z	C CERA	50V F 0.01MF Z		DA49	DUZ10BM---	DIODE ZENER	UZ-10BM	
C219	CCZF1H103Z	C CERA	50V F 0.01MF Z		JA01	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING	
C220	CCZF1H103Z	C CERA	50V F 0.01MF Z		JA02	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING	
C221	CCZF1H103Z	C CERA	50V F 0.01MF Z		JA03	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING	
C222	CCZF1H103Z	C CERA	50V F 0.01MF Z		JA04	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING	
C223	CCZF1H103Z	C CERA	50V F 0.01MF Z		JA05	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING	
C224	CZSL1H560J	C CERA	50V SL 56PF J (AXIAL)		JA06	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING	
C225	CZSL1H330J	C CERA	50V SL 33PF J (AXIAL)		JA07	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING	
C226	CBZF1H104Z	C CERA SEMI	50V F 0.1MF Z		JA08	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING	
C227	CCZF1H103Z	C CERA	50V F 0.01MF Z		JA09	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING	
C228	CZCH1H220J	C CERA	50V CH 22PF J (AXIAL)		JA10	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING	
C229	CZSL1H560J	C CERA	50V SL 56PF J (AXIAL)		JA11	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING	
C230	CZCH1H220J	C CERA	50V CH 22PF J (AXIAL)		JA12	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING	
C233	CCZF1H103Z	C CERA	50V F 0.01MF Z		JA13	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING	
CA05	CCZB1H391K	C CERA	50V B 390PF K (AXIAL)		JA14	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING	

Loc	Part_Cd	Part_Name	Part_Desc	REMARK	Loc	Part_Cd	Part_Name	Part_Desc	REMARK
JA15	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		LA05	5CPZ479K02	COIL PEAKING	4.7UH K (AXIAL 3.5MM)	
JA16	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		LA06	5CPZ829K02	COIL PEAKING	8.2UH K (AXIAL 3.5MM)	
JA17	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R201	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J	
JA18	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R202	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J	
JA19	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R203	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J	
JA20	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R204	RD-AZ152J-	R CARBON FILM	1/6 1.5K OHM J	
JA21	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R209	RD-AZ152J-	R CARBON FILM	1/6 1.5K OHM J	
JA22	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R211	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J	
JA23	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R212	RD-AZ821J-	R CARBON FILM	1/6 820 OHM J	
JA24	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R213	RD-AZ472J-	R CARBON FILM	1/6 4.7K OHM J	
JA25	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R214	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J	
JA26	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R215	RD-AZ203J-	R CARBON FILM	1/6 20K OHM J	
JA27	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R216	RD-AZ472J-	R CARBON FILM	1/6 4.7K OHM J	
JA28	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R217	RD-AZ392J-	R CARBON FILM	1/6 3.9K OHM J	
JA29	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R220	RD-AZ123J-	R CARBON FILM	1/6 12K OHM J	
JA30	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R221	RD-AZ822J-	R CARBON FILM	1/6 8.2K OHM J	
JA31	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R222	RD-AZ821J-	R CARBON FILM	1/6 820 OHM J	
JA32	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R223	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J	
JA33	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R224	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J	
JA34	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R225	RD-AZ332J-	R CARBON FILM	1/6 3.3K OHM J	
JA35	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R226	RD-AZ123J-	R CARBON FILM	1/6 12K OHM J	
JA36	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R227	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J	
JA37	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R228	RD-AZ561J-	R CARBON FILM	1/6 560 OHM J	
JA38	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R229	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J	
JA39	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R230	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J	
JA40	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R231	RD-AZ750J-	R CARBON FILM	1/6 75 OHM J	
JA41	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R232	RD-AZ431J-	R CARBON FILM	1/6 430 OHM J	
JA42	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R233	RD-AZ332J-	R CARBON FILM	1/6 3.3K OHM J	
JA43	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R234	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J	
JA44	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R235	RD-AZ473J-	R CARBON FILM	1/6 47K OHM J	
JA45	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R236	RD-AZ123J-	R CARBON FILM	1/6 12K OHM J	
JA46	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R237	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J	
JA47	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R238	RD-AZ391J-	R CARBON FILM	1/6 390 OHM J	
JA49	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R239	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J	
JA50	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R240	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J	
JA51	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R241	RD-AZ750J-	R CARBON FILM	1/6 75 OHM J	
JA53	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R257	RD-AZ511J-	R CARBON FILM	1/6 510 OHM J	
JW01	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R260	RD-AZ221J-	R CARBON FILM	1/6 220 OHM J	
JW02	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R261	RD-AZ221J-	R CARBON FILM	1/6 220 OHM J	
JW03	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		R272	RD-AZ479J-	R CARBON FILM	1/4 4.7 OHM J	
L201	5CPZ101K02	COIL PEAKING	100UH K (AXIAL 3.5MM)		R273	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J	
L203	5CPZ270K02	COIL PEAKING	27UH K (AXIAL 3.5MM)		RA01	RD-AZ750J-	R CARBON FILM	1/6 75 OHM J	
L204	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		RA02	RD-AZ151J-	R CARBON FILM	1/6 150 OHM J	
L205	5CPZ101K02	COIL PEAKING	100UH K (AXIAL 3.5MM)		RA03	RD-AZ151J-	R CARBON FILM	1/6 150 OHM J	
L206	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		RA04	RD-AZ151J-	R CARBON FILM	1/6 150 OHM J	
L207	5CPZ101K02	COIL PEAKING	100UH K (AXIAL 3.5MM)		RA05	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J	
L208	5CPZ101K02	COIL PEAKING	100UH K (AXIAL 3.5MM)		RA06	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J	
L209	5CPZ101K02	COIL PEAKING	100UH K (AXIAL 3.5MM)		RA07	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J	
L210	5CPZ330K02	COIL PEAKING	33UH K (AXIAL 3.5MM)		RA08	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J	
L211	5CPZ560K02	COIL PEAKING	56UH K (AXIAL 3.5MM)		RA09	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J	
L212	5CPZ470K02	COIL PEAKING	47UH K (AXIAL 3.5MM)		RA10	RD-AZ151J-	R CARBON FILM	1/6 150 OHM J	
L213	5CPZ470K02	COIL PEAKING	47UH K (AXIAL 3.5MM)		RA100	RD-AZ181J-	R CARBON FILM	1/6 180 OHM J	
L214	5CPZ101K02	COIL PEAKING	100UH K (AXIAL 3.5MM)		RA101	RD-AZ181J-	R CARBON FILM	1/6 180 OHM J	
LA02	5CPZ120K02	COIL PEAKING	12UH K (AXIAL 3.5MM)		RA102	RD-AZ104J-	R CARBON FILM	1/6 100K OHM J	

Loc	Part_Cd	Part_Name	Part_Desc	REMARK	Loc	Part_Cd	Part_Name	Part_Desc	REMARK
RA103	RD-AZ224J-	R CARBON FILM	1/6 220K OHM J		RA64	RD-AZ182J-	R CARBON FILM	1/6 1.8K OHM J	
RA104	RD-AZ224J-	R CARBON FILM	1/6 220K OHM J		RA65	RD-AZ104J-	R CARBON FILM	1/6 100K OHM J	
RA11	RD-AZ151J-	R CARBON FILM	1/6 150 OHM J		RA66	RD-4Z479J-	R CARBON FILM	1/4 4.7 OHM J	
RA12	RD-AZ750J-	R CARBON FILM	1/6 75 OHM J		RA67	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J	
RA13	RD-AZ203J-	R CARBON FILM	1/6 20K OHM J		RA68	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J	
RA14	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J		RA69	RD-AZ821J-	R CARBON FILM	1/6 820 OHM J	
RA15	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J		RA70	RD-AZ181J-	R CARBON FILM	1/6 180 OHM J	
RA16	RD-AZ151J-	R CARBON FILM	1/6 150 OHM J		RA71	RD-AZ182J-	R CARBON FILM	1/6 1.8K OHM J	
RA17	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J		RA72	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J	
RA18	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J		RA73	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J	
RA19	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J		RA74	RD-AZ821J-	R CARBON FILM	1/6 820 OHM J	
RA20	RD-AZ151J-	R CARBON FILM	1/6 150 OHM J		RA75	RD-AZ181J-	R CARBON FILM	1/6 180 OHM J	
RA21	RD-AZ224J-	R CARBON FILM	1/6 220K OHM J		RA76	RD-AZ224J-	R CARBON FILM	1/6 220K OHM J	
RA22	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J		RA77	RD-AZ151J-	R CARBON FILM	1/6 150 OHM J	
RA23	RD-AZ332J-	R CARBON FILM	1/6 3.3K OHM J		RA78	RD-AZ242J-	R CARBON FILM	1/6 2.4K OHM J	
RA24	RD-AZ221J-	R CARBON FILM	1/6 220 OHM J		RA79	RD-AZ242J-	R CARBON FILM	1/6 2.4K OHM J	
RA25	RD-AZ221J-	R CARBON FILM	1/6 220 OHM J		RA80	RD-AZ361J-	R CARBON FILM	1/6 360 OHM J	
RA26	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J		RA81	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J	
RA27	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J		RA82	RD-4Z479J-	R CARBON FILM	1/4 4.7 OHM J	
RA28	RD-AZ224J-	R CARBON FILM	1/6 220K OHM J		RA83	RD-4Z479J-	R CARBON FILM	1/4 4.7 OHM J	
RA29	RD-AZ151J-	R CARBON FILM	1/6 150 OHM J		RA84	RD-AZ201J-	R CARBON FILM	1/6 200 OHM J	
RA30	RD-AZ223J-	R CARBON FILM	1/6 22K OHM J		RA85	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J	
RA31	RD-AZ223J-	R CARBON FILM	1/6 22K OHM J		RA86	RD-AZ680J-	R CARBON FILM	1/6 68 OHM J	
RA32	RD-AZ151J-	R CARBON FILM	1/6 150 OHM J		RA87	RD-AZ221J-	R CARBON FILM	1/6 220 OHM J	
RA33	RD-AZ332J-	R CARBON FILM	1/6 3.3K OHM J		RA88	RD-AZ201J-	R CARBON FILM	1/6 200 OHM J	
RA34	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J		RA89	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J	
RA35	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J		RA90	RD-4Z479J-	R CARBON FILM	1/4 4.7 OHM J	
RA36	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		RA91	RD-AZ201J-	R CARBON FILM	1/6 200 OHM J	
RA37	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		RA92	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J	
RA38	RD-AZ224J-	R CARBON FILM	1/6 220K OHM J		RA93	RD-AZ821J-	R CARBON FILM	1/6 820 OHM J	
RA39	RD-AZ224J-	R CARBON FILM	1/6 220K OHM J		RA94	RD-AZ821J-	R CARBON FILM	1/6 820 OHM J	
RA40	RD-AZ224J-	R CARBON FILM	1/6 220K OHM J		RA95	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J	
RA41	RD-AZ750J-	R CARBON FILM	1/6 75 OHM J		RA96	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J	
RA42	RD-AZ750J-	R CARBON FILM	1/6 75 OHM J		RA97	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J	
RA43	RD-AZ224J-	R CARBON FILM	1/6 220K OHM J		RA98	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J	
RA44	RD-AZ224J-	R CARBON FILM	1/6 220K OHM J		RA99	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J	
RA45	RD-AZ472J-	R CARBON FILM	1/6 4.7K OHM J		RW01	RD-4Z829J-	R CARBON FILM	1/4 8.2 OHM J	
RA46	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J		RW03	RD-AZ472J-	R CARBON FILM	1/6 4.7K OHM J	
RA47	RD-AZ151J-	R CARBON FILM	1/6 150 OHM J		RW04	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J	
RA48	RD-AZ750J-	R CARBON FILM	1/6 75 OHM J		ZZ800	PTTLMSD167	PCB TELETEXT MANUAL	DTC-29Z9WPT	
RA49	RD-AZ750J-	R CARBON FILM	1/6 75 OHM J		IT01	1SAA5281PR	IC TEXT	SAA5281P/R	
RA50	RD-AZ750J-	R CARBON FILM	1/6 75 OHM J		WT01	4859231610	CONN HOUSING	BH254-07	
RA51	RD-AZ750J-	R CARBON FILM	1/6 75 OHM J		WT02	4859231910	CONN HOUSING	BH254-10	
RA52	RD-AZ224J-	R CARBON FILM	1/6 220K OHM J		XT01	5XE27R000E	CRYSTAL QUARTZ	HC-49/U 27.0MHZ 30PPM	
RA53	RD-AZ224J-	R CARBON FILM	1/6 220K OHM J		ZZ200	PTTLJRD167	PCB TELETEXT RADIAL	DTC-29Z9WPT	
RA54	RD-AZ151J-	R CARBON FILM	1/6 150 OHM J		CT02	CEXF1E101V	C ELECTRO	25V RSS 10MF (6.3X11) TP	
RA55	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J		CT06	CMXM2A104J	C MYLAR	100V 0.1MF J (TP)	
RA56	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J		CT07	CMXM2A104J	C MYLAR	100V 0.1MF J (TP)	
RA57	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J		CT08	CMXM2A104J	C MYLAR	100V 0.1MF J (TP)	
RA58	RD-4Z479J-	R CARBON FILM	1/4 4.7 OHM J		CT09	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP	
RA59	RD-AZ682J-	R CARBON FILM	1/6 6.8K OHM J		CT10	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP	
RA60	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J		QT01	TKTC3198Y-	TR	KTC3198Y	
RA61	RD-AZ221J-	R CARBON FILM	1/6 220 OHM J		QT02	TKTA1266Y-	TR	KTA1266Y (TP)	
RA62	RD-4Z479J-	R CARBON FILM	1/4 4.7 OHM J		QT03	TKTA1266Y-	TR	KTA1266Y (TP)	
RA63	RD-AZ680J-	R CARBON FILM	1/6 68 OHM J						

Loc	Part_Cd	Part_Name	Part_Desc	REMARK	Loc	Part_Cd	Part_Name	Part_Desc	REMARK
QT04	TKTC3198Y-	TR	KTC3198Y		RT07	RD-AZ221J-	R CARBON FILM	1/6 220 OHM J	
ZZ200	PTTLJAD167	PCB TELETEXT AXIAL A	DTC-29Z9WPT		RT08	RD-AZ471J-	R CARBON FILM	1/6 470 OHM J	
10	2TM14006LB	TAPE MASKING	3M #232 6.0X2000M		RT09	RD-AZ221J-	R CARBON FILM	1/6 220 OHM J	
20	2TM10006LB	TAPE MASKING	3M #232-MAP-C 6.2X2000M		RT10	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J	
A001	4859804918	PCB TELETEXT	67X75(246X246/9)D1B		RT11	RD-AZ272J-	R CARBON FILM	1/6 2.7K OHM J	
CT01	CBZF1H104Z	C CERA SEMI	50V F 0.1MF Z		RT12	RD-AZ222J-	R CARBON FILM	1/6 2.2K OHM J	
CT03	CCZB1H102K	C CERA	50V B 1000PF K (AXIAL)		RT13	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J	
CT04	CZCH1H150J	C CERA	50V CH 15PF J (AXIAL)		RT14	RD-AZ182J-	R CARBON FILM	1/6 1.8K OHM J	
CT05	CZSL1H560J	C CERA	50V SL 56PF J (AXIAL)		RT15	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J	
CT12	CBZF1H104Z	C CERA SEMI	50V F 0.1MF Z		RT16	RD-AZ223J-	R CARBON FILM	1/6 22K OHM J	
DT01	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		RT17	RD-AZ332J-	R CARBON FILM	1/4 3.3K OHM J	
DT02	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		RT18	RD-AZ131J-	R CARBON FILM	1/6 130 OHM J	
DT03	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		RT19	RD-AZ131J-	R CARBON FILM	1/6 130 OHM J	
DT04	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING		RT20	RD-AZ131J-	R CARBON FILM	1/6 130 OHM J	
LT01	5CPZ109M02	COIL PEAKING	1UH M (AXIAL 3.5MM)		RT38	RD-AZ222J-	R CARBON FILM	1/6 2.2K OHM J	
LT02	5CPZ569K02	COIL PEAKING	5.6UH K (AXIAL 3.5MM)		ZZ900	PTSEMSD167	PCB SCART AS	DTC-29Z9WPT	
RT01	RD-AZ273J-	R CARBON FILM	1/6 27K OHM J		A001	4859807224	PCB SCART	123X49(246X197/8)D1B	
RT02	RD-AZ431J-	R CARBON FILM	1/6 430 OHM J		JV01	4859201501	SOCKET RGB	SR-21S2 (STRAIGHT TYPE)	
RT03	RD-AZ431J-	R CARBON FILM	1/6 430 OHM J		M361	4853630120	TERMINAL	FR HIPS BK	
RT04	RD-AZ431J-	R CARBON FILM	1/6 430 OHM J		M361C	7178301212	SCREW TAPPTITE	TT2 WAS 3X12 MFZN BK	
RT05	RD-AZ750J-	R CARBON FILM	1/6 75 OHM J		PS01	4850709S03	CONNECTOR	YH025-09+YST025+ULW=400	
RT06	RD-AZ221J-	R CARBON FILM	1/6 220 OHM J		PS01A	4856812001	TIE CABLE	NYLON66 DA100	

■ Option Part List (Default : DTD-29U9WPT)

FP-68T30 DIFFERENT PART LIST

Changed Contents	Loc	Part_Cd	Part_Name	Part_Desc	Assy_Cd
D(delete)	M191	4851938500	DECO WOOFER AS	29340+59333+7122401612	PTCACAD351
D	SP01A	4856016100	SCREW SPECIAL	SWRM	PTCACAD351
D	C111	CEXF1C102V	C ELECTRO	16V RSS 1000MF (10X20) TP	PTMPJ0D351
D	C130	CEXF1E471V	C ELECTRO	25V RSS 470MF (10X16) TP	PTMPJ0D351
D	D133	D1N4148---	DIODE	1N4148 (TAPPING)	PTMPJAD351
D	J001	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING	PTMPJAD351
D	J004	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING	PTMPJAD351
D	J064	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING	PTMPJAD351
D	J122	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING	PTMPJAD351
D	R165	RD-AZ221J-	R CARBON FILM	1/6 220 OHM J	PTMPJAD351
D	R166	RD-AZ221J-	R CARBON FILM	1/6 220 OHM J	PTMPJAD351
D	R168	RD-AZ123J-	R CARBON FILM	1/6 12K OHM J	PTMPJAD351
D	R169	RD-AZ822J-	R CARBON FILM	1/6 8.2K OHM J	PTMPJAD351
D	C138	CEXF1H479V	C ELECTRO	50V RSS 4.7MF (5X11) TP	PTMPJRD351
D	C142	CEXF1H470V	C ELECTRO	50V RSS 47MF (6.3X11) TP	PTMPJRD351
D	D132	1UPC574J-	IC	UPC574J	PTMPJRD351
D	U102	4859715930	TUNER VARACTOR	ENV59D15G3	PTMPMSD351
D	U102B	4859003750	PLUG PHONE AS	PLUG+CABLE 1365AWG26=150B	PTMPMSD351
D	ZZ500	PTPMMSD167	PCB PIP MANUAL AS	DTC-29Z9WPT	PTMPMSD351
D	ZZ600	PTSBSWD167	PCB SUB AS	DTC-29Z9WPT	PTMPMSD351
D	ZZ900	PTSEMSD167	PCB SCART AS	DTC-29Z9WPT	PTMPMSD351
D	R881	RS02Z912JS	R M-OXIDE FILM	2W 9.1K OHM J SMALL	PTPWJBD351
D	R899	RN02B912JS	R METAL FILM	2W 9.1K OHM J SMALL	PTPWJRD351
D	JW01	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING	PTU1JAD167
D	JW02	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING	PTU1JAD167
D	JW03	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING	PTU1JAD167
D	RW01	RD-4Z829J-	R CARBON FILM	1/4 8.2 OHM J	PTU1JAD167
D	RW03	RD-AZ472J-	R CARBON FILM	1/6 4.7K OHM J	PTU1JAD167
D	RW04	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J	PTU1JAD167
D	CW02	CEXF1H229V	C ELECTRO	50V RSS 2.2MF (5X11) TP	PTU1JRD167
D	CW03	CMXM2A223J	C MYLAR	100V 0.022MF J TP	PTU1JRD167
D	CW04	CMXM2A104J	C MYLAR	100V 0.1MF J (TP)	PTU1JRD167
D	CW06	CEXF1E101V	C ELECTRO	25V RSS 100MF (6.3X11) TP	PTU1JRD167
D	CW09	CMXM2A823J	C MYLAR	100V 0.082MF J (TP)	PTU1JRD167
D	CW01	CEYF1H222V	C ELECTRO	50V RSS 2200MF (18X35.5)	PTU1MSD167
D	CW07	CEYF1H222V	C ELECTRO	50V RSS 2200MF (18X35.5)	PTU1MSD167
D	CW08	CMXM2A224J	C MYLAR	100V 0.22MF J	PTU1MSD167
D	CW10	CMXM2A224J	C MYLAR	100V 0.22MF J	PTU1MSD167
D	IW01	PTB2SW3332	HEAT SINK ASS'Y	1TDA2616-- + 7128301011	PTU1MSD167
D	P606	4859231620	CONN WAFER	YW025-03	PTU1MSD167
D	PA06	4859235220	CONN WAFER	YW025-09	PTU1MSD167
A(add)	J003	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING	PTMPJAD351
A	J005	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING	PTMPJAD351
A	J183	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING	PTMPJAD351
A	J184	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING	PTMPJAD351
A	J189	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING	PTMPJAD351
A	R721	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J	PTMPJAD351
C(Change)	M361	4853630120	TERMINAL	FR HIPS BK	PTSEMSD167
		4853630110			PTSEMSD167

DTD-29U9WP DIFFERENT PARTSLIST

Changed Contents	Loc	Part_Cd	Part_Name	Part_Desc	Assy_Cd
D	ZZ800	PTTLMSD167	PCB TELETEXT MANUAL	DTC-29Z9WPT	PTMPMSD351
D	ZZ900	PTSEMSD167	PCB SCART AS	DTC-29Z9WPT	PTMPMSD351
D	J001	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING	PTMPJAD351
D	J232	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING	PTMPJAD351
A	J005	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J	PTMPJAD351
A	J015	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J	PTMPJAD351
A	C534	CBZF1H104Z	C CERA SEMI	50V F 0.1MF Z	PTMPJAD351
A	C535	CBZF1H104Z	C CERA SEMI	50V F 0.1MF Z	PTMPJAD351
A	C536	CBZF1H104Z	C CERA SEMI	50V F 0.1MF Z	PTMPJAD351
C(Change)	M361	4853630120	TERMINAL	FR HIPS BK	PTSEMSD167
		4853630110			PTSEMSD167

■ Printed Circuit Boards

1. CM-916F MAIN PCB

2. CM-916F POWER PCB

3. CM-916F AV / WOOPER PCB

4. CM-916F PIP PCB

5. CM-916F ETC
CRT

SUB SOUND


SCART

CONTROL


TEXT

■ Circuit Schematics


1. CM-916F u-COM

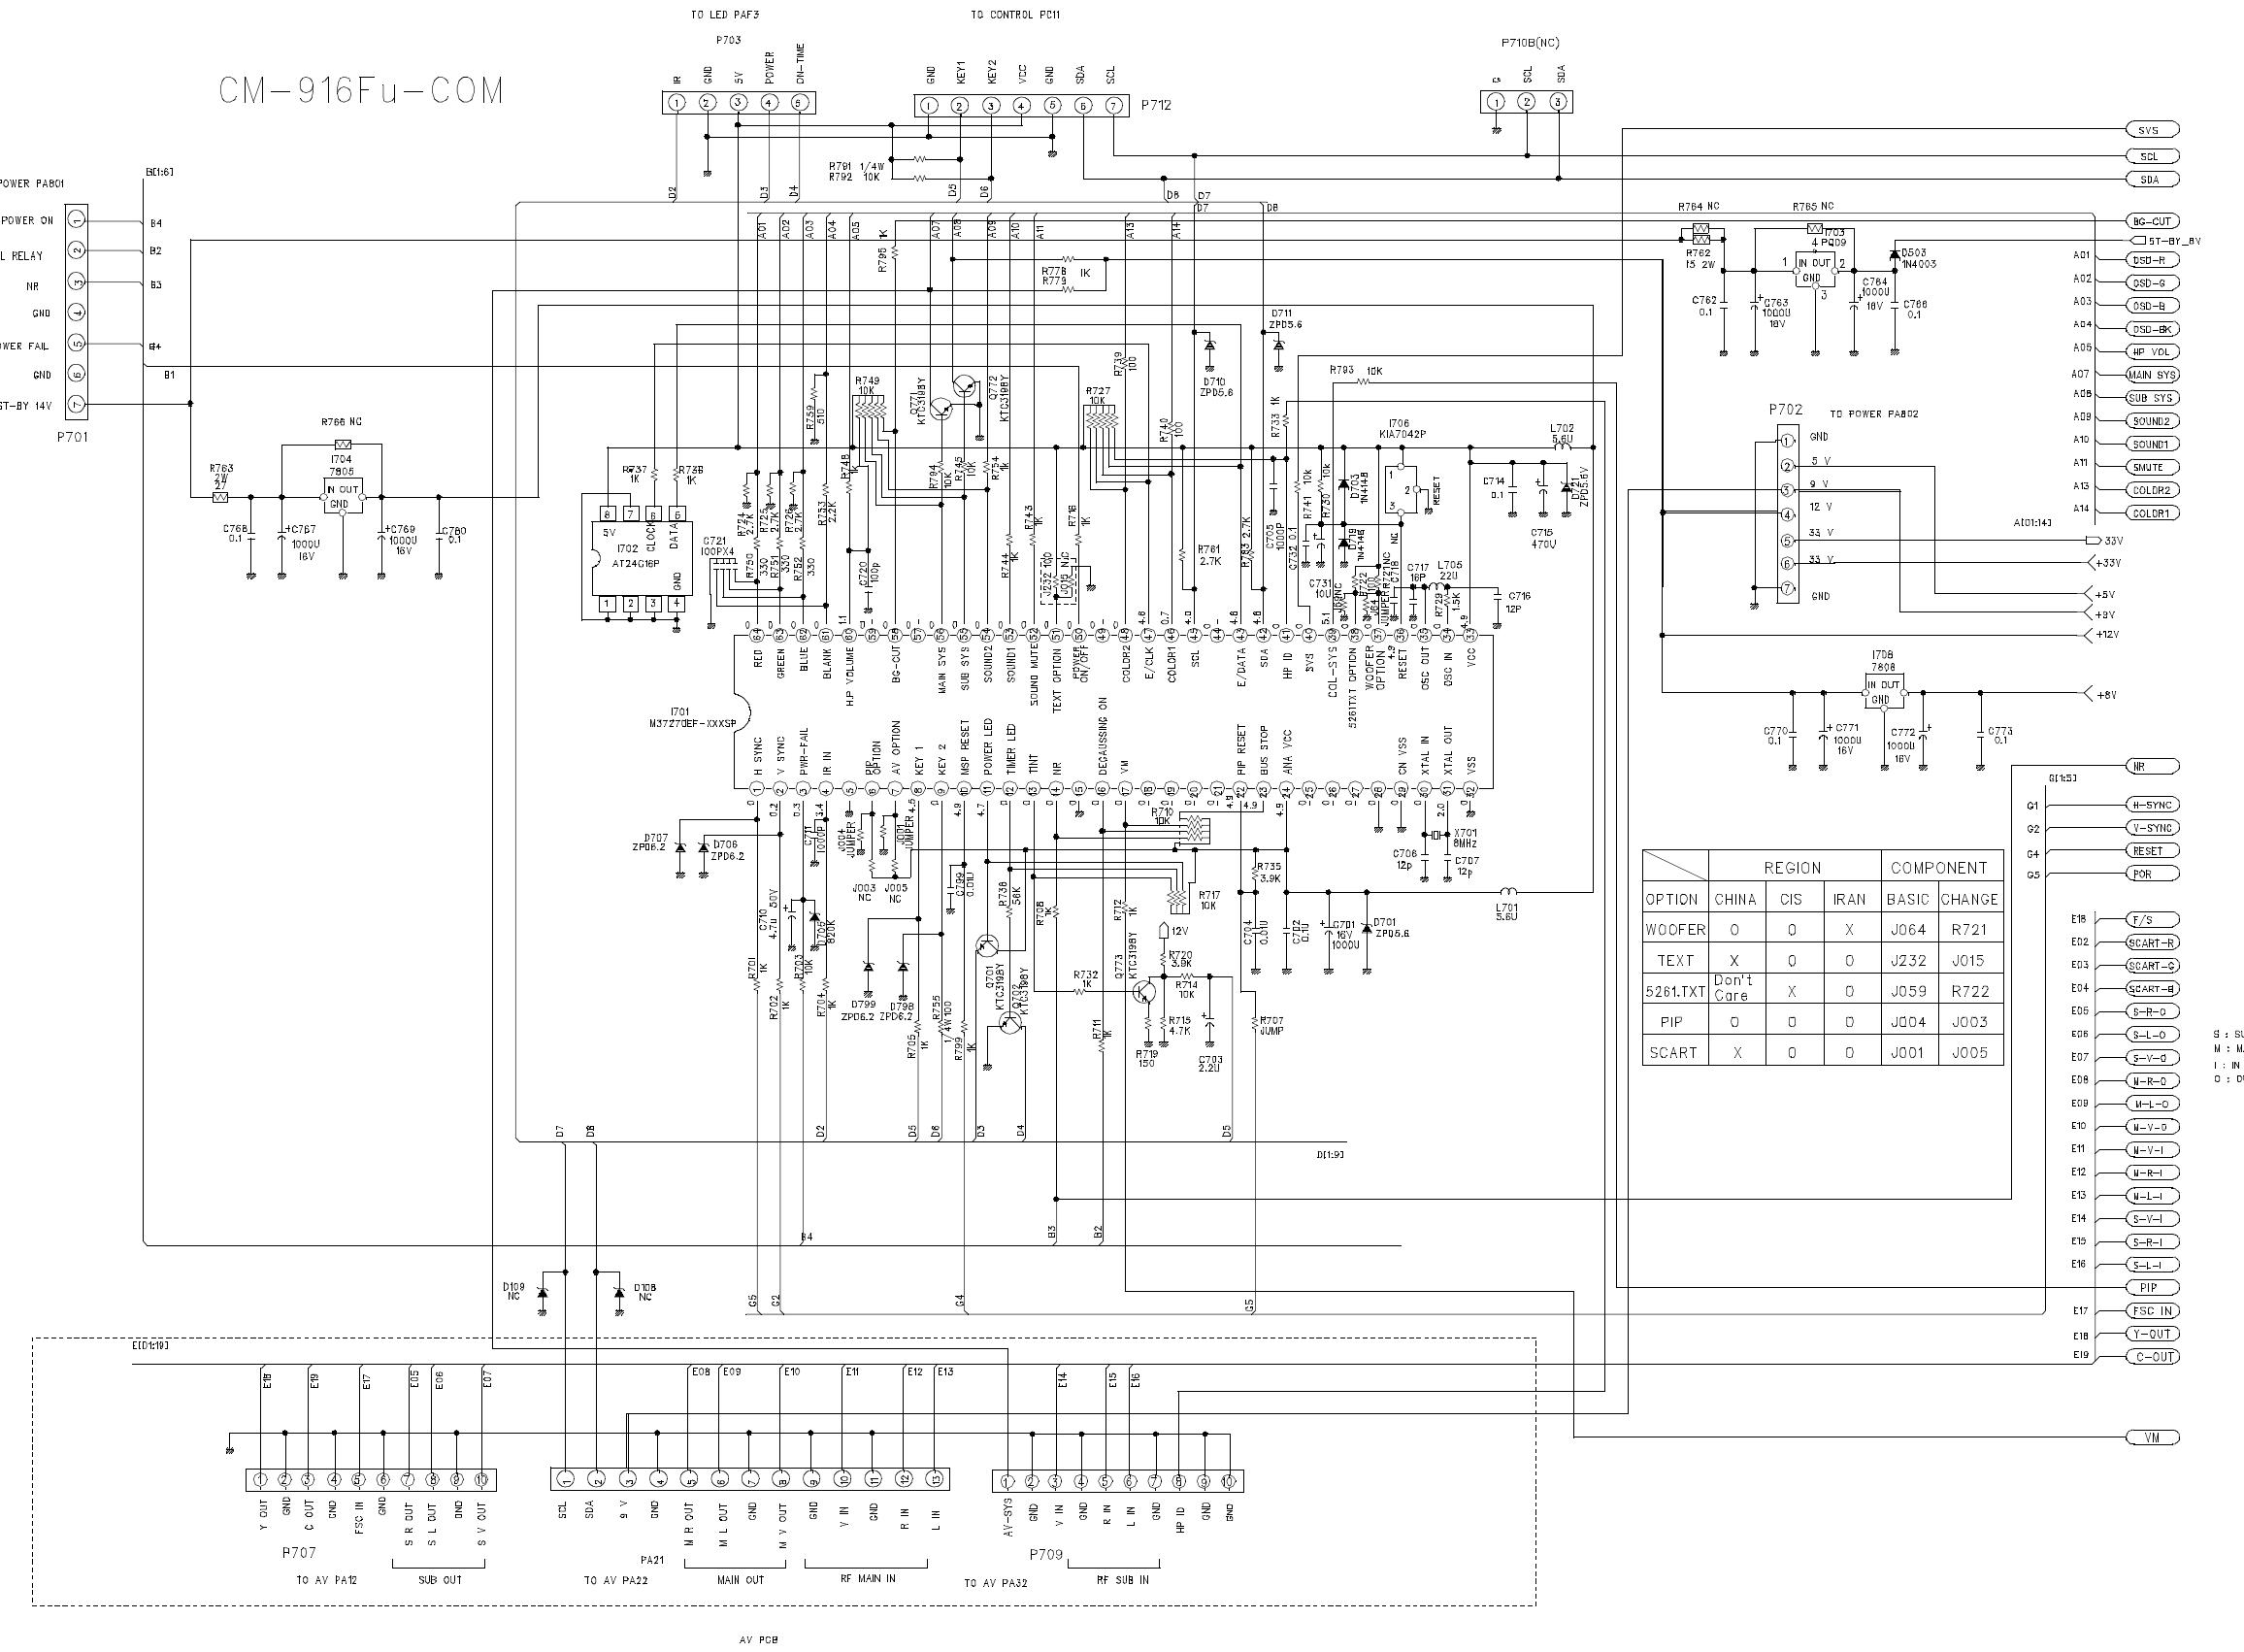

2. CM-916F MAIN

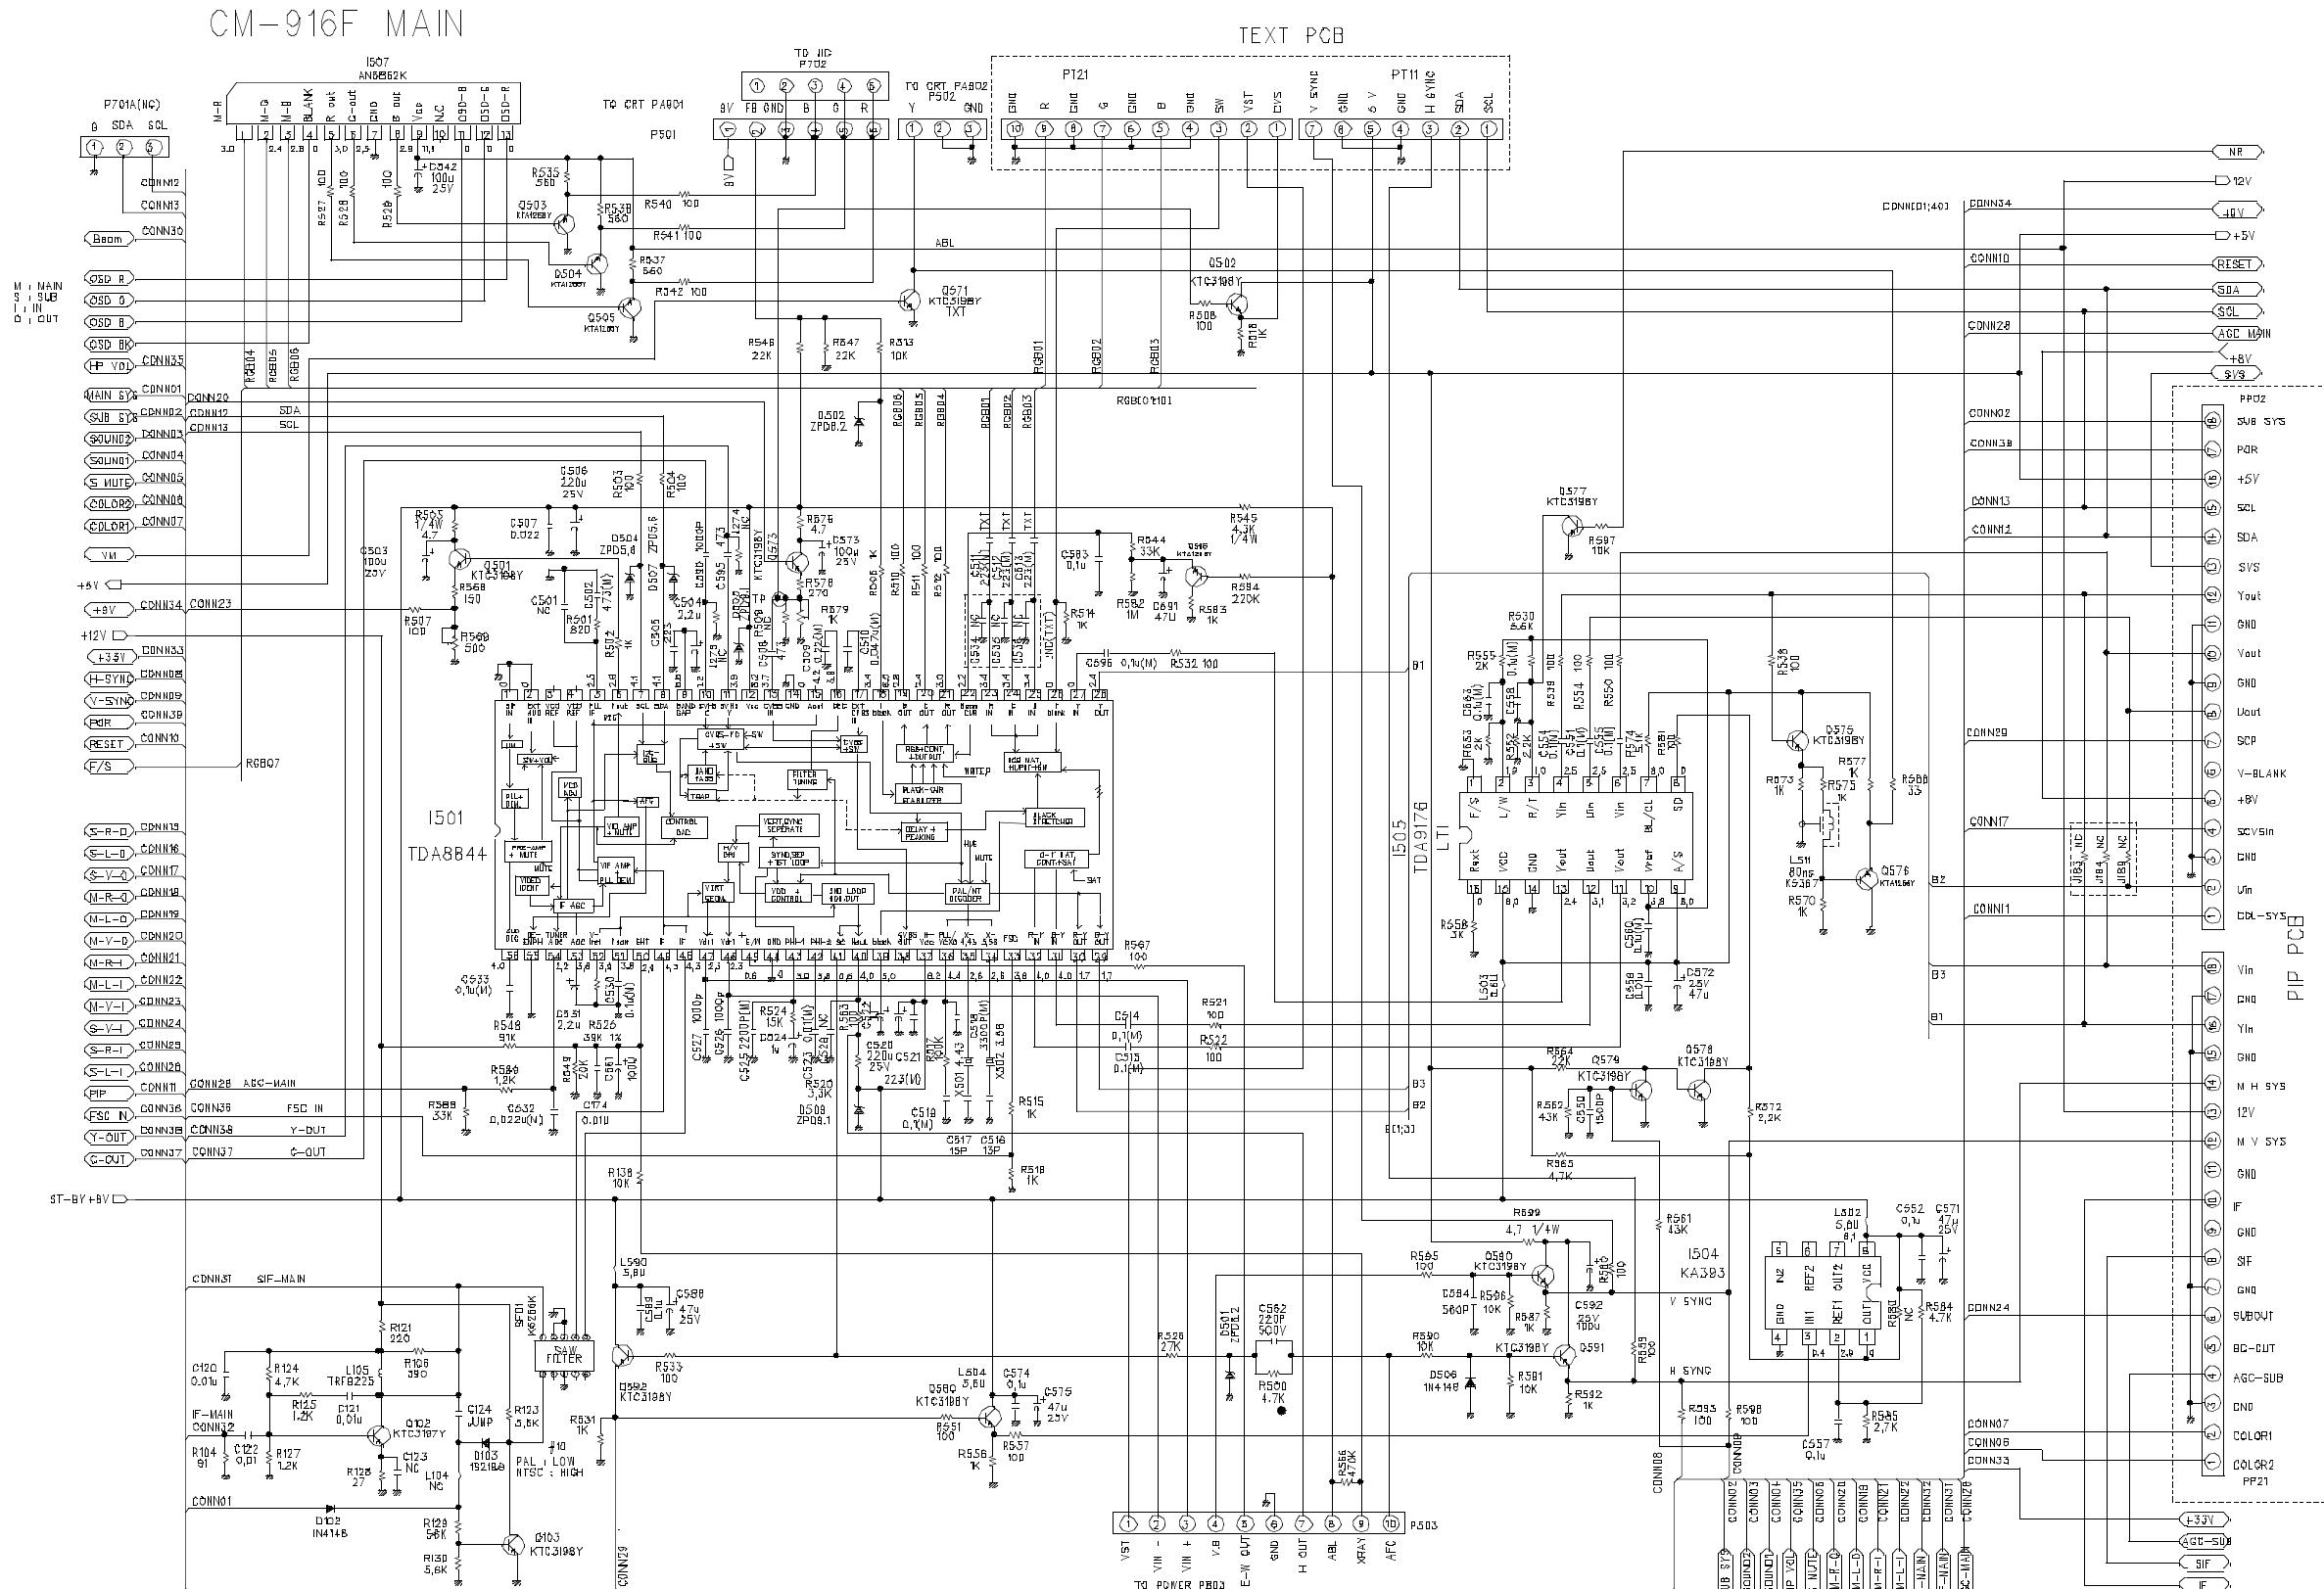


3. CM-916F POWER

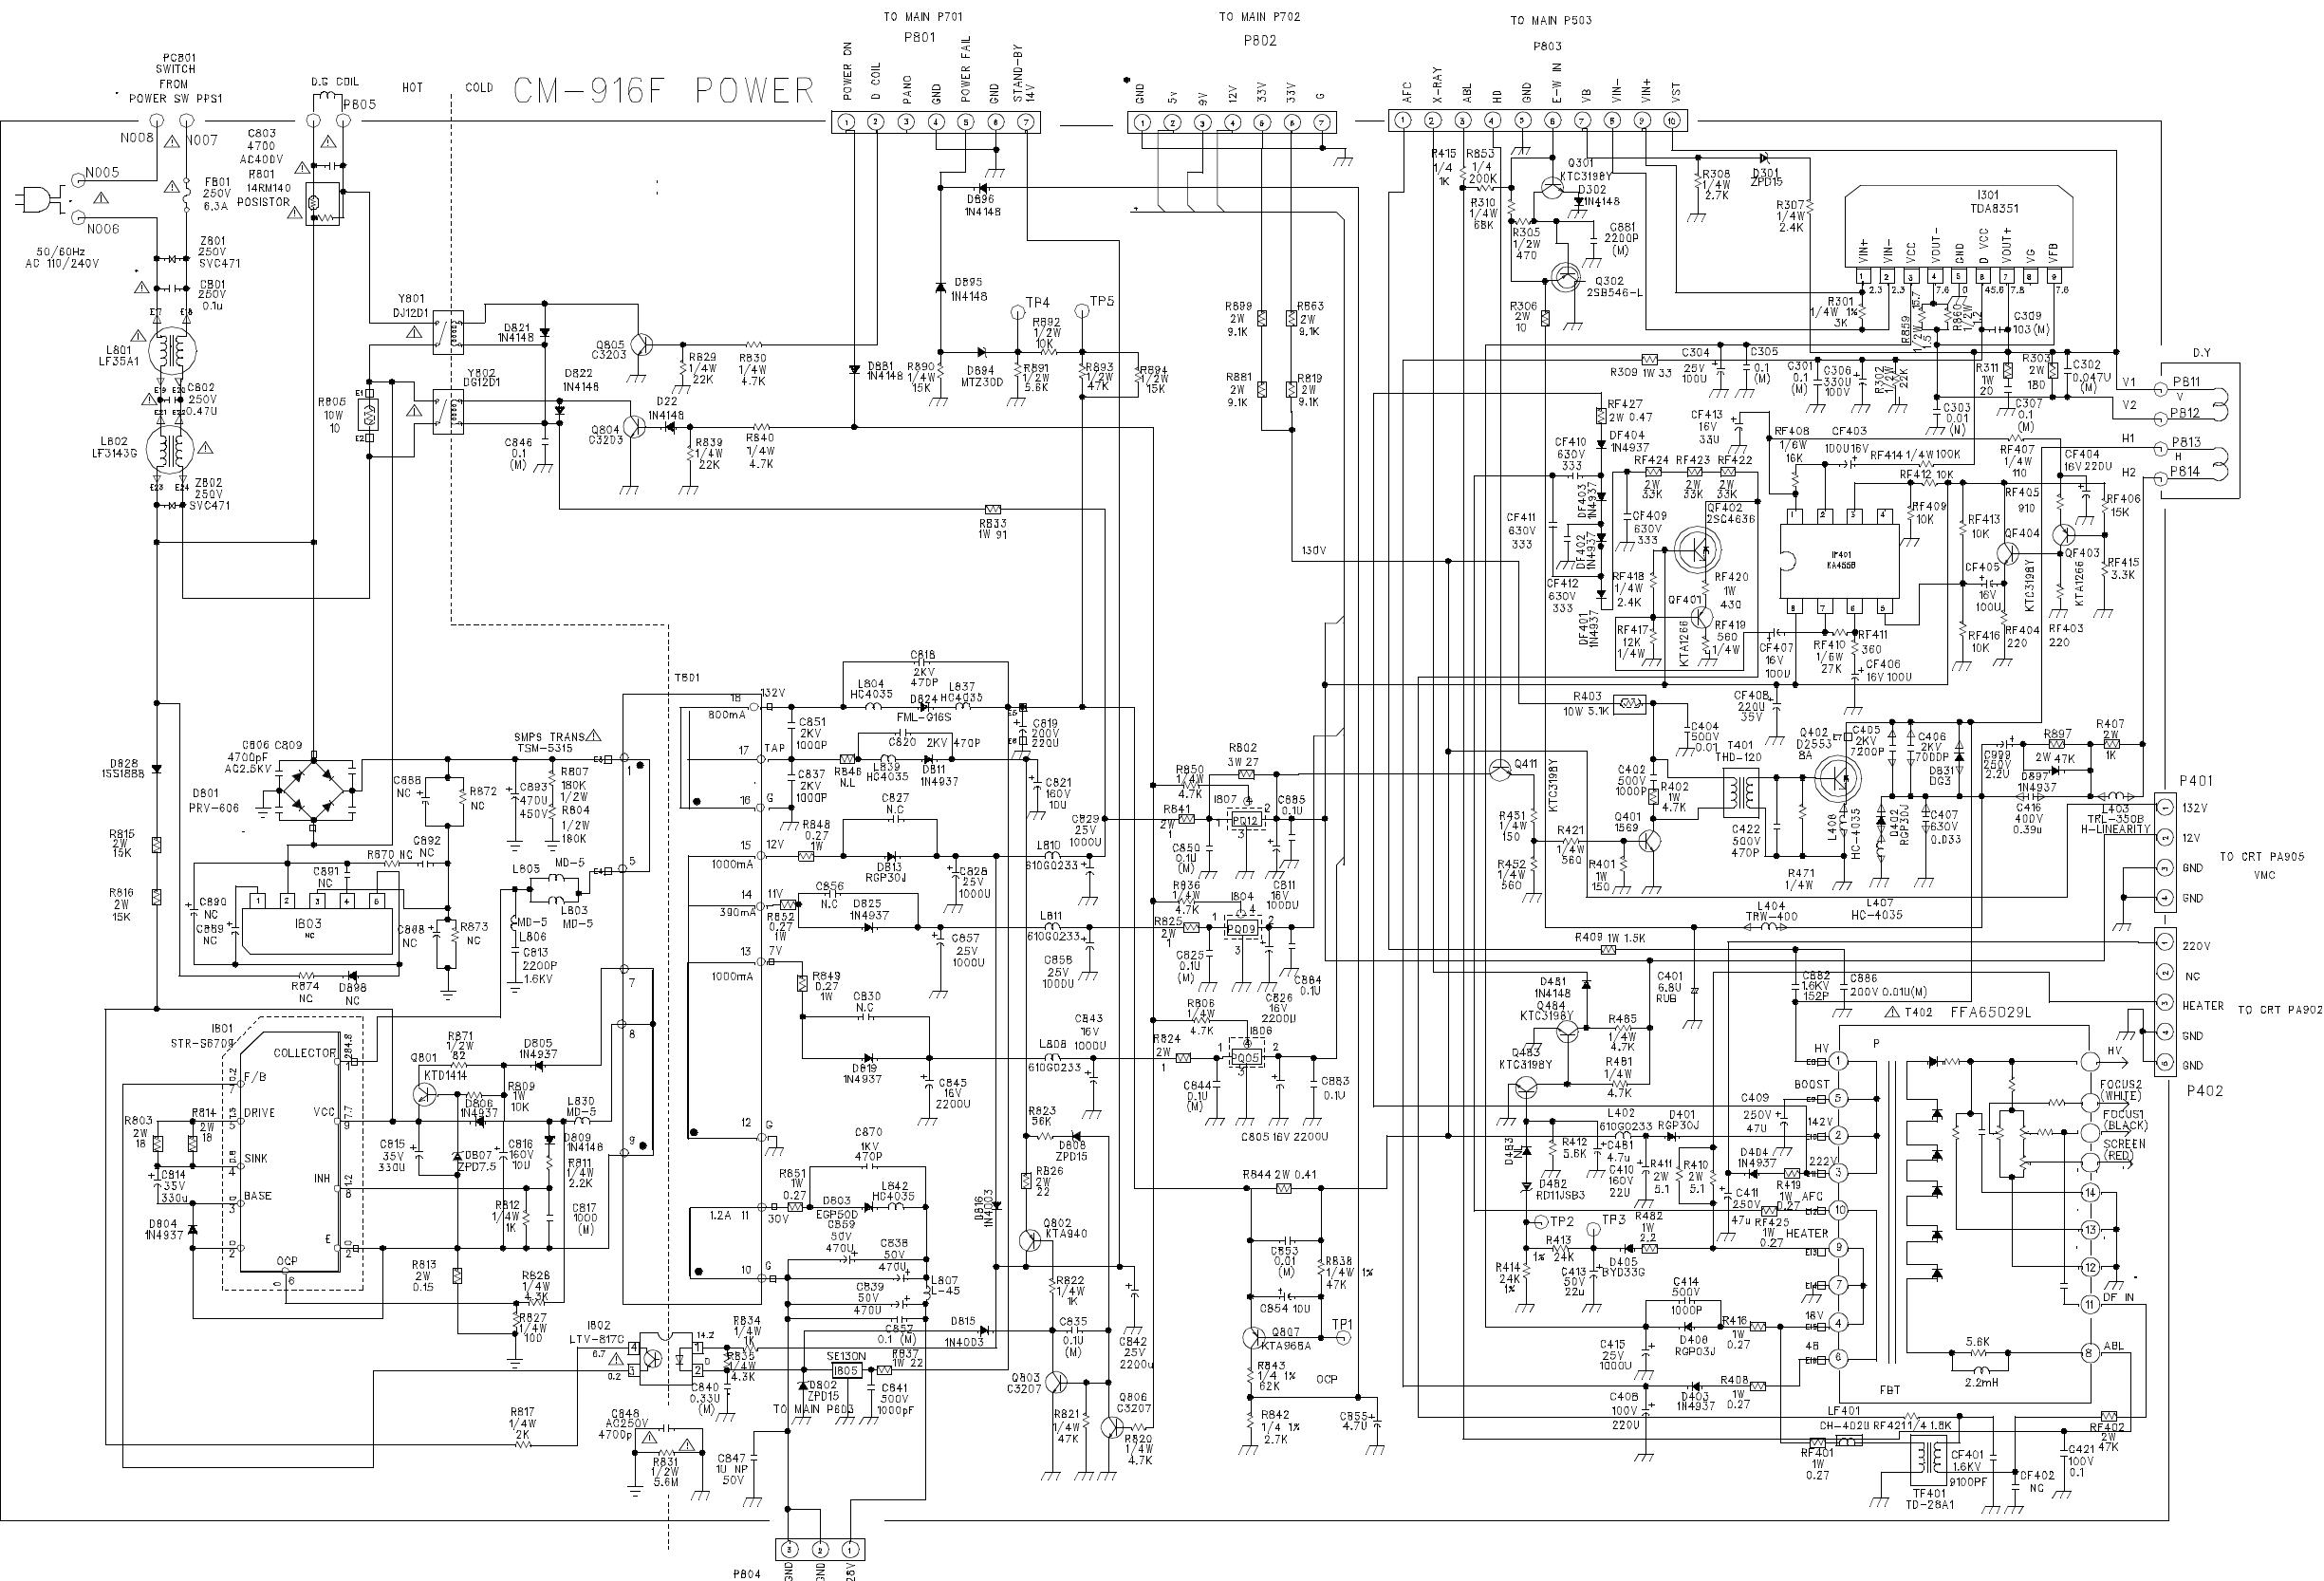

4. CM-915 AV / COMB


915av. sch-1 - Wed Sep 27 11:02:24 2000

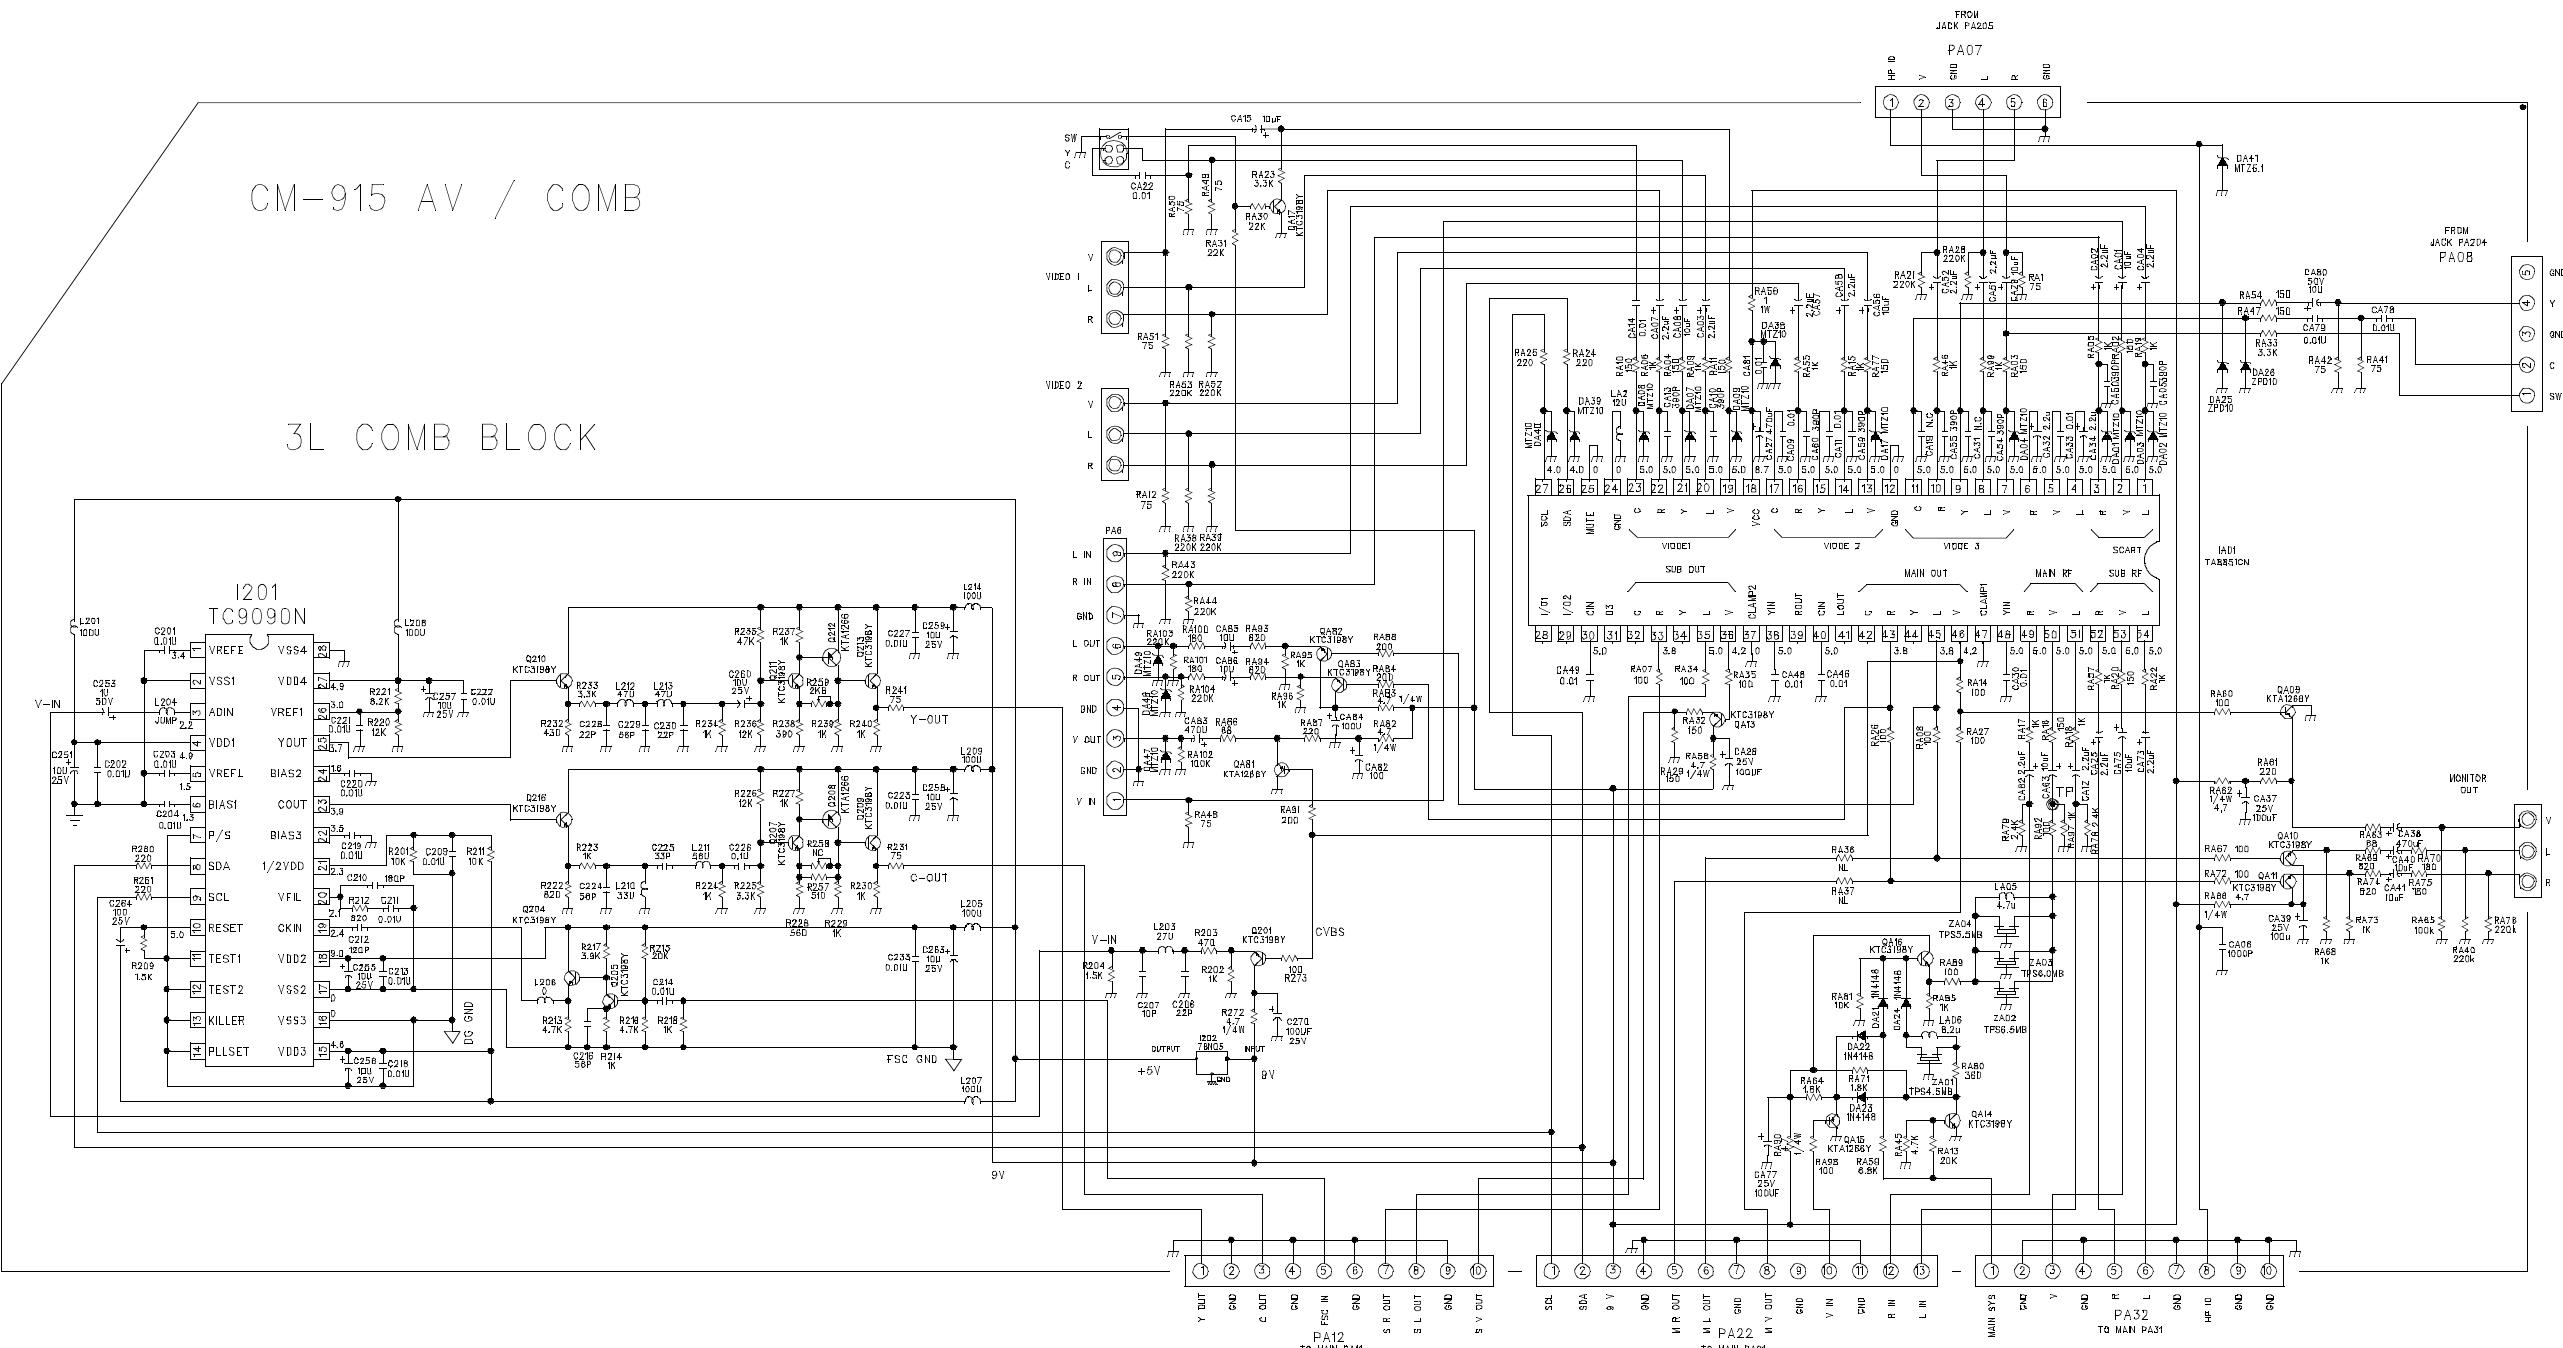

5. CM-915 WOOFER SOUND / TUNER

915sound.sch-1 - Wed Sep 27 11:06:49 2000


CM-915 WOOFER SOUND / TUNER

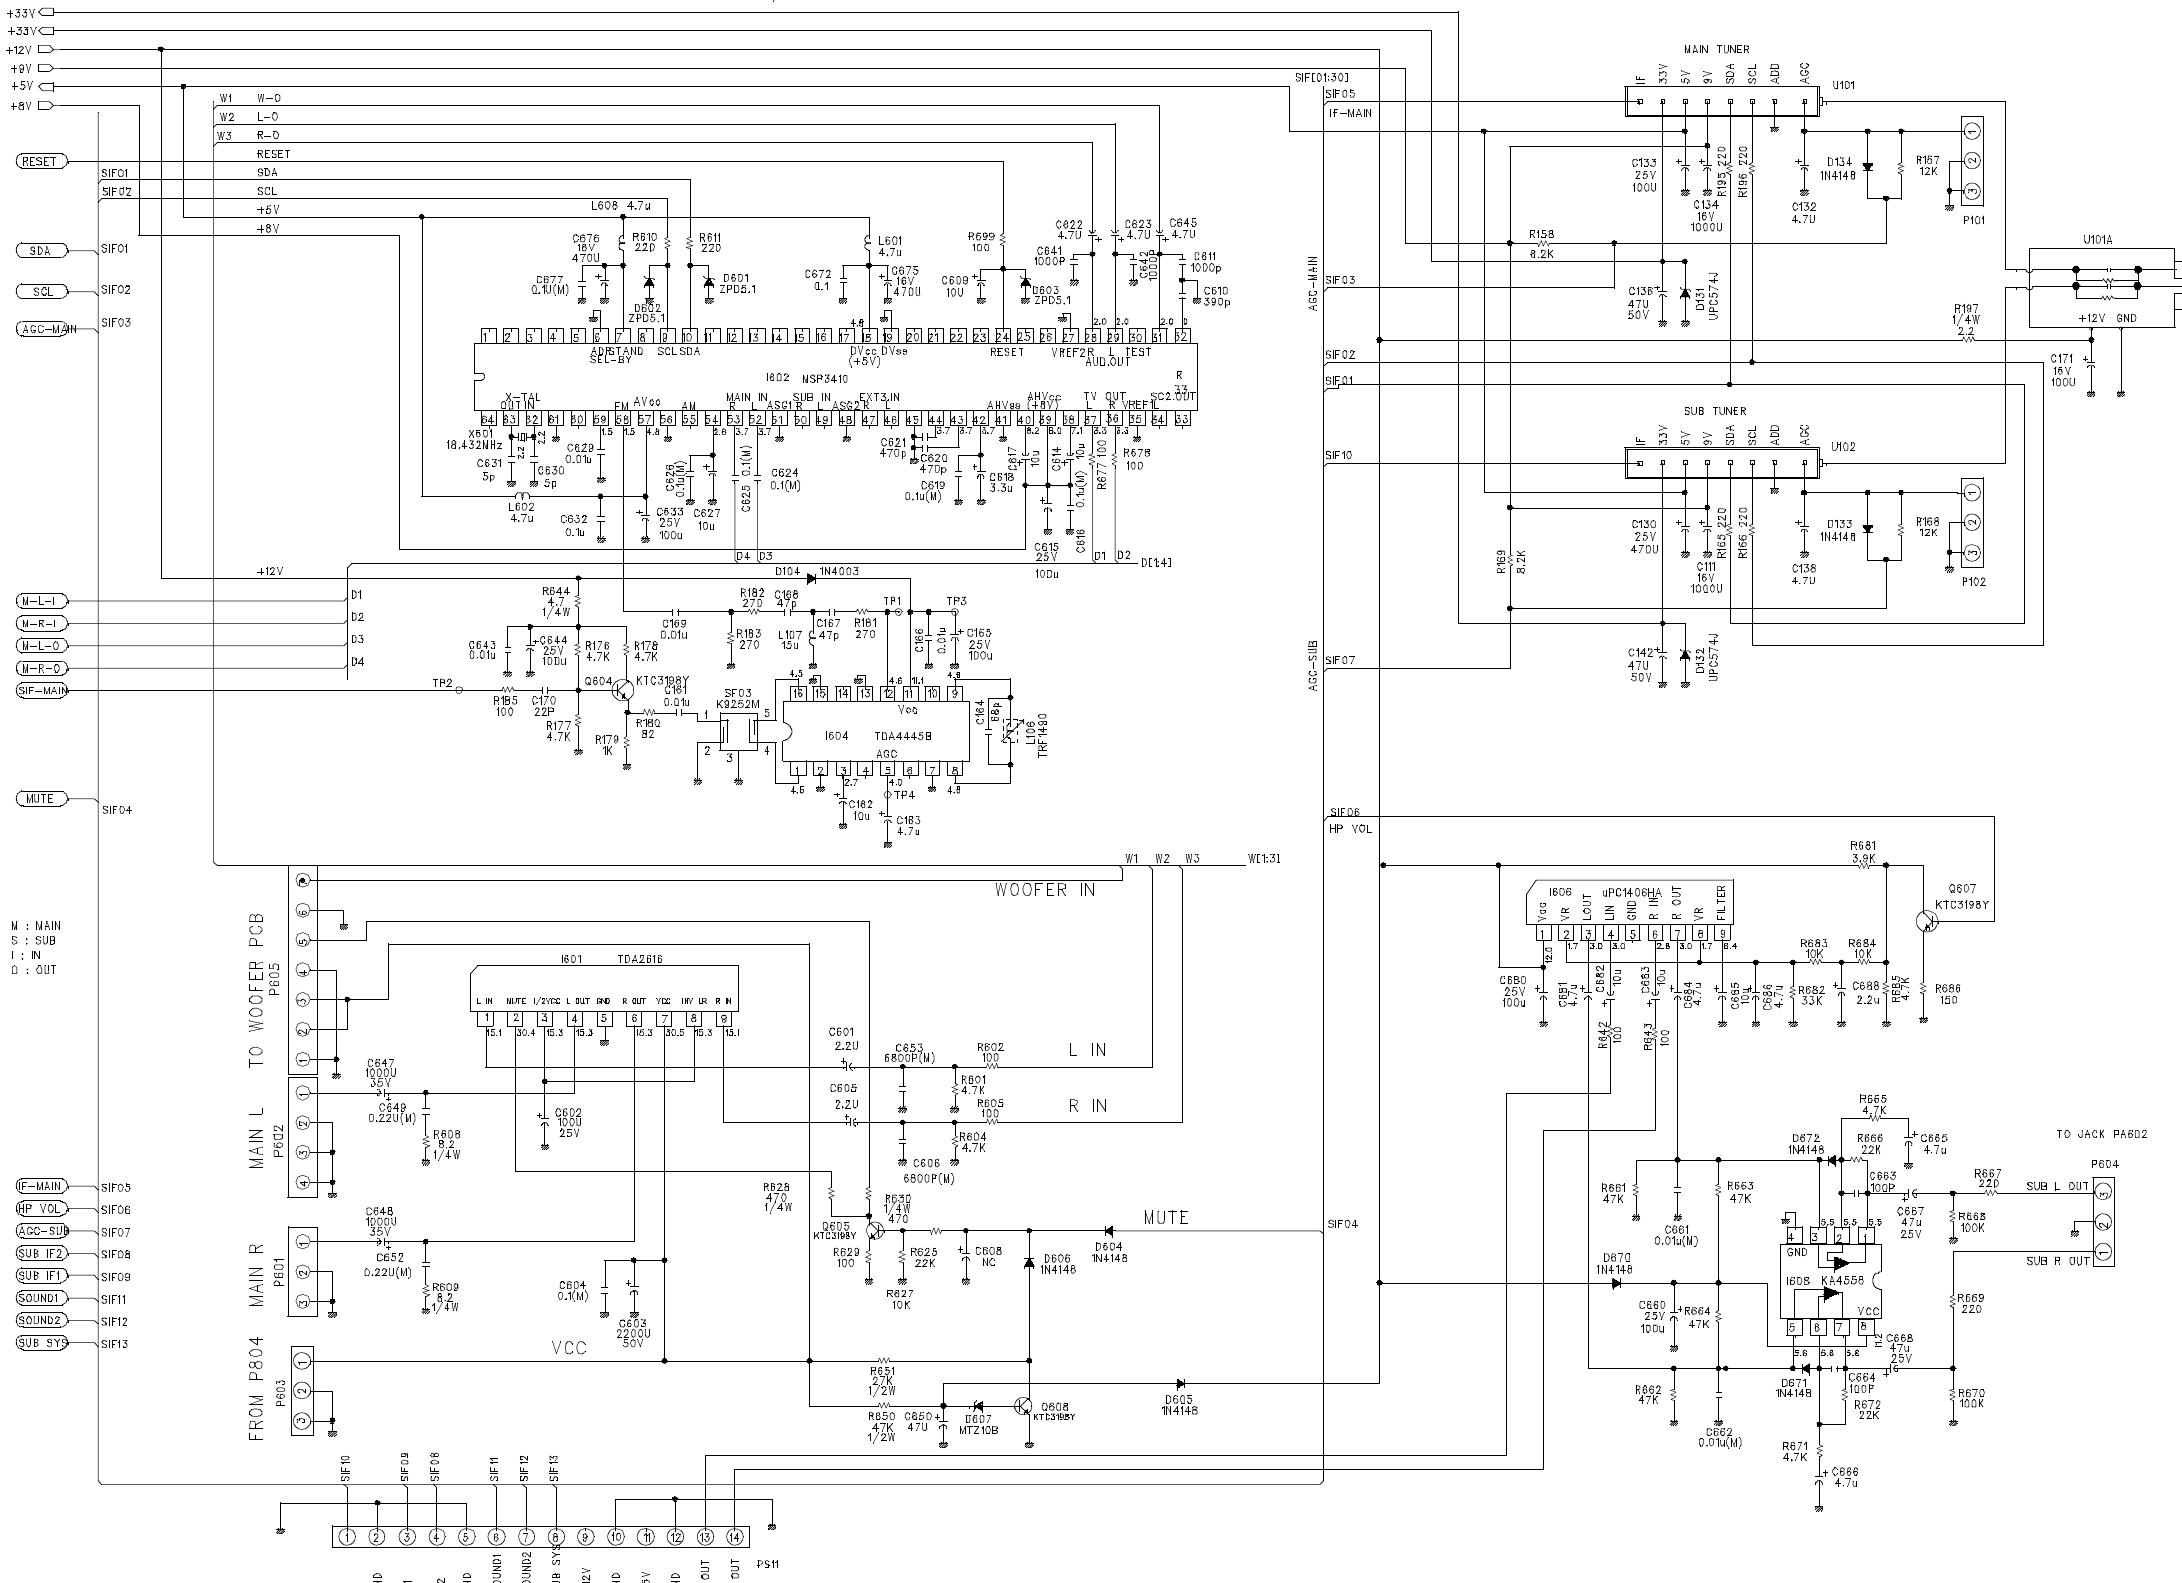


6. CM-915 PIP

915pip.sch-1 - Wed Sep 27 11:03:24 2000


CHIP COMPONENT : RCPXX & CCPXX & QCPXX

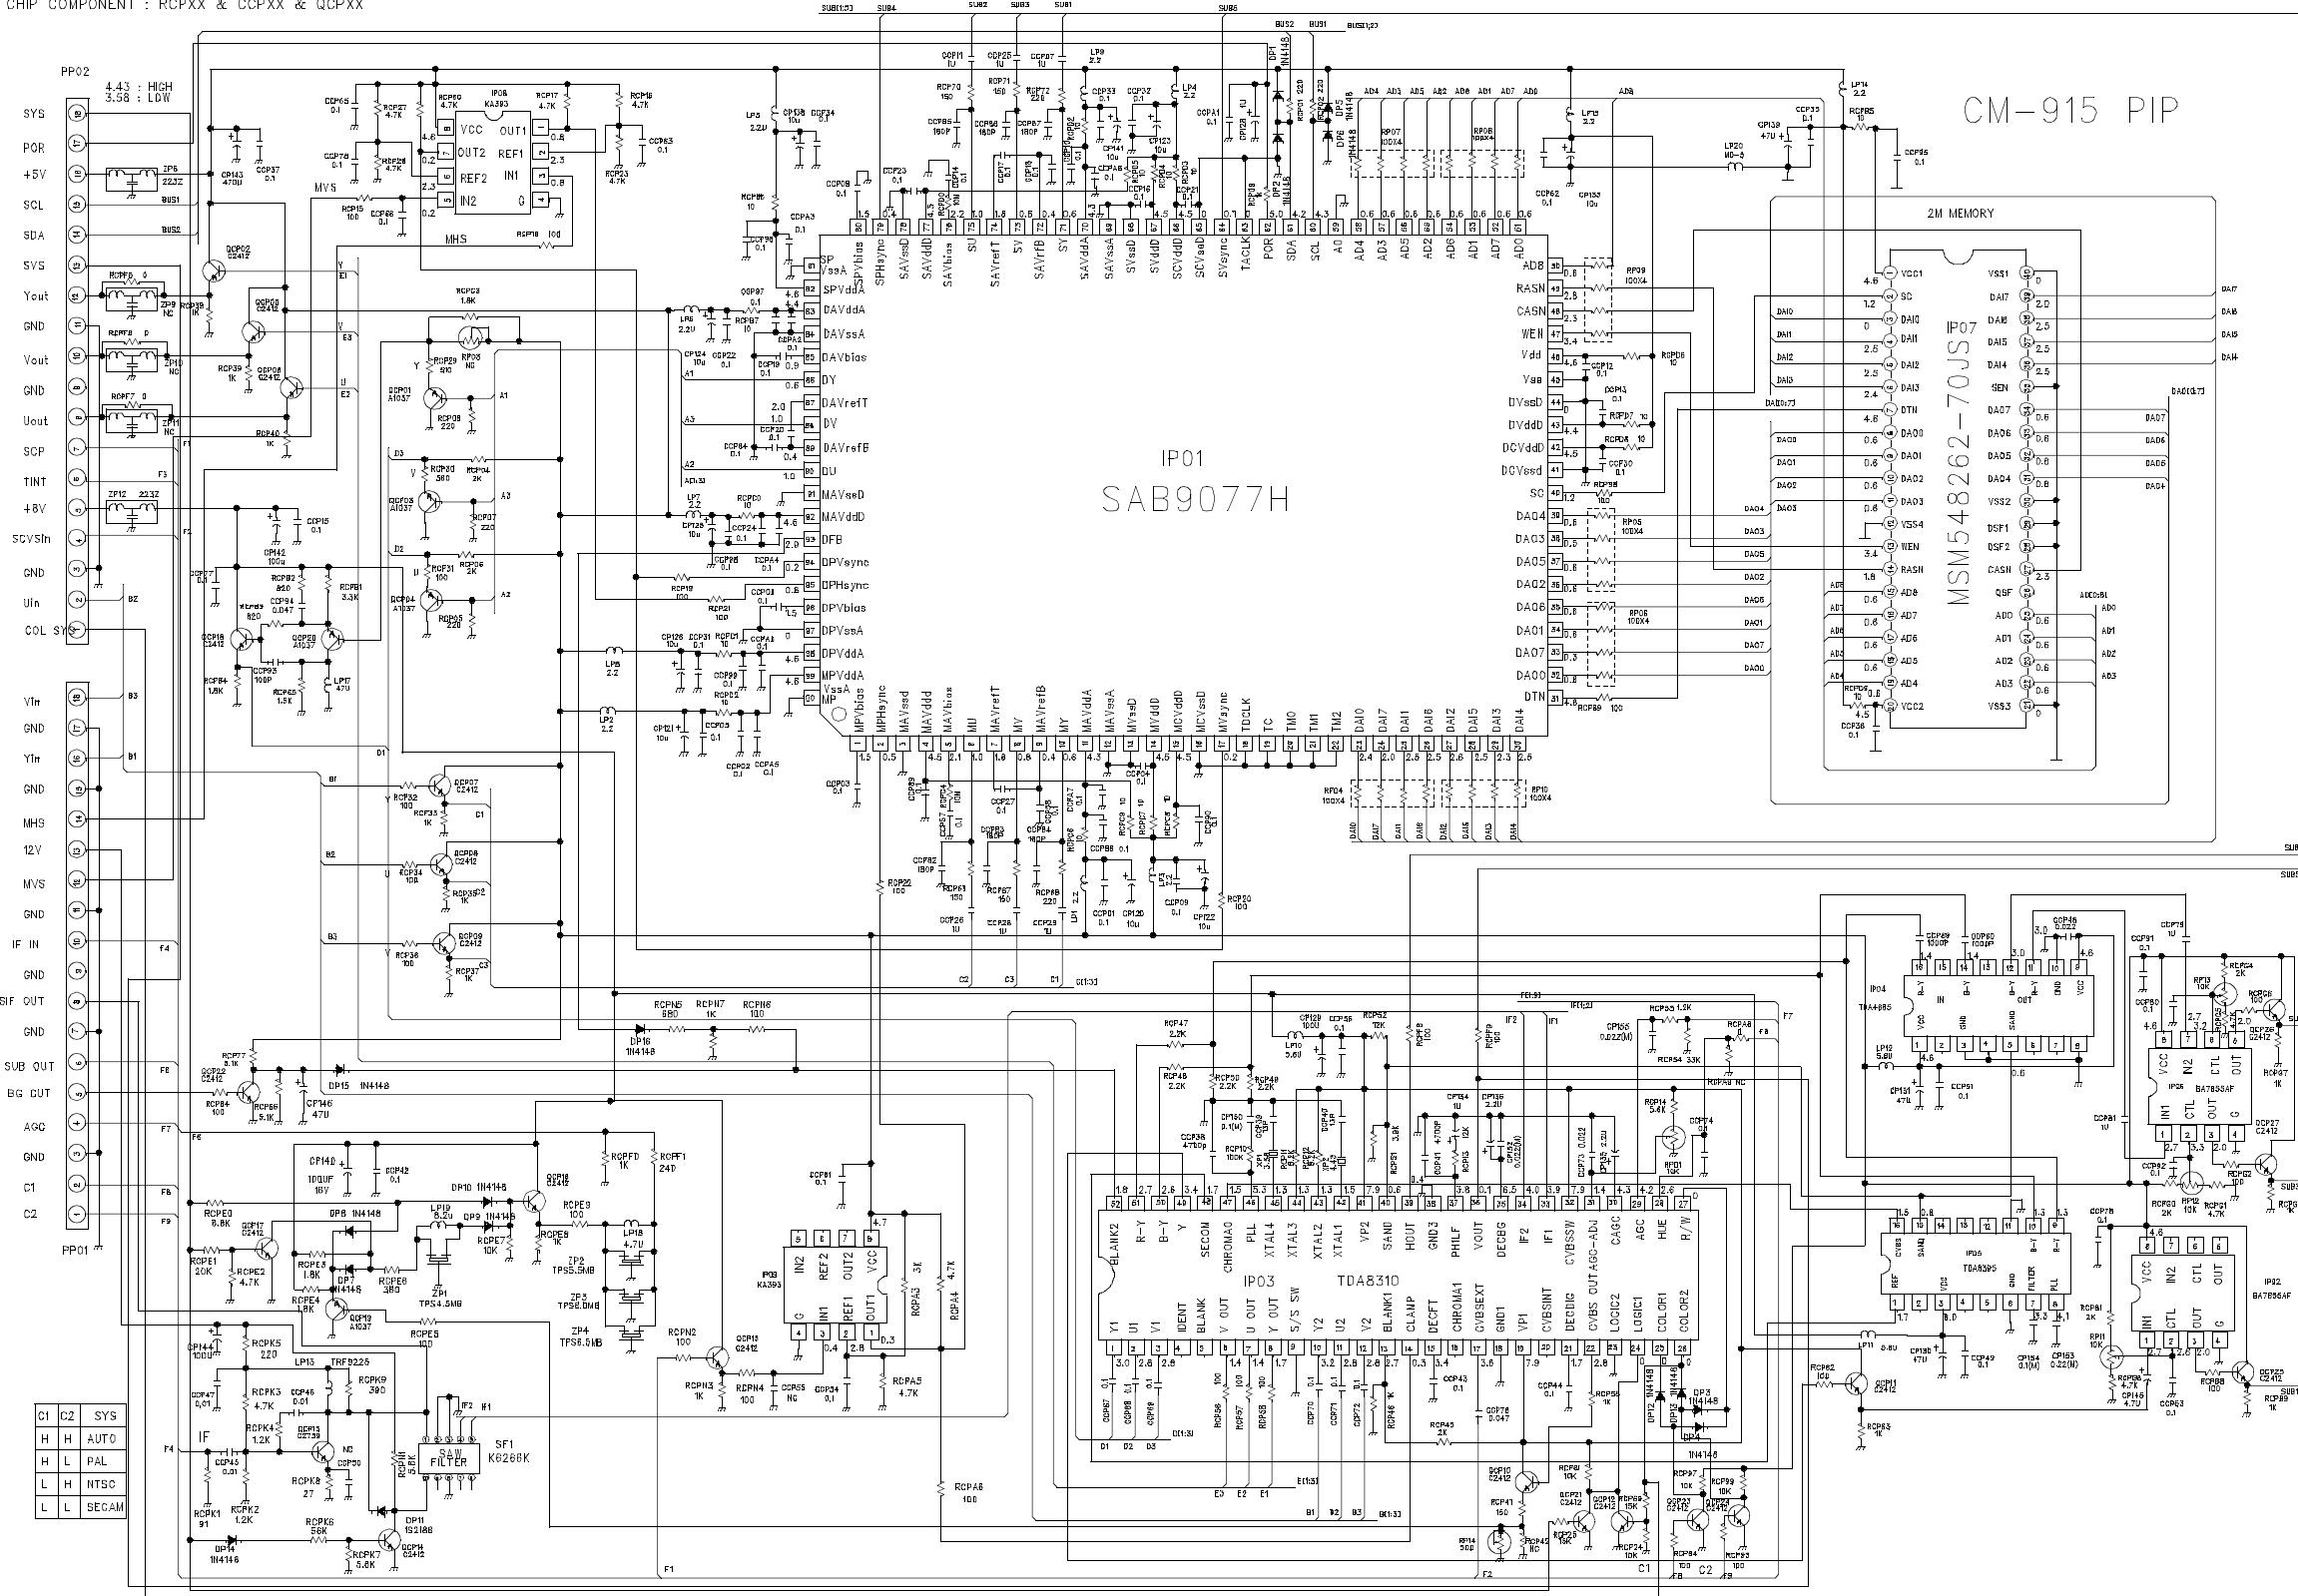


7. CM-916F CRT

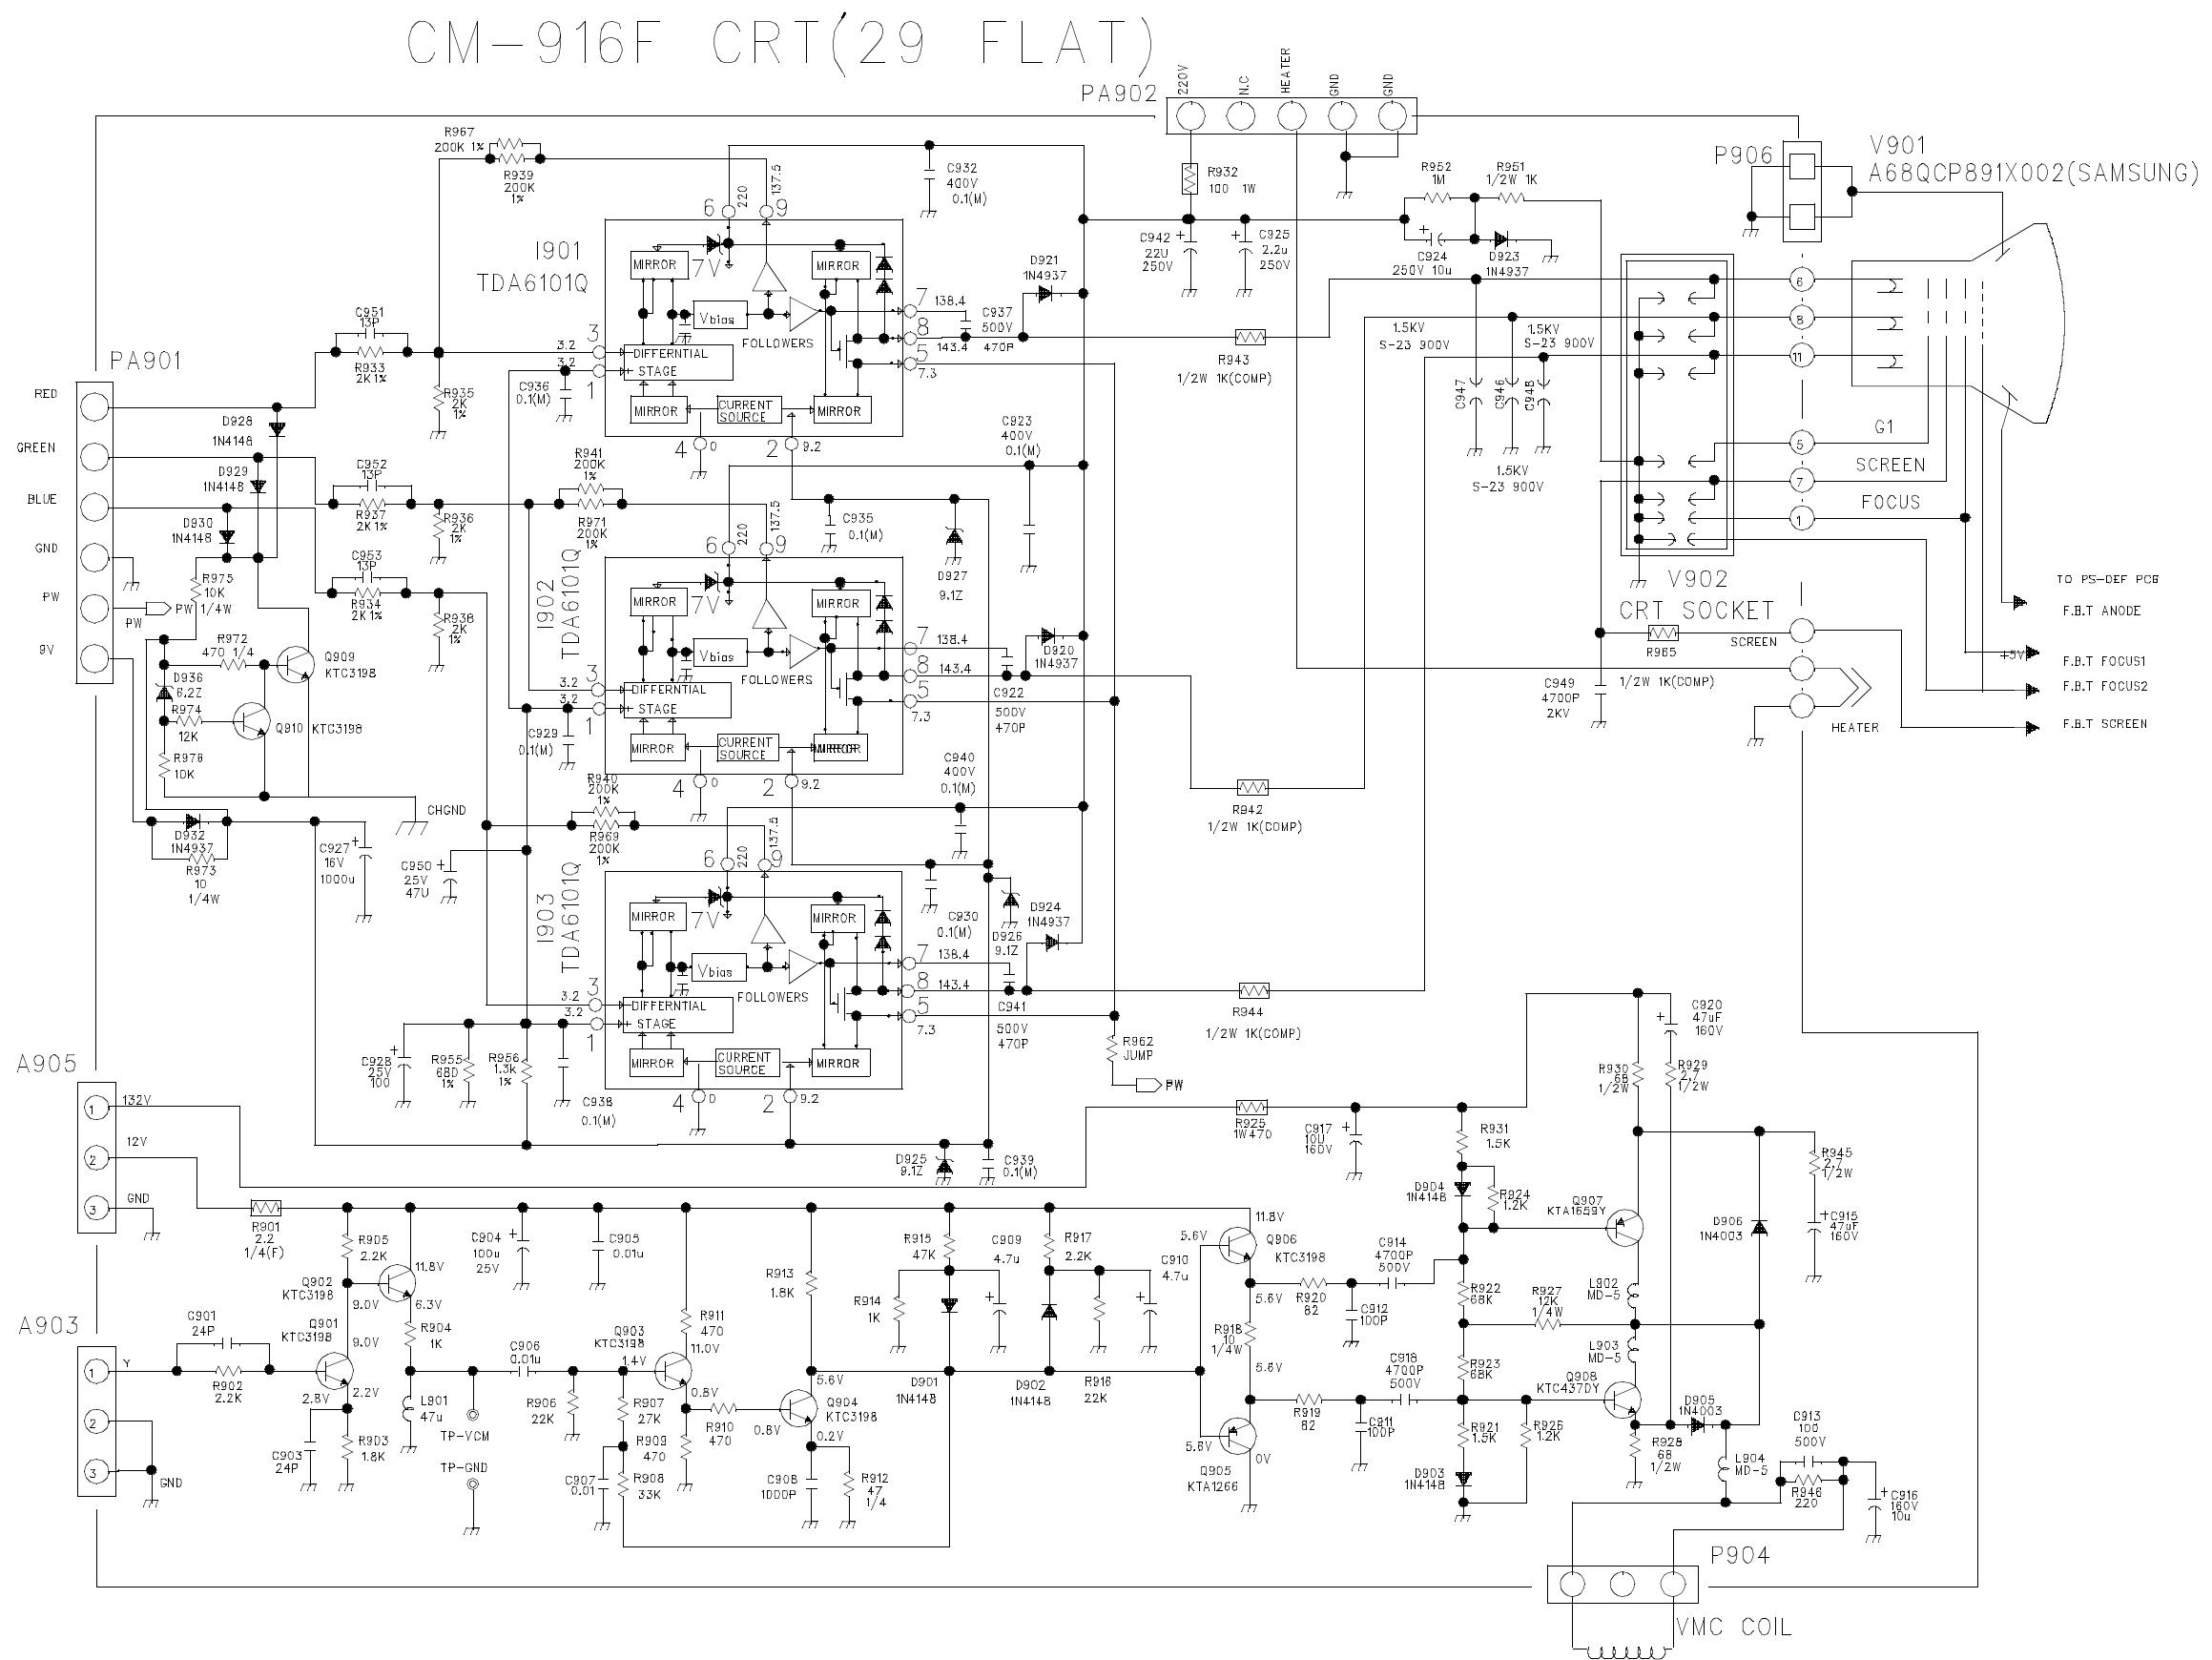


CM-916F TEXT

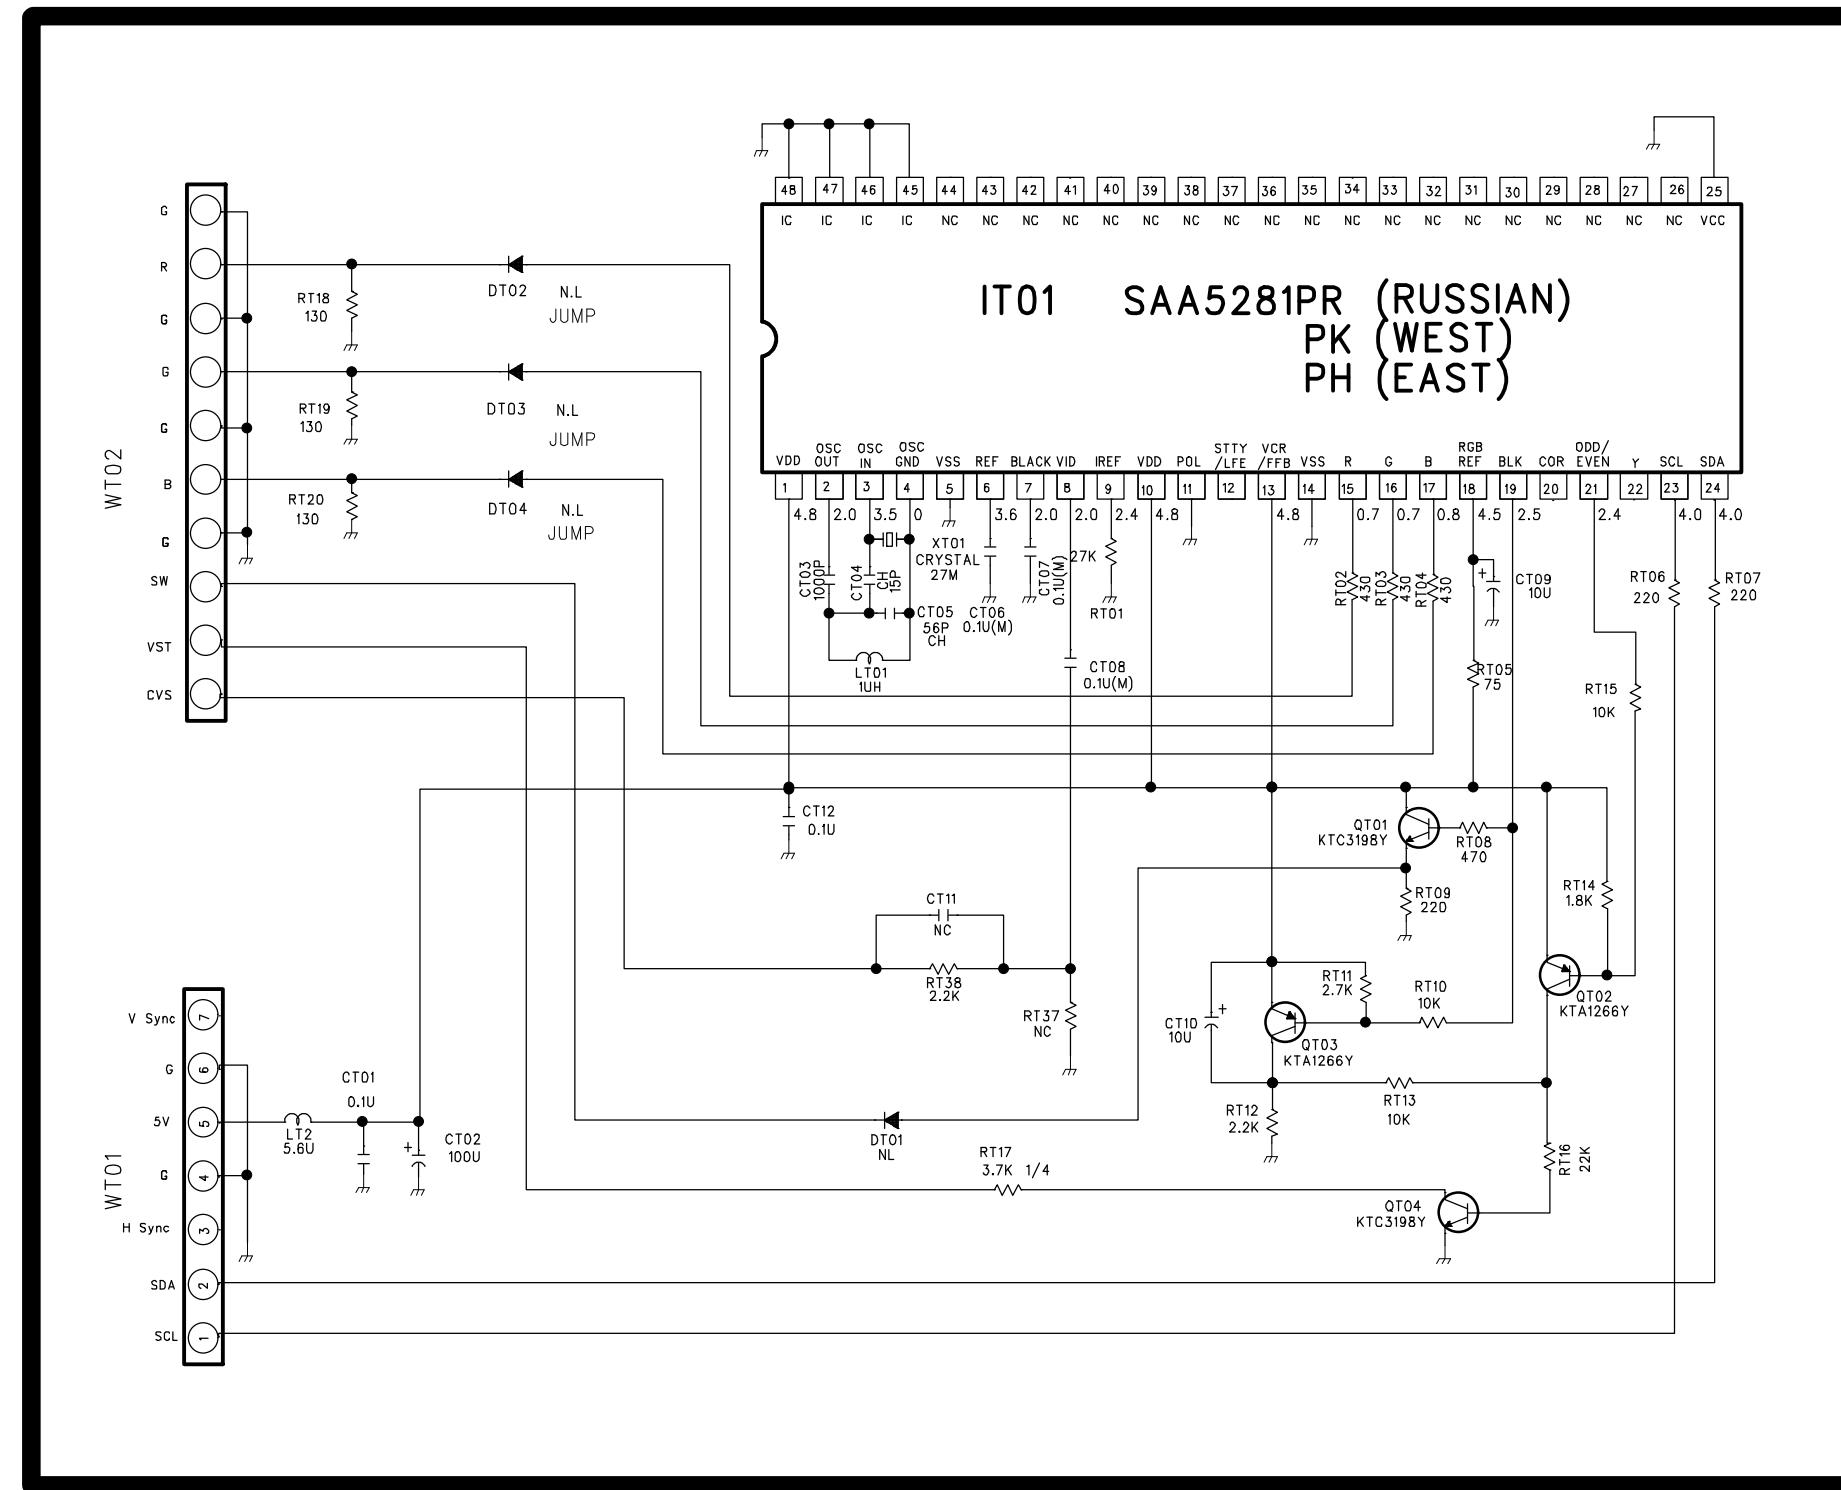


9. CM-916F ETC

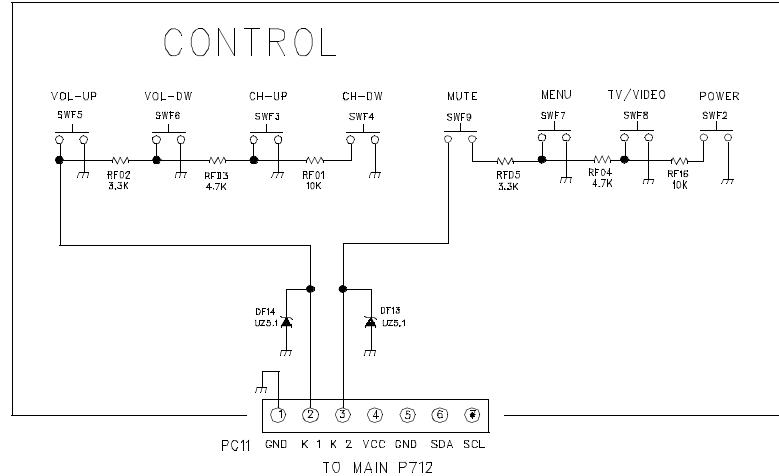


CM-916F

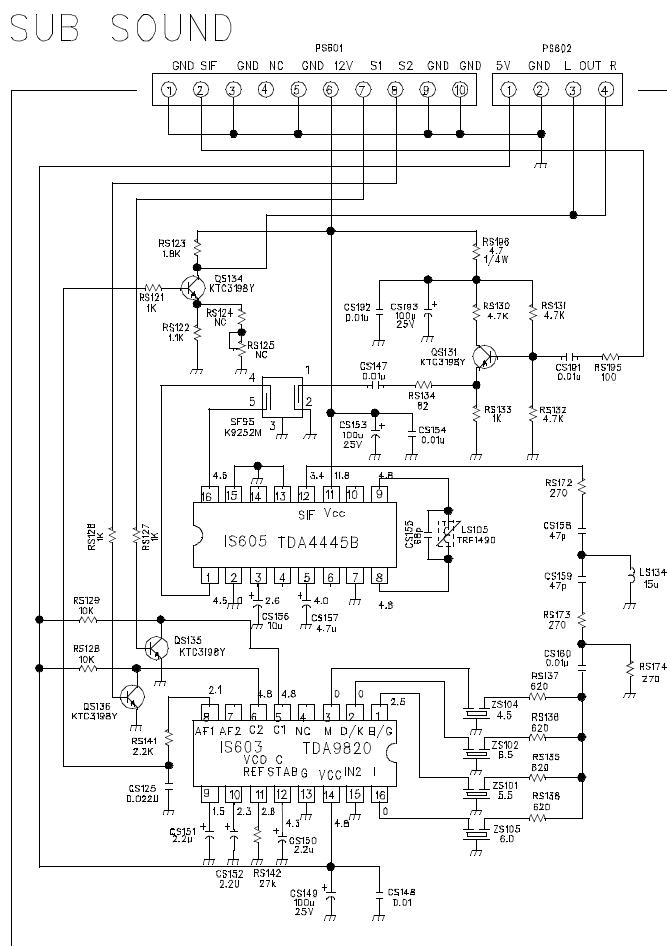


SCART

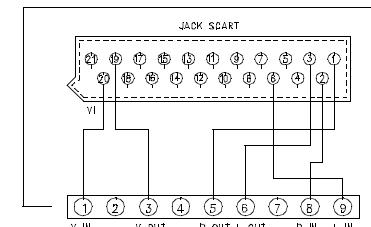


151




POWER SW



TDA9820		
○	C1(S1)	C2(S2)
B/G	1(0)	1(0)
M	1(0)	0(1)
I	0(1)	1(0)
D/K	0(1)	0(1)

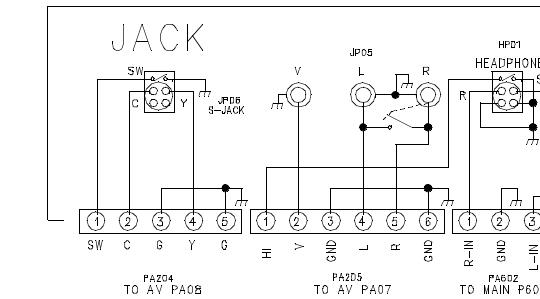

WOOFE

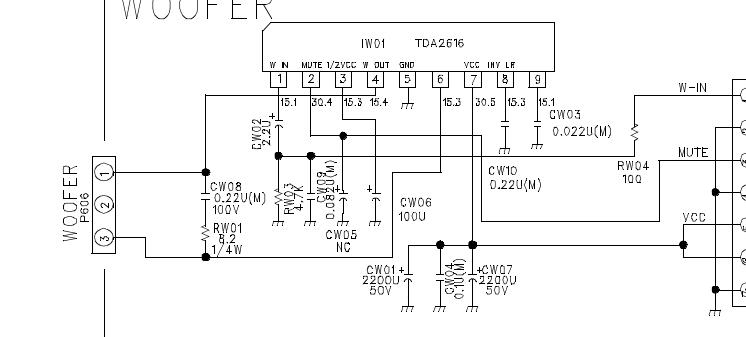


**SAA5261 110(PERSIAN)
222(PAN-EUROPEAN)
223(ARAB)**


SAA5261(222 PAN-EUROPEAN OPTION)

OPTION	WEST	EAST
#52	JT02	RT48

■ Wave Form

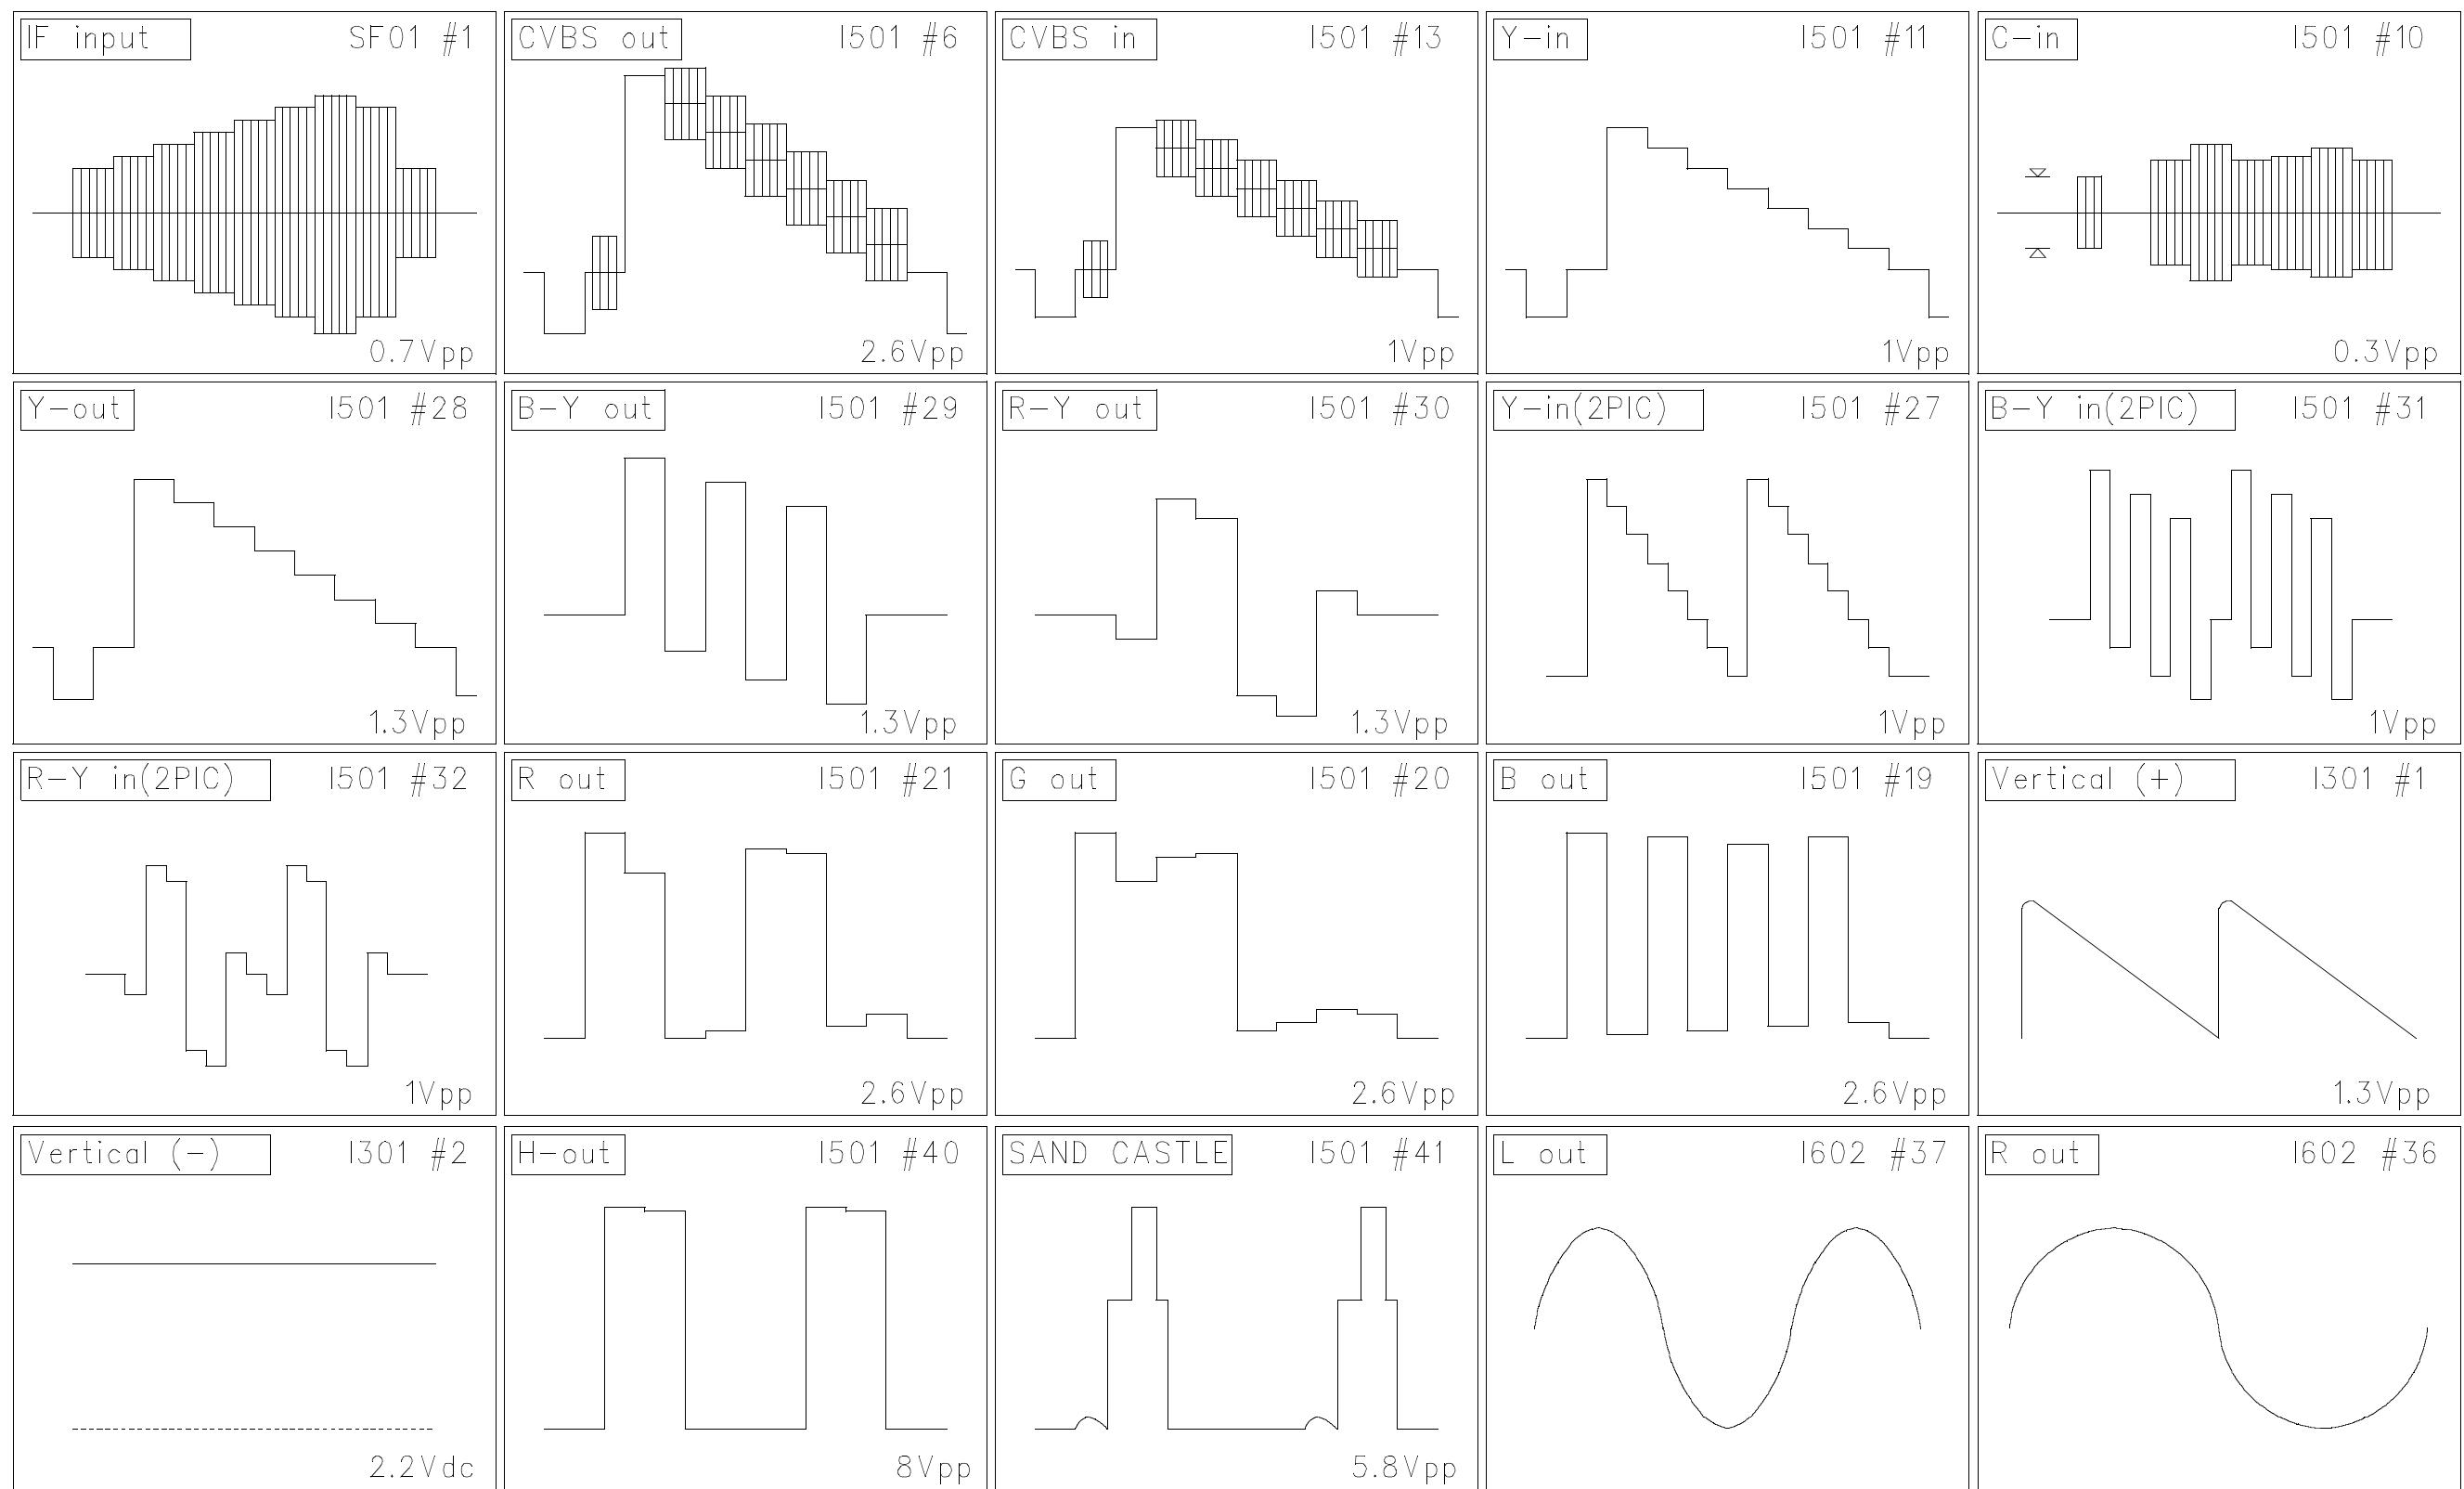


■ Exploded View(DTD-29U9/FP-68T30)

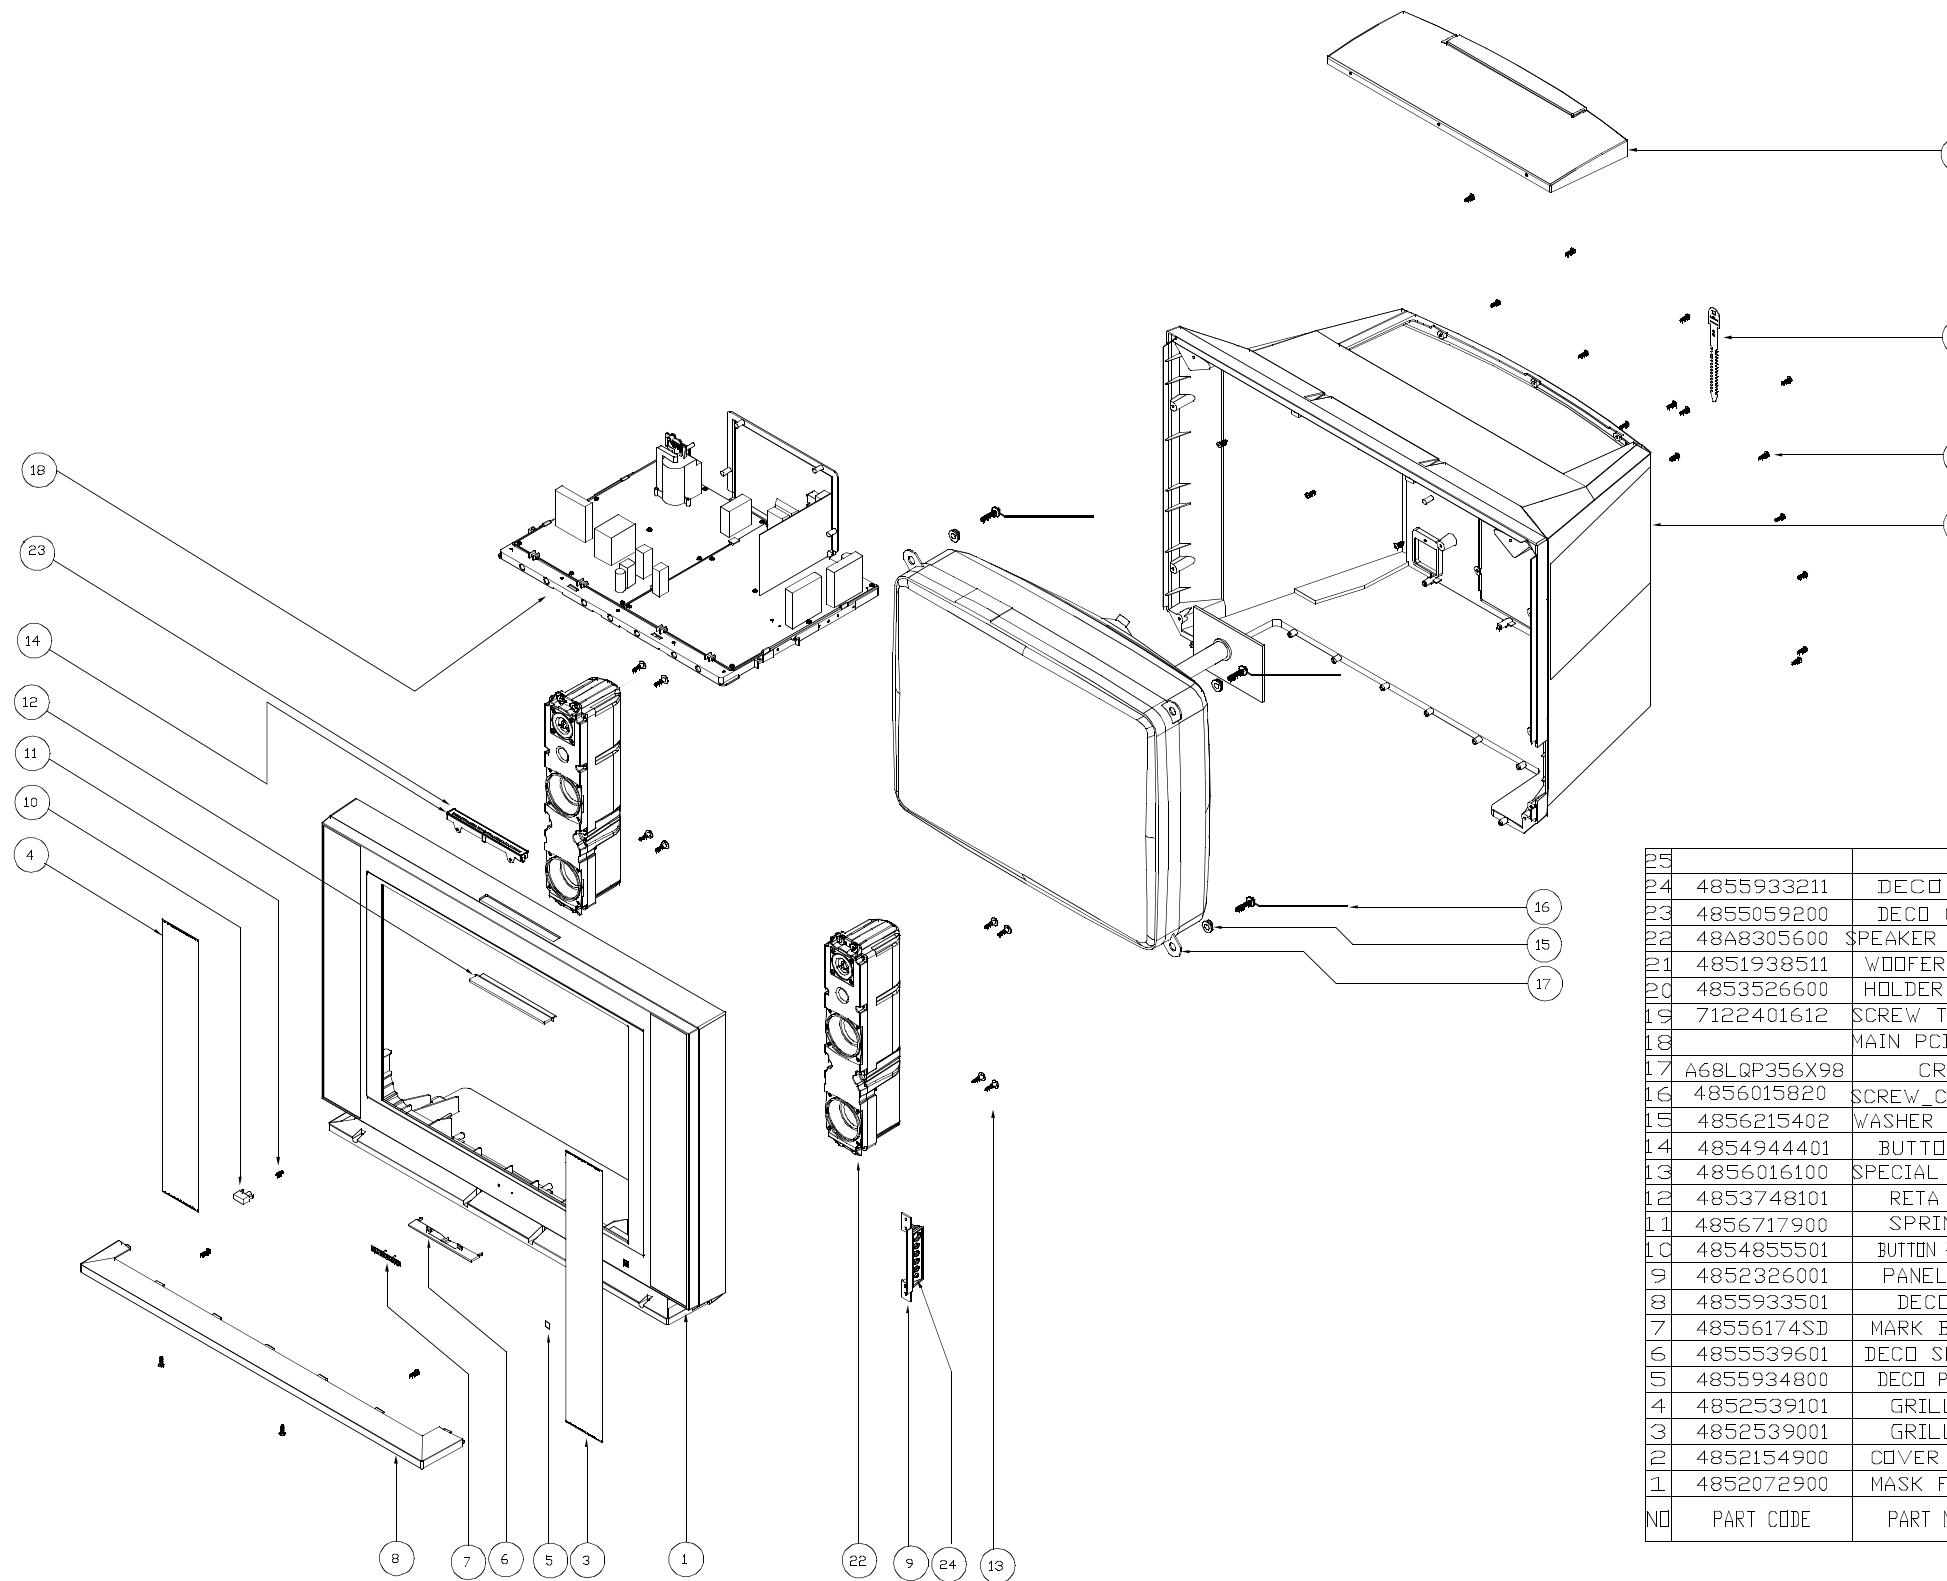

NO	PART CODE	PART NAME	QTY	MATERIAL	REMARKS
25					
24	4855933211	DEC0 AV	1	PVC T0.2	
23	4855059200	DEC0 CTRL	1	AL T0.5	
22	48A8305600	SPEAKER SYSTEM	2	SS-80A04 15W 8ΩHM	
21	4851938511	WOOFER ASSY	1	2934011+5933301+22401612	
20	4853526600	HOLDER CORD	1	NYLON66	
19	7122401612	SCREW TAPPING	31	SWRM BK	
18		MAIN PCB ASSY	1	PCB ASSY	
17	A68LQP356X98	CRT	1	CRT	
16	4856015820	SCREW_CRT_FIX	4	SWRM+SK-5 YL	
15	4856215402	WASHER RUBBER	4	CR	
14	4854944401	BUTTON CH	1	ABS MILKY	
13	4856016100	SPECIAL SCREW	8	SWRM	
12	4853748101	RETA RIB	1	HIPS BK	
11	4856717900	SPRING	1	SWPA T0.5	
10	4854855501	BUTTON POWER	1	ABS BK	
9	4852326001	PANEL AV	1	HIPS BK	
8	4855933501	DEC0 A	1	HIPS BK	
7	48556174SD	MARK BRAND	1	AL	
6	4855539601	DEC0 SENSOR	1	ABS MILKY	
5	4855934800	DEC0 PLATE	1	AL T0.4	
4	4852539101	GRILL L	1	PS SHEET	
3	4852539001	GRILL R	1	PS SHEET	
2	4852154900	COVER BACK	1	FR HIPS BK	
1	4852072900	MASK FRONT	1	FR HIPS GY340A	

DTD-29U9WP(T)

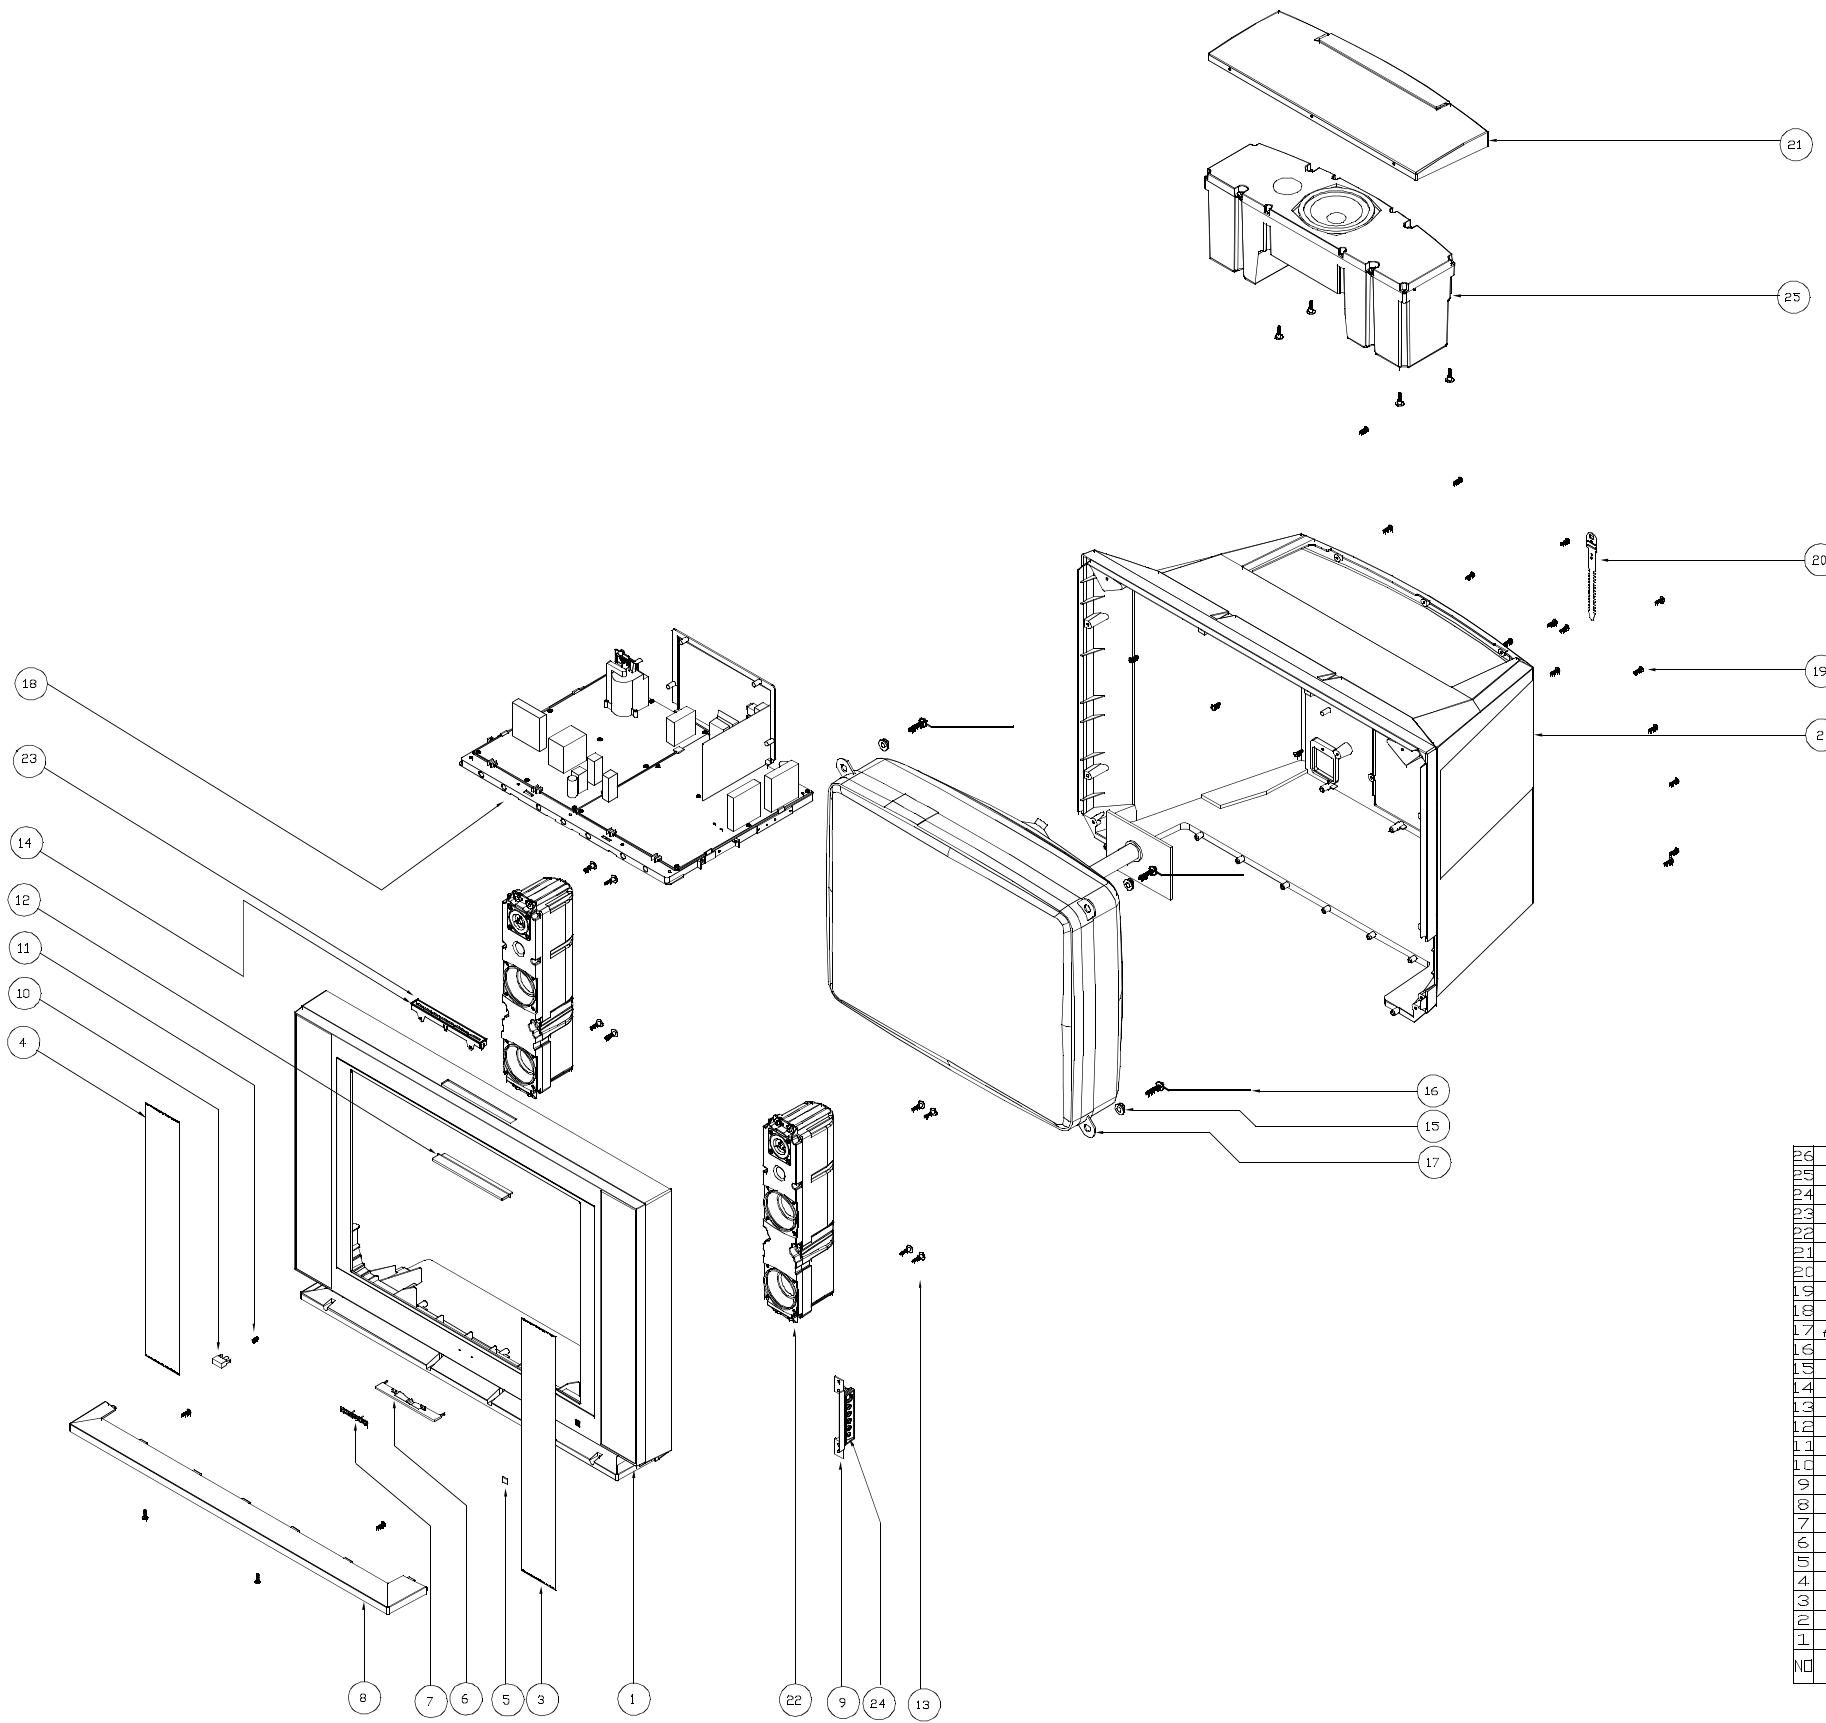

NO	PART CODE	PART NAME	QTY	MATERIAL	REMARKS
21	48A8305800	WOOFER SYSTEM	1	SS-130A02 15W 80HM	
22	4855933211	DECO AV	1	PVC T0.2	
23	4855059200	DECO CTRL	1	AL T0.5	
24	48A8305600	SPEAKER SYSTEM	1	SS-80A04 15W 80HM	
25	4851938511	WOOFER ASSY	1	2934011+5933301+22401612	
26	4853526601	HOLDER CORD	1	NYLON66	
27	7122401612	SCREW TAPPING	31	SWRM BK	
28	4856015820	MAIN PCB ASSY	1	PCB ASSY	
29	A68LQP356X98	CRT	1	CRT	
30	4856015820	SCREW_CRT_FIX	4	SVRM+SK-5 YL	
31	4856215402	WASHER RUBBER	4	CR	
32	4854944401	BUTTON CH	1	ABS MILKY	
33	4856016100	SPECIAL SCREW	12	SWRM	
34	4853748101	RETA RIB	1	HIPS BK	
35	4856717900	SPRING	1	SWPA T0.5	
36	4854855501	BUTTON POWER	1	ABS BK	
37	4852326001	PANEL AV	1	HIPS BK	
38	4855933501	DECO A	1	HIPS BK	
39	48556174SD	MARK BRAND	1	AL	
40	4855539601	DECO SENSOR	1	ABS MILKY	
41	4855934800	DECO PLATE	1	AL T0.4	
42	4852539101	GRILL L	1	PS SHEET	
43	4852539001	GRILL R	1	PS SHEET	
44	4852154901	COVER BACK	1	HIPS BK	
45	4852072901	MASK FRONT	1	HIPS GY340A	