

FOLDER 5  
SET 453



COLUMBIA  
MODEL 360

COLUMBIA  
MODEL 360



COLUMBIA  
MODEL 360

TRADE NAME	Columbia Records Model 360		
MANUFACTURER	Columbia Records, 799 Seventh Ave., New York 19, N. Y.		
TYPE SET	AC Operated 3 Tube Stereo Amplifier With 4 Speed Automatic Record Changer		
POWER SUPPLY	110-120 Volts AC, 60 Cycles	RATING	35 Watts, .37 Amp. @117 Volts AC (Less Motor)

FOR SERVICE INFORMATION ON RECORD CHANGER — SEE V-M 1200A — PHOTOFACT SET 353 FOLDER 16 OR RECORD CHANGER MANUAL RC-10

**HOWARD W. SAMS & CO., INC.** Indianapolis 6, Indiana

The listing of any available replacement part herein does not constitute in any case a recommendation, warranty or guaranty by Howard W. Sams & Co., Inc., as to the quality and suitability of such replacement part. The numbers of these parts have been compiled from information furnished to Howard W. Sams & Co., Inc., by the manufacturers of J166

the particular type of replacement part listed. Reproduction or use, without express permission, of editorial or pictorial content, in any manner, is prohibited. No patent liability is assumed with respect to the use of the information contained herein. © 1959 Howard W. Sams & Co., Inc., Indianapolis 6, Indiana. Printed in U.S. of America

DATE 8-59

SET 453


FOLDER 5

SET 453 FOLDER 5

PARTS LIST AND DESCRIPTIONS  
 TUBES (GENERAL ELECTRIC, SYLVANIA)

ITEM No.	USE	TYPE	NOTES
V1	Right Channel AF Amp-Left Channel AF Amp.	12AX7	
V2	Right Channel Output	50C5	
V3	Left Channel Output	50C5	

CHASSIS—TOP VIEW

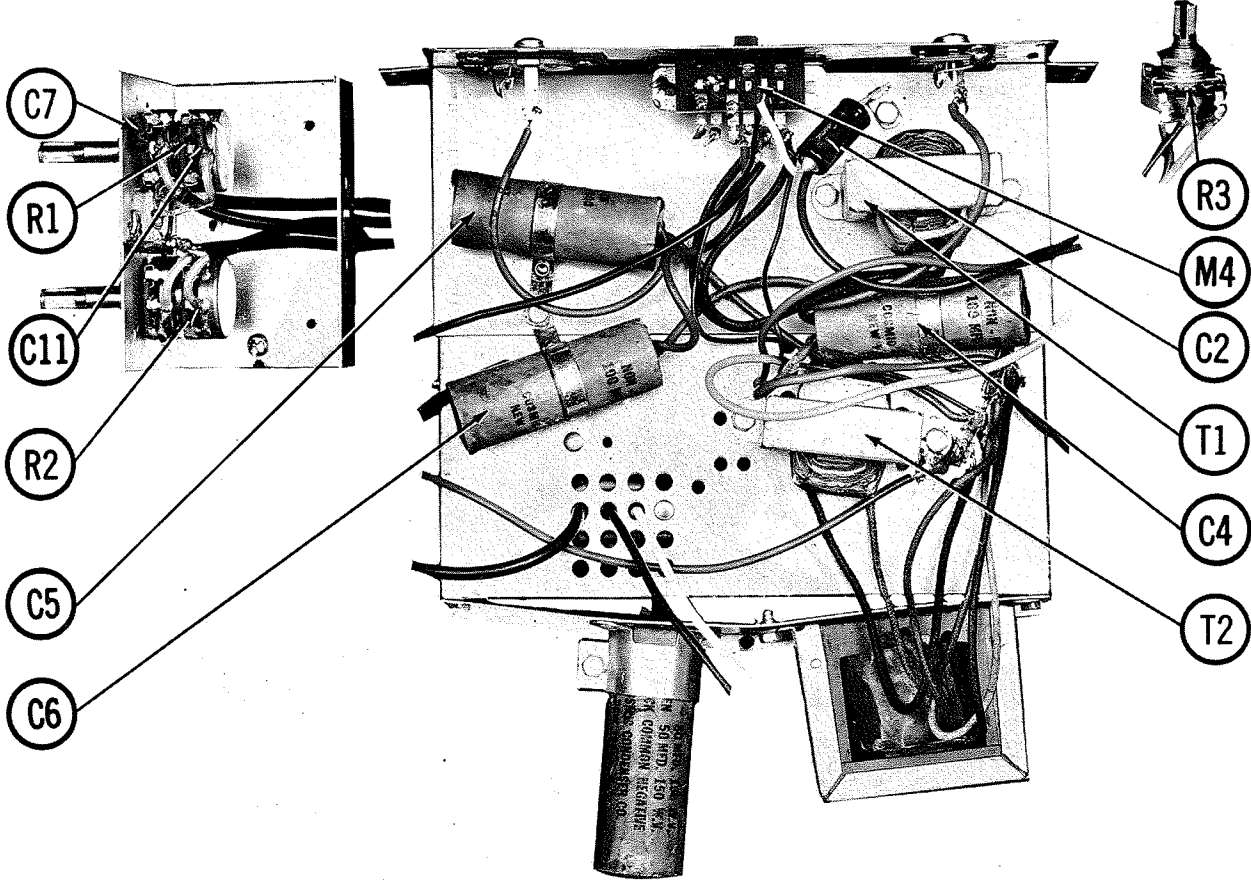

PARTS LIST AND DESCRIPTIONS (Continued)  
 TRANSFORMER (AUDIO OUTPUT)

ITEM No.	IMPEDANCE	REPLACEMENT DATA				NOTES
		COLUMBIA PART No.	Holldorson PART No.	Merit PART No.	Stancor PART No.	
T1	4500Ω 8-80 CT	3A232				
T2	1400Ω 1-2Ω	3A233				

SPEAKER

ITEM No.	TYPE	REPLACEMENT DATA		NOTES
		COLUMBIA PART No.	QUAM PART No.	
SP1	6" FIELD	1A104	6A1	
SP2	6" PM	1A104	6A1	

RECTIFIERS

ITEM No.	RATING	REPLACEMENT DATA				NOTES
		COLUMBIA PART No.	FEDERAL PART No.	INTERNATIONAL PART No.	SARKES PART No.	
M1	.085A	10A608 ①	1101A ①	RS100A ①	100A ①	① Selenium ② Silicon

PHONO CARTRIDGE

ITEM No.	REPLACEMENT DATA			REMARKS
	COLUMBIA PART No.	ASTATIC CARTRIDGE	JENSEN PART No.	
M2		13-TB *		* Includes needles & mounting mechanism

PHONO NEEDLE

ITEM No.	REPLACEMENT DATA			REMARKS
	COLUMBIA PART No.	ASTATIC CARTRIDGE	JENSEN PART No.	
M3		S89X † or S89XSD † *		* Includes Cartridge † Jewel * Diamond

MISCELLANEOUS

ITEM No.	PART NAME	COLUMBIA PART No.	NOTES
M4	Switch	19AC25	Mono-Stereo (DPDT, Slide Type)

CABINETS & CABINET PARTS

(When Ordering Cabinets & Cabinet Parts, Specify Model, Chassis & Color)

NAME	PART NO.	DESCRIPTION
Knob	8A462	Control
Cabinet	17A955	Mahogany
Cabinet	17A956	Blonde

WIRING DATA

General-use Unshielded Hook-up Wire	Use BELDEN No. 8830 (Solid) Available in Ten Colors
Power Cord	8824 (Stranded) Available in Ten Colors
Low-Loss Shielded Lead (Interconnecting)	Use BELDEN No. 1765-B (6 Ft. Length)
Phono Pick-up Arm Cable	Use BELDEN No. 8401
	Use BELDEN No. 8430 (Two Conductor - Twisted)

CHASSIS BOTTOM VIEW

