

## PARTS LIST AND DESCRIPTIONS

## TUBES (GENERAL ELECTRIC, SYLVANIA)

ITEM No.	USE	TYPE	NOTES	ITEM No.	USE	TYPE	NOTES
V1	Output	25L6GT					

## ELECTROLYTIC CAPACITORS

ITEM No.	RATING	REPLACEMENT DATA					
		TRAY-LER PART No.	AEROVOX PART No.	CORNELL-DUBILIER PART No.	MALLORY PART No.	PYRAMID PART No.	SANGAMO PART No.
C1A	80	EC-38 ①	PR8150V8020	BBRT53215		TDLT-4	FMT-315
B	150						
C2	70	EC-6 ②	PR8150V780	BBR100-15	TC492	TD-80-150	MTD-304

① Models 7055 &amp; 7057 Use Part #EC-26

② Not Used in Model 7060

\* Not normally in distributors stock. Available thru distributor on order to manufacturer.

## FIXED CAPACITORS

Capacity values given in the rating column are in mfd. for Paper Capacitors, and in mmfd. for Mica and Ceramic Capacitors.

ITEM No.	RATING	REPLACEMENT DATA						NOTES
		TRAY-LER PART No.	AEROVOX PART No.	CENTRALAB PART No.	CORNELL-DUBILIER PART No.	MALLORY PART No.	SPRAGUE PART No.	
C3	400	PC-5	P488N-05	DF-503	CUB455	GEM-415	4TM-55	①
C4	.05	PC-5	P488N-05	DF-503	CUB455	GEM-415	4TM-55	
C5	.05	PC-5	P488N-05	DF-503	CUB455	GEM-415	4TM-55	

① Model 7060 uses .01mfd in this application (Part #PC-7).

## CONTROLS

ITEM No.	RATING	REPLACEMENT DATA						INSTALLATION NOTES
		TRAY-LER PART No.	CENTRALAB PART No.	CLAROSTAT PART No.	IRC PART No.	MALLORY PART No.		
R1A	Imag	VC-70 ①	B-70	A47-imag-Z	Q13-137	US3		Volume
B	Shaft		Not Req.	KSS-3	Not Req.	Not Req.		
C	Switch	KB-1orKR-1*	SWF-32	SWF-32	78-1	US-26		
R2A	25K	VC-71 ②	B-26	A47-25K-S	Q11-120	U99		Tone
B	Shaft		Not Req.	KSS-3	Not Req.	Not Req.		

\* Use KR with CRL "Red Label" controls and KB with "Blue Label" controls.

① Part # VC-9 is used in models 7057 and 7055.

② Not used in model 7060. Part #VC-42 is used in models 7057 and 7055.

## RESISTORS

All wattages 1/2 watt, or less, unless otherwise listed.

ITEM No.	RATING	REPLACEMENT DATA		ITEM No.	RATING	REPLACEMENT DATA		NOTES
		TRAY-LER PART No.	NOTES			TRAY-LER PART No.	NOTES	
R3	47K	IR-10		R6	33K	IR-17		① ②
R4	150K	IR-14		R7	33K	IR-17		
R5	10K	IR-37		R8	680K			

① Models 7062, 7055, 7057, 7060 and 7061 uses 47K in this application.

② Not used in some versions. (Part #IR-41)

## TRANSFORMER (AUDIO OUTPUT)

ITEM No.	IMPEDANCE	REPLACEMENT DATA						NOTES
		TRAY-LER PART No.	Holderson PART No.	Merit PART No.	Rom PART No.	Stoncor PART No.	Thordarson PART No.	
T1	2450Ω 3-4Ω	Part of SPI	Z1101	A-3025	AU-605	A-3332	24S53	S-12X

## SPEAKER

ITEM No.	TYPE	REPLACEMENT DATA		NOTES
		TRAY-LER PART No.	QUAM PART No.	
SF1	4" PM	SPK-22 ①	4A07	① Includes TL Part #SPK-23 used in model 7061, SPK-24 used in models 7055, 7057, 7062.

## SELENIUM RECTIFIER

ITEM No.	RATING	REPLACEMENT DATA				NOTES
		TRAY-LER PART No.	FEDERAL PART No.	INTERNATIONAL PART No.	SARKES PART No.	
M1	.047A	SR-2	1234AH	RS075 SD-92 ①	65 K200 ①	① Silicon Type

## PHONO CARTRIDGE

ITEM No.	RATING	REPLACEMENT DATA				REMARKS
		TRAY-LER PART No.	ASTATIC CARTRIDGE PART No.	JENSEN CARTRIDGE PART No.	NEEDLE	
M2	PU-22 ①	420-TB-TS N8-1 & KR-314-TT N8-3				Model 7073
	PU-13 ①	16 N4-2(J)				Model 7057
	PU-15 ①	66-TV K-J & K-78-J				Model 7061
		66-1 or 414-1 N8-1				Model 7055
		420-TS N8-1 & N8-3				Model 7062
	PU-14 ①	28 N4-2(J)				Model 7060

① Includes tone arm and cartridge.

ASTATIC NEEDLE LISTING SHOWN ABOVE IS SPECIFIED FOR THE RESPECTIVE REPLACEMENT CARTRIDGE LISTED. FOR ORIGINAL CARTRIDGE NEEDLE REPLACEMENTS SEE BELOW.

## PHONO NEEDLE

(FOR REPLACEMENT IN ORIGINAL EQUIPMENT CARTRIDGE)

ITEM No.	RATING	REPLACEMENT DATA				REMARKS
		TRAY-LER PART No.	JENSEN CARTRIDGE PART No.	WALCO PART No.		
M3	(78) PU-22 (LP)	①	VA29 † VA29D † VA29LP † J-152 or † J-252 or † J-252D	† W-6IS † W-6IMGS or † W-6IACS † WA-400-2 or † WS-400-2		Model 7073
	PU-13 ①		† W-394 or † W-395 or † W-39D † W-39MGA or † W-39MGS or † W-39MGD † A-10 or † A-10LP or † A-102	† A-76 or † A-87 or † A-87D † A-76LP or † A-87LP or † A-87LPD † W-28A or † W-28MGA or † W-28MGA		Model 7057
	(78) PU-15 ①		† CRA-55 or † CRA-55D † CRA-55LP or † CRA-55LPD † J-152 or † J-252 or † J-252D	† W-64S or † W-64D † W-64MGS or † W-64MGD † WA-400-2 † WS-400-2		Model 7061
	(LP)					Model 7055
	(78)					Model 7062
	(LP)					Model 7060
	PU-14 ①					

\* Metal † Jewel ♦ Diamond ① Includes tone arm and cartridge.

## MISCELLANEOUS


ITEM No.	PART NAME	TRAY-LER PART No.	NOTES
M4	Phono Motor	M-15	Model 7073
	Phono Motor	M-10	Model 7057
	Phono Motor	M-12	Model 7061

## WIRING DATA

General-use Unshielded Hook-up Wire ..... Use BELDEN No. 8530 (Solid) Available in Ten Colors  
Power Cord ..... Use BELDEN No. 1765-B (6 Ft. Length)  
Low-Loss Shielded Lead (Interconnecting) ..... Use BELDEN No. 1725-K (7 1/2 Ft. Length)  
Phono Pick-up Arm Cable ..... Use BELDEN No. 8401  
Phono Pick-up Arm Cable ..... Use BELDEN No. 8430 (Two Conductor - Twisted)


TRAV-LER MODELS 7055, 7057,  
7060, 7061, 7062, 7073

MODEL 7073

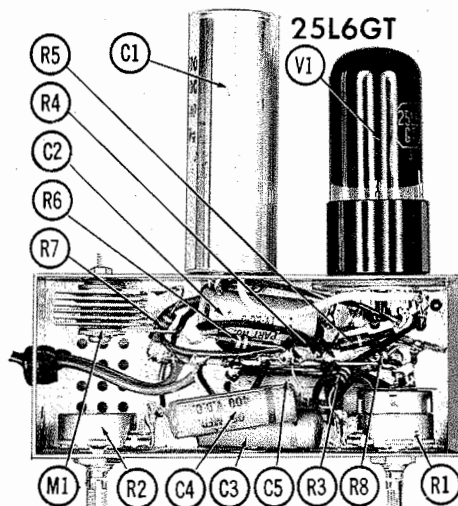

TRADE NAME	Trav-Ler Models 7055, 7057, 7060, 7061, 7062, 7073
MANUFACTURER	Trav-Ler Radio & Tel. Corp., 571 W. Jackson Blvd., Chicago, Illinois
TYPE SET	AC Operated Phono Amplifier With 3 Speed Manual Record Player (Models 7055 and 7062 Have 3 Speed Automatic Record Changers)
TUBES (One)	Type 25L6GT Output
POWER SUPPLY	110-120 Volts AC-60 Cycles      RATING .39 Amp. @117 Volts AC (40 Watts) Less Motor

FOR SERVICE INFORMATION ON RECORD CHANGER RC-11 USED IN MODEL 7055--SEE SIMILAR V-M 950--  
PHOTOFACT SET 216 FOLDER 11 OR RECORD CHANGER MANUAL CM-5.  
FOR SERVICE INFORMATION ON RECORD CHANGER RC-17 USED IN MODEL 7062 -- SEE SIMILAR V-M 1200--  
PHOTOFACT SET 290 FOLDER 11 OR RECORD CHANGER MANUAL CM-7.

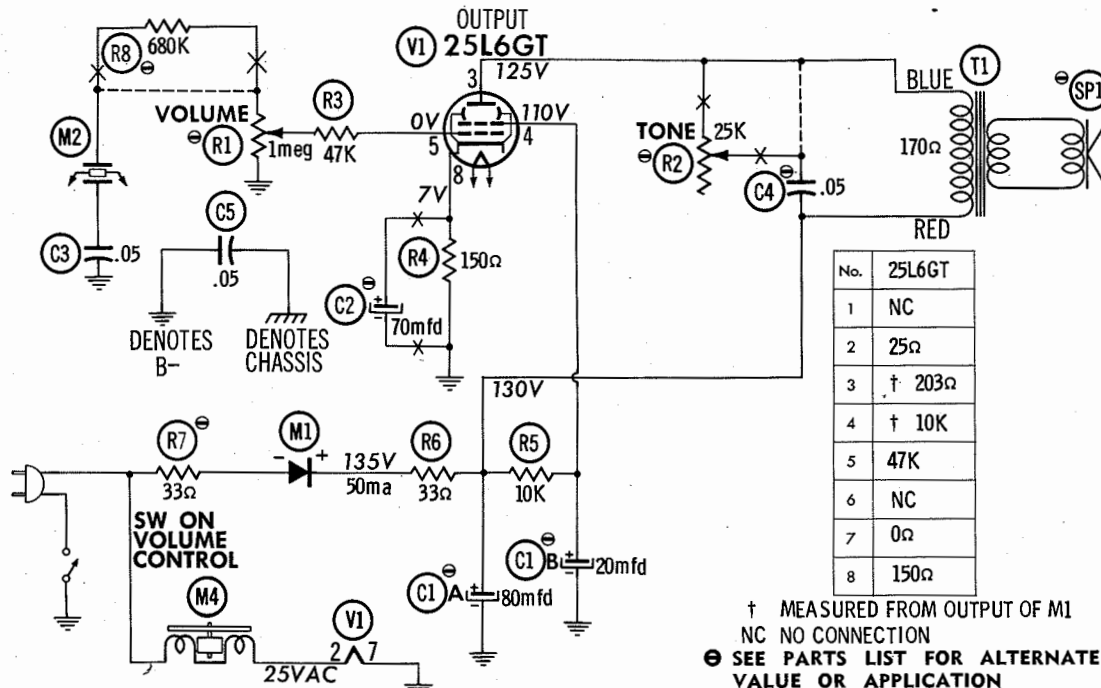

A PHOTOFACT STANDARD NOTATION SCHEMATIC

© Howard W. Sams &amp; Co., Inc. 1959

**HOWARD W. SAMS & CO., INC.** Indianapolis 6, Indiana

The listing of any available replacement part herein does not constitute in any case a recommendation, warranty or guaranty by Howard W. Sams & Co., Inc., as to the quality and suitability of such replacement part. The numbers of these parts have been compiled from information furnished to Howard W. Sams & Co., Inc., by the manufacturers of H761

the particular type of replacement part listed. Reproduction or use, without express permission, of editorial or pictorial content, in any manner, is prohibited. No patent liability is assumed with respect to the use of the information contained herein. © 1959 Howard W. Sams & Co., Inc., Indianapolis 6, Indiana. Printed in U.S. of America

TRAV-LER MODELS 7055, 7057,  
7060, 7061, 7062, 7073