


WEBCOR  
MODELS 129-1, 129-2

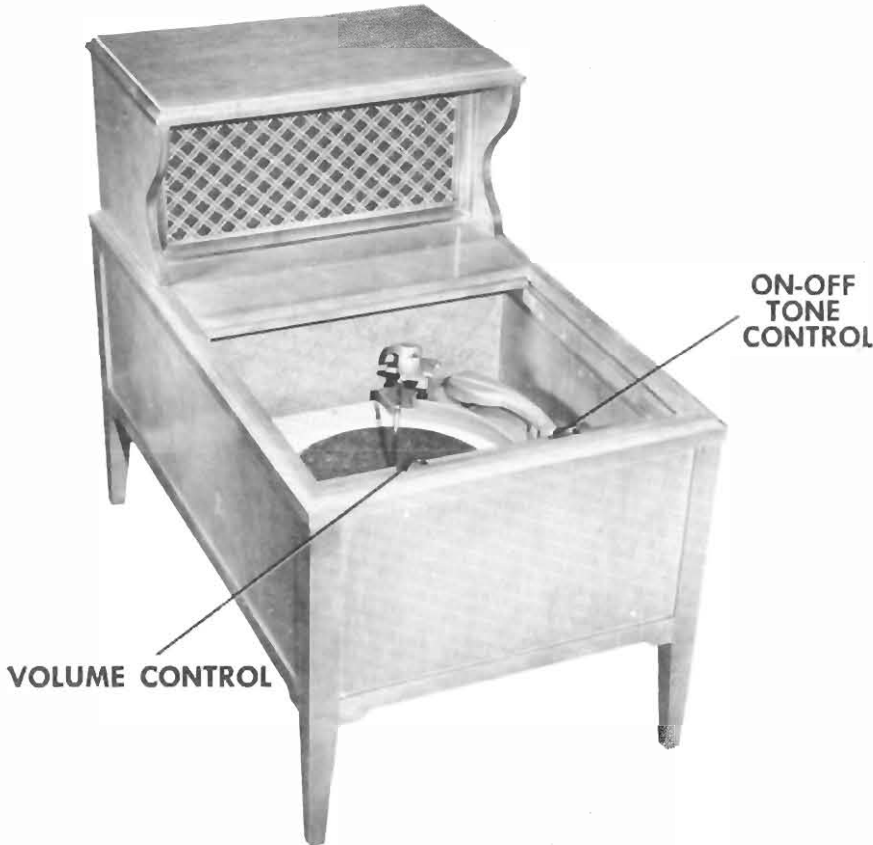

TRADE NAME	Webcor Models 129-1, 129-2	
MANUFACTURER	Webster-Chicago, 5610 Bloomingdale Ave., Chicago, Ill.	
TYPE SET	AC Operated Phono Amplifier with 3 Speed Automatic Record Player	
TUBES (Four)	Types 12AX7 Pre-amp., -Phase Inv., (2) 50L6GT Audio Output, 5Y3GT Rectifier	
POWER SUPPLY	110-120 Volts AC-60 Cycle	RATING .61 Amp. @ 117 Volts AC

FOR SERVICE INFORMATION ON RECORD CHANGER UNIT, WEBSTER MODEL 126, SEE PHOTOFACT SET #208 - FOLDER 13.

HOWARD W. SAMs & CO., INC. • Indianapolis 5, Indiana

"The listing of any available replacement part herein does not constitute in any case a recommendation, warranty or guaranty by Howard W. Sams & Co., Inc., as to the quality and suitability of such replacement part. The numbers of these parts have been compiled from information furnished to Howard W. Sams & Co., Inc., by the manufacturers of the particular type of replacement part listed."

"Reproduction or use, without express permission, of editorial or pictorial con-

tent, in any manner, is prohibited. No patent liability is assumed with respect to the use of the information contained herein. Copyright 1953 by Howard W. Sams & Co., Inc., Indianapolis 5, Indiana, U. S. of America. Copyright under International Copyright Union. All rights reserved under Inter-American Copyright Union (1910) by Howard W. Sams & Co., Inc." Printed in U. S. of America

PARTS LIST AND DESCRIPTIONS

WEBCOR  
MODEL 129-1

TUBES (SYLVANIA or Equivalent)

ITEM No.	USE	REPLACEMENT DATA		RMA BASE TYPE	INSTALLATION NOTES
		WEBCOR PART No.	STANDARD REPLACEMENT		
V1	Phono Pre-Amp.-Phase Inverter	12AX7	12AX7	9A	
V2	Audio Output	50L6GT	50L6GT	7S	
V3	Audio Output	50L6GT	50L6GT	7S	
V4	Rectifier	5Y3GT	5Y3GT	5T	

CAPACITORS

Capacity values given in the rating column are in mfd. for Electrolytic and Paper Capacitors, and in mmfd. for Mica and Ceramic Capacitors.

ITEM No.	RATING		REPLACEMENT DATA						NOTES
	CAP.	VOLT	WEBCOR PART No.	AEROVOX PART No.	CENTRALAB PART No.	CORNELL-DUBILIER PART No.	ERIE PART No.	MALLORY PART No.	
C1A	20	250		FRS250/20-		EDL2225		3N539	TVA-2515
B	20	250				BR2025			TVA-1508
C	20	250		FRS250/20					
C2	.047	400		P488-047	DF-503	PTE4S47		PT4147	4TM-S47
C3	.047	400		P488-047	DF-503	PTE4S47		PT4147	4TM-S47
C4	.0022	400		P688-0022	D6-222	PTE6D22	GP2-333-222	PT6222	6TM-D22
C5	.003	400		P668-033		PTE6S33		PT6133	6TM-S33

CONTROLS

ITEM No.	RATING RESIST. WATTS	REPLACEMENT DATA					INSTALLATION NOTES
		WEBCOR PART No.	IRC PART No.	CLAROSTAT PART No.	CENTRALAB PART No.	MALLORY PART No.	
R1A	1Meg	31P042	Q3-137	AG-63-Z	BSK-70-S	U-53	Tone
B	Switch	Not Req.	Not Req.	KSS-3	Not Req.	Not Req.	Attach to R1A
C	Shaft	31P076	Q3-137	SWB	Not Req.	US-26	Attach to R1A
R2A	1Meg	Not Req.	Not Req.	AG-63-Z	BSK-70	U-53	Volume
B	Shaft	Not Req.	Not Req.	KSS-3	Not Req.	Not Req.	Attach to R2A

RESISTORS

ITEM No.	RATING OHMS WATT	REPLACEMENT DATA		NOTES
		WEBCOR PART No.	IRC PART No.	
R3	1000Ω		BTS-1000	
R4	100KΩ		BTS-100K	
R5	3300Ω		BTS-3300	
R6	100KΩ		BTS-100K	
R7	100KΩ		BTS-100K	

TRANSFORMER (POWER)

ITEM No.	RATING			REPLACEMENT DATA		
	PRI.	SEC. 1	SEC. 2	WEBCOR PART No.	STANCOR PART No.	CHICAGO PART No.
T1	117VAC ② 46A	452VCT ② 2A	SEC. 3	68P024		TRIAD PART No.

PARTS LIST AND DESCRIPTIONS (Continued)

TRANSFORMER (AUDIO OUTPUT)

ITEM No.	RATING			REPLACEMENT DATA			NOTES
	IMPEDANCE PRI.	DC RES. SEC.	SEC. 1	WEBCOR PART No.	STANCOR PART No.	CHICAGO PART No.	
T2	5.1KΩ CT	3.4Ω CT	182Ω CT	67P028			

*Submitted 3-15-62.*

SPEAKER

ITEM No.	RATINGS		REPLACEMENT DATA		NOTES
	SIZE	FIELD	WEBCOR PART No.	JENSEN PART No.	
SP1	8"	PM 3.4Ω	76P024	ST-115 Mod. P8-V	

PHONO CARTRIDGE and NEEDLE

ITEM No.	REPLACEMENT DATA				REMARKS
	WEBCOR PART No.	ASTATIC CARTRIDGE	SHURE CARTRIDGE	ELECTRO-VOICE CARTRIDGE	
M1		ACD-C-J	WC24	96-UT	


ASTATIC, SHURE AND ELECTRO-VOICE NEEDLE LISTINGS SHOWN ABOVE ARE SPECIFIED FOR THE RESPECTIVE REPLACEMENT CARTRIDGES LISTED. FOR ORIGINAL CARTRIDGE NEEDLE REPLACEMENT SEE BELOW.

PHONO NEEDLE


(FOR REPLACEMENT IN ORIGINAL EQUIPMENT CARTRIDGE)

ITEM No.	REPLACEMENT DATA		REMARKS
	WEBCOR PART No.	WALCO PART No.	
M2		W-5MGA or W-5MGS & W-5A or W-5S	

CHASSIS—TOP VIEW

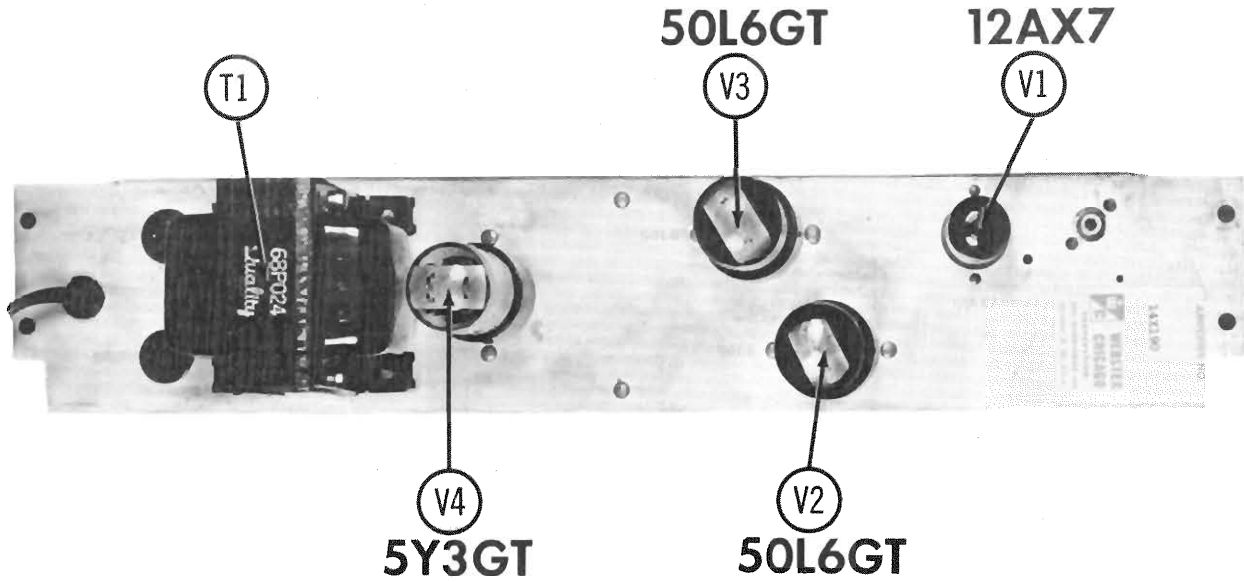

CHASSIS—BOTTOM VIEW

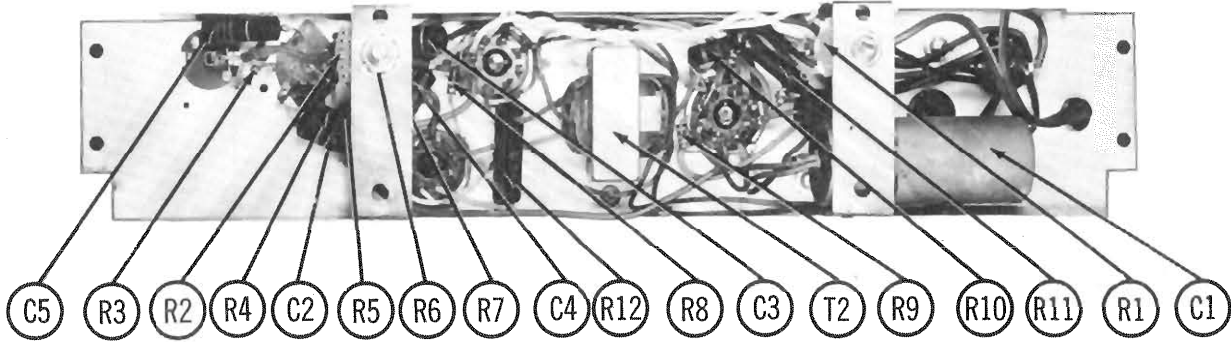

WEBCOR  
MODEL 129-1

WEBCOR  
MODEL 129-1