

**AIRLINE MODELS GAA-1014A,
B, C, GAA-2610A, GAA-2611A**

⊖ SEE PARTS LIST FOR ALTERNATE
VALUE OR APPLICATION

PHOTOFACT® Folder

**AIRLINE MODELS GAA-1014A,
B, C, GAA-2610A, GAA-2611A**



the particular type of replacement part listed. Reproduction or use, without express permission, of editorial or pictorial content, in any manner, is prohibited. No patent liability is assumed with respect to the use of the information contained herein. © 1960 Howard W. Sams & Co., Inc., Indianapolis 6, Indiana. Printed in U.S. of America

FOLDER 4


**AIRLINE MODELS GAA-1014A,
B, C, GAA-2610A, GAA-2611A**

**AIRLINE MODELS GAA-1014A,
B, C, GAA-2610A, GAA-2611A**

PARTS LIST AND DESCRIPTIONS
 TUBES

CHASSIS—TOP VIEW

CBS • GENERAL ELECTRIC • RAYTHEON • SYLVANIA •		
ITEM No.	USE	TYPE
V1	Channel 1 A.F. Amp. - Channel 2 A.F. Amp.	12AX7
V2	Channel 1 Output	50C5
V3	Channel 2 Output	50C5

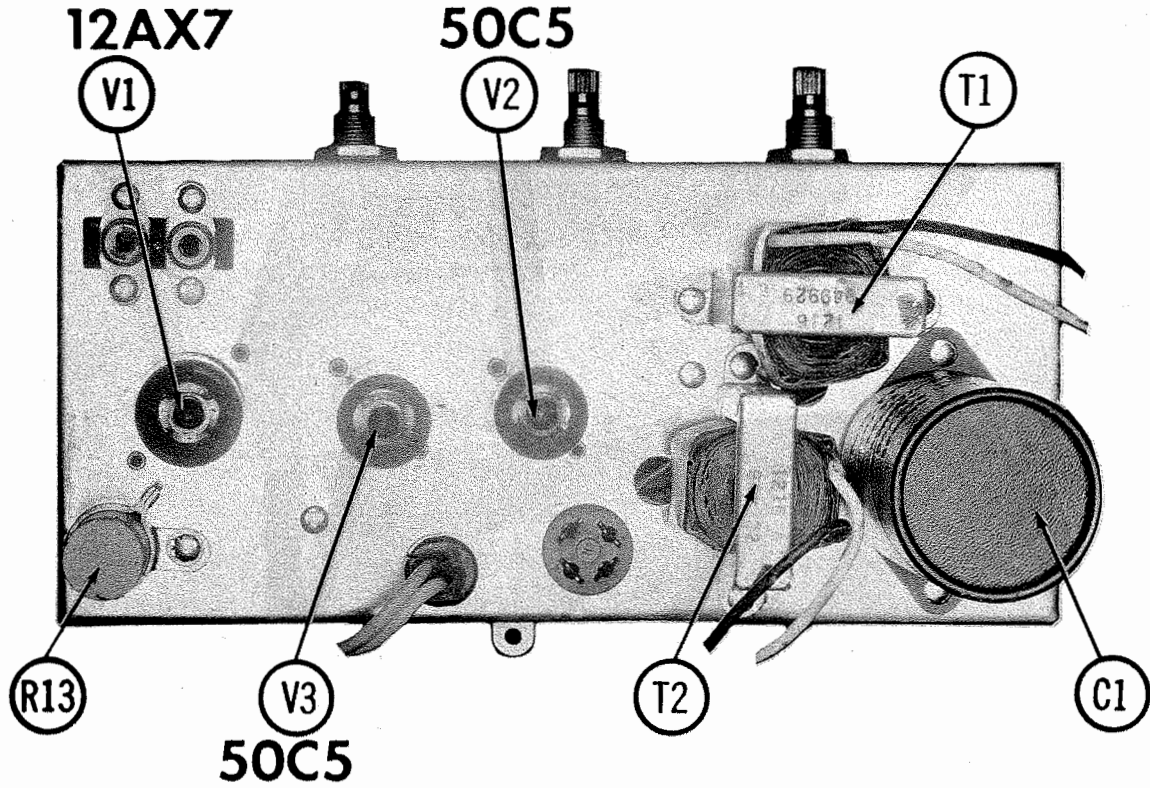

ELECTROLYTIC CAPACITORS

RATING		REPLACEMENT DATA				
ITEM No.	CAP.	AIRLINE PART No.	AEROVOX PART No.	CORNELL-DUBILIER PART No.	MALLORY PART No.	SPRAGUE PART No.
C1A	.80	1034 ①	C1060	FB341.3	TMT-132	TVL-3422
C1B	.40		BR8035	TC26	TD-80-350	TVA-1716
C1C	.20					
C1D	.25					

① Model GAA-1014A uses 3 section unit omitting CID (Part #1018).

FIXED CAPACITORS

Capacity values given in the rating column are in mfd. for Paper Capacitors, and in mmfd. for Mica and Ceramic Capacitors.

RATING		REPLACEMENT DATA				
ITEM No.	CAP.	AIRLINE PART No.	AEROVOX PART No.	CORNELL-DUBILIER PART No.	MALLORY PART No.	SPRAGUE PART No.
C2	.05 400V		P488N-05	DD-503	CUB485	4DP-3-503
C3	5000		BPD-005	DD-502	BYA10D5	CCD-502
C4	5000		BPD-005	DD-502	BYA10D5	CCD-502
C5	.05 200V		P288N-05	DD-503	CUB485	4DP-3-503
C6	5000		BPD-005	DD-502	BYA10D5	CCD-502
C7	5000		BPD-005	DD-502	BYA10D5	CCD-502
C8	.05 200V		P288N-05	DD-503	CUB485	4DP-3-503
C9	.05 600V		P688N-05	DD-503	CUB485	4DP-3-503
C10	.05 400V		P488N-05	DD-503	CUB485	4DP-3-503

CONTROLS

RATING		REPLACEMENT DATA			INSTALLATION NOTES	
ITEM No.	RESIST.-ANCE	WATTS	AIRLINE PART No.	CENTRALAB PART No.	CTS-IRC PART No.	MALLORY PART No.
R1A	3meg		435	B-85		FC36A
R1B	3meg			SR-85		RU36A
R1C	3 Shaft			Not Req.		CS3500
R2A	500K		436	B-60		FA26A
R3A	500K		437	SR-613		RU26A
R3B	2meg			B-76		CS3500
R3C	2 Shaft			Not Req.		

RESISTORS

All wattages 1/2 watt, or less, unless otherwise listed.

ITEM No.	RATING	REMARKS	ITEM No.	RATING	REMARKS
R4	10meg		R8	220K	
R5	200K	Note 1	R9	2200Ω	
R6	82Ω 2W		R10	82Ω 2W	
R7	10meg		R11	27Ω 2W	

Note 1. Model GAA-1014A uses one 150Ω resistor in each output.

PARTS LIST AND DESCRIPTIONS (Continued)
 TRANSFORMER (AUDIO OUTPUT)

REPLACEMENT DATA		REPLACEMENT DATA		REPLACEMENT DATA		REPLACEMENT DATA	
ITEM No.	IMPEDANCE	AIRLINE PART No.	Holden-on PART No.	Meritt PART No.	Ram PART No.	Stencor PART No.	Thorderson PART No.
T1	2500Ω 3-4Ω	1216	24553	A-3025	A11-605	A-3332	24553
T2	2500Ω 3-4Ω	1218A	24553	A-3025	A11-605	A-3332	24553

SPEAKER

TYPE		REPLACEMENT DATA		REPLACEMENT DATA	
ITEM No.	SIZE	AIRLINE PART No.	QUAM PART No.	ITEM No.	NOTES
SP1	6" PM	3-40	2627 *	6A1	* Portable Models
SP2	4" PM	6-80	2647 *	4A1Z7	* Console Models
SP3	4"x6" PM	3-40	2646 *	6A21	
	6" PM	3-40	2646 *	6A21	

RECTIFIERS

RATING		REPLACEMENT DATA			REPLACEMENT DATA	
ITEM No.	CURRENT (Measured)	AIRLINE PART No.	INTERNATIONAL PART No.	ITT PART No.	SARKES TAZIAN PART No.	SYLVANIA PART No.
M1	.098A	2763 *	254 *	RE504 *	K200 *	SR200 *

PHONO CARTRIDGE

REPLACEMENT DATA		REPLACEMENT DATA		REPLACEMENT DATA	
ITEM No.	AIRLINE PART No.	ASTATIC PART No.	ELECTRO-VOICE PART No.	JENSEN PART No.	SONOTONE PART No.
M2	60-86	13TB	66	46	10T2B-S

PHONO NEEDLE

FOR REPLACEMENT IN ORIGINAL EQUIPMENT CARTRIDGE

REPLACEMENT DATA		REPLACEMENT DATA		REPLACEMENT DATA	
ITEM No.	AIRLINE PART No.	CLEVITE WALCO PART No.	JENSEN PART No.	REMARKS	
M3		* W-808DS †	* 46 †	† Jewel	* Diamond
				* Includes Cartridge	

CABINETS & CABINET PARTS

(When Ordering Cabinets & Cabinet Parts, Specify Model, Chassis & Color)

NAME	PART NO.	DESCRIPTION
Knob	2462	Loudness, Balance, Tone

WIRING DATA

General-use Unshielded Hook-up Wire	Use BELDEN No. 8530 (Solid) Available in Ten Colors
Power Cord	Use BELDEN No. 8524 (Stranded) Available in Ten Colors
Low-Loss Shielded Lead (Interconnecting)	Use BELDEN No. 1765-B (6 Ft. Length)
Photo Pick-up Arm Cable	Use BELDEN No. 1725-K (7 1/2 Ft. Length)
	Use BELDEN No. 8401
	Use BELDEN No. 8480 (Two Conductor - Twisted)

CHASSIS—BOTTOM VIEW

